

Hong Kong Standards and Testing Centre

No.: HM155673

Applicant: DWK Toys Co., Ltd.

Pumei Industrial Zone, Zhenxing Road,

Chenghai District, Shantou, Guangdong China

Description of Samples: Model name: RC Skimmer Remote Controller

Model no.: D006688
Brand name: N/A

FCC ID: TVL27DRRCSKMR

Date Samples Received: 2005-12-09

Date Tested: 2005-12-16

Investigation Requested: FCC Part 15 Subpart C

Conclusions: The submitted product <u>COMPLIED</u> with the

requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on

Section 2.2 in this Test Report.

Remarks: For additional models details, see page 5.

LEE Kam Chuen, EMD For and on behalf of

The Hong Kong Standards and Testing Centre Ltd.

This report shall not be reproduced unless with prior written approval from the Hong Kong Standards and Testing Centre.



Hong Kong Standards and Testing Centre

No.: HM155673

CONTENT:

	Cover Content	Page 1 of 17 Page 2-3 of 17
<u>1.0</u>	General Details	
1.1	Test Laboratory	Page 4 of 17
1.2	Applicant Details Applicant HKSTC Code Number for Applicant Manufacturer	Page 4 of 17
1.3	Equipment Under Test [EUT] Description of EUT operation	Page 5 of 17
1.4	Date of Order	Page 5 of 17
1.5	Submitted Samples	Page 5 of 17
1.6	Test Duration	Page 5 of 17
1.7	Country of Origin	Page 5 of 17
2.0	Technical Details	
2.1	Investigations Requested	Page 6 of 17
2.2	Test Standards and Results Summary	Page 6 of 17
<u>3.0</u>	Test Results	
3.1	Emission	Page 7-10 of 17
3.2	Bandwidth Measurement	Page 11-12 of 17



Hong Kong Standards and Testing Centre

No.: HM155673

Appendix A

List of Measurement Equipment Page 13 of 17

Appendix B

Duty Cycle Correction During 100 msec Page 14-15 of 17

Appendix C

Photographs Page 16-17 of 17



Hong Kong Standards and Testing Centre

No.: HM155673

1.0 General Details

1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd. EMC Laboratory 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

Telephone: 852 2666 1888 Fax: 852 2664 4353

1.2 Applicant Details Applicant

DWK Toys Co., Ltd.
Pumei Industrial Zone, Zhenxing Road, Chenghai District,
Shantou, Guangdong China

Manufacturer

N/A



Hong Kong Standards and Testing Centre

No.: HM155673

1.3 Equipment Under Test [EUT] Description of Sample

Model Name: RC Skimmer Remote Controller

Manufacturer: N/A
Brand Name: N/A
Model Number: D006688
Additional Model Number: JN06

Rating: 9Vd.c ("6FF" size battery x 1)

1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a DWK Toys Co., Ltd., RC Skimmer Remote Controller. The transmitter is a 2 joystick transmitter. The EUT continues to transmit while joystick is being pressed, It is pulse transmitter, Modulation by IC, and type is pulse modulation.

1.4 Date of Order

2005-12-09

1.5 Submitted Sample(s):

1 Samples per model

1.6 Test Duration

2005-12-16

1.7 Country of Origin

China



香港標準及檢定中心 Hong Kong Standards and Testing Centre

TEST REPORT

Page 6 of 17

Date: 2005-12-19 No.: HM155673

2.0 Technical Details

2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15 and ANSI C63.4:2003 for FCC Certification.

2.2 Test Standards and Results Summary Tables

EMISSION										
	Results Summary									
Test Condition	Test Requirement	Test Method	Class /	Te	est Resul					
			Severity	Pass	Failed	N/A				
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.227	ANSI C63.4:2003	N/A							
Radiated Emissions	FCC 47CFR 15.209	ANSI C63.4:2003	N/A							
Conducted Emissions on AC, 0.15MHz to 30MHz	FCC 47CFR 15.207	ANSI C63.4:2003	N/A			\boxtimes				

Note: N/A - Not Applicable



Hong Kong Standards and Testing Centre

Date : 2005-12-19 **TEST REPORT** Page 7 of 17

No.: HM155673

3.0 Test Results

3.1 Emission

3.1.1 Radiated Emissions (30 – 1000MHz)


Test Requirement: FCC 47CFR 15.227
Test Method: ANSI C63.4:2003
Test Date: 2005-12-16
Mode of Operation: Tx mode

Test Method:

The sample was placed 0.8m above the ground plane on the standard radiated emission test site*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

*: Standard radiated emission test site located at HKSTC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

Test Setup:

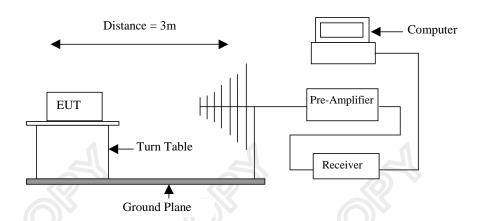



Hong Kong Standards and Testing Centre

No.: HM155673

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.227]:

Frequency Range of	Field Strength of	Field Strength of
Fundamental	Fundamental Emission	Fundamental Emission
	[Peak]	[Average]
[MHz]	[μV/m]	[μV/m]
26.96-27.28	100,000	10,000

Results:

Field Strength of Fundamental Emissions								
			Peak Value	•				
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field		
	Level @3m	Factor	Strength	Strength		Polarity		
MHz	dΒμV	dB/m	dBμV/m	μV/m	μV/m			
27.15	48.80	19.2	68.0	2,511.9	100,000	Vertical		

Field Strength of Fundamental Emissions									
	Average								
Frequency	Measured	Adjusted by	Correction	Field	Field	Limit @3m	E-Field		
	Level @3m	Duty Cycle	Factor	Strength	Strength		Polarity		
MHz	dΒμV	dB	dB/m	dBµV/m	μV/m	μV/m			
27.15	45.1	-3.7	19.2	64.3	1,640.6	10,000	Vertical		

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Remarks:

Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz ±4.1dB



Hong Kong Standards and Testing Centre

No.: HM155673

Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range [MHz]	Quasi-Peak Limits [μV/m]
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasipeak detector and above 1000MHz are based on measurements employing an average detector.

Results:

	Radiated Emissions Quasi-Peak										
Frequency	1 1 1	asured	Correction		Field Field		Limit @3m	E-Field			
MHz		el @3m lBμV	Factor dB/m		trength BµV/m	Strength µV/m		_		μV/m	Polarity
54.29	<	1.0	10.1	/	11.1	<	3.6	100	Vertical		
81.44	<	1.0	9.5	٧	10.5	<	3.3	100	Vertical		
108.58	<	1.0	10.7	<	11.7	<	3.8	150	Vertical		
135.73	<	1.0	10.2	٧	11.2	<	3.6	200	Vertical		
162.87	<	1.0	11.9	٧	12.9	<	4.4	200	Vertical		
190.02	<	1.0	12.4	٧	13.4	<	4.7	200	Vertical		
217.16	<	1.0	13.2	٧	14.2	<	5.1	200	Vertical		
244.31	<	1.0	15.0	٧	16.0	<	6.3	200	Vertical		
271.45	<	1.0	16.1	٧	17.1	<	7.2	200	Vertical		

Remarks:

Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz ±4.1dB



香港標準及檢定中心 Hong Kong Standards and Testing Centre

No.: HM155673

3.1.1 Conducted Emissions (0.15MHz to 30MHz)

Test Requirement: FCC 47CFR 15.207
Test Method: ANSI C63.4:2003

Test Date: N/A Mode of Operation: N/A

Results: N/A

The EUT is operated by a single source of internal battery power [located in the battery compartment], therefore power line conducted emission was deemed unnecessary.



Hong Kong Standards and Testing Centre

No.: HM155673

3.2 20dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.227

Test Method: ANSI C63.4:2003 (Section 13.1.7)

Test Date: 2005-12-16 Mode of Operation: On mode

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.



Hong Kong Standards and Testing Centre

No.: HM155673

START

Limits for 20dB Bandwidth of Fundamental Emission:

BW 3.0 kHz

Frequency Range	20dB Bandwidth	FCC Limits
[MHz]	[KHz]	[MHz]
27.145	18.2	within 26.96-27.28

20dB Bandwidth of Fundamental Emission

MARKER 27.1456 MHz 51.21 dBpV LOS REF 77.0 dBpV 10 dB/ #ATN 0 dB VA VB SC FC CORR

AVG BW 3 kHz

27.2800 MHz SWP 107 msec



Hong Kong Standards and Testing Centre

No.: HM155673

Appendix A

List of Measurement Equipment

Radiated Emission

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL
EM007	SPECTRUM ANALYZER	HEWLETT PACKARD	HP85660B	3144A21192	27/06/05
EM008	SPECTRUM ANALYZER DISPLAY	HEWLETT PACKARD	HP85662A	3144A20514	27/06/05
EM009	QUASI PEAK ADAPTOR	HEWLETT PACKARD	HP85650A	3303A01702	27/06/05
EM010	RF PRESELECTOR	HEWLETT PACKARD	HP85685A	3221A01410	27/06/05
EM011	ATTENUATOR/SWITCH	HEWLETT PACKARD	HP11713A	2508A10595	27/06/05
EM012	PRE-AMPLIFIER	HEWLETT PACKARD	HP8449B	3008A00262	27/06/05
EM013	CONTROLLER (COMPUTER), COLOR MONITOR, KEYBOARD , MOUSE & FLOPPY DRIVE	HEWLETT PACKARD	HP9000 HP A1097C HP9133L	6226A60314 3151J39517 2623A02468	N/A
EM020	HORN ANTENNA	ETS-Linggren	3115	4032	30/07/03
EM022	LOOP ANTENNA	ETS-Linggren	6502	1189-2424	19/09/03
EM072	SIGNAL GENERATOR	HEWLETT PACKARD	8640B	1948A11892	N/A
EM083	OPEN AREA TEST SITE	HKSTC	N/A	N/A	08/02/03
EM131	EMC ANALYZER	HEWLETT PACKARD	8595EM	3710A00155	13/01/04
EM145	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESCS 30	830245/021	04/10/04
EM195	ANTENNA POSITIONING MAST	ETS-Linggren	2075	2368	N/A
EM196	MULTI-DEVICE CONTROLLER	ETS-Linggren	2090	1662	N/A
EM215	MULTIDEVICE CONTROLER	ETS-Linggren	2090	00024676	N/A
EM216	MINI MAST SYSTEM	ETS-Linggren	2075	00026842	N/A
EM217	ELECTRIC POWERED TURNTABLE	ETS-Linggren	2088	00029144	N/A
EM218	ANECHOIC CHAMBER	ETS-Linggren	FACT-3		19/03/04
EM219	BICONILOG ANTENNA	ETS-Linggren	3142C	00029071	28/10/03

Line Conducted

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL
EM078	VARIAC	SHANGHAI VOLTAGE	TDGC-3/0.5	N/A	CM
EM081	SMALL SCREENED ROOM	MIKO INST HK	N/A	N/A	27/01/05
EM119	LISN	ROHDE & SCHWARZ	ESH3-Z5	0831.5518.52	14/10/04
EM127	ISOLATION TRANSFORMER 220 TO 300V	WING SUN	N/A	N/A	СМ
EM142	PULSE LIMITER	ROHDE & SCHWARZ	ESH3Z2	357.8810.52	04/08/04
EM181	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB7	100072	06/01/04
EM154	SHIELDING ROOM	SIEMENA MATSUSHITA COMPONENTS	N/A	803-740-057- 99A	27/01/05
EM197	LISN	ETS-Linggren	4825/2	1193	27/06/05
EM213	DIGITAL POWER METER	VICNOBL	VIP120	00277	14/09/04

Remarks:-

CM Corrective Maintenance N/A Not Applicable or Not Available

TBD To Be Determined



香港標準及檢定中心 Hong Kong Standards and Testing Centre

No.: HM155673

Appendix B


Duty Cycle Correction During 100msec

Each function key sends a different series of characters, but each packet period (19.275msec) never exceeds a series of 4 long (1.65msec) and 10 short (600µsec) pulses. Assuming any combination of short and long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered 4x1.65msec+10x600µsec per 19.275msec=65.3% duty cycle. Figure A through C show the characteristics of the pulse train for one of these functions.

Remarks:

Duty Cycle Correction = 20Log(0.653) =-3.7dB


The following figures [Figure A to Figure C] show the characteristics of the pulse train for one of these functions.

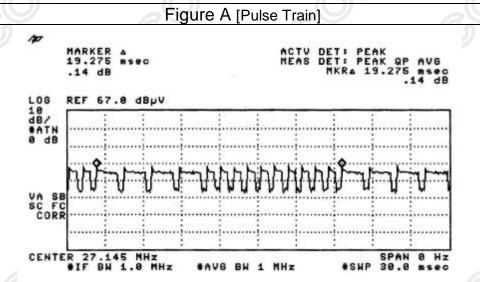




Hong Kong Standards and Testing Centre

No.: HM155673

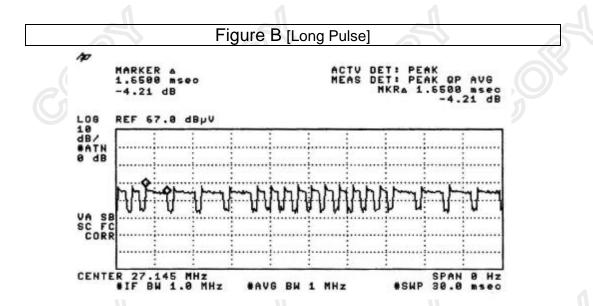

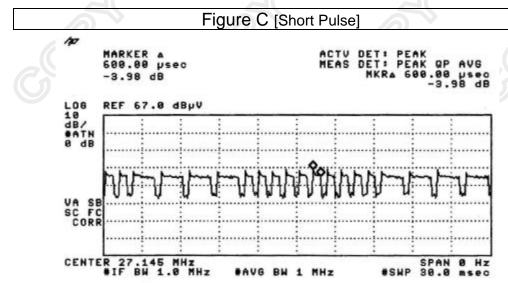



Hong Kong Standards and Testing Centre

No.: HM155673

Appendix C

Photographs of EUT

Front View of the product



Rear View of the product



Inner Circuit Top View



Inner Circuit Bottom View






Hong Kong Standards and Testing Centre

No.: HM155673

Photographs of EUT

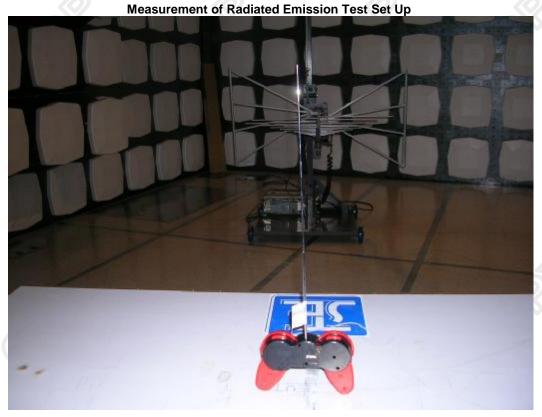

***** End of Test Report *****