



Prüfbericht - Nr.: <i>Test Report No.:</i>		14013355 001		Seite 1 von 13 <i>Page 1 of 13</i>	
Auftraggeber: <i>Client:</i>		Touch Technology Limited Room 601, Metro Centre II, 21 Lam Hing Street, Kowloon Bay, Kowloon, Hong Kong			
Gegenstand der Prüfung: <i>Test Item:</i>		iota ear plug Handsfree with Bluetooth wireless technology			
Bezeichnung: <i>Identification:</i>		BTH 738	Serien-Nr.: <i>Serial No.:</i>	Engineering sample	
Wareneingangs-Nr.: <i>Receipt No.:</i>		060602009	Eingangsdatum: <i>Date of Receipt:</i>	02.06.2006	
Prüfört: <i>Testing Location:</i>		TÜV Rheinland Hong Kong Ltd. Room 8, 25th Floor, Skyline Tower, 39 Wang Kwong Road, Kowloon Bay Kowloon, Hong Kong Hong Kong Productivity Council HKPC Building, 78 Tat Chee Avenue, Kowloon, Hong Kong			
Prüfgrundlage: <i>Test Specification:</i>		FCC Part 15 Subpart C ANSI C63.4-2003 CISPR 22:1997			
Prüfergebnis: <i>Test Result:</i>		Das vorstehend beschriebene Gerät wurde geprüft und entspricht oben genannter Prüfgrundlage. <i>The a. m. test item passed the test specification.</i>			
geprüft / tested by:			kontrolliert / checked by:		
21.07.2006	Sharon Li Project Engineer		21.07.2006	Thomas Berns Manager	
Datum <i>Date</i>	Name <i>Name</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name <i>Name</i>	Unterschrift <i>Signature</i>
Sonstiges: <i>Other Aspects</i>					
FCCID: UEEBTH738					
Abkürzungen:	OK, Pass, P Fail, F N.A.	= entspricht Prüfgrundlage = entspricht nicht Prüfgrundlage = nicht anwendbar	Abbreviations:	OK, Pass, P Fail, F N.A.	= passed = failed = not applicable
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report relates to the a. m. test sample. Without permission of the test centre this test report is not permitted to be duplicate in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i>					

Table of Content

	Page
Cover Page	1
Table of Content	2
Product information.....	3
Manufacturers declarations	3
Product function and intended use.....	3
Submitted documents	3
Special accessories and auxiliary equipment.....	3
List of Test and Measurement Instruments.....	4
Result FCC Part 15 – Subpart C	5
Subclause 15.203 – Antenna Information.....	Pass..... 5
Subclause 15.204 – Antenna Information.....	Pass..... 5
Subclause 15.207 – Disturbance Voltage on AC Mains	Pass..... 5
Subclause 15.247 (a) – Carrier Frequency Separation.....	Pass..... 6
Subclause 15.247 (a) – Time of Occupancy (Dwell Time).....	Pass..... 7
Subclause 15.247 (a) – 20 dB Bandwidth	8
Subclause 15.247 (a) – Hopping Sequence.....	Pass..... 8
Subclause 15.247 (a) – Equal Hopping Frequency Use	Pass..... 9
Subclause 15.247 (a) – Receiver Input Bandwidth	Pass..... 10
Subclause 15.247 (a) – Receiver Hopping Capability.....	Pass..... 10
Subclause 15.247 (b) – Peak Output Power	Pass..... 10
Subclause 15.247 (b) – Band edge compliance	Pass..... 11
Subclause 15.247 (c) – Spurious Conducted Emissions.....	Pass..... 11
Subclause 15.247 (c) – Spurious Radiated Emissions.....	Pass..... 12
Appendix 1 – Test protocols	15 pages
Appendix 2 – Test setup	2 pages
Appendix 3 – Photo documentation	7 pages
Appendix 4 – Product documentation	26 pages

Product information

Manufacturers declarations

	Transceiver
Operating frequency range	2402 - 2480 MHz
Type of modulation	FHSS modulation
Number of channels	79
Channel separation	1 MHz
Type of antenna	Integral Antenna
Antenna gain (dBi)	0
Power level	fix
Type of equipment	stand alone
Connection to public utility power line	Yes
Nominal voltage	V_{nor} : 3.7 V
Independent Operation Modes	Page scan Inquiry scan Connection state - ACL Link Connection state - SCO Link

Product function and intended use

The test item is a Bluetooth Headset based on the Bluetooth technology.

Bluetooth is a short-range radio link intended to be a cable replacement between portable and/or fixed electronic devices.

Bluetooth operates in the unlicensed ISM Band at 2.4 GHz. In the US a band of 83.5 MHz width is available. In this band, 79 RF channels spaced 1 MHz apart are defined.

The channel is represented by a pseudo-random hopping sequence through the 79 channels. The channel is divided into time slots, with a nominal slot length of 625 μ s, where each slot corresponds to different RF hop frequencies. The nominal hop rate is 1600 hops/s. The symbol rate on the channel is 1 Ms/s.

Submitted documents

Circuit Diagram
Block Diagram
Bill of material
User manual

Special accessories and auxiliary equipment

The product has been tested together with the following additional accessory:

- Standard Charger
Manufacturer: Huizhou Sky Fortune Electronics Co., Ltd.
Model number: S002BU0500025
Input: 100-240VAC, 50mA, 50-60Hz
Output: 5.0V, 250mA

List of Test and Measurement Instruments

	Kind of Equipment	Manufacturer	Type	S/N
<input checked="" type="checkbox"/>	Test Receiver	Rohde & Schwarz	ESH-3	890173/033
<input checked="" type="checkbox"/>	L/I/S/N	Rohde & Schwarz	ESH 3-Z5	849876/026
<input type="checkbox"/>	Oscilloscope	HP	54713B	US34510455
<input type="checkbox"/>	Test Receiver	Rohde & Schwarz	ESVP	882402/033
<input type="checkbox"/>	Absorbing Clamp	Rohde & Schwarz	MDS-21	979 3/4
<input checked="" type="checkbox"/>	Test Receiver	Rohde & Schwarz	ESVS30	842807/009
<input checked="" type="checkbox"/>	Biconical Antenna	Rohde & Schwarz	HK116	841489/015
<input checked="" type="checkbox"/>	Log.-Periodic Antenna	Rohde & Schwarz	HL223	841516/017
<input type="checkbox"/>	Universal Power Analyzer	Voltech	PM3000A	9915
<input type="checkbox"/>	Reference Impedance Network	Voltech	IEC 555 Standard	9946
<input type="checkbox"/>	AC Power Source	California Instr.	4500L	HK51895
<input type="checkbox"/>	Trip-Loop Antenna	Chase	LLA6142	1019
<input type="checkbox"/>	Double Ridge Horn Antenna	EMCO	3115	9002-3351
<input checked="" type="checkbox"/>	Double Ridge Horn Antenna	EMCO	3115	9002-3347
<input type="checkbox"/>	RF Comms Test Set	HP	8920B	US36492628
<input type="checkbox"/>	Spectrum Analyser + Tracking G.	HP	8596E	3639A00758
<input type="checkbox"/>	Signal Generator	Rohde & Schwarz	SMY 01	844146/024
<input type="checkbox"/>	Signal Generator	Rohde & Schwarz	SMY 01	844146/023
<input type="checkbox"/>	BiLog Antenna	EMCO	3143	9607-1287
<input type="checkbox"/>	Isotropic Field Probe	Holladay	HI-4422	90956
<input type="checkbox"/>	Power Amplifier	Kalmus	757-LC	7620-1
<input type="checkbox"/>	Power Amplifier	Kalmus	122-FC	7620-2
<input type="checkbox"/>	Coupling Clamp	Schaffner	CDN 126	312
<input type="checkbox"/>	Couple Device Network	Fischer	CDN-M2	9604
<input checked="" type="checkbox"/>	Spectrum Analyzer	Rohde & Schwarz	FSP30	1093.4495K30
<input type="checkbox"/>	Temperature Chamber	Binder	MK 240	9020-0028
<input type="checkbox"/>	EFT,ESD,SURGE, DIPS tester	Schaffner	Best 96	IN3796-011
<input type="checkbox"/>	Surge Generator	Schaffner	NSG650	280
<input checked="" type="checkbox"/>	Active Loop Antenna	EMCO	6502	9107-2651

Result FCC Part 15 – Subpart C

Subclause 15.203 – Antenna Information		Pass
Requirement:	No antenna other than that furnished by the responsible party shall be used with the device	
Result:	Permanent attached antenna	
Verdict:	Pass	

Subclause 15.204 – Antenna Information		Pass
Requirement:	Provide information for every antenna proposed for the use with the EUT	
Result:	a) Antenna type: Integral antenna soldered to the circuit board b) Manufacturer and model no: N.A. c) Gain with reference to an isotropic radiator: 0 dBi	
Verdict:	Pass	

Subclause 15.207 – Disturbance Voltage on AC Mains						Pass
Test Port: AC mains input port of the charger Applied voltage: 100VAC Applicable only to equipment designed to be connected to the public utility power line. Mode of operation: Operating and charging at the same time						
Live measurement						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak (dBµV)	Average (dBµV)	Limit QP (dBµV)	Limit AV (dBµV)	Verdict
0,15 – 0,5	0.342000	34.7	26.3	66 - 56	56 - 46	Pass
> 0,5 - 5	0.546000	33.6	24.8	56	46	Pass
> 5 - 30	-	-	-	60	50	Pass
Neutral measurement						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak (dBµV)	Average (dBµV)	Limit QP (dBµV)	Limit AV (dBµV)	Verdict
0,15 – 0,5	0.266730	33.5	25.1	66 - 56	56 - 46	Pass
	0.338370	33.0	25.1	66 - 56	56 - 46	Pass
> 0,5 - 5	1.188000	29.3	11.4	56	46	Pass
> 5 - 30	-	-	-	60	50	Pass
Result: The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz does not exceed the limits.						

Subclause 15.247 (a) – Carrier Frequency Separation		Pass
Requirement:	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.	
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (hopping on), DH1 packet Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 100 kHz / 300 kHz Supply voltage : 3.7VDC from DC power supply Temperature : 23°C Humidity : 50%		
Result: The centre frequencies of the hopping channels are separated by more than the 20dB bandwidth. For test results plots refer to Appendix 1, page 2.		
Verdict: Pass		

Subclause 15.247 (a) – Time of Occupancy (Dwell Time)	Pass
Requirement: Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.	
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (hopping on), DH5 packet Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 1 MHz / 3 MHz Supply voltage : 3.7VDC from DC power supply Temperature : 23°C Humidity : 50%	
Result: The screenshot in Appendix 1 page 9 shows the occurrence of a channel in a 31.6 s time period. In normal hopping mode Bluetooth is using 79 hopping channels only. The frequency was used 64 times. The dwell time for the longest supported packet type is about 3 ms. As a result the average time of occupancy will not be greater than 400 ms. i.e. Time period calculation: $0.4 \times 79 = 31.6\text{s}$ Limit calculation: $64 \times 2.928 \times 10^{-3} = 187.4 \times 10^{-3}$ $\leq 400 \times 10^{-3} \text{ s}$ For test protocols please refer to Appendix 1, page 3-4. Verdict: Pass	

Subclause 15.247 (a) – 20 dB Bandwidth

Requirement: Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

Test Specification : FCC Part 15 Subpart A – Subclause 15.31
 Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz), DH5 packet
 Port of testing : Temporary antenna port
 Detector : Peak
 RBW/VBW : 30 kHz / 100 kHz
 Supply voltage : 3.7VDC from DC power supply
 Temperature : 23°C
 Humidity : 50%

Results

For test protocols refer to Appendix 1, page 5-6.


Frequency (MHz)	20 dB left (MHz)	20 dB right (MHz)	20dB bandwidth (MHz)
2402	0.464	0.460	0.924
2441	0.472	0.452	0.924
2480	0.464	0.460	0.924

Subclause 15.247 (a) – Hopping Sequence**Pass**

Requirement: The hopping sequence is generated and provided with an example.

Hopping sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master. The X input determines the phase in the 32-hop segment, whereas Y1 and Y2 selects between master-to-slave and slave-to-master transmission. The inputs A to D determine the ordering within the segment, the inputs E and F determine the mapping onto the hop frequencies.

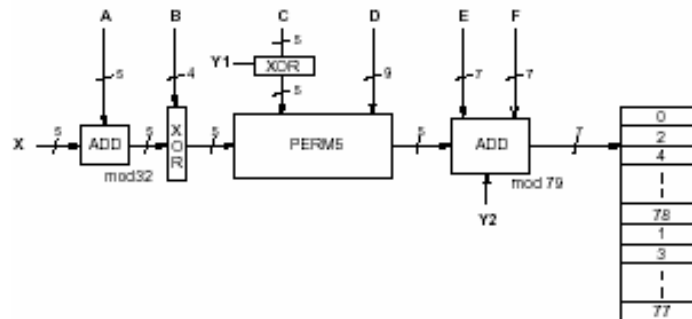

Example data:

Hop sequence {k} for CONNECTION STATE:

CLK start: 0x0000010

ULAP: 0x00000000

#ticks: 00 02 | 04 06 | 08 0a | 0c 0e | 10 12 | 14 16 | 18 1a | 1c 1e |

```

0x0000010: 08 66 | 10 70 | 12 19 | 14 23 | 16 01 | 18 05 | 20 33 | 22 37 |
0x0000030: 24 03 | 26 07 | 28 35 | 30 39 | 32 72 | 34 76 | 36 25 | 38 29 |
0x0000050: 40 74 | 42 78 | 44 27 | 46 31 | 48 09 | 50 13 | 52 41 | 54 45 |
0x0000070: 56 11 | 58 15 | 60 43 | 62 47 | 32 17 | 36 19 | 34 49 | 38 51 |
0x0000090: 40 21 | 44 23 | 42 53 | 46 55 | 48 33 | 52 35 | 50 65 | 54 67 |
0x00000b0: 56 37 | 60 39 | 58 69 | 62 71 | 64 25 | 68 27 | 66 57 | 70 59 |
0x00000d0: 72 29 | 76 31 | 74 61 | 78 63 | 01 41 | 05 43 | 03 73 | 07 75 |
0x00000f0: 09 45 | 13 47 | 11 77 | 15 00 | 64 49 | 66 53 | 68 02 | 70 06 |
0x0000110: 01 51 | 03 55 | 05 04 | 07 08 | 72 57 | 74 61 | 76 10 | 78 14 |
0x0000130: 09 59 | 11 63 | 13 12 | 15 16 | 17 65 | 19 69 | 21 18 | 23 22 |
0x0000150: 33 67 | 35 71 | 37 20 | 39 24 | 25 73 | 27 77 | 29 26 | 31 30 |
0x0000170: 41 75 | 43 00 | 45 28 | 47 32 | 17 02 | 21 04 | 19 34 | 23 36 |
0x0000190: 33 06 | 37 08 | 35 38 | 39 40 | 25 10 | 29 12 | 27 42 | 31 44 |
0x00001b0: 41 14 | 45 16 | 43 46 | 47 48 | 49 18 | 53 20 | 51 50 | 55 52 |
0x00001d0: 65 22 | 69 24 | 67 54 | 71 56 | 57 26 | 61 28 | 59 58 | 63 60 |
0x00001f0: 73 30 | 77 32 | 75 62 | 00 64 | 49 34 | 51 42 | 57 66 | 59 74 |
0x0000210: 53 36 | 55 44 | 61 68 | 63 76 | 65 50 | 67 58 | 73 03 | 75 11 |
0x0000230: 69 52 | 71 60 | 77 05 | 00 13 | 02 38 | 04 46 | 10 70 | 12 78 |
0x0000250: 06 40 | 08 48 | 14 72 | 16 01 | 18 54 | 20 62 | 26 07 | 28 15 |
0x0000270: 22 56 | 24 64 | 30 09 | 32 17 | 02 66 | 06 74 | 10 19 | 14 27 |
0x0000290: 04 70 | 08 78 | 12 23 | 16 31 | 18 03 | 22 11 | 26 35 | 30 43 |
0x00002b0: 20 07 | 24 15 | 28 39 | 32 47 | 34 68 | 38 76 | 42 21 | 46 29 |
0x00002d0: 36 72 | 40 01 | 44 25 | 48 33 | 50 05 | 54 13 | 58 37 | 62 45 |
0x00002f0: 52 09 | 56 17 | 60 41 | 64 49 | 34 19 | 36 35 | 50 51 | 52 67 |
0x0000310: 38 21 | 40 37 | 54 53 | 56 69 | 42 27 | 44 43 | 58 59 | 60 75 |
0x0000330: 46 29 | 48 45 | 62 61 | 64 77 | 66 23 | 68 39 | 03 55 | 05 71 |
0x0000350: 70 25 | 72 41 | 07 57 | 09 73 | 74 31 | 76 47 | 11 63 | 13 00 |
0x0000370: 78 33 | 01 49 | 15 65 | 17 02 | 66 51 | 70 67 | 03 04 | 07 20 |
0x0000390: 68 55 | 72 71 | 05 08 | 09 24 | 74 59 | 78 75 | 11 12 | 15 28 |
0x00003b0: 76 63 | 01 00 | 13 16 | 17 32 | 19 53 | 23 69 | 35 06 | 39 22 |
0x00003d0: 21 57 | 25 73 | 37 10 | 41 26 | 27 61 | 31 77 | 43 14 | 47 30 |
0x00003f0: 29 65 | 33 02 | 45 18 | 49 34 | 19 04 | 21 08 | 23 20 | 25 24 |

```

Subclause 15.247 (a) – Equal Hopping Frequency Use**Pass**

Requirement: Each of the transmitter's hopping channels is used equally on average.

Equal hopping frequency use

The EUT complies with the Bluetooth RF specifications. For details refer to the Bluetooth standard.

Subclause 15.247 (a) – Receiver Input Bandwidth		Pass
Requirement:	The associated receiver(s) complies with the requirement that its input bandwidth matches the bandwidth of the transmitted signal.	
Receiver input bandwidth		
The receiver bandwidth is equal to the receiver bandwidth in the 79 hopping channel mode, which is 1 MHz. The receiver bandwidth was verified during Bluetooth RF conformance testing.		

Subclause 15.247 (a) – Receiver Hopping Capability		Pass
Requirement:	The associated receiver has the ability to shift frequencies in synchronisation with the transmitted signals.	
Receiver hopping Capability		
The EUT complies with the Bluetooth RF specifications. For details refer to the Bluetooth standard.		

Subclause 15.247 (b) – Peak Output Power		Pass			
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz), DH1 packet Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 1 MHz / 3 MHz Supply voltage : 3.7VDC from DC power supply Temperature : 23°C Humidity : 50%					
Requirement:	For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 Watt. For all other frequency hopping systems in the 2400 – 2483.5 MHz band: 0.125 Watts.				
Result All three transmit frequency modes comply with the maximum peak output power limit. For test protocols please refer to Appendix 1, page 7-8.					
Frequency (MHz)	Maximum peak output power (dBm)	Cable attenuation (dB)	Output power (dBm)	Limit (W/dBm)	Verdict
2402	-5.09	3.52	-1.57	1 / 30.0	Pass
2441	-3.61	3.65	0.04	1 / 30.0	Pass
2480	-3.02	3.60	0.58	1 / 30.0	Pass

Subclause 15.247 (b) – Band edge compliance		Pass
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz), DH1 packet Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 100 kHz / 1 MHz Supply voltage : 3.7VDC from DC power supply Temperature : 23°C Humidity : 50%		
Requirement: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.		
Result There is no peak found outside any 100 kHz bandwidth of the operating frequency band in the three transmit frequency. All three transmit frequency modes comply with the limit stated in subclause 15.247(c). For test protocols refer to Appendix 1, page 9-10.		

Subclause 15.247 (c) – Spurious Conducted Emissions			Pass		
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz), DH1 packet Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 100 kHz / 300 kHz Supply voltage : 3.7VDC from DC power supply Temperature : 23 °C Humidity : 50 %					
Requirement: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Result There is no peak found outside any 100kHz bandwidth of the operating frequency band in the three transmit frequency. All three transmit frequency modes comply with the limit stated in subclause 15.247(c). For test protocols refer to Appendix 1, page 11-15 .					
Operating frequency (MHz)	Spurious frequency (MHz)	Spurious Level (dBm)	Reference value (dBm)	Delta (dB)	Verdict
2402	No peak found	-	-	-	Pass
2441	No peak found	-	-	-	Pass
2480	No peak found	-	-	-	Pass

Subclause 15.247 (c) – Spurious Radiated Emissions			Pass
Test Specification : ANSI C63.4 - 2003 Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz), DH1 packet Port of testing : Enclosure Detector : Peak RBW/VBW : 100 kHz / 300 kHz for $f < 1$ GHz 1 MHz / 3 MHz for $f > 1$ GHz Supply voltage : internal batteries has been activated Temperature : 23°C Humidity : 50%			
Requirement: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.			
Result			
All three transmit frequency modes comply with the field strength within the restricted bands. There is no spurious found under the frequency below 30MHz.			
Tx frequency 2402MHz Vertical Polarization			
Freq (MHz)	Level (dBuV/m)	Limit/ Detector (dBuV/m)	Delta to Limit (dB)
44.0012	30.5	43.5 / QP	13
1602.0200	40.75	74.0 / P	33.25
1601.9400	39.37	54.0 / A	14.63
4804.1200	45.04	74.0 / P	28.96
4804.1400	36.55	54.0 / A	17.45
Tx frequency 2402MHz Horizontal Polarization			
Freq (MHz)	Level (dBuV/m)	Limit/ Detector (dBuV/m)	Delta to Limit (dB)
182.6600	21.9	43.5 / QP	21.6
1602.0000	51.95	74.0 / P	22.05
1601.9600	49.29	54.0 / A	4.71
4804.0400	46.35	74.0 / P	27.65
4804.1800	37.82	54.0 / A	16.18
Tx frequency 2441MHz Vertical Polarization			
Freq (MHz)	Level (dBuV/m)	Limit/ Detector (dBuV/m)	Delta to Limit (dB)
44.0025	30.7	43.5 / QP	12.8
1181.7600	38.25	74.0 / P	35.75
1180.8000	26.83	54.0 / A	27.17
1627.8800	42.78	74.0 / P	31.22
1628.0400	41.89	54.0 / A	12.11
4881.9600	45.86	74.0 / P	28.14
4881.9600	38.41	54.0 / A	15.59

Tx frequency 2441MHz		Horizontal Polarization	
Freq (MHz)	Level (dBuV/m)	Limit/ Detector (dBuV/m)	Delta to Limit (dB)
182.6600	19.7	43.5 / QP	23.8
1628.0400	52.42	74.0 / P	21.58
1628.0000	52.06	54.0 / A	1.94
4882.0200	46.04	74.0 / P	27.96
4882.0000	39.01	54.0 / A	14.99
Tx frequency 2480MHz		Vertical Polarization	
Freq (MHz)	Level (dBuV/m)	Limit/ Detector (dBuV/m)	Delta to Limit (dB)
44.0016	30.2	43.5 / QP	13.3
83.998	21.8	43.5 / QP	21.7
1654.0200	41.06	74.0 / P	32.94
1653.9800	39.74	54.0 / A	14.26
4959.9400	46.24	74.0 / P	27.76
4960.0400	40.92	54.0 / A	13.08
Tx frequency 2480MHz		Horizontal Polarization	
Freq (MHz)	Level (dBuV/m)	Limit/ Detector (dBuV/m)	Delta to Limit (dB)
1653.9000	42.78	74.0 / P	31.22
1654.0600	45.02	54.0 / A	8.98
4959.9200	50.24	74.0 / P	23.76
4959.9600	44.99	54.0 / A	9.01