

FC

Test Report

Product Name	Bluetooth MP3
Model No.	SL-10CMW
FCC ID.	ULLSL-10CMW

Applicant	SKYLIE INFORMATION CO.,LTD.
Address	8F., No.38, Sihyuan Rd., Sinjhuang City, Taipei County 242, Taiwan

Date of Receipt	July 19, 2006
Issued Date	Sep. 20, 2006
Report No.	067L122-RF-US-P18V02

The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Test Report Certification

Issued Date: Sep. 20, 2006

Report No.: 067L122-RF-US-P18V02



Product Name	Bluetooth MP3
Applicant	SKYLIE INFORMATION CO.,LTD.
Address	8F., No.38, Sihyuan Rd., Sinjhuang City, Taipei County 242, Taiwan
Manufacturer	SKYLIE INFORMATION CO.,LTD.
Model No.	SL-10CMW
FCC ID.	ULLSL-10CMW
Rated Voltage	AC 120V/60Hz
Working Voltage	DC 5V
Trade Name	SKYLINE
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2005 ANSI C63.4: 2003 CISPR 22: 2005
Test Result	Complied



The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented By

:

Rita Huang

(Rita Huang)



Tested By

:

Tom Hsieh

(Tom Hsieh)



0914

Approved By

:

George Chen

(George Chen)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description.....	5
1.2. Operational Description.....	7
1.3. Test System Details	8
1.4. Configuration of Test System	8
1.5. EUT Exercise Software	8
1.6. Test Facility	10
2. CONDUCTED EMISSION	11
2.1. Test Equipment.....	11
2.2. Test Setup	11
2.3. Limits.....	12
2.4. Test Procedure	12
2.5. Uncertainty	12
2.6. Test Result of Conducted Emission.....	13
3. PEAK POWER OUTPUT	15
3.1. Test Equipment.....	15
3.2. Test Setup	15
3.3. Limit	15
3.4. Uncertainty	15
3.5. Test Result of Peak Power Output.....	16
4. RADIATED EMISSION	17
4.1. Test Equipment.....	17
4.2. Test Setup	18
4.3. Limits.....	18
4.4. Test Procedure	19
4.5. Uncertainty	19
4.6. Test Result of Radiated Emission.....	20
5. BAND EDGE	24
5.1. Test Equipment.....	24
5.2. Test Setup	24
5.3. Limit	25
5.4. Test Procedure	25
5.5. Uncertainty	25
5.6. Test Result of Band Edge	26
6. CHANNEL NUMBER.....	31
6.1. Test Equipment.....	31
6.2. Test Setup	31
6.3. Limit	31
6.4. Uncertainty	31
6.5. Test Result of Channel Number.....	32
7. CHANNEL SEPARATION.....	32

7.1.	Test Equipment	33
7.2.	Test Setup	33
7.3.	Limit	33
7.4.	Uncertainty	33
7.5.	Test Result of Channel Separation.....	34
8.	DWELL TIME	35
8.1.	Test Equipment	35
8.2.	Test Setup	35
8.3.	Limit	35
8.4.	Uncertainty	35
8.5.	Test Result of Dwell Time	36
9.	OCCUPIED BANDWIDTH	42
9.1.	Test Equipment	42
9.2.	Test Setup	42
9.3.	Limits.....	42
9.4.	Uncertainty	42
9.5.	Test Result of Occupied Bandwidth	43
10.	EMI REDUCTION METHOD DURING COMPLIANCE TESTING	46
Attachment 1: EUT Test Photographs		
Attachment 2: EUT Detailed Photographs		

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	Bluetooth MP3
Trade Name	SKYLINE
FCC ID.	ULLSL-10CMW
Model No.	SL-10CMW
Frequency Range	2402 - 2480MHz
Channel Number	79
Type of Modulation	FHSS
Antenna Type	Chip Antenna
Channel Control	Auto
Antenna Gain	Refer to the table "Antenna List"
USB Cable	Shielded, 0.4m

Antenna List

No.	Manufacturer	Part No.	Peak Gain
1	CHANT	920D07E15XX5013	2 dBi for 2.4 GHz

Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 20:	2422 MHz	Channel 40:	2442 MHz	Channel 60:	2462 MHz
Channel 01:	2403 MHz	Channel 21:	2423 MHz	Channel 41:	2443 MHz	Channel 61:	2463 MHz
Channel 02:	2404 MHz	Channel 22:	2424 MHz	Channel 42:	2444 MHz	Channel 62:	2464 MHz
Channel 03:	2405 MHz	Channel 23:	2425 MHz	Channel 43:	2445 MHz	Channel 63:	2465 MHz
Channel 04:	2406 MHz	Channel 24:	2426 MHz	Channel 44:	2446 MHz	Channel 64:	2466 MHz
Channel 05:	2407 MHz	Channel 25:	2427 MHz	Channel 45:	2447 MHz	Channel 65:	2467 MHz
Channel 06:	2408 MHz	Channel 26:	2428 MHz	Channel 46:	2448 MHz	Channel 66:	2468 MHz
Channel 07:	2409 MHz	Channel 27:	2429 MHz	Channel 47:	2449 MHz	Channel 67:	2469 MHz
Channel 08:	2410 MHz	Channel 28:	2430 MHz	Channel 48:	2450 MHz	Channel 68:	2470 MHz
Channel 09:	2411 MHz	Channel 29:	2431 MHz	Channel 49:	2451 MHz	Channel 69:	2471 MHz
Channel 10:	2412 MHz	Channel 30:	2432 MHz	Channel 50:	2452 MHz	Channel 70:	2472 MHz
Channel 11:	2413 MHz	Channel 31:	2433 MHz	Channel 51:	2453 MHz	Channel 71:	2473 MHz
Channel 12:	2414 MHz	Channel 32:	2434 MHz	Channel 52:	2454 MHz	Channel 72:	2474 MHz
Channel 13:	2415 MHz	Channel 33:	2435 MHz	Channel 53:	2455 MHz	Channel 73:	2475 MHz
Channel 14:	2416 MHz	Channel 34:	2436 MHz	Channel 54:	2456 MHz	Channel 74:	2476 MHz
Channel 15:	2417 MHz	Channel 35:	2437 MHz	Channel 55:	2457 MHz	Channel 75:	2477 MHz
Channel 16:	2418 MHz	Channel 36:	2438 MHz	Channel 56:	2458 MHz	Channel 76:	2478 MHz
Channel 17:	2419 MHz	Channel 37:	2439 MHz	Channel 57:	2459 MHz	Channel 77:	2479 MHz
Channel 18:	2420 MHz	Channel 38:	2440 MHz	Channel 58:	2460 MHz	Channel 78:	2480 MHz
Channel 19:	2421 MHz	Channel 39:	2441 MHz	Channel 59:	2461 MHz		

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. The transmitter is presented with a continuous data stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its 79 channels and over the minimum number of hopping channels (75 channels).

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Note:

1. The EUT is a Bluetooth MP3 with a built-in 2.4GHz transceiver.
2. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
3. Regarding to the operation frequency band, the lowest, middle, and highest frequency are selected to perform the test.
4. QuieTek verified constructions and functions, which are shown in the test report, in typical operation.
5. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

1.2. Operational Description

The EUT is a Bluetooth MP3 with a built-in 2.4GHz transceiver. The signals are modulated by frequency hopping spread spectrum. The number of channels is 79 in 2402-2480MHz.

The EUT provides wireless technology that revolutionizes personal connectivity. It is the solution for the seamless integration of Bluetooth technology into personal computer enabling short-range wireless connections between desktop/laptop computers, Bluetooth-enabled peripherals, and portable handheld devices.

Test Mode	Mode 1: Transmitter
-----------	---------------------


1.3. Test System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	Power Cord
(1)	Notebook PC	DELL	PPT	N/A	Non-Shielded, 0.8m
(2)	Development Kit	CSR	BCES301199/1	8585260105	Non-Shielded, 1.5m

Signal Cable Type	Signal cable Description
A. RS-232 Cable	Shielded, 1.8m
B. USB Cable	Shielded, 0.4m
C. Control Cable	Non-Shielded, 0.15m

1.4. Configuration of Test System

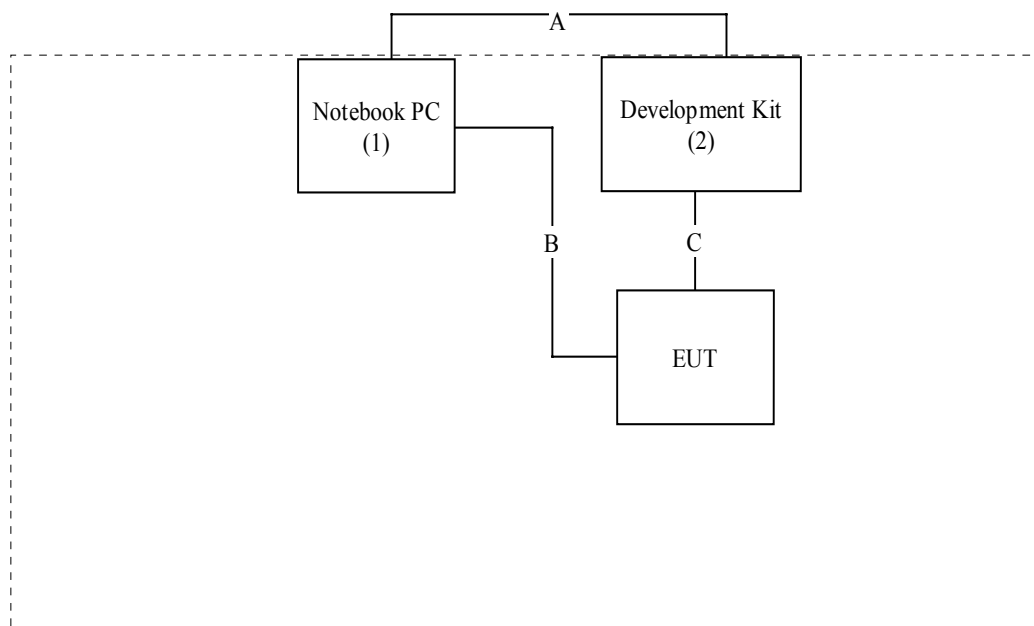

1.5. EUT Exercise Software

- (1) Setup the EUT as shown in Section 1.4.
- (2) Execute BlueTest.exe on the notebook.
- (3) Configure the test channel and the packet type.
- (4) Press “OK” to start the continuous transmission.
- (5) Verify the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	30-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Reference 31040/SIT1300F2



Accreditation on NVLAP
NVLAP Lab Code: 200533-0



Site Name: Quietek Corporation
Site Address: No. 5-22, Ruei-Shu Valley, Ruei-Ping Tsuen,
Lin-Kou Shiang, Taipei,
Taiwan, R.O.C.
TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
E-Mail : service@quietek.com




2. Conducted Emission

2.1. Test Equipment

Item	Instrument	Manufacturer	Type No./Serial No	Last Cal.	Remark
1	EMI Test Receiver	R&S	ESCS 30/100367	Aug., 2006	
2	LISN	R&S	ESH3-Z5/836679/023	July, 2006	EUT
3	LISN	R&S	ESH3-Z5/836679/017	Feb., 2006	Peripherals
4	Pulse Limiter	R&S	ESH3-Z2/357.8810.52	Sep., 2006	
5	No.7 Shielded Room			N/A	

Note: All equipments are calibrated every one year.

2.2. Test Setup

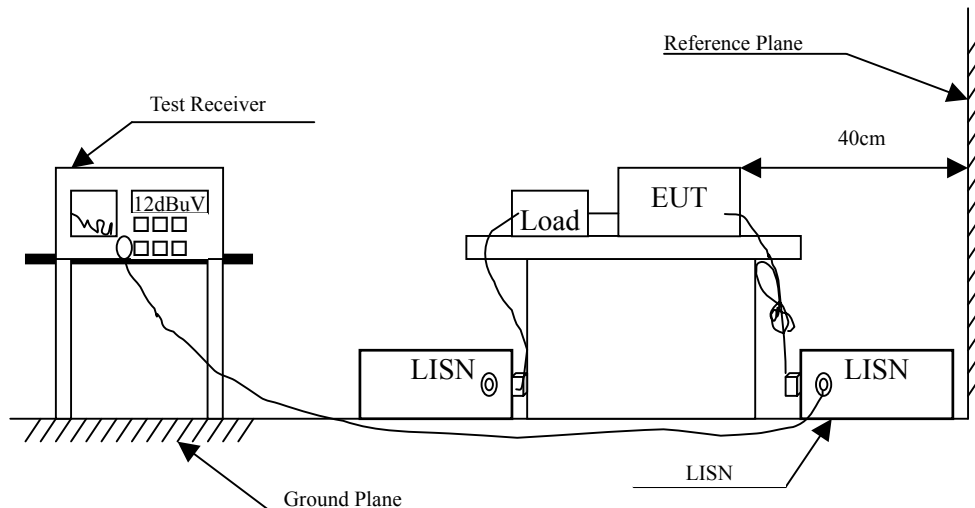

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Uncertainty

± 2.26 dB

2.6. Test Result of Conducted Emission

Product : Bluetooth MP3
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 1: Transmitter (Channel 39)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV	dB	dBuV
Quasi-Peak					
0.180	0.202	46.740	46.942	-18.201	65.143
0.247	0.203	41.680	41.883	-21.346	63.229
0.287	0.214	36.820	37.034	-25.052	62.086
1.259	0.246	35.930	36.176	-19.824	56.000
1.630	0.261	37.610	37.871	-18.129	56.000
1.888	0.275	36.590	36.865	-19.135	56.000
Average					
0.180	0.202	32.970	33.172	-21.971	55.143
0.247	0.203	30.640	30.843	-22.386	53.229
0.287	0.214	20.490	20.704	-31.382	52.086
1.259	0.246	26.180	26.426	-19.574	46.000
1.630	0.261	27.740	28.001	-17.999	46.000
1.888	0.275	27.010	27.285	-18.715	46.000

Note:

1. All reading levels are quasi-peak and average value.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Product : Bluetooth MP3
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 1: Transmitter (Channel 39)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV	dB	dBuV
Quasi-Peak					
0.184	0.202	46.290	46.492	-18.537	65.029
0.252	0.203	42.950	43.153	-19.933	63.086
0.334	0.214	36.830	37.044	-23.699	60.743
0.474	0.216	31.600	31.816	-24.927	56.743
1.404	0.248	37.860	38.108	-17.892	56.000
1.615	0.261	38.570	38.831	-17.169	56.000
Average					
0.184	0.202	35.480	35.682	-19.347	55.029
0.252	0.203	29.720	29.923	-23.163	53.086
0.334	0.214	22.270	22.484	-28.259	50.743
0.474	0.216	18.330	18.546	-28.197	46.743
1.404	0.248	26.750	26.998	-19.002	46.000
1.615	0.261	28.510	28.771	-17.229	46.000

Note:

1. All reading levels are quasi-peak and average value.
2. " " means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.


3. Peak Power Output

3.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	Advantest	R3162 / 121200166	July, 2006

Note: 1. All equipments are calibrated every one year.
2. Test instruments marked by “X” are used to measure the final test results.

3.2. Test Setup

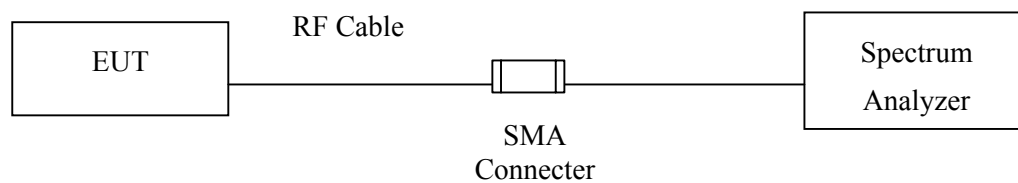

3.3. Limit

The maximum peak power shall be less 1Watt.




3.4. Uncertainty

± 1.27 dB

3.5. Test Result of Peak Power Output

Product : Bluetooth MP3
 Test Item : Peak Power Output
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter

Channel No.	Frequency (MHz)	Measurement	Required Limit	Result
Channel 00	2402.00	-5.13dBm	1 Watt= 30 dBm	Pass
Channel 39	2441.00	-6.26dBm	1 Watt= 30 dBm	Pass
Channel 78	2480.00	-7.08dBm	1 Watt= 30 dBm	Pass

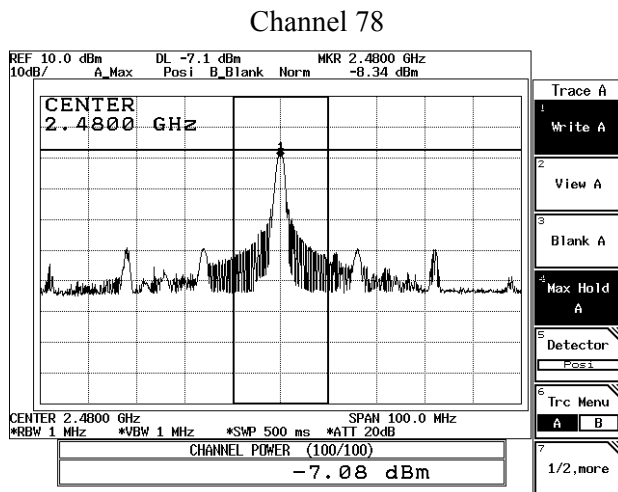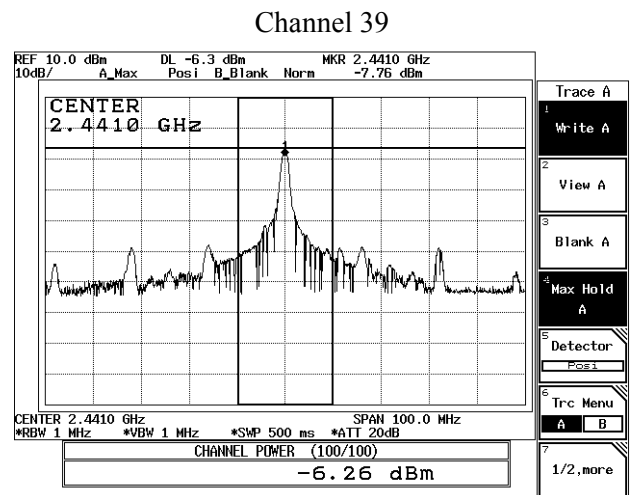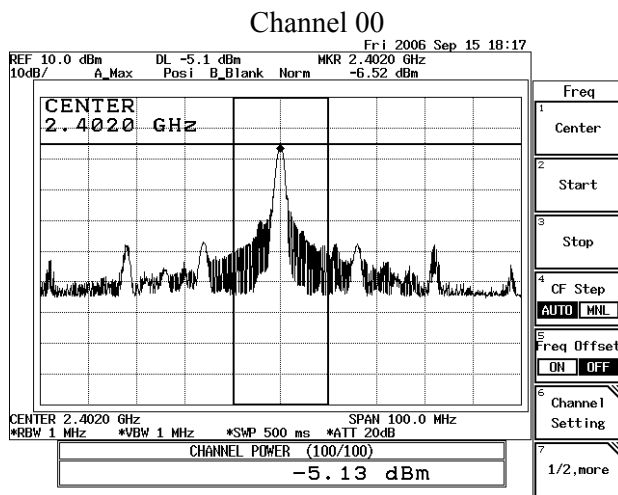


4. Radiated Emission

4.1. Test Equipment

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
<input type="checkbox"/> Site # 1		Test Receiver	R & S	ESVS 10 / 834468/003	May, 2006
		Spectrum Analyzer	Advantest	R3162/ 00803480	May, 2006
		Pre-Amplifier	Advantest	BB525C/ 3307A01812	May, 2006
		Bilog Antenna	SCHAFFNER	CBL6112B / 2697	Sep., 2006
<input type="checkbox"/> Site # 2		Test Receiver	R & S	ESCS 30 / 836858 / 022	May, 2006
		Spectrum Analyzer	Advantest	R3162 / 100803466	May, 2006
		Pre-Amplifier	Advantest	BB525C/3307A01814	May, 2006
		Bilog Antenna	SCHAFFNER	CBL6112B / 2705	May, 2006
		Horn Antenna	ETS	3115 / 0005-6160	Sep., 2006
		Pre-Amplifier	QTK	QTK-AMP-01/ 0001	May, 2006
<input checked="" type="checkbox"/> Site # 3	X	Test Receiver	R & S	ESI 26 / 838786/004	May, 2006
	X	Spectrum Analyzer	Advantest	R3162 / 100803480	May, 2006
	X	Bilog Antenna	SCHAFFNER	CBL6112B / 2697	May, 2006
	X	Horn Antenna	Schwarzbeck	BBHA9120D / 305, 306	July, 2006
	X	Horn Antenna	Schwarzbeck	BBHA9170 / 208, 209	July, 2006
	X	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2006
	X	Pre-Amplifier	HP	8449B / 3008A01123	July, 2006
	X	Pre-Amplifier	MITEQ	AMF-4D-180400-45-6P	May, 2006

Note: 1. All equipments are calibrated every one year.
2. Test equipments marked by "X" are used to measure the final test results.

4.2. Test Setup

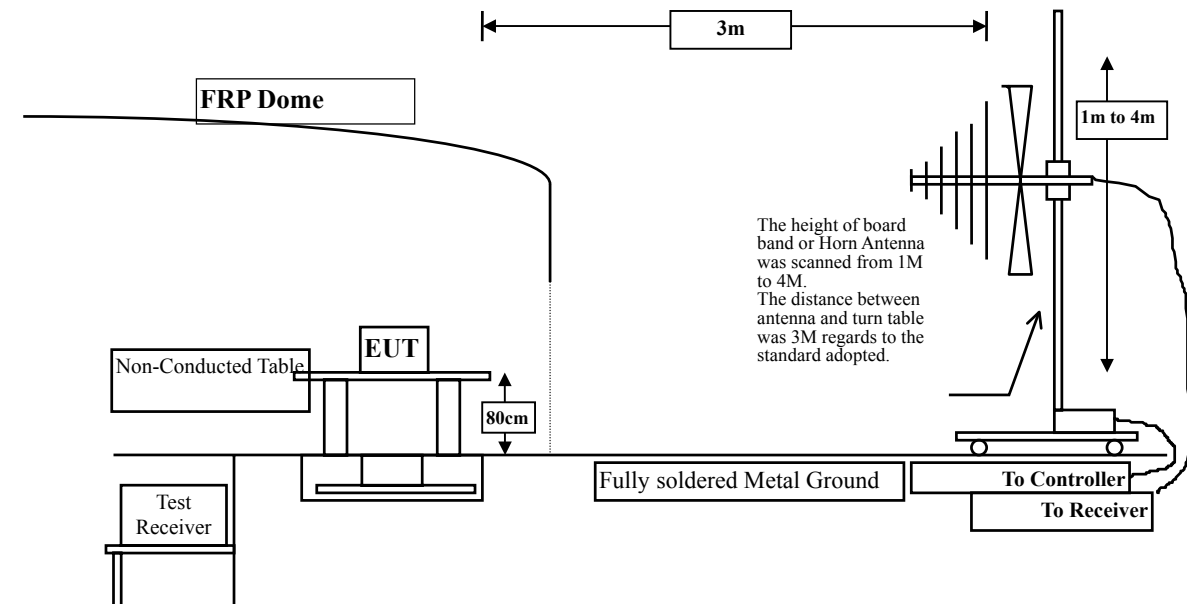

4.3. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

- Remarks:
1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated measurement.

The additional latch filter below 1GHz was used to measure the level of harmonics radiated emission during field strength of harmonics measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 kHz, above 1GHz are 1 MHz.

The frequency range from 30MHz to 10th harmonics is checked.

4.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

4.6. Test Result of Radiated Emission

Product : Bluetooth MP3
Test Item : Harmonic Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 1: Transmitter (Channel 00)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4804.000	3.054	42.886	45.940	-28.060	74.000
7206.000	8.533	38.947	47.480	-26.520	74.000
9608.000	10.883	37.754	48.637	-25.363	74.000

Average Detector:

--

Vertical

Peak Detector:

4804.000	3.054	45.181	48.235	-25.765	74.000
7206.000	8.533	38.586	47.119	-26.881	74.000
9608.000	10.883	38.712	49.595	-24.405	74.000

Average Detector:

--

Note:

1. The reading levels below 1GHz and above 1GHz are quasi-peak values and peak/average values, respectively.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Correct Factor.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Bluetooth MP3
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (Channel 39)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4882.000	3.291	43.289	46.580	-27.420	74.000
7323.000	8.822	38.470	47.291	-26.709	74.000
9764.000	10.966	37.870	48.836	-25.164	74.000

Average Detector:

--

Vertical

Peak Detector:

4882.000	3.291	45.627	48.918	-25.082	74.000
7323.000	8.822	38.484	47.305	-26.695	74.000
9764.000	10.966	37.870	48.836	-25.164	74.000

Average Detector:

--

Note:

1. The reading levels below 1GHz and above 1GHz are quasi-peak values and peak/average values, respectively.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Correct Factor.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Bluetooth MP3
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (Channel 78)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4960.000	3.544	45.281	48.824	-25.176	74.000
7440.000	9.106	37.195	46.300	-27.700	74.000
9920.000	11.057	38.987	50.044	-23.956	74.000

Average Detector:

--

Vertical

Peak Detector:

4960.000	3.544	48.279	51.822	-22.178	74.000
7440.000	9.106	37.447	46.552	-27.448	74.000
9920.000	11.057	38.987	50.044	-23.956	74.000

Average Detector:

--

Note:

1. Reading levels below 1GHz and above 1GHz are quasi-peak values and peak/average values, respectively.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Correct Factor.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Bluetooth MP3
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (Channel 39)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
192.470	9.304	18.300	27.604	-15.896	43.500
286.100	13.443	15.100	28.542	-17.458	46.000
415.500	17.637	10.500	28.137	-17.863	46.000
524.900	18.519	8.700	27.219	-18.781	46.000
565.900	19.144	9.800	28.944	-17.056	46.000
575.500	19.501	8.010	27.511	-18.489	46.000
Vertical					
260.000	14.609	17.800	32.409	-13.591	46.000
352.500	15.421	19.600	35.021	-10.979	46.000
385.000	17.116	19.400	36.516	-9.484	46.000
699.900	20.664	11.100	31.764	-14.236	46.000
734.500	23.170	10.300	33.470	-12.530	46.000
750.100	23.182	7.900	31.083	-14.917	46.000

Note:

1. The reading levels below 1GHz are quasi-peak values.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The radiated emissions below 1GHz of the lowest, middle, highest frequency are pretested. Only the worst case is shown on the report.

5. Band Edge

5.1. Test Equipment


	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Test Receiver	R & S	ESI 26 / 838786/004	May, 2006
X	Spectrum Analyzer	Advantest	R3162 / 100803480	May, 2006
X	Bilog Antenna	SCHAFFNER	CBL6112B / 2697	May, 2006
X	Horn Antenna	Schwarzbeck	BBHA9120D / 305, 306	July, 2006
X	Horn Antenna	Schwarzbeck	BBHA9170 / 208, 209	July, 2006
X	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2006
X	Pre-Amplifier	HP	8449B / 3008A01123	July, 2006
X	Pre-Amplifier	MITEQ	AMF-4D-180400-45-6P	May, 2006

OATS No.3

- Note:
1. All equipments are calibrated every one year.
 2. The test equipments marked by "X" are used to measure the final test results.

5.2. Test Setup

RF Radiated Measurement:

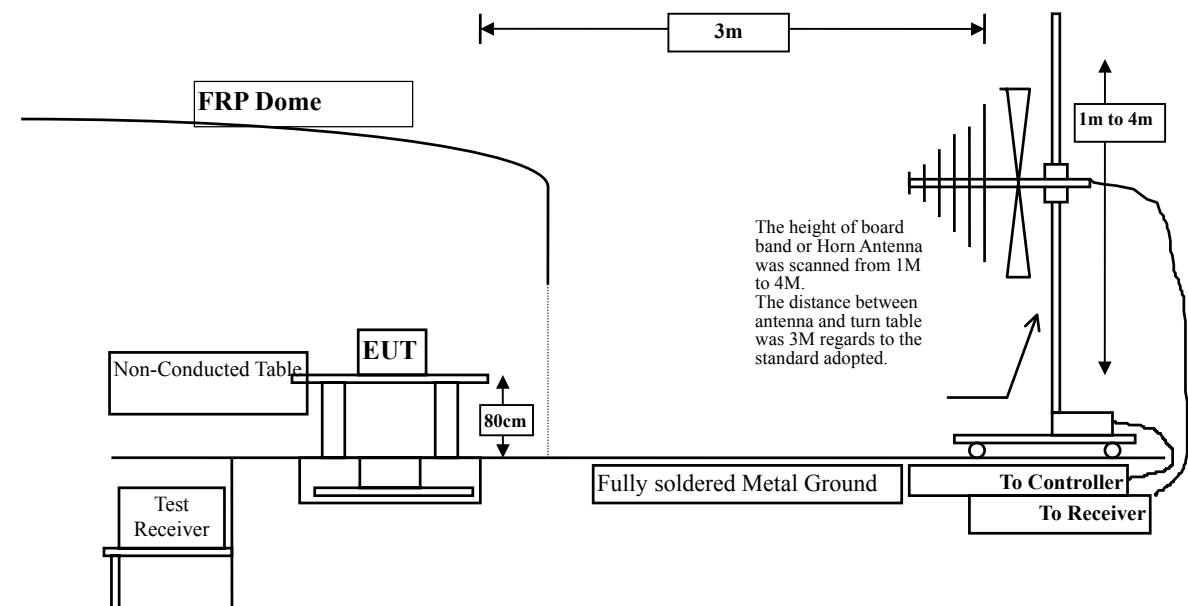

5.3. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:2003 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 kHz, above 1GHz are 1 MHz.

5.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

5.6. Test Result of Band Edge

Product : Bluetooth MP3
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (Channel 00)


RF Radiated Measurement:

Channel No.	Frequency (MHz)	Required Limit (dBc)	Result
00	<2400	>20	Pass

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBUV)	Emission Level (dBUV/m)	Peak Limit (dBUV/m)	Average Limit (dBUV/m)	Result
00(Peak)	2386.125	-2.902	54.269	51.367	74.00	54.00	Pass
00(Avg)	--	--	--	--	74.00	54.00	Pass

Figure Channel 00: (Horizontal)

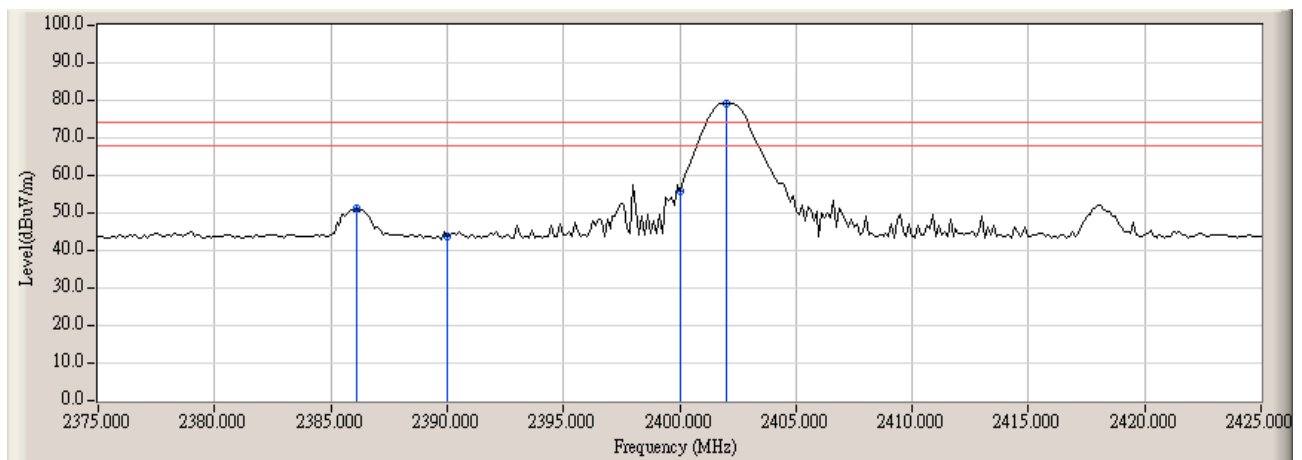

Note:

RBW=1MHz, VBW=1MHz, Sweep Time=500ms.

Product : Bluetooth MP3
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (Channel 00)


RF Radiated Measurement:

Channel No.	Frequency (MHz)	Required Limit (dBc)	Result
00	<2400	>20	Pass

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBUV)	Emission Level (dBUV/m)	Peak Limit (dBUV/m)	Average Limit (dBUV/m)	Result
00(Peak)	2386.000	-2.902	57.312	54.410	74.00	54.00	Pass
00(Avg)	2386.000	-2.902	49.828	46.925	74.00	54.00	Pass


Figure Channel 00: (Vertical) (Peak)

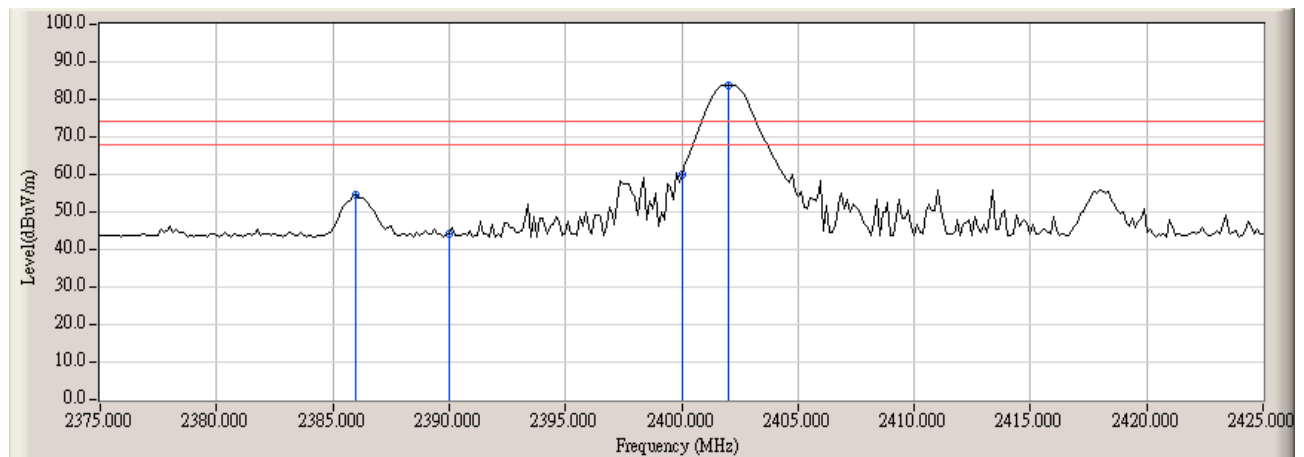

Note:

RBW=1MHz, VBW=1MHz, Sweep Time=500ms.

Figure Channel 00: (Vertical) (Average)

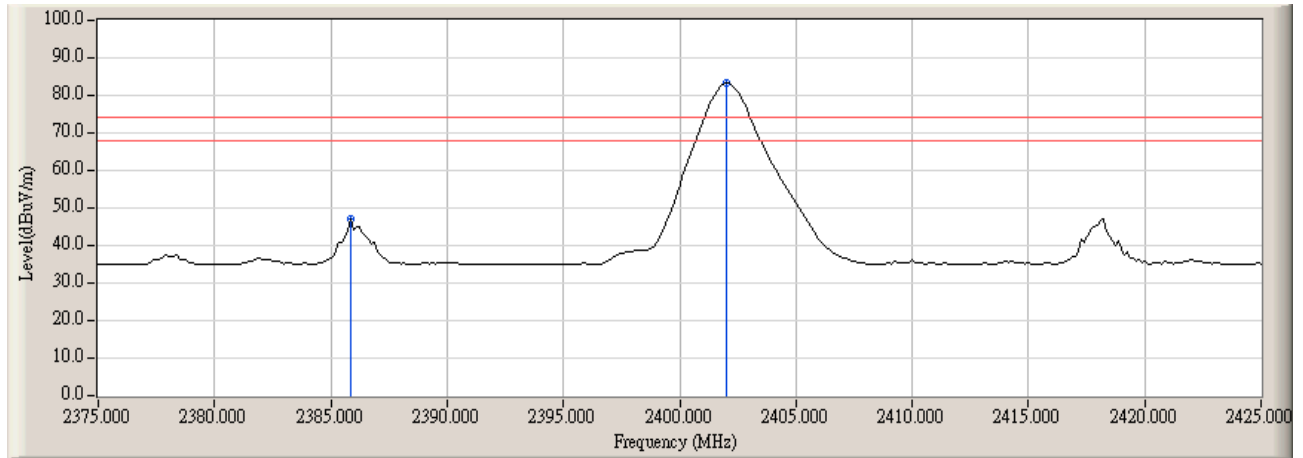

Note:

1. RBW=1MHz, VBW=3kHz, Sweep Time=500ms
2. VBW Justification: on period of a pulse, $T_{on} = 400\mu s$, $VBW \geq 1/T_{on}$

Product : Bluetooth MP3
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (Channel 78)

RF Radiated Measurement:


Channel No.	Frequency (MHz)	Required Limit (dBc)	Result
78	>2483.5	>20	Pass

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00(Peak)	2496.125	-2.388	52.545	50.157	74.00	54.00	Pass
00(Avg)	--	--	--	--	74.00	54.00	Pass

Figure Channel 78:

Horizontal (Peak)

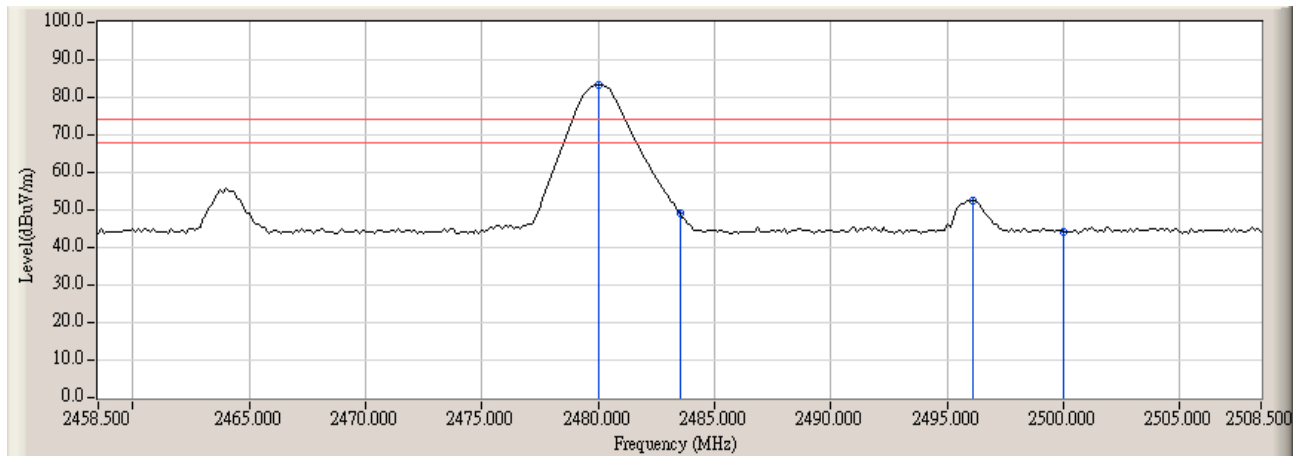

Note:

RBW=1MHz, VBW=1MHz, Sweep Time=500ms

Product : Bluetooth MP3
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (Channel 78)

RF Radiated Measurement:


Channel No.	Frequency (MHz)	Required Limit (dBc)	Result
78	>2483.5	>20	Pass

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00(Peak)	2496.125	-2.388	55.062	52.674	74.00	54.00	Pass
00(Avg)	--	--	--	--	74.00	54.00	Pass

Figure Channel 78:

Vertical (Peak)

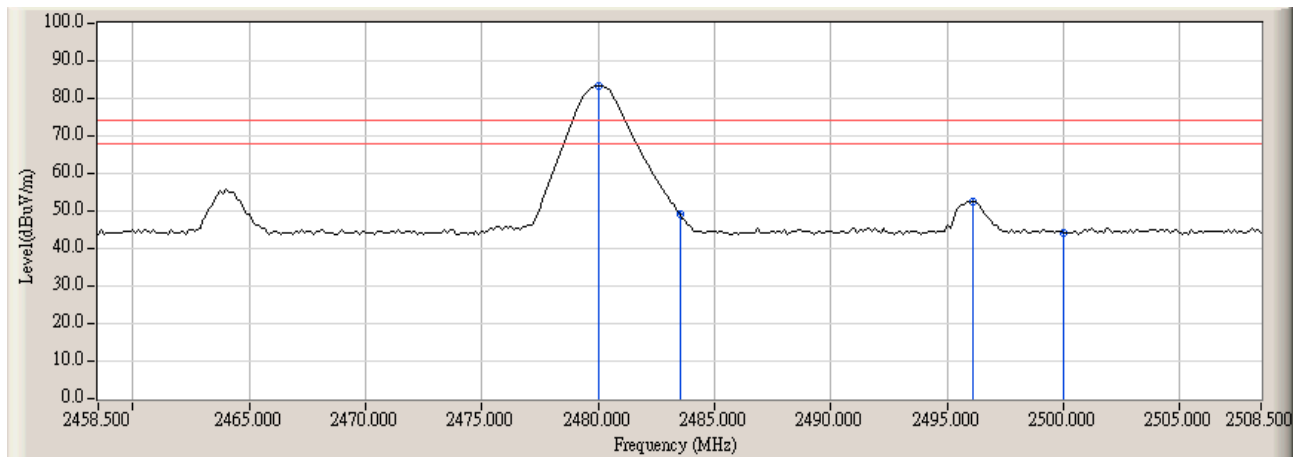

Note:
 RBW=1MHz, VBW=1MHz, Sweep Time=500ms.

Note: The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.


6. Channel Number

6.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	Advantest	R3162 / 121200166	July, 2006

Note: 1. All equipments are calibrated every one year.
2. The test equipments marked by "X" are used to measure the final test results.

6.2. Test Setup

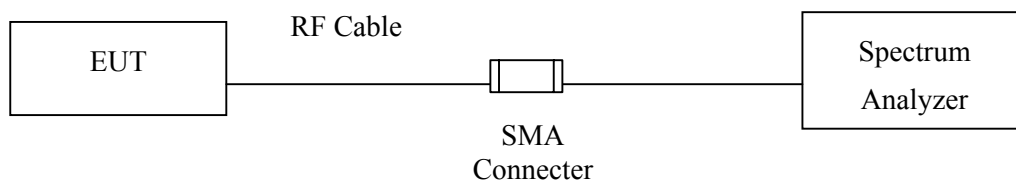

6.3. Limit

Frequency hopping systems operating in the 2400-2483.5 MHz bands shall use at least 75 hopping frequencies.

6.4. Uncertainty


N/A

6.5. Test Result of Channel Number

Product : Bluetooth MP3
 Test Item : Channel Number
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter

Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>75	Pass

2402-2421MHz

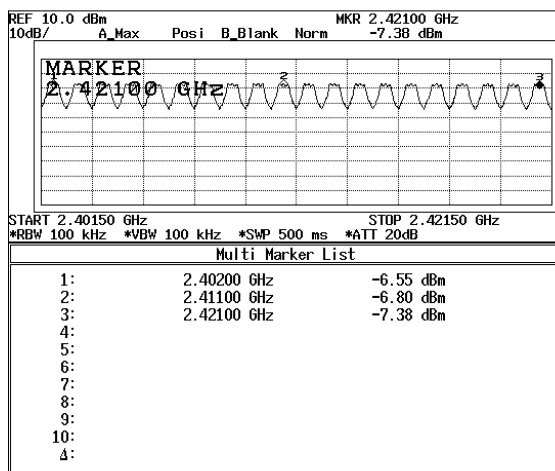

MKR Setup

1 Marker No. 3


2 Marker ON

3 Marker OFF

4 Active Marker

7 Reset Marker

2422-2441MHz

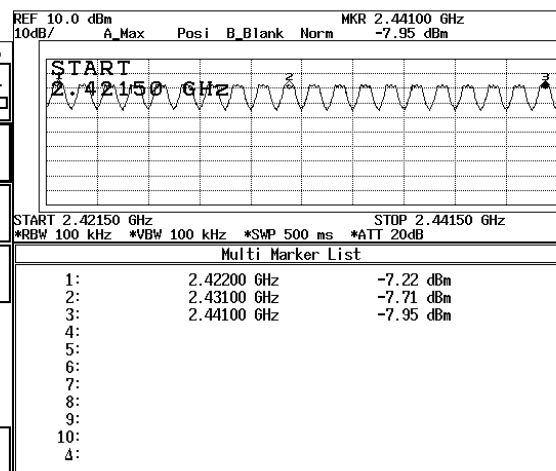

Trace A

1 Write A

2 View A

3 Blank A


4 Max Hold A

5 Detector Pos1

6 Trc Menu A B

7 1/2, more

2442-2471MHz

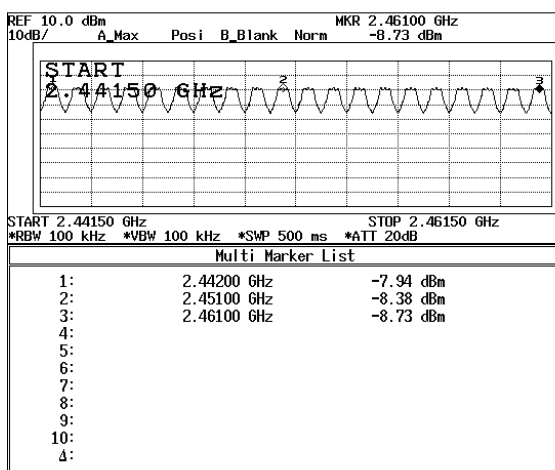

Freq

1 Center

2 Start

3 Stop


4 CF Step AUTO MNL

5 Freq Offset ON OFF

6 Channel Setting

7 1/2, more

2472-2481MHz

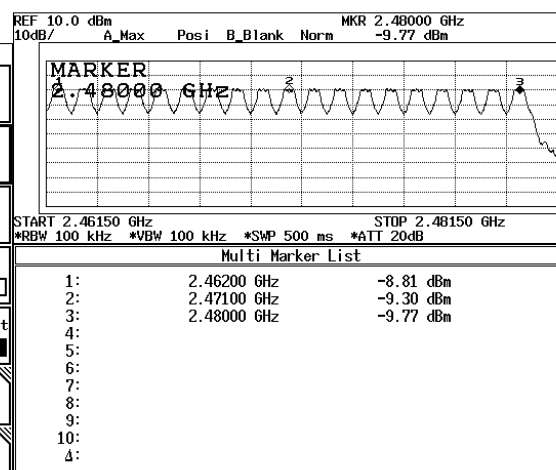

MKR Setup

1 Marker No. 3

2 Marker ON

3 Marker OFF

4 Active Marker

7 Reset Marker


7. Channel Separation

7.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	Advantest	R3162 / 121200166	July, 2006

Note: 1. All equipments are calibrated every one year.
2. The test instruments marked by “X” are used to measure the final test results.

7.2. Test Setup

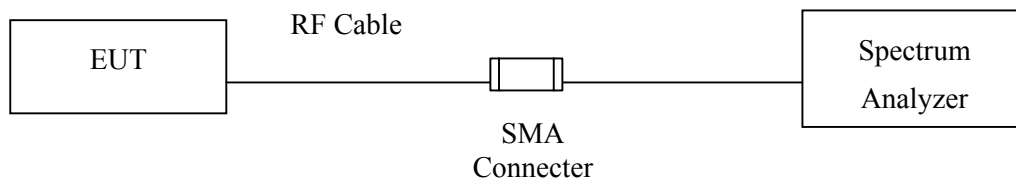

7.3. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

7.4. Uncertainty


$\pm 150\text{Hz}$

7.5. Test Result of Channel Separation


Product : Bluetooth MP3
 Test Item : Channel Separation
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter

Frequency (MHz)	Measurement Level (MHz)	Required Limit	Result
2402	1.00	>25 kHz or 2/3 * 20 dB BW	Pass
2441	1.00	>25 kHz or 2/3 * 20 dB BW	Pass
2480	1.00	>25 kHz or 2/3 * 20 dB BW	Pass


Channel 00 2402MHz

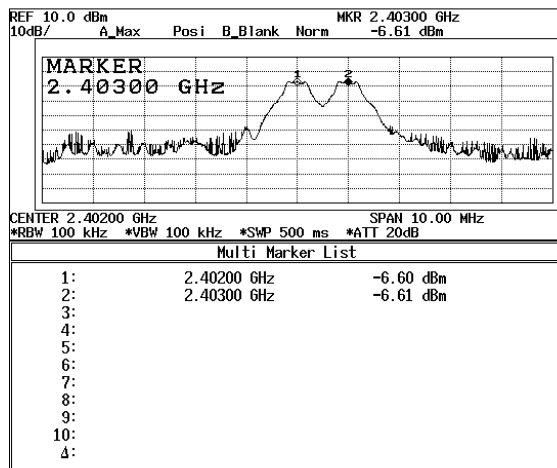

Channel 39 2441MHz

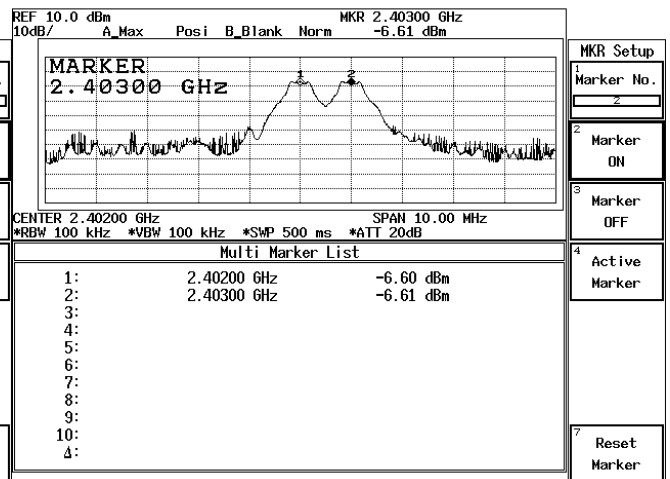

Channel 78 2480 MHz

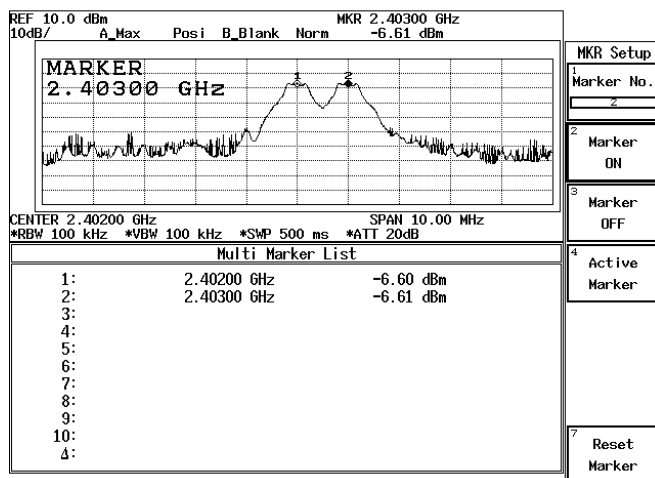


8. Dwell Time

8.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	Advantest	R3162 / 121200166	July, 2006

Note: 1. All equipments are calibrated every one year.
2. The test equipments marked "X" are used to measure the final test results.

8.2. Test Setup

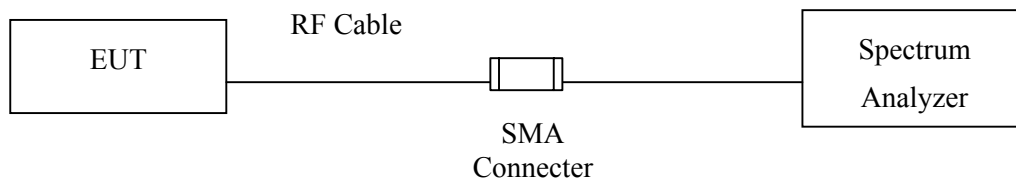

8.3. Limit

The dwell time shall be the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

8.4. Uncertainty


± 25msec

8.5. Test Result of Dwell Time


Product : Bluetooth MP3
 Test Item : Dwell Time
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (Channel 00,39,78 –DH1)

Channel (MHz)	Measurement Level (ms)	Required Limit (sec.)	Result
CH 00 2402	128	< 0.4	Pass
CH 39 2441	128	< 0.4	Pass
CH 78 2480	128	< 0.4	Pass


CH 00 2402MHz

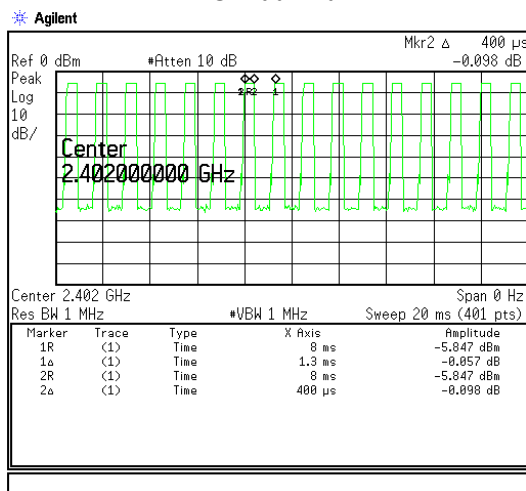


CH 39 2441MHz

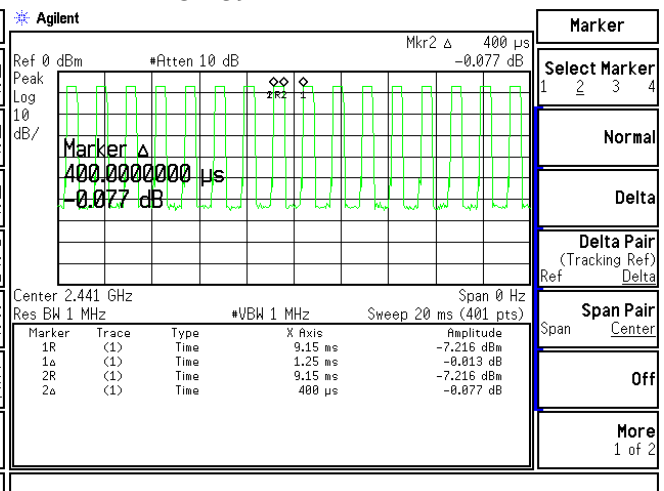

CH 78 2480MHz

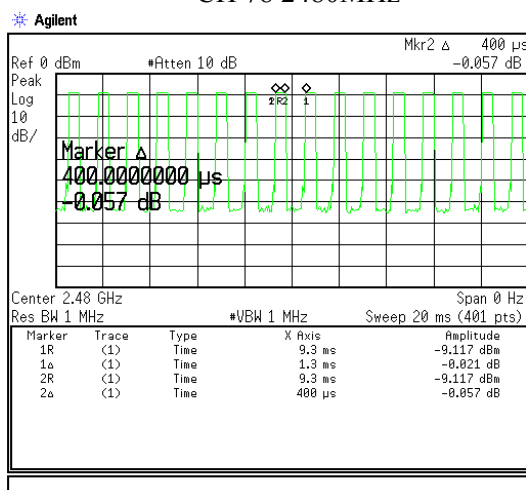

Total

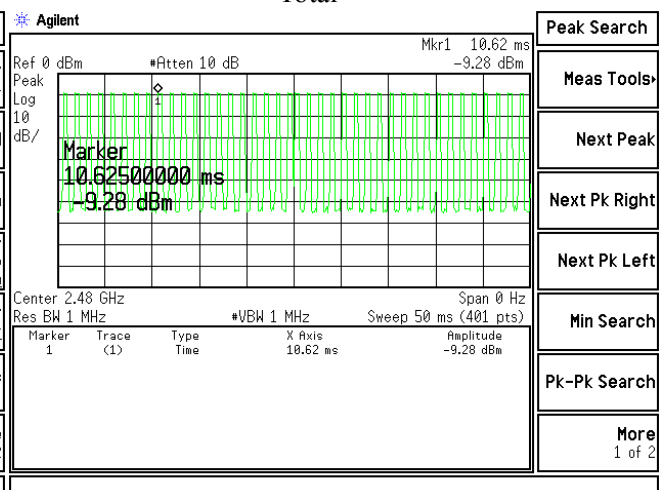

Note: Dwell time = time slot length * hop rate / number of hopping channels * period

Occupancy Time of Frequency Hopping System

Test Time Period: $0.4 \times 79 = 31.6\text{sec}$, Hopping Times Within 1sec: $40/50\text{msec} = 0.8 \text{ hops/msec}$.

A) 2402MHz The Maximum Occupancy Time Within 31.6sec: $400 \mu\text{s} \times 800 / 79 \times 31.6 = 128\text{msec}$ °

B) 2441MHz The Maximum Occupancy Time Within 31.6sec: $400 \mu\text{s} \times 800 / 79 \times 31.6 = 128\text{msec}$ °

C) 2480MHz The Maximum Occupancy Time Within 31.6sec: $400 \mu\text{s} \times 800 / 79 \times 31.6 = 128\text{msec}$ °

Test Result: The average occupancy times of the highest, middle and lowest channel are less than 0.4sec, and thus complies the standard.

PS: (1) From Bluetooth Specification, It Hops 1640 Times in 1sec. The Average Occupancy Time of Each 79 Channels is $1600/79$ Times, Therefore, We Calculate The Maximum Occupancy Time (worst case) As Below:

A) 2402Mhz The Occupancy Time of Each Pulse is 0.4msec, The Maximum Occupancy Time within 31.6sec is $0.4\text{msec} \times 1640/79 \times 31.6 = 289.056\text{msec}$

B) 2441MHz The Occupancy Time of Each Pulse is 0.4msec, The Maximum Occupancy Time within 31.6sec is $0.4\text{msec} \times 1640/79 \times 31.6 = 289.056\text{msec}$


C) 2480MHz The Occupancy Time of Each Pulse is 0.4msec, The Maximum Occupancy Time within 31.6sec is $0.4\text{msec} \times 1640/79 \times 31.6 = 289.056\text{msec}$

Test Result: The average occupancy times of the highest, middle and lowest channel are less than 0.4sec, and thus complies the standard.


Product : Bluetooth MP3
 Test Item : Dwell Time
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (Channel 00,39,78 –DH3)

Channel (MHz)	Measurement Level (ms)	Required Limit (sec.)	Result
CH 00 2402	272	< 0.4	Pass
CH 39 2441	272	< 0.4	Pass
CH 78 2480	272	< 0.4	Pass


CH 00 2402MHz

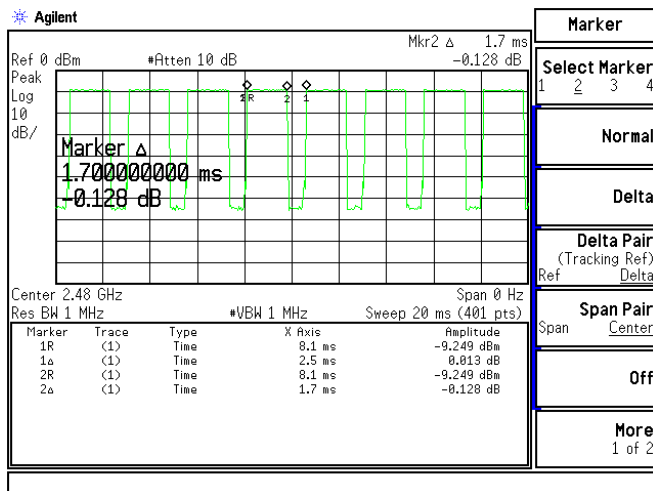


CH 39 2441MHz

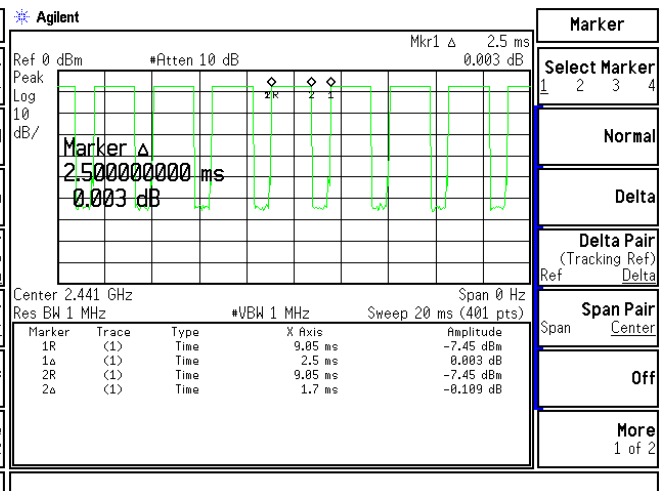

CH 78 2480MHz

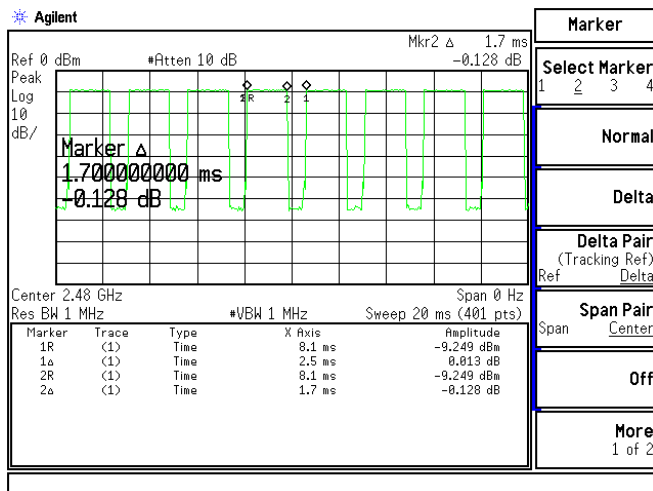

Total

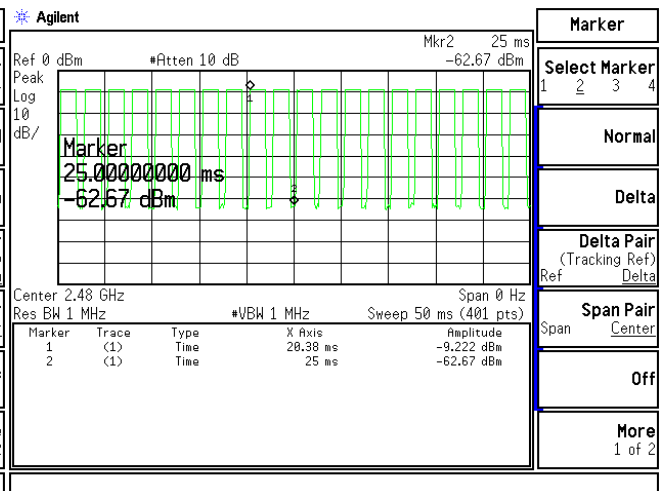

Note: Dwell time = time slot length * hop rate / number of hopping channels * period

Occupancy Time of Frequency Hopping System

Test Time Period: $0.4 * 79 = 31.6\text{sec}$, Hopping Times Within 1sec: $20/50\text{msec} = 0.4 \text{ hops/msec}$.

A) 2402MHz The Maximum Occupancy Time Within 31.6sec: $1700 \mu\text{s} * 400 / 79 * 31.6 = 272\text{msec}$ °

B) 2441MHz The Maximum Occupancy Time Within 31.6sec: $1700 \mu\text{s} * 400 / 79 * 31.6 = 272\text{msec}$ °

C) 2480MHz The Maximum Occupancy Time Within 31.6sec: $1700 \mu\text{s} * 400 / 79 * 31.6 = 272\text{msec}$ °

Test Result: The average occupancy times of the highest, middle and lowest channel are less than 0.4sec, and thus complies the standard.

PS: (1) From Bluetooth Specification, It Hops 1640 Times in 1sec. The Average Occupancy Time of Each 79 Channels is $1600/79$ Times, Therefore, We Calculate The Maximum Occupancy Time (worst case) As Below:

A) 2402Mhz The Occupancy Time of Each Pulse is 0.4msec, The Maximum Occupancy Time within 31.6sec is $0.4\text{msec} * 1640 / 79 * 31.6 = 289.056\text{msec}$

B) 2441MHz The Occupancy Time of Each Pulse is 0.4msec, The Maximum Occupancy Time within 31.6sec is $0.4\text{msec} * 1640 / 79 * 31.6 = 289.056\text{msec}$


C) 2480MHz The Occupancy Time of Each Pulse is 0.4msec, The Maximum Occupancy Time within 31.6sec is $0.4\text{msec} * 1640 / 79 * 31.6 = 289.056\text{msec}$

Test Result: The average occupancy times of the highest, middle and lowest channel are less than 0.4sec, and thus complies the standard.


Product : Bluetooth MP3
 Test Item : Dwell Time
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (Channel 00,39,78 –DH5)

Channel (MHz)	Measurement Level (ms)	Required Limit (sec.)	Result
CH 00 2402	301.6	< 0.4	Pass
CH 39 2441	301.6	< 0.4	Pass
CH 78 2480	301.6	< 0.4	Pass


CH 00 2402MHz

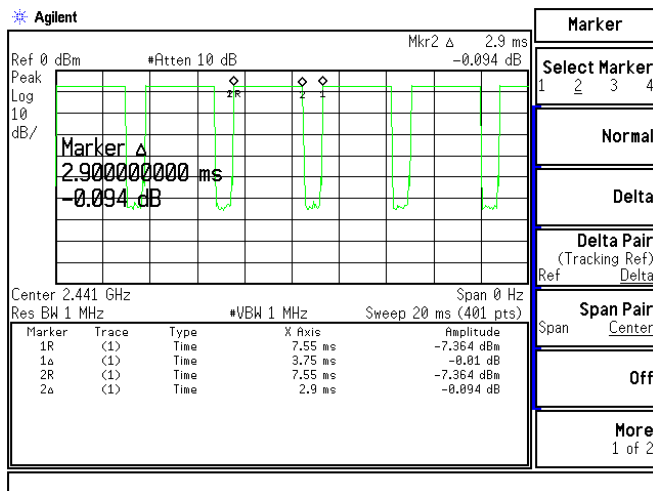


CH 39 2441MHz

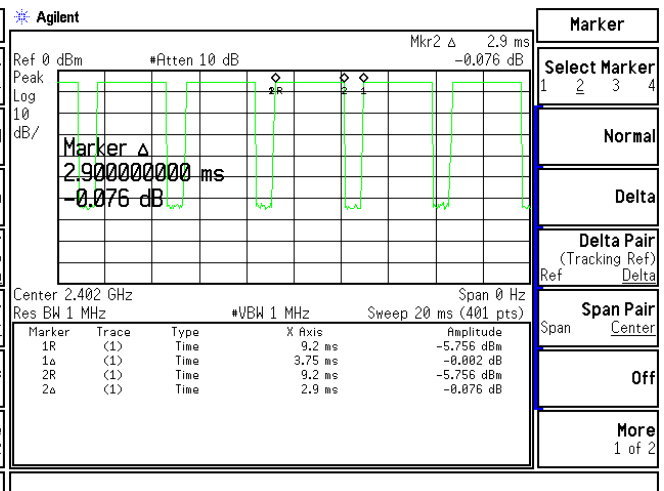

CH 78 2480MHz

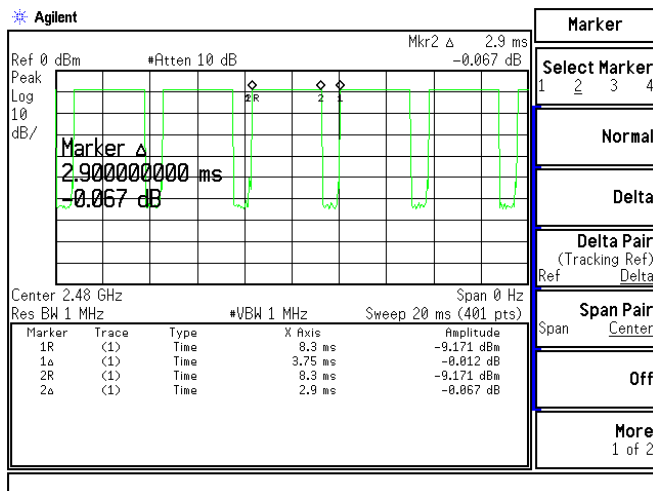

Total

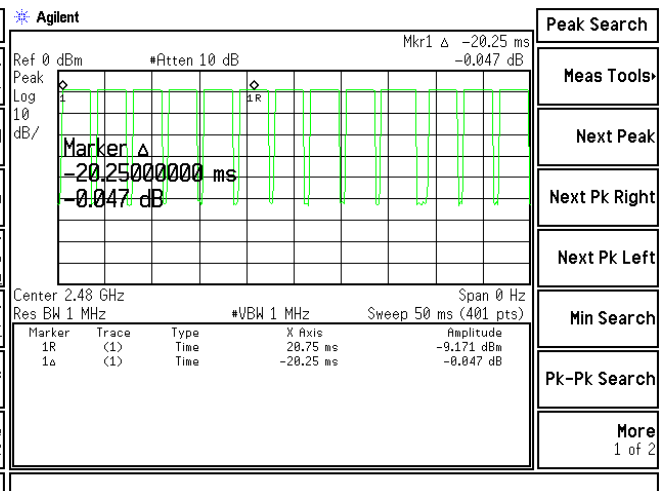

Note: Dwell time = time slot length * hop rate / number of hopping channels * period

Occupancy Time of Frequency Hopping System

Test Time Period: $0.4 \times 79 = 31.6\text{sec}$, Hopping Times Within 1sec: $13/50\text{msec} = 0.26 \text{ hops/msec}$.

A) 2402MHz The Maximum Occupancy Time Within 31.6sec: $2900 \mu\text{s} \times 260 / 79 \times 31.6 = 301.6\text{msec}$ ◦

B) 2441MHz The Maximum Occupancy Time Within 31.6sec: $2900 \mu\text{s} \times 260 / 79 \times 31.6 = 301.6\text{msec}$ ◦

C) 2480MHz The Maximum Occupancy Time Within 31.6sec: $2900 \mu\text{s} \times 260 / 79 \times 31.6 = 301.6\text{msec}$ ◦

Test Result: The average occupancy times of the highest, middle and lowest channel are less than 0.4sec, and thus complies the standard.

PS: (1) From Bluetooth Specification, It Hops 1640 Times in 1sec. The Average Occupancy Time of Each 79 Channels is $1600/79$ Times, Therefore, We Calculate The Maximum Occupancy Time (worst care) As Below:

A) 2402Mhz The Occupancy Time of Each Pulse is 0.4msec, The Maximum Occupancy Time within 31.6sec is $0.4\text{msec} \times 1640/79 \times 31.6 = 289.056\text{msec}$

B) 2441MHz The Occupancy Time of Each Pulse is 0.4msec, The Maximum Occupancy Time within 31.6sec is $0.4\text{msec} \times 1640/79 \times 31.6 = 289.056\text{msec}$

C) 2480MHz The Occupancy Time of Each Pulse is 0.4msec, The Maximum Occupancy Time within 31.6sec is $0.4\text{msec} \times 1640/79 \times 31.6 = 289.056\text{msec}$

Test Result: The average occupancy times of the highest, middle and lowest channel are less than 0.4sec, and thus complies the standard.


9. Occupied Bandwidth

9.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	Advantest	R3162 / 121200166	July, 2006

Note: 1. All equipments are calibrated every one year.
 2. The test instruments Marked “X” are used to measure the final test results.

9.2. Test Setup

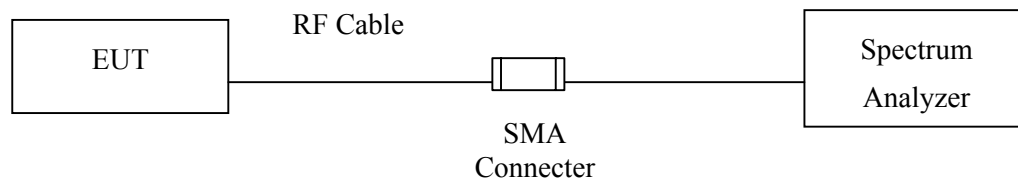

9.3. Limits

N/A

9.4. Uncertainty


$\pm 150\text{Hz}$

9.5. Test Result of Occupied Bandwidth

Product : Bluetooth MP3
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2402MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	10900	--	N/A


Figure Channel 00:

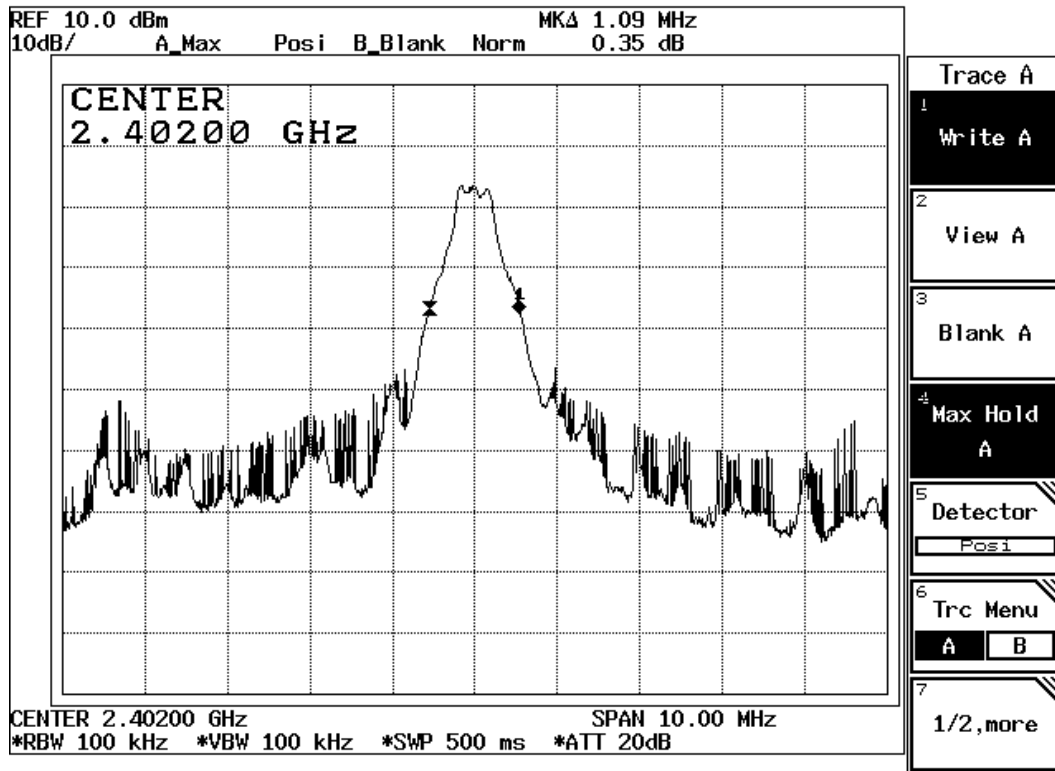

Product : Bluetooth MP3
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2441MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
39	2441	10900	--	N/A


Figure Channel 39:

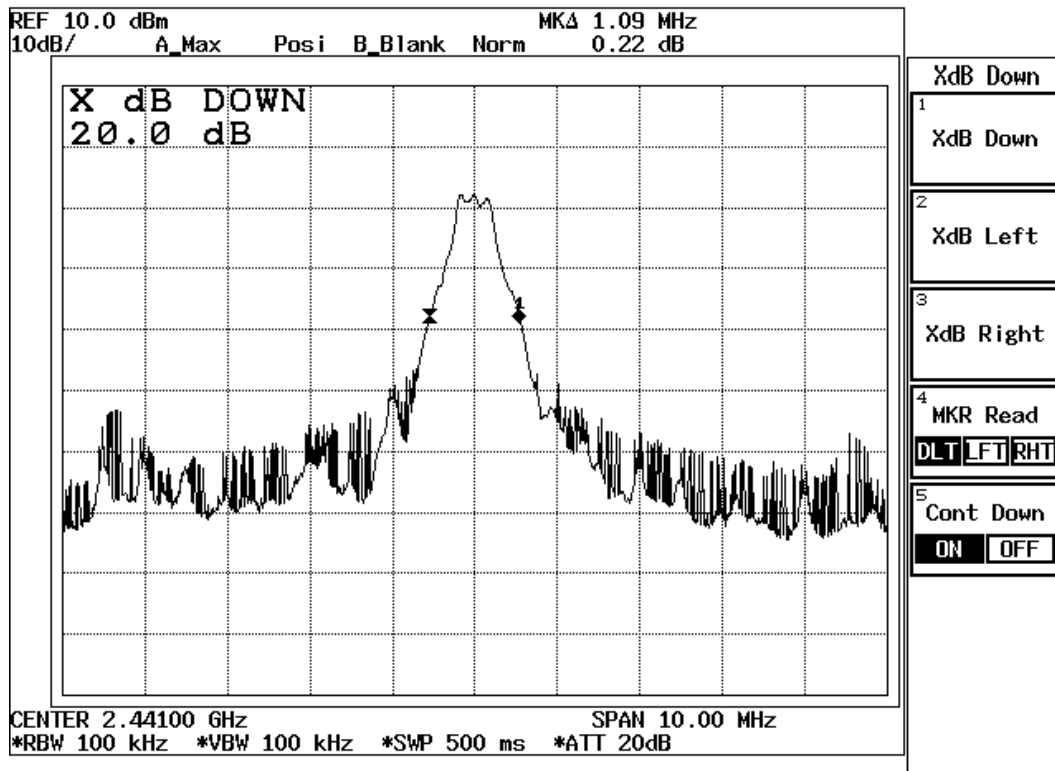

Product : Bluetooth MP3
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2480MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
78	2480	11000	--	N/A

Figure Channel 78:

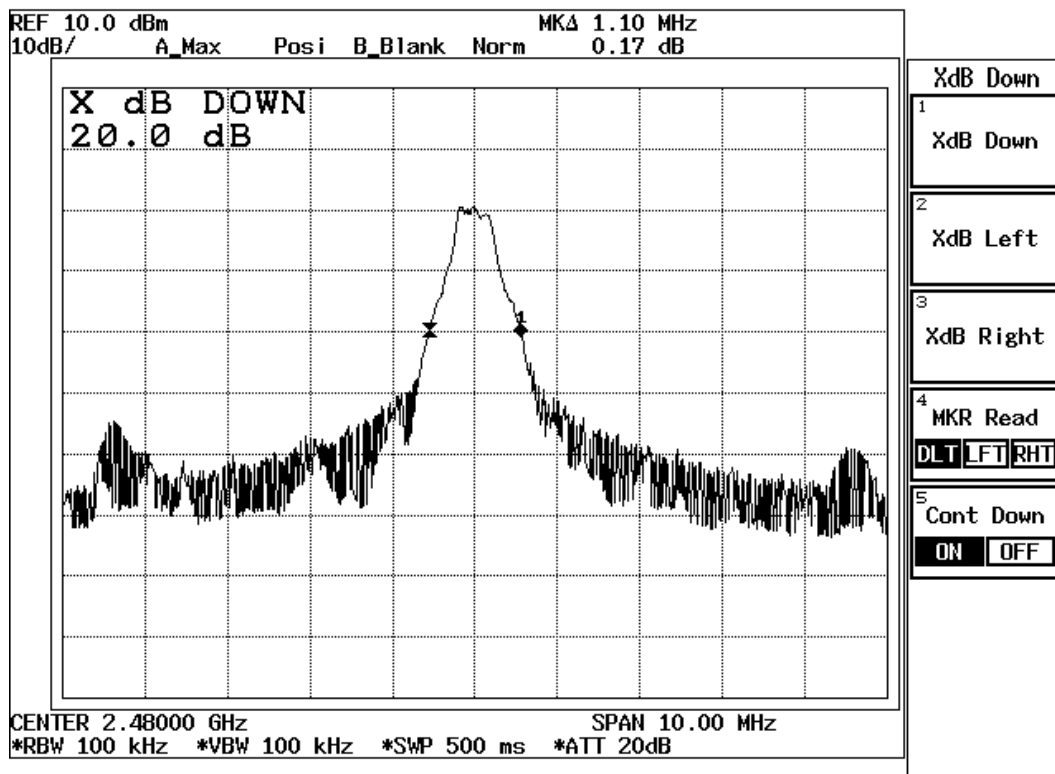

10. EMI Reduction Method During Compliance Testing

No modification was made during testing.