



LCIE

Rapport d'essai / Test report

JDE : 60052797 N° 200611-3431C-R1-E

DELIVRE A / ISSUED TO : EUROCAVE (M. WAROUX)
24 rue Francis de Pressensé
69100 VILLEURBANNE

Objet / Subject : Essais de compatibilité électromagnétique conformément aux normes :
Electromagnetic compatibility tests according to the standard :
- 47 CFR Part 15 Subpart C
- RSS 210 & RSS gene

Matériel testé / Apparatus under test :

- Produit / Product : Cave à vin radio pilote / Wire cellar radio-controlled
- Marque / Trade mark : EUROCAVE
- Constructeur / Manufacturer : EUROCAVE
- Type / Model : ORIGINE Puissance / ORIGINE Afficheur
- N° de série / serial number :

* : information donnée par le client / information given by the customer

Date des essais / Test date : Le 12 et 15 janvier 2007 / January 12th and 15th 2007

Lieu d'essai / Test location : LCIE
ZI des Blanchisseries
38500 VOIRON - France

Test réalisé par / Test performed by : Jacques LORQUIN

Ce document comporte / Composition of document : 20 pages.

VOIRON, LE 28 FEVRIER 2007 / FEBRUARY 28TH, 2007

Ecrit par / Written by
Jacques LORQUIN

Approuvé par / Approved by
Yannick SAVOIE
BUREAU VERITAS
CENTRAL DES
INDUSTRIES ELECTRIQUES
Etablissement de Voiron
Z.I. les Blanchisseries
38500 VOIRON
Tél. 04 76 05 09 08 - Fax 04 76 66 18 30
Siret: 408 363 174 00099

La reproduction de ce document n'est autorisée que sous sa forme intégrale. Toute reproduction partielle ou toute insertion de résultats dans un texte d'accompagnement en vue de leur diffusion doit recevoir un accord préalable et formel du LCIE. Ce document résulte d'essais effectués sur un spécimen, un échantillon ou une éprouvette. Il ne préjuge pas de la conformité de l'ensemble des produits fabriqués à l'objet essayé. Il ne préjuge en aucun cas d'une décision de certification. This document shall not be reproduced, except in full, without the written approval of the LCIE. This document contains results related only to the item tested. It does not imply the conformity of the whole production to the item tested. This document doesn't anticipate any certification decision



1. TEST PROGRAMME

Tests have been performed according to following standards:

Standard : 47 CFR Part 15 Subpart C Title 47 – Telecommunication; Part 15- Radio Frequency Devices
RSS 210 & RSS gene

A pre-qualification in anechoic chamber has been performed for find the worst case:

- Measure with remote control (ORIGINE Afficheur) only put on table, on 3 axes (X, Y, Z).
- Measure with ORIGINE puissance with cellar only.
- Measure with ORIGINE puissance and ORIGINE afficheur in the holder.

The worst case is measure with both units; consequently, all test results of test report are for the ORIGINIE Afficheur in the holder of ORIGINE puissance.

2. SETUP

2.1. Hardware identification:

* Equipment under test (EUT) :

ORIGINE Afficheur pn: P-3186-4400631

- Size: 90x90x30mm
- Firmware: none
- RF power output: -8dBm
- Inputs/Outputs:
 - None

* Equipment under test (EUT) :

ORIGINE Puissance pn: P-3187-4400620

- Size: 75x40x140mm
- Firmware: none
- RF power output: -6dBm
- Inputs/Outputs:
 - Mains power supply input
 - 2x Input/Output relays

* Cables:

- Power supply cord of cellar, unshielded, length : 2.5m (internal cable).
- I/O cable of cellar, unshielded, length: 2.5m (internal cable).

2.2. Auxiliaries or control equipment used for test

The FCC IDs for all equipment, plus description of all cables used in the tested system (including inserted cards, which have grants) are:

Trade Mark – Model Number (Serial number)	FCC ID	Description	Cable description
EUROCAVE	None	Wire cellar	Power cord unshielded length 2m
EUROCAVE ORIGINE Afficheur P-3186-4400631	UXLORIGINE1	Remote control	None
EUROCAVE ORIGINE Puissance P-3187-4400620	UXLORIGINE1	Base	Unshielded cables


2.3. Running mode

The system was configured for testing in a typical fashion (as a customer would normally use it).


- Communication between ORIGINE Afficheur and ORIGINE Puissance.

2.4. Equipment modifications

A capacitor of 1pF is set outside of the RF module see photo for ORIGINE Afficheur and ORIGINE Puissance.

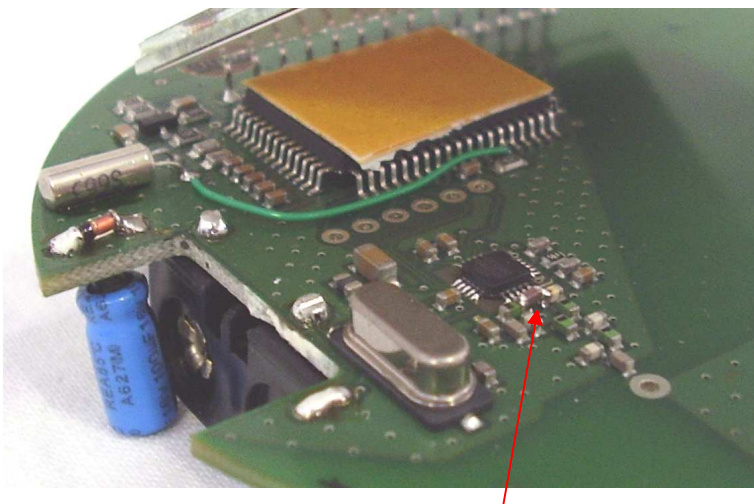

ORIGINE Afficheur

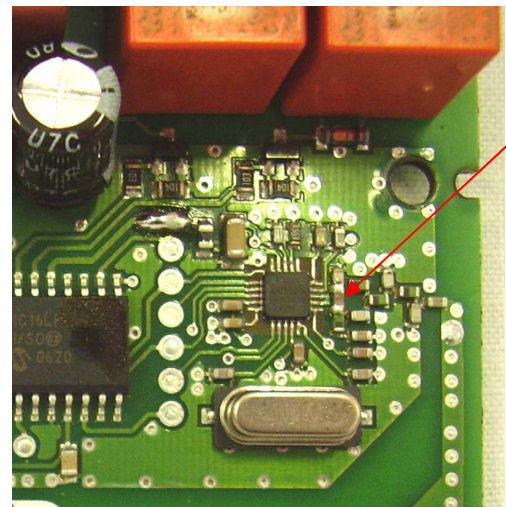

ORIGINE Puissance

3. RADIATED EMISSION DATA

3.1. Setup

Mains: 115V@60Hz

The EUT and auxiliaries are set on the floor.


Equipment configuration and running mode:

- The cellar is powered by 115V@60Hz
- The ORIGINE Afficheur is set on the remote control holder



RADIATED EMISSION - EUROCAVE

Filename : c:\emtest\data\3431c\pol#v.dat
Oper : Jacques LORQUIN
Spec : EN 55022, Class B
Type : Radiated

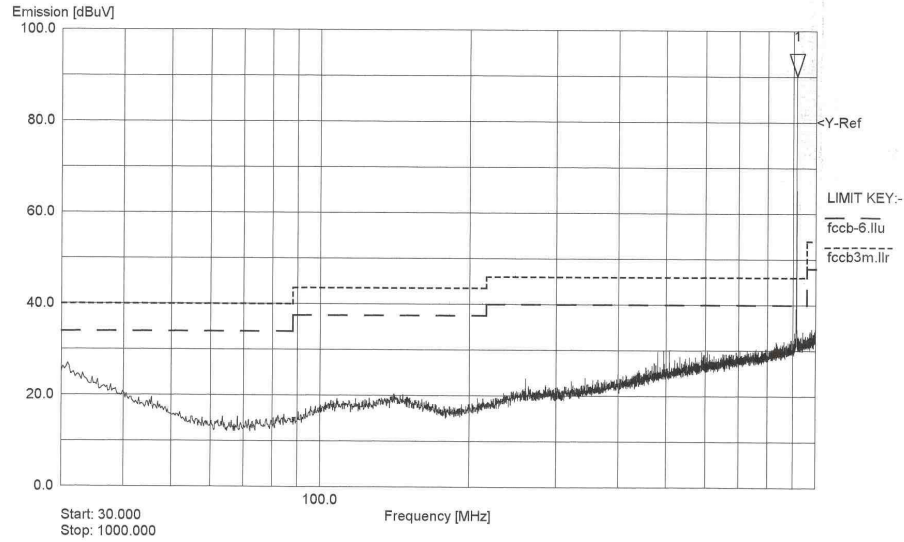

10:39:55 12 Jan 2007


RBW: 120.00 KHz
VBW: 300.00 KHz
Device : ORIGINE (Afficheur - Puissance)
Serial #: (110V@60Hz) Polar V



3.2.2. Pre-characterization at 3 meters below 30MHz of EUT

A pre-scan of all the setup has been performed in a 3 meters full anechoic chamber. The distance between EUT and antenna is 3 meters. Test is performed in horizontal (H) and vertical (V) axis and the loop antenna position was rotated during the test for maximized the emission measurement. See below for a graph example:

RADIATED EMISSION - EUROCAVE

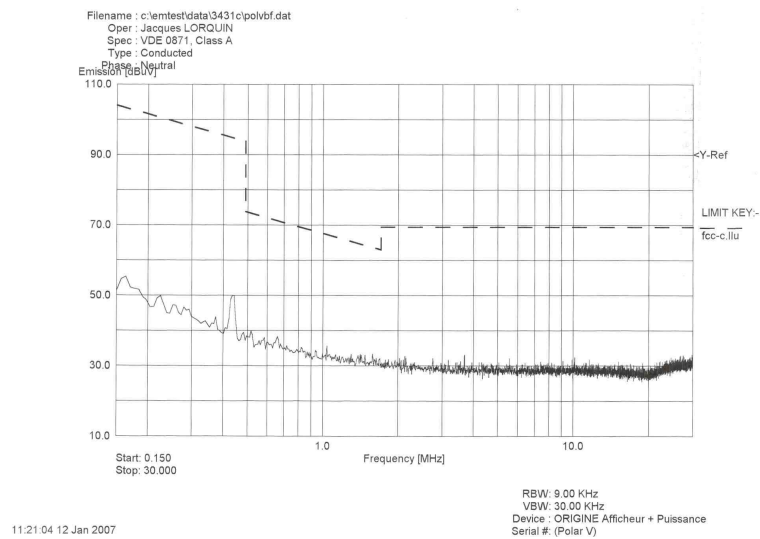

3.2.3. Pre-characterization at 3 meters above 1GHz of EUT

A pre-scan of all the setup has been performed in a 3 meters full anechoic chamber. The distance between EUT and antenna is 3 meters. Test is performed in horizontal (H) and vertical (V) axis.



3.2.6. Characterization on 3 meters open site from 1GHz to 9.15GHz

The product has been tested according to ANSI C63.4-(2003),. Radiated Emission was measured on an open area test site. A description of the facility is on file with the FCC.

The product has been tested with 110V@60Hz power line voltage, at a distance of 3 meters from the antenna and compared to the FCC Part 15 Subpart C limits. Measurement bandwidth was 1MHz from 1GHz to 9.15GHz.

Antenna height search was performed from 1m to 4m for both horizontal and vertical polarization. Continuous linear turntable azimuth search was performed with 360 degrees range.

Interconnecting cables and equipment's were moved to position that maximized emission. A summary of the worst case emissions found in all test configurations and modes is shown on clause 3.1.

Frequency list has been created with anechoic chamber pre-scan results.

No	Frequencies (MHz)	Average Lmt (dBμV/m)	Av (dBμV/m)	Av-Lmt (dB)	Angle (deg)	Pol	Hgt (cm)	Corr Factor (dB)	Comments
1	1.019	54	(35.9)	-18.1	268°	H	115	-7.2	
2	1.032	54	(35.3)	-18.7	269°	H	114	-7.2	
3	1.045	54	(34.8)	-19.2	269°	H	116	-7.2	
4	1.836	54	47.6	-6.4	321°	V	114	-5	
5	2.745	54	53.5	-0.5	75°	V	127	-1.2	
6	3.660	54	(48.3)	-5.7	34°	H	102	-0.4	
7	4.575	54	(47.5)	-6.5	295°	V	144	+1.9	
8	5.489	54	53.9	-0.1	126°	V	128	+2.9	

Note - Measure inside () are in peak mode.

No	Frequencies (MHz)	Peak Lmt (dBμV/m)	Peak (dBμV/m)	Pk-Lmt (dB)	Angle (deg)	Pol	Hgt (cm)	Corr Factor (dB)	Comments
1	1.019	74	35.9	-38.1	268°	H	115	-7.2	
2	1.032	74	35.3	-38.7	269°	H	114	-7.2	
3	1.045	74	34.8	-39.2	269°	H	116	-7.2	
4	1.836	74	52.4	-21.6	321°	V	114	-5	
5	2.745	74	55.6	-18.4	75°	V	127	-1.2	
6	3.660	74	48.3	-25.7	34°	H	102	-0.4	
7	4.575	74	47.5	-26.5	295°	V	144	+1.9	
8	5.489	74	57.8	-16.2	126°	V	128	+2.9	




3.3. Test sequence and results (Receive mode)

3.3.1. Pre-characterization at 3 meters from 30MHz to 1GHz

A pre-scan of all the setup has been performed in a 3 meters full anechoic chamber. The distance between EUT and antenna is 3 meters. Test is performed in horizontal (H) and vertical (V) polarization, and from 0 to 360° of the EUT. See below for a graph example:

RBW: 120kHz - VBW: 300kHz

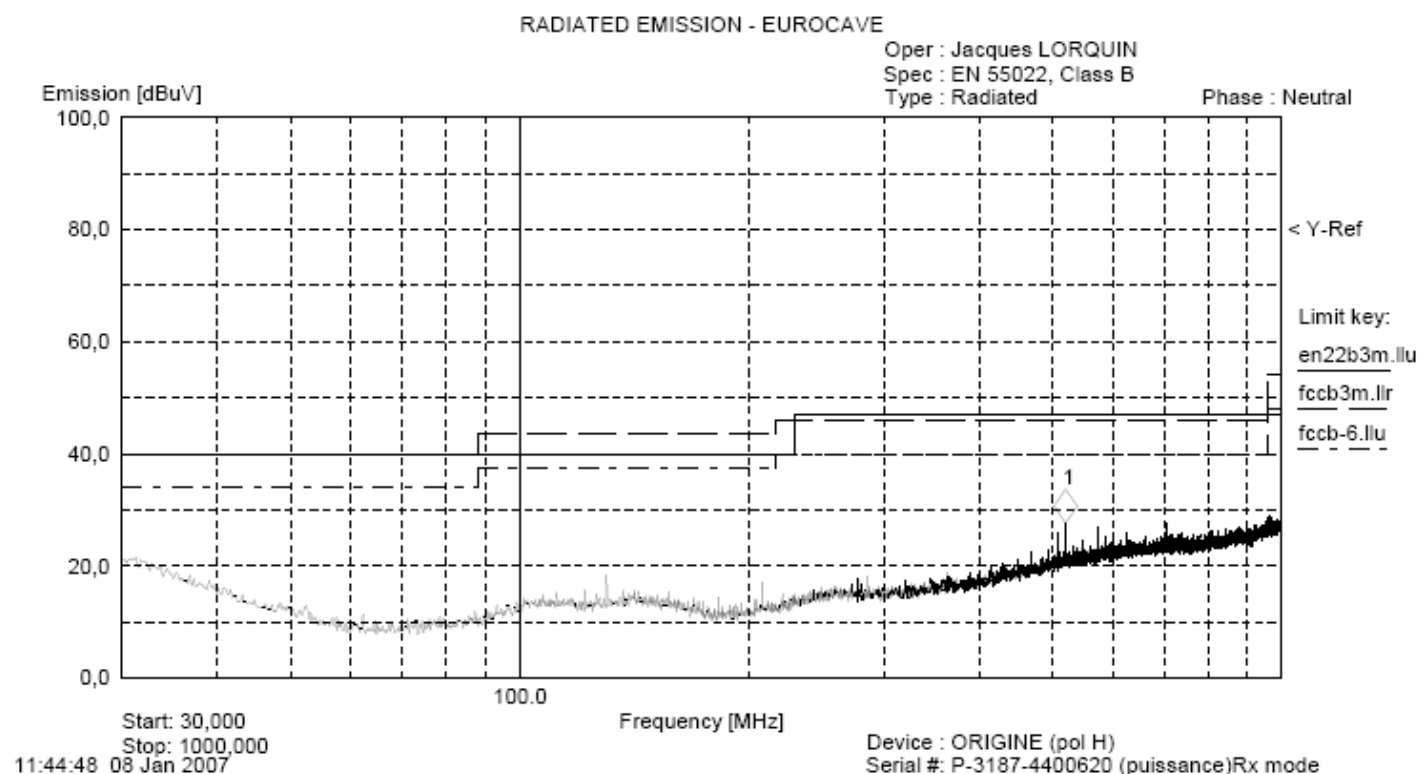

Marker	Frequency [MHz]	Peak [dBuV]	Comments
1	520,1	27,64	

3.3.2. Pre-characterization at 3 meters above 1GHz and below 30MHz

No traceable signal.

3.3.3. Characterization on 3 meters open site from 30MHz to 1GHz

The product has been tested according to ANSI C63.4-(2003). Radiated Emission was measured on an open area test site. A description of the facility is on file with the FCC.

The product has been tested with 110V@60Hz power line voltage, at a distance of 3 meters from the antenna and compared to the FCC Part 15 Subpart C limits. Measurement bandwidth was 120kHz from 30MHz to 1GHz.

Antenna height search was performed from 1m to 4m for both horizontal and vertical polarization. Continuous linear turntable azimuth search was performed with 360 degrees range.



Interconnecting cables and equipment's were moved to position that maximized emission. A summary of the worst case emissions found in all test configurations and modes is shown on clause 3.1.

Frequency list has been created with anechoic chamber pre-scan results.

No	Frequencies (MHz)	QPeak Lmt (dBµV/m)	QPeak (dBµV/m)	QPeak-Lmt (dB)	Angle (deg)	Pol	Hgt (cm)	Corr Factor (dB)	Comments
1	519.993	46.0	41.0	-5.0	335	V	200	22.0	*

*: Measures have been done at 10m distance and corrected following requirements of 15.31

3.4. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follow:

$$FS = RA + AF + CF - AG$$

Where
FS = Field Strength
RA = Receiver Amplitude
AF = Antenna Factor
CF = Cable Factor
AG = Amplifier Gain

Assume a receiver reading of 52.5dBµV is obtained. The antenna factor of 7.4 and a cable factor of 1.1 is added. The amplifier gain of 29dB is subtracted, giving a field strength of 32 dBµV/m.

$$FS = 52.5 + 7.4 + 1.1 - 29 = 32 \text{ dB}\mu\text{V/m}$$

The 32 dBµV/m value can be mathematically converted to its corresponding level in µV/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32\text{dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}.$$

4. CONDUCTED EMISSION DATA

The product has been tested according to ANSI C63.4-(2003).

The product has been tested with 110V@60Hz power line voltage and compared to the FCC part 15 Subpart C limits. Measurement bandwidth was 9kHz from 150kHz to 30MHz.

Measurement was initially made with an HP-8591EM Spectrum Analyzer in peak mode. This was followed by a Quasi-Peak, i.e. CISPR measurement with the Rohde & Schwarz ESH3 receiver for any strong signal. If the average limit is met when using a Quasi-Peak detector, the EUT shall be deemed to meet both limits and measurement with the average detector is unnecessary.

The Peak data are shown on the following plots. Quasi-Peak and Average measurements are detailed in a table with frequencies and levels measured.

Interconnecting cables and equipment's were moved to position that maximized emission. A summary of the worst case emissions found in all test configurations and modes is shown on the following page.

4.1. Setup

Mains: 110V@60Hz




The EST and auxiliaries are set on the floor. The equipment under test is powered via the LISN.


**4.2. TEST SEQUENCE AND RESULTS**

Measures are performed on line 1 and line 2 of the power supply of the cellar.

4.2.1. Line conducted emission data (110V@60Hz) (ORIGINE Puissance with ORIGINE Afficheur)

RBW: 9kHz - VBW: 30kHz

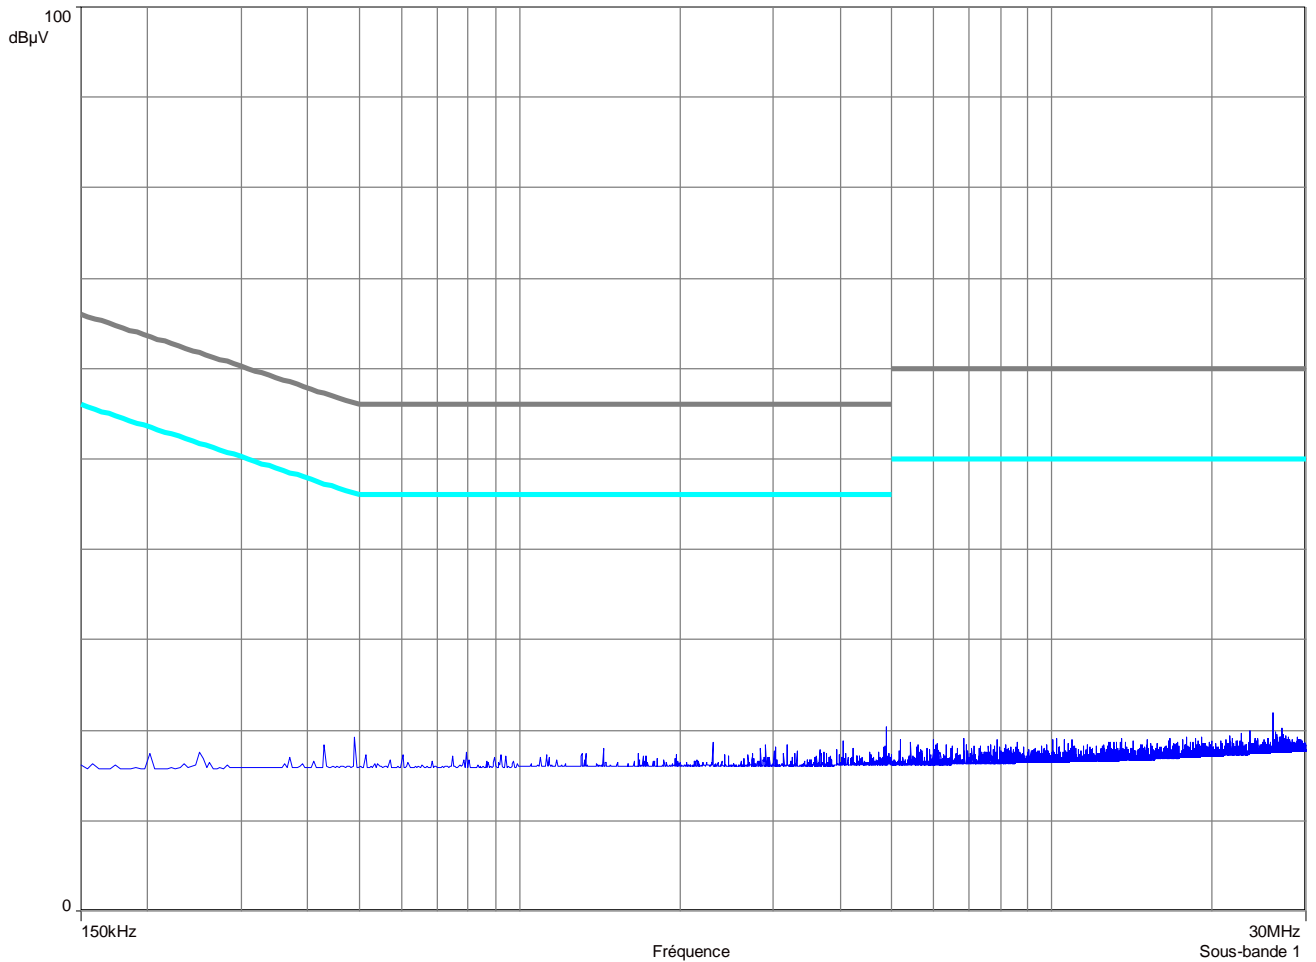

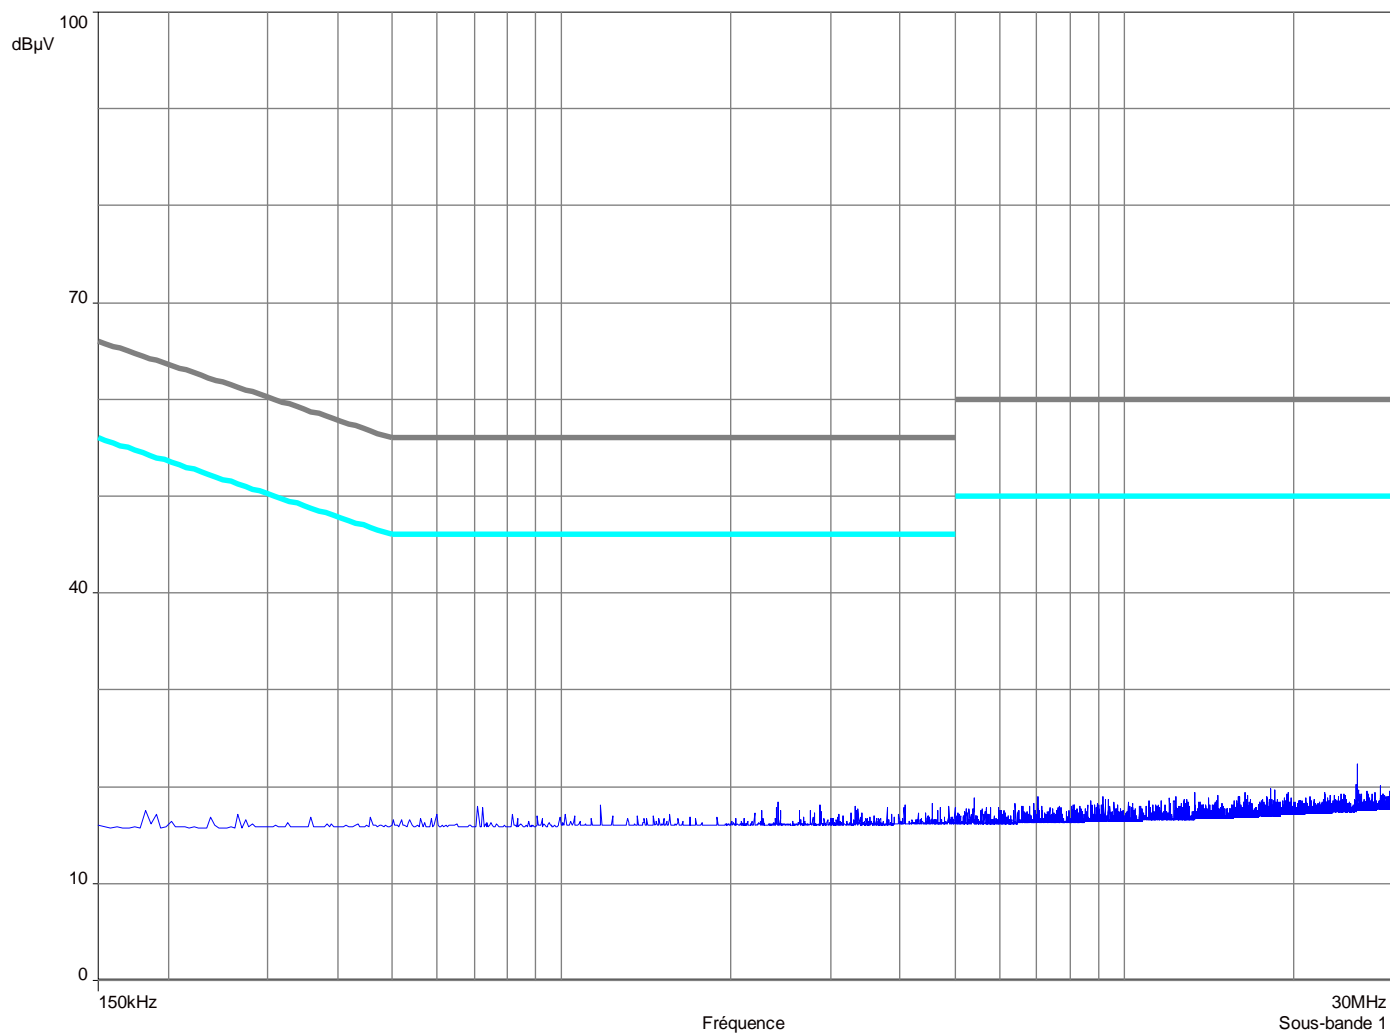**4.2.2. Neutral conducted emission data (110V@60Hz) (ORIGINE Puissance with ORIGINE Afficheur)****RBW: 9kHz - VBW: 30kHz**

**5. FIELD STRENGTH OF FUNDAMENTAL §15.249**

The polarization of the measurements for the larger power level is vertical (Antenna height search was performed from 1m to 4m for both horizontal and vertical polarization. Continuous linear turntable azimuth search was performed with 360 degrees range.)

Measure has been done at 3m distance.

No	Frequencies (MHz)	QPeak Lmt (dBμV/m)	QPeak (dBμV/m)	QPeak-Lmt (dB)	Angle (deg)	Pol	Hgt (cm)	Corr Factor (dB)	Comments
4	915.034	94.0	92.7	-1.3	300	H	130	27.7	

No significantly variation of the fundamental amplitude during voltage variation testing per 15.31(e). Maximum deviation:

+0 dB
-0.1 dB

With the following setup:

For *ORIGINE puissance* :

- Under extreme test condition (voltage variation from 85% to 115%):

For *ORIGINE Afficheur*:

- With a new batterie :

Limits Subclause §15.249(a): Operation within the band 902-928MHz

Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
902 - 928	50 (94 dBμV/m)	3

5.1. Temperature


Temperature has been set at -30°C and +50°C at nominal voltage 110Vac.

Operating frequency: 915.013000 MHz

Voltage	-30°C	-20°C	0°C	20°C	+50°C
Frequency (MHz)	915.013213	915.015088	915.012513	915.013000	914.989651


**6. OCCUPIED BANDWIDTH §15.205**

Here is a plot of the occupied bandwidth, which shows that, 608-614 and 960-1240 restricted bands are free of carrier signal.

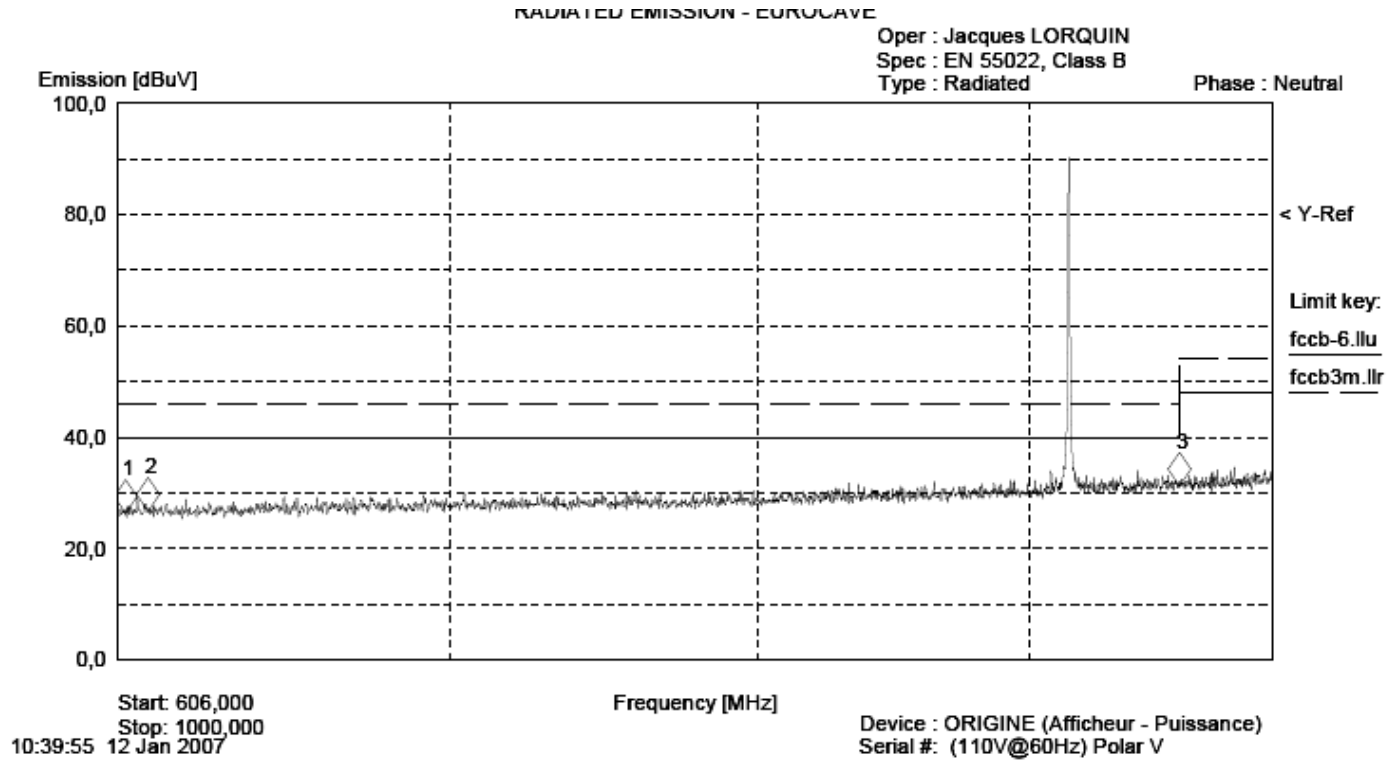


7. 99% OCCUPIED BANDWIDTH COMPLIANCE

Measures are performed at 99%
RBW 3kHz VBW 10kHz span 300kHz

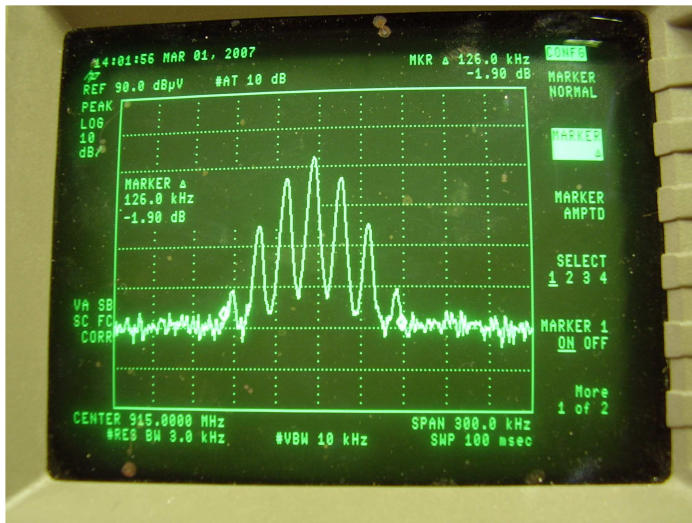

Occupied bandwidth for ORIGINE Afficheur

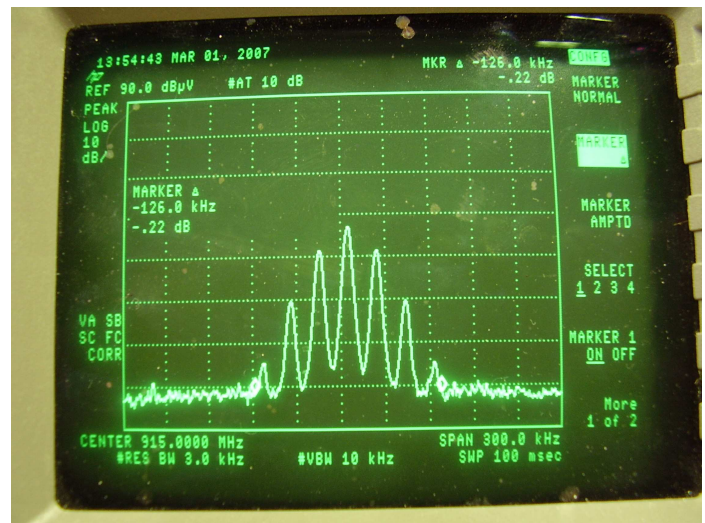

Occupied bandwidth for ORIGINE Puissance

Band-edge : 126 kHz

End of Tests

8. CONCLUSION

The Equipment Under Test (ORIGINE Puissance pn: P-3187-4400620 & ORIGINE Afficheur pn: P-3186-4400631) in the configuration described in this report, shows a sufficient margin with the limits of the FCC Part 15 Subpart C & RSS210 limits.



LISTE DE MATERIEL / LIST OF EQUIPMENT

	N° LCIE	GENRE	MARQUE	TYPE	SERIE
	A1481006VO	Voltmètre RF	BOOTON	9200C	339301AA
	A1240169VO	Multimètre	Wavetek	DM15XL	40417876
	C2320056VO	Réseau de couplage découplage	FCC	FCC 801 M1 25	28
	C2320057VO	Réseau de couplage découplage	FCC	FCC 801 M2 25	38
	C2320058VO	Réseau de couplage découplage	FCC	FCC 801 M3 25	96
	A4083040VO	Oscilloscope 100 MHz 500Ms/s	Tektronix	TDS30-25	H712103
EMC	A2640011VO	Récepteur de mesure 9 KHz – 30 MHz	Rohde et Schwarz	ESH3	972079/117
EMC	A4049061VO	Transient limiter	Hewlett Packard	11947A	3107A01596
EMR	A7102019VO	Amplificateur 9 KHz – 1300 MHz	Hewlett Packard	8447F Opt 64	3113A06394
EMC	A3169049VO	Conducted emission comb generator	Bardet		CGPR12
	A2320059VO	Réseau divers (LISN)	EMCO	3810/2SH	9511/1182
EMR	A3169050VO	Radiated emission comb generator	Bardet		PR17B
EMR EMC	A4060016VO	Analyseur de spectre 9 – 1.8 KHz	Hewlett Packard	8591E	3536A00384
EMR	C2040051VO	Antenne bi-log	Chase	CBL6111A	1628
	A5160028VO	Générateur de Burst	Schaffner	NSG2025-1	1109
	C1127003VO	Générateur onde de choc	Schaffner	NSG650	269
	A2249072VO	Pince de couplage	Schaffner	CDN 126	194
	A7130044VO	Coupleur directif	Schaffner	CDN 110	294
	C2320060VO	Réseau de couplage	Schaffner	CDN116	166
	A2249019VO	Sonde de champ 30-1000 MHz	Hewlett Packard	11940A	2650A05962
	A2249023VO	Sonde de champ 9 KHz – 30 MHz	Hewlett Packard	11941A	2807A04302
	A5322008VO	Pistolet de DES 15 KV	Schaffner	NSG 435	1354
	A5322009VO	Pistolet de DES 25 KV	Schaffner	NSG 432	1226
	A2120003VO	Harmonic/Flickermetre	Hewlett Packard	6842A	3531A00109
	A7156005VO	Adaptateur 50-150 ohms	FCC	FCC-150-50	378
	A7156006VO	Adaptateur 50-150 ohms	FCC	FCC-150-50	379
	B2163022VO	Synthétiseur de fréquence	Marconi	2023	112158027
	A2249021VO	Sonde de champ	Holaday	HI-4422	90264
	A7102020VO	Amplificateur 0.01-1000 MHz	KALMUS	757LC	122297-7
	A7132005VO	Coupleur bi-directionnel 40 dB	KALMUS	DC100RHH	7330A-1
	A7122008VO	Atténuateur 6 dB	BIRD	8343-060	2038
	B4204052VO	Thermo-hygromètre	HUGER		
EMR	D3044009VO	Chambre anéchoïque	EUROSHIELD	RDF-F-60-060	1213
EMC	D3044010VO	Cage de faraday	RAY PROOF		4854
	A1290016VO	Pince multimètre	LEM HEME	LH240	9611006692
	A5329032VO	Pince d'absorption	LUTHI	MDS21	2826
	A5329033VO	Pince d'injection	LUTHI	EM101	35430
	A5329042VO	Tube de ferrite	LUTHI	FTC 101	4485
	A5322010VO	Station d'essai ESD			
	A5329043VO	Câble blindé « IMR&EMR »	AIRCOM		
	A7122009VO	Atténuateur 10 dB	Hewlett Packard	8491A	2708A53166
	A5329034VO	Câble blindé injection IMC			
	A5329035VO	Câble blindé calibrage IMC	AIRCOM		
	A5329036VO	Module d'injection direct		MID01-100 ohms	



	N° LCIE	GENRE	MARQUE	TYPE	SERIE
		100ohms			
EMR	C2040050VO	Antenne biconique	EMCO	3104C	9401-4636
EMR	C2040056VO	Antenne logpériodique	EMCO	3146	2178
EMR	F2000286VO	Contrôleur de table	EMCO	1060-10	1217
EMR	F2000287VO	Contrôleur de mat d'antenne	EMCO	1050	8811-1295
	A4049059VO	Adaptateur quasi-peak	Hewlett Packard	HP85650	2811A01136
	A4060017VO	Analyseur de spectre	Hewlett Packard	HP8568B	2732A04140
	A4060019VO	Spectrum analyseur display	Hewlett Packard	HP85662A	2816A16561
	A4060027VO	RF preselector	Hewlett Packard	HP85685A	2833A00773
EMR	F2000288VO	Mat d'antenne	EMCO	1050	
EMR	F2000289VO	Table tournante	EMCO	1060	
EMR	C4040009VO	Compresseur d'air	ATLAS COPCO	LX111	0615-038
	C1207122VO	Dipole de précision	Schwarzbeck	VHAP	211
	C1207123VO	Dipole de précision	Schwarzbeck	UHAP	205
	C2040054VO	Antenne logpériodique	Schwarzbeck	UHALP 9107	910
	C2040047VO	Antenne biconique	Schwarzbeck	VHA 910	911
	C2040048VO	Antenne biconique	EMCO	3104	3767
	C2040049VO	Antenne biconique	EMCO	3110	1245
	C2040055VO	Antenne logpériodique	EMCO	3146A	9011-1151
EMC	C2320061VO	Réseau LISN	Telemeter electronic	NNB-2/16Z	98010
	C2320062VO	Réseau LISN triphasé ESH2-Z5	Rhode et Schwarz	33852.19.53	841223/008
	C2320063VO	Réseau LISN triphasé ESH2-Z5	Rhode et Schwarz	33852.19.53	841223/007
	A1240170VO	Multimètre	Fluke	87	75250745
	C2320064VO	Réseau divers	EM TEST	CDN-M3	6219C
	C2320065VO	Réseau divers	EM TEST	CDN-T8/RJ45	9011C
	C2040057VO	Antenne monopole	AH SYSTEM	SAS-551	181
	A1290017VO	Sonde de courant	Schaffner	CSP9160	1097
	C2320066VO	Réseau RSIL 4 Fils	Rhode et Schwarz	ENY41	838119/023
	C2320067VO	Réseau RSIL 2 x 2 Fils	Rhode et Schwarz	ENY22	836727/015
	A5329034VO	Sonde injection de courant	Schaffner	CIP8213	52
	C2042027VO	Antenne cornet	EMCO	3115	6382
	A4060018VO	Analyseur de spectre 9 KHz – 26.5 GHz	Hewlett Packard	8593E	3409u00537
	A4024018VO	Oscilloscope 500 MHz	Hewlett Packard	54542C	US36040602
	A5442021VO	Générateur HF 100 KHz – 3200 MHz	Hewlett Packard	8648C	3443U00509
	A4024019VO	Oscilloscope	Hewlett Packard	54720A	0007426600
	A4089115VO	Active probe 2.5 GHz	Hewlett Packard	54701A	3220A 00325
	A4089116VO	Active probe 2.5 GHz	Hewlett Packard	54701A	3220A 00329
	C2040058VO	Close fied probe 30 MHz – 1 GHz	Hewlett Packard	HP11940A	
	C2040059VO	Close fied probe 9 KHz – 30 MHz	Hewlett Packard	HP11941A	
	A4069007VO	High frequency probe	Hewlett Packard	85024A	280 1A 04205
	A5329044VO	Pince d'absorption 30MHz–1GHz	Rhode et Schwarz	85024A	194.0100.50
	A3169048VO	Field site source	EMCO	4610	9012-1161
	A7102021VO	Amplificateur 9 KHz – 1300 MHz	Hewlett Packard	8447F	2944A04010
	A7102022VO	Amplificateur 0.5-1000 MHz	KALMUS	706FC	7359-1
	A7122010VO	Atténuateur 70 dB	Hewlett Packard	8495B	3308A17069
	A7122011VO	Atténuateur 20 dB - 0.1 GHz	ROLS ESH	ESH 2Z11	349.7518.52
	A1290018VO	Sonde de courant	HF STROMWANDLER	ESH2-Z1	872 545/24
	A2240015VO	Sonde de champ	EMCO	7405	9301-2355



	N° LCIE	GENRE	MARQUE	TYPE	SERIE
	A7132006VO	Coupleur bi-directionnel	Hewlett Packard	778D	1144A07705
	A7102023VO	Amplificateur 2.5 GHz	Mini-circuits	ZFL-2500VH AS	
	A7102024VO	Amplificateur 8 GHz	HEROTEK	A1080304A	222033
	D1022117VO	Enceinte climatique	BIA CLIMATIC	CL 6-25	200 105 6
	A5329045VO	Câble IMR&EMR	SMEE	KX13	
	A5329046VO	Câble EMR FCC	RADIALL	9542 gd câb. vert	
	A5329047VO	Câble EMR FCC	RADIALL	960603 pt câb. vert	
	C2040052VO	Antenne boucle	Electro-metrics	EM-6879	690234
	C2040053VO	Antenne boucle	TELEC	CT2A	140
	A2322003VO	Outil courant de fuite	SMEE	61010A3&A4	
	A5329048VO	Câble EMR FCC	SUCOFLEX	106G	553
	A1500016VO	Wattmètre RF	ANRITSU	ML1437A	03050003
	A7132007VO	Coupleur bi-directionnel 20 dB	MCLI	C36-20	0D2LS 0148
	A5329038VO	Câble coaxial 3.5 m	SUHNER	SUCOFLEX 106	26732/6
	A2249024VO	Sonde de champ électrique 5GHz	HOLADAY	HI-6005	107884
	A7102025VO	Amplificateur 0.8-3GHz	PRANA	AP32 SV125A	0310-0573
EMR	A4049060VO	Adaptateur quasi-peak	Hewlett Packard	HP85650A	2811A01134
EMR	A4060028VO	Spectrum analyseur display	Hewlett Packard	HP85662A	2816A16603
EMR	A4060029VO	Spectrum analyseur	Hewlett Packard	HP8568B	2732A04155
EMR	A4060030VO	Preselcteur RF	Hewlett Packard	HP85685A	2837A00784
	C2042028VO	Antenne cornet	Schwarzbeck	BBHA 9170	BBHA9170232
	A7043036VO	Alimentation DC 300W	SODILEC	7SDLIN/GB AUTO 300-150.6	493711
	A5320017VO	BEST EMC	Schaffner		200040-023SC
	A5322011VO	Pistolet de DES	Schaffner	BEST ESD	1033
	C2320073VO	Pince de couplage TRS	Schaffner	CDN8014	074
EMC	C2320068VO	Line impedance stabilisation network	EMCO	3825/2	9309/2122
	C2320069VO	Réseau divers	LUTHI	CDN L-801 M2	2076
	C2320070VO	Réseau divers	LUTHI	CDN L-801 M2	2075
	A7102026VO	Amplificateur	ALDETEC	ALS01452	001
	A5442022VO	Générateur 2GHz – 18GHz	Hewlett Packard	8672A	2104A01703
	A7122013VO	Burst verification coupler	Schaffner	INA 265 A	20935/1
	A7122014VO	Burst verification coupler	Schaffner	INA 266	20935/2
	A5329040VO	Câble coaxial		RG58	
	A2249022VO	HV PROBE (E6N CVH1-100/1)	Schaffner	MD200	037005
	A1092039VO	Pince ampèremétrique	Chauvin Arnoux	P01120040A	100044CAV
	A1091249VO	Shunt coaxial	LEM	ISM 5P/5	4502
	A5329041VO	Câble coaxial vert 45cm			
	D2124025VO	Marteau de choc	LCIE	Marteau V01	V01
	A7043037VO	Alimentation DC 30V 10A	ELC	AL924	95/00600
	A4089117VO	Sonde de tension	SMEE		
	A7156004VO	Adaptateur 100ohms	LUTHI	CR100A	221
	A1240171VO	Multimètre	FLUKE	189	89770115
	C2320071VO	CDN	LUTHI	L 801 M4 PE	2088
	A7122012VO	Atténuateur	WEINSCHEL	48-40-43	BT2126
	A1092041VO	PINCE ELECTROMAGNETIQUE	LUTHI	EM101	35758
EMR	A1092042VO	PINCE FERRITE	LUTHI	FTC101	4763

EMR : Emission rayonnée / Radiated emission

EMC : Emission conduite / Conducted emission



TABLE DES INCERTITUDES / UNCERTAINTIES CHART

Type de mesure / Kind of measurement	Incertitude élargie laboratoire / Wide uncertainty laboratory (k=2) $\pm x$ (dB)	Incertitude limite du CISPR / CISPR uncertainty limit $\pm y$ (dB)
Emission Rayonnée / Radiated emission		
Antenne biconique (30MHz - 200MHz) - polarisation horizontale	± 4.46 dB	± 5.2
Antenne biconique (30MHz - 200MHz) - polarisation verticale	± 5.15 dB	± 5.2
Antenne log-périodique (200MHz - 1GHz) - polarisation horizontale	± 4.48 dB	± 5.2
Antenne log- périodique (200MHz - 1GHz) - polarisation verticale	± 5.04 dB	± 5.2
Emission conduite RSIL / Conducted emission LISN		
Estimation de l'incertitude pour des mesures de 150kHz à 30MHz	± 3.40 dB	± 3.6
Emission conduite RSI / Conducted emission LIS		
Estimation de l'incertitude pour des mesures de 150kHz à 30MHz	± 3.20 dB	± 3.6
Emission conduite sonde de courant / Conducted emission current probe		
Estimation de l'incertitude pour des mesures de 150kHz à 30MHz	± 2.68 dB	± 3.6

Les valeurs d'incertitudes calculées du laboratoire étant inférieures aux valeurs d'incertitudes limites établies par le CISPR, la conformité de l'échantillon est établie directement par les niveaux limites applicables. / The uncertainty values calculated by the laboratory are lower than limit uncertainty values defined by the CISPR. The conformity of the sample is directly established by the applicable limits values.