

# **FCC RADIO TEST REPORT**

according to

47 CFR FCC Part 15 Subpart C § 15.247

Equipment : Sansa Connect  
Model No. : Connect-4GB  
Filing Type : New Application  
Applicant : Ensky Technology Pte. Ltd.  
2001 Central Plaza, 18 Harbour Road, Wanchai, Hong Kong  
FCC ID : UZB-ES20070309  
Received Date : Feb. 26, 2007  
Test Date : Mar. 01, 2007

## **Statement**

**Test result included is only for the 802.11b/g part of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Lab Code: 200079-0

***SPORTON International Inc.***

*6F, No. 106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.*

## Table of Contents

<b>1. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>2. GENERAL INFORMATION.....</b>	<b>3</b>
2.1. Product Details.....	3
2.2. Accessories.....	3
2.3. Table for Filed Antenna .....	3
2.4. Table for Carrier Frequencies.....	3
2.5. Table for Test Modes .....	4
2.6. Table for Testing Locations .....	4
2.7. Table for Supporting Units.....	4
2.8. Table for Parameters of Test Software Setting .....	5
2.9. Test Configurations .....	5
<b>3. TEST RESULT .....</b>	<b>7</b>
3.1. AC Power Line Conducted Emissions Measurement.....	7
3.2. Maximum Peak Output Power Measurement .....	15
3.3. Power Spectral Density Measurement.....	17
3.4. 6dB Spectrum Bandwidth Measurement .....	22
3.5. Radiated Emissions Measurement .....	27
3.6. Band Edge Emissions Measurement.....	47
3.7. Antenna Requirements.....	52
<b>4. LIST OF MEASURING EQUIPMENTS .....</b>	<b>53</b>
<b>5. TEST LOCATION.....</b>	<b>55</b>
<b>6. TAF CERTIFICATE OF ACCREDITATION .....</b>	<b>56</b>
<b>APPENDIX A TEST PHOTOS. ....</b>	<b>A1 ~ A10</b>
<b>APPENDIX B PHOTOGRAPHS OF EUT. ....</b>	<b>B1 ~ B18</b>
<b>APPENDIX C MAXIMUM PERMISSIBLE EXPOSURE.....</b>	<b>C1 ~ C3</b>

## History of This Test Report

Original Issue Date: Mar. 01, 2007

Report No.: FR721511

No additional attachment.

Additional attachment were issued as following record:

Attachment No.	Issue Date	Description


## CERTIFICATE OF COMPLIANCE

according to

47 CFR FCC Part 15 Subpart C § 15.247

Equipment : Sansa Connect  
Model No. : Connect-4GB  
Applicant : Ensky Technology Pte. Ltd.  
2001 Central Plaza, 18 Harbour Road, Wanchai, Hong Kong

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Feb. 26, 2007 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Roger Sheng / Manager  
Reviewed Date: Mar. 06, 2007

**SPORTON International Inc.**

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

## 1. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
3.1	15.207	AC Power Line Conducted Emissions	Complies	8.83 dB
3.2	15.247(b)(3)	Maximum Peak Conducted Output Power	Complies	14.49 dB
3.3	15.247(e)	Power Spectral Density	Complies	5.59 dB
3.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
3.5	15.247(d)	Radiated Emissions	Complies	7.98 dB
3.6	15.247(d)	Band Edge Emissions	Complies	7.33 dB
3.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Peak Conducted Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

## 2. GENERAL INFORMATION

### 2.1. Product Details

EUT is a Sansa Connect with IEEE 802.11b/g radio functions. Only the radio detail of WLAN is shown in the table below. For more detailed features description, please refer to the manufacturer's specifications or user's manual.

Items	Description
Power Type	5VDC from Adapter; 3.7VDC from Battery
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11
Channel Band Width (99%)	11b: 13.56 MHz ; 11g: 16.48 MHz
Conducted Output Power	11b: 15.48 dBm ; 11g: 15.51 dBm

### 2.2. Accessories

Power	Brand	Model	Rating
Adapter 1	DVE	DSA-10P-05	Input: 100-240VAC, 50/60Hz, 0.3A Output: +5V, 1.0A
Adapter 2	PHIHONG	PSB05R-050Q	Input: 100-240VAC, 50-60Hz, 0.2A Output: +5V, 1.0A
Battery	-	Everest	3.7 V
Others			
USB Cable			

### 2.3. Table for Filed Antenna

Ant.	Antenna Type	Connector	Gain (dBi)
1	Chip	FIX	1.00

### 2.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz		

**2.5. Table for Test Modes**

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Mode1/Mode 2	11 Mbps	6	1
Maximum Peak Conducted Output Power	11b/CCK	11 Mbps	1/6/11	1
Power Spectral Density	11g/BPSK	6 Mbps	1/6/11	1
6dB Spectrum Bandwidth				
Radiated Emissions 9kHz~1GHz	11g/BPSK (Adapter1/Adapter2)	6 Mbps	6	1
Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic	11b/CCK	11 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
Band Edge Emissions	11b/CCK	11 Mbps	1/11	1
	11g/BPSK	6 Mbps	1/11	1

For AC Power Line Conducted Emissions test, the following modes were tested:

Mode 1: Adapter Mode (Adapter 1/Adapter 2)

Mode 2: PC Link Mode

**2.6. Table for Testing Locations**

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	101377	IC 4088	-
CO04-HY	Conduction	Hwa Ya	101377	IC 4088	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

**2.7. Table for Supporting Units**

Support Unit	Brand	Model	FCC ID
Notebook	DELL	D400	DOC
Mouse	Microsoft	1004	DOC
Modem	ACCEX	DM1414	IFAXDM1414
Earphone	HIAWK	-	DOC
MICRO SD	SAN DISK	SDSOQ-1024	DOC

## 2.8. Table for Parameters of Test Software Setting


During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

### Power Parameters of IEEE 802.11b/g


Test Software Version	Terminal		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	4c	4a	49
IEEE 802.11g	4c	49	47

## 2.9. Test Configurations

### 2.9.1. Radiation Emissions Test Configuration

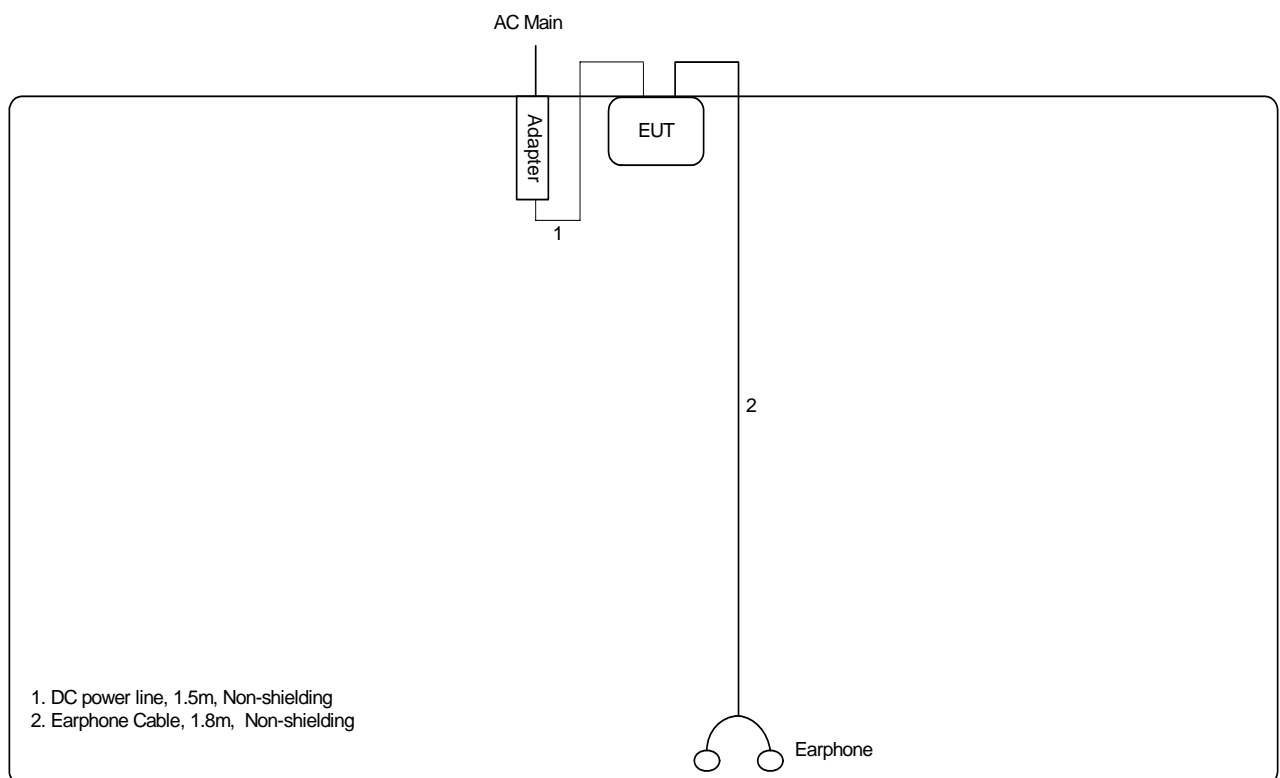



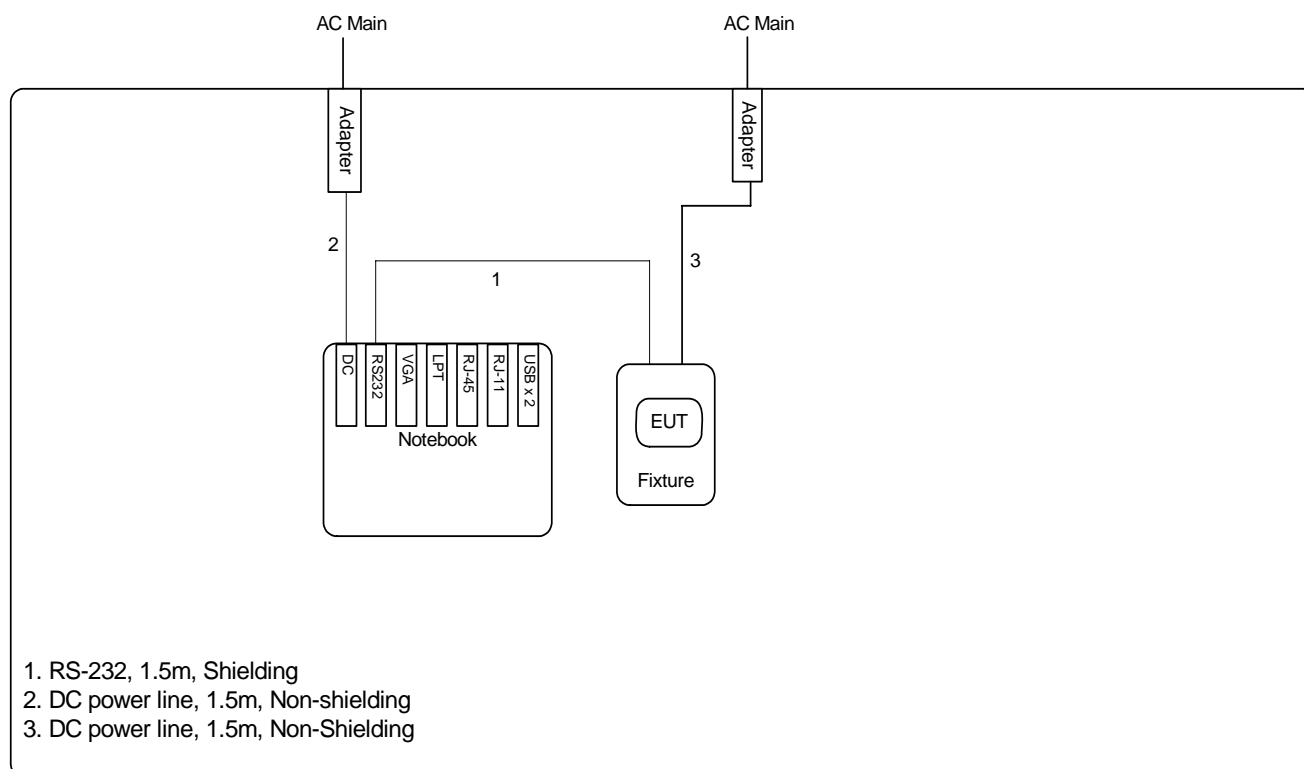

### 3. TEST RESULT

#### 3.1. AC Power Line Conducted Emissions Measurement

##### 3.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

##### 3.1.2. Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

##### 3.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

### 3.1.4. Test Setup Layout

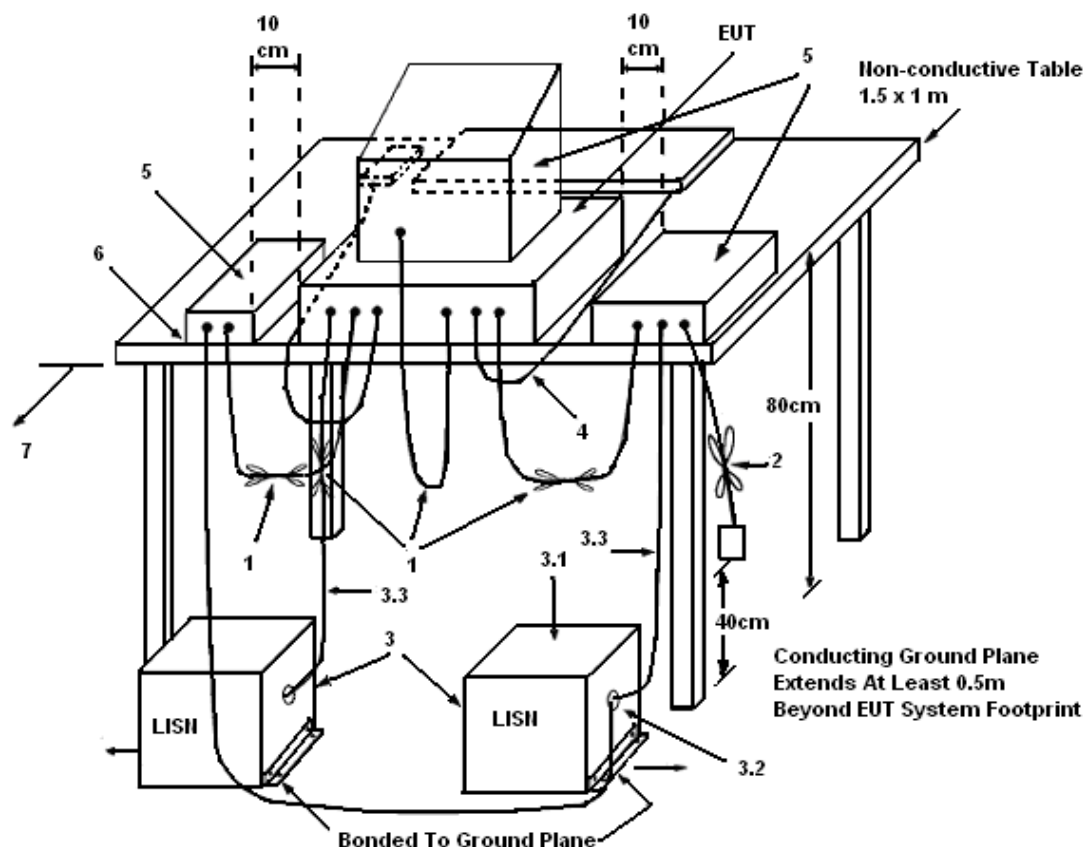

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

## 3.1.5. Test Deviation


There is no deviation with the original standard.

## 3.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


## 3.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	28	Humidity	45%
Test Engineer	Ted	Phase	Line
Configuration	Mode 1 (Adapter 1: DVE / DSA-10P-05)		

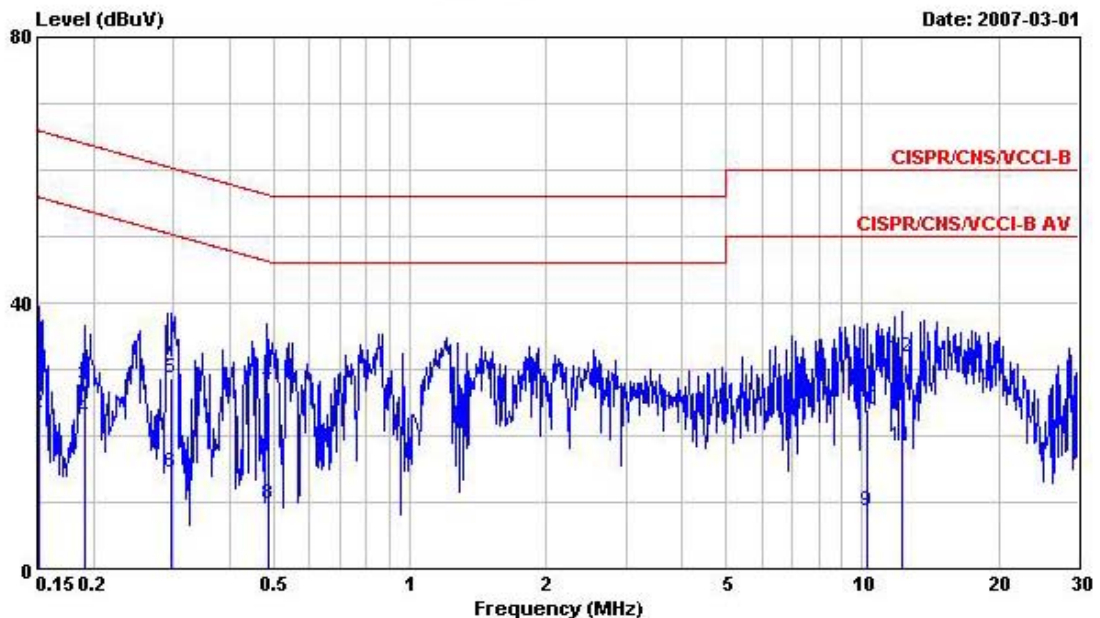

	Freq	Level	Over Limit	Limit Line	Mean Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1515980	31.07	-34.84	65.91	30.28	0.10	0.69	QP
2	0.1515980	23.48	-32.43	55.91	22.69	0.10	0.69	Average
3	0.1903870	27.55	-36.47	64.02	26.92	0.10	0.53	QP
4	0.1903870	22.75	-31.27	54.02	22.12	0.10	0.53	Average
5	0.2971150	28.58	-31.74	60.32	28.08	0.10	0.40	QP
6	0.2971150	14.60	-35.72	50.32	14.10	0.10	0.40	Average
7	0.4850280	26.53	-29.72	56.25	26.00	0.10	0.43	QP
8	0.4850280	9.74	-36.51	46.25	9.21	0.10	0.43	Average
9	10.290	8.75	-41.25	50.00	7.82	0.22	0.71	Average
10	10.290	23.87	-36.13	60.00	22.94	0.22	0.71	QP
11	12.190	18.33	-31.67	50.00	17.18	0.40	0.75	Average
12	12.190	31.94	-28.06	60.00	30.79	0.40	0.75	QP

Temperature	28	Humidity	45%
Test Engineer	Ted	Phase	Neutral
Configuration	Mode 1 (Adapter 1: DVE / DSA-10P-05)		

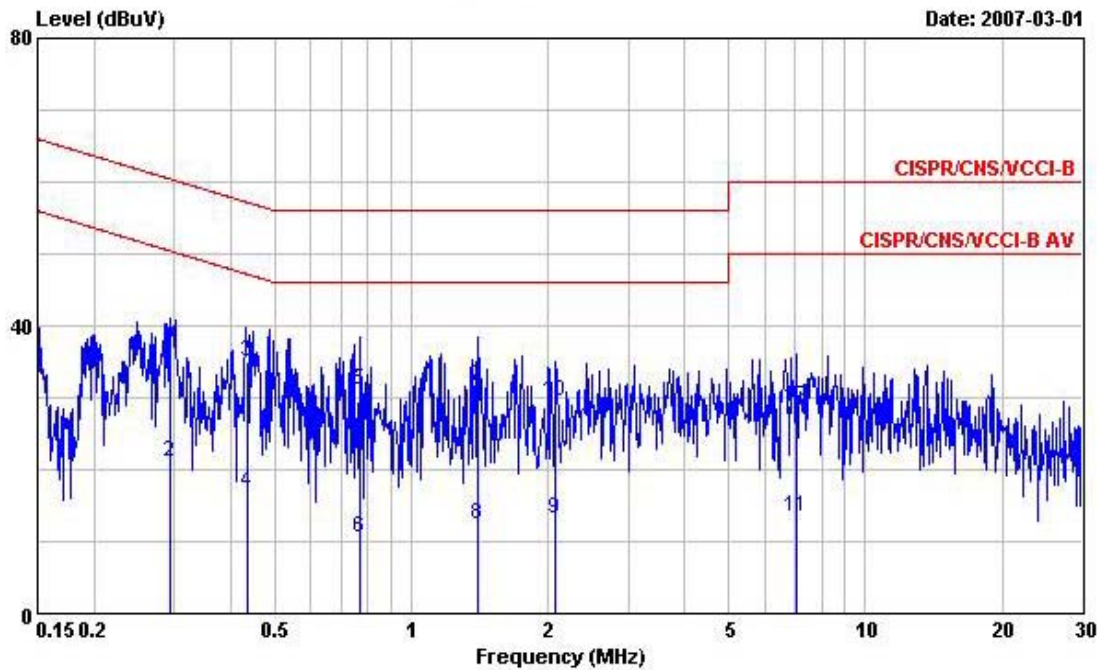


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.2939830	36.82	-23.59	60.41	36.31	0.10	0.41	QP
2	0.2939830	20.99	-29.42	50.41	20.48	0.10	0.41	Average
3	0.4361230	34.89	-22.25	57.14	34.31	0.10	0.48	QP
4	0.4361230	16.81	-30.33	47.14	16.23	0.10	0.48	Average
5	0.7670230	30.98	-25.02	56.00	30.44	0.10	0.44	QP
6	0.7670230	10.66	-35.34	46.00	10.12	0.10	0.44	Average
7	1.400	31.46	-24.54	56.00	30.86	0.10	0.50	QP
8	1.400	12.41	-33.59	46.00	11.81	0.10	0.50	Average
9	2.070	13.03	-32.97	46.00	12.42	0.10	0.51	Average
10	2.070	29.54	-26.46	56.00	28.93	0.10	0.51	QP
11	7.060	13.32	-36.68	50.00	12.41	0.26	0.65	Average
12	7.060	28.71	-31.29	60.00	27.80	0.26	0.65	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.


Temperature	28	Humidity	45%
Test Engineer	Ted	Phase	Line
Configuration	Mode 1 (Adapter 2: PHIHONG / PSB05R-050Q)		

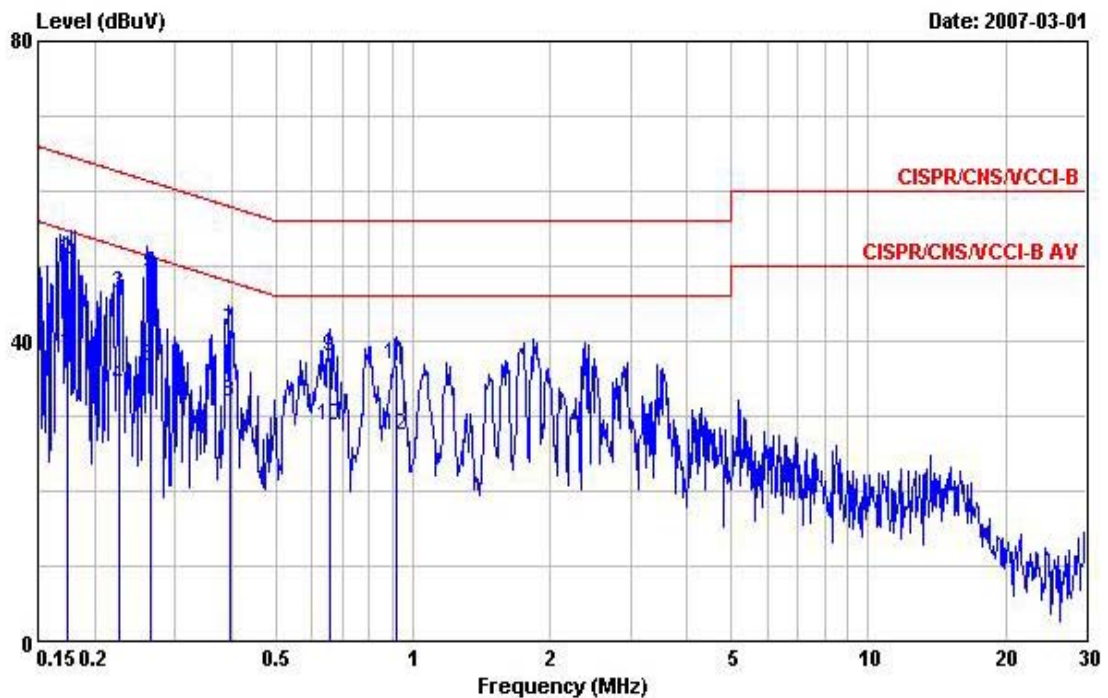

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1735520	38.42	-16.37	54.79	37.72	0.10	0.60	Average
2	0.1735520	50.78	-14.01	64.79	50.08	0.10	0.60	QP
3	0.2267630	46.23	-16.34	62.57	45.63	0.10	0.50	QP
4	0.2267630	33.85	-18.72	52.57	33.25	0.10	0.50	Average
5	0.2655150	48.94	-12.32	61.26	48.37	0.10	0.47	QP
6	0.2655150	36.67	-14.59	51.26	36.10	0.10	0.47	Average
7	0.3977400	41.44	-16.46	57.90	40.94	0.10	0.40	QP
8	0.3977400	31.82	-16.08	47.90	31.32	0.10	0.40	Average
9	0.6543010	38.02	-17.98	56.00	37.52	0.10	0.40	QP
10	0.6543010	28.62	-17.38	46.00	28.12	0.10	0.40	Average
11	0.9233040	36.78	-19.22	56.00	36.18	0.10	0.50	QP
12	0.9233040	27.41	-18.59	46.00	26.81	0.10	0.50	Average



Temperature	28	Humidity	45%
Test Engineer	Ted	Phase	Neutral
Configuration	Mode 1 (Adapter 2: PHIHONG / PSB05R-050Q)		

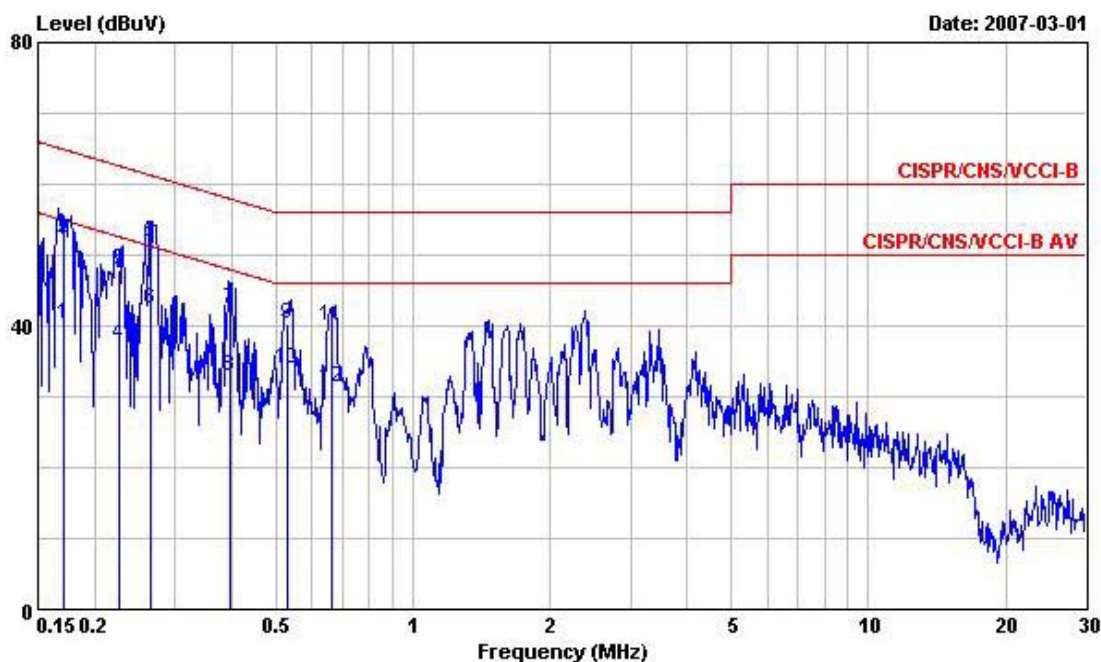


	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.1706180	40.22	-14.71	54.93	39.51	0.10	0.61	Average
2	0.1706180	52.26	-12.67	64.93	51.55	0.10	0.61	QP
3	0.2272960	47.94	-14.61	62.55	47.34	0.10	0.50	QP
4	0.2272960	37.42	-15.13	52.55	36.82	0.10	0.50	Average
5	0.2643070	51.88	-9.41	61.29	51.31	0.10	0.47	QP
6	0.2643070	42.46	-8.83	51.29	41.89	0.10	0.47	Average
7	0.3967900	42.31	-15.61	57.92	41.81	0.10	0.40	QP
8	0.3967900	32.87	-15.05	47.92	32.37	0.10	0.40	Average
9	0.5314230	40.27	-15.73	56.00	39.71	0.10	0.46	QP
10	0.5314230	33.83	-12.17	46.00	33.27	0.10	0.46	Average
11	0.6612710	40.09	-15.91	56.00	39.59	0.10	0.40	QP
12	0.6612710	31.33	-14.67	46.00	30.83	0.10	0.40	Average

Note:

Level = Read Level + LISN Factor + Cable Loss.


Temperature	28	Humidity	45%
Test Engineer	Ted	Phase	Line
Configuration	Mode 2 (PC Link)		

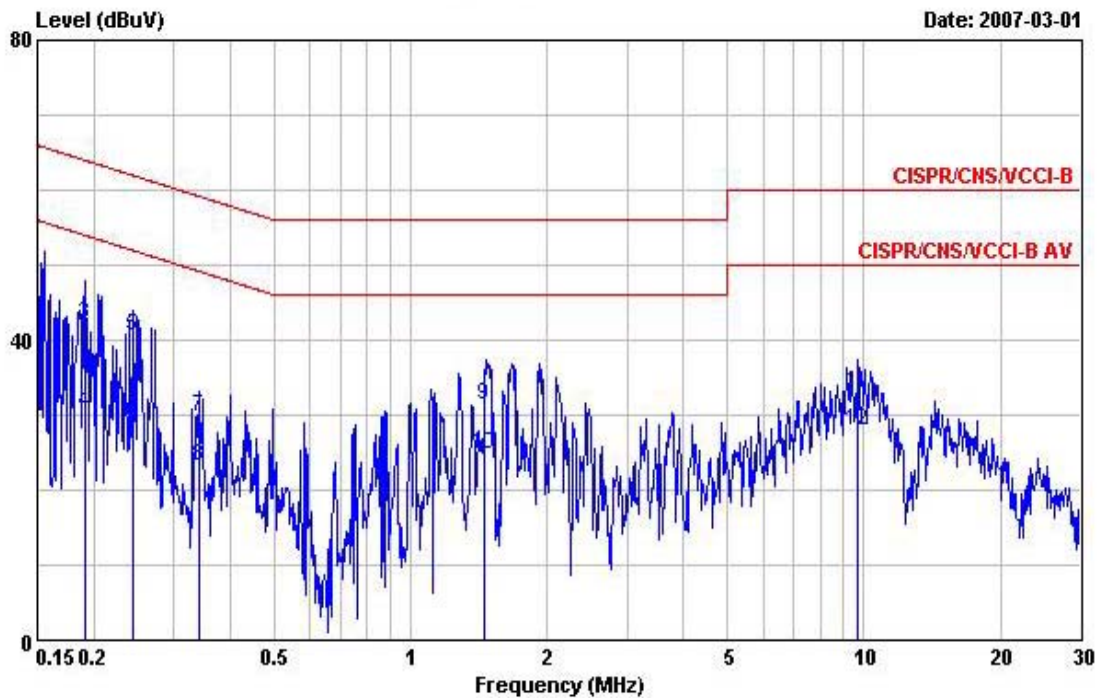

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1500000	51.12	-14.88	66.00	50.32	0.10	0.70	QP
2	0.1500000	34.88	-21.12	56.00	34.08	0.10	0.70	Average
3	0.1903870	42.21	-21.81	64.02	41.58	0.10	0.53	QP
4	0.1903870	30.15	-23.87	54.02	29.52	0.10	0.53	Average
5	0.2442230	40.64	-21.31	61.95	40.04	0.10	0.50	QP
6	0.2442230	29.00	-22.95	51.95	28.40	0.10	0.50	Average
7	0.3409970	29.77	-29.41	59.18	29.27	0.10	0.40	QP
8	0.3409970	23.12	-26.06	49.18	22.62	0.10	0.40	Average
9	1.456	31.29	-24.71	56.00	30.69	0.10	0.50	QP
10	1.456	24.81	-21.19	46.00	24.21	0.10	0.50	Average
11	9.710	32.93	-27.07	60.00	32.03	0.20	0.70	QP
12	9.710	27.84	-22.16	50.00	26.94	0.20	0.70	Average



Temperature	28	Humidity	45%
Test Engineer	Ted	Phase	Neutral
Configuration	Mode 2 (PC Link)		

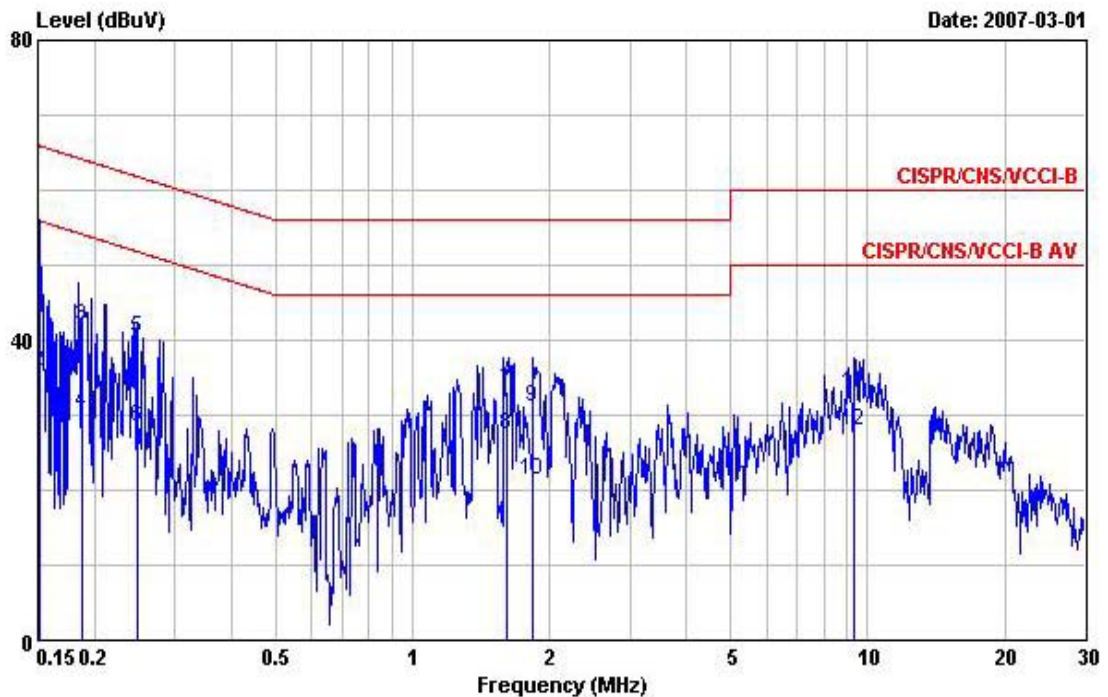

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1507970	50.70	-15.26	65.96	49.90	0.10	0.70	QP
2	0.1507970	35.70	-20.26	55.96	34.90	0.10	0.70	Average
3	0.1883300	41.74	-22.37	64.11	41.10	0.10	0.54	QP
4	0.1883300	30.39	-23.72	54.11	29.75	0.10	0.54	Average
5	0.2481360	40.18	-21.64	61.82	39.58	0.10	0.50	QP
6	0.2481360	28.44	-23.38	51.82	27.84	0.10	0.50	Average
7	1.608	33.09	-22.91	56.00	32.49	0.10	0.50	QP
8	1.608	27.30	-18.70	46.00	26.70	0.10	0.50	Average
9	1.840	30.94	-25.06	56.00	30.34	0.10	0.50	QP
10	1.840	21.24	-24.76	46.00	20.64	0.10	0.50	Average
11	9.350	32.84	-27.16	60.00	31.86	0.29	0.69	QP
12	9.350	27.85	-22.15	50.00	26.87	0.29	0.69	Average

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 3.2. Maximum Peak Output Power Measurement

### 3.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 3.2.2. Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Filter No.	Auto
Measurement time	0.135 s ~ 26 s
Used Peak Sensor	NRV-Z32 (model 04)

### 3.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the peak power value.
3. Repeat above procedures on all channels needed to be tested.

### 3.2.4. Test Setup Layout

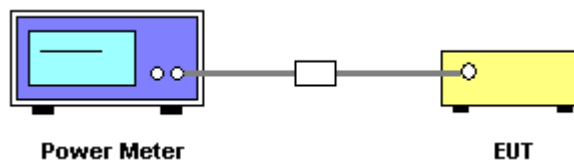

### 3.2.5. Test Deviation

There is no deviation with the original standard.

### 3.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

**3.2.7. Test Result of Maximum Peak Output Power**

<b>Temperature</b>	25.6	<b>Humidity</b>	57%
<b>Test Engineer</b>	Sam	<b>Configurations</b>	802.11b/g

**Configuration IEEE 802.11b**

<b>Channel</b>	<b>Frequency</b>	<b>Conducted Power (dBm)</b>	<b>Max. Limit (dBm)</b>	<b>Result</b>
1	2412 MHz	15.21	30.00	<b>Complies</b>
6	2437 MHz	15.11	30.00	<b>Complies</b>
11	2462 MHz	15.48	30.00	<b>Complies</b>

**Configuration IEEE 802.11g**

<b>Channel</b>	<b>Frequency</b>	<b>Conducted Power (dBm)</b>	<b>Max. Limit (dBm)</b>	<b>Result</b>
1	2412 MHz	15.51	30.00	<b>Complies</b>
6	2437 MHz	15.21	30.00	<b>Complies</b>
11	2462 MHz	15.01	30.00	<b>Complies</b>

### 3.3. Power Spectral Density Measurement

#### 3.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 3.3.2. Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	1.5MHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	500s

#### 3.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.

#### 3.3.4. Test Setup Layout

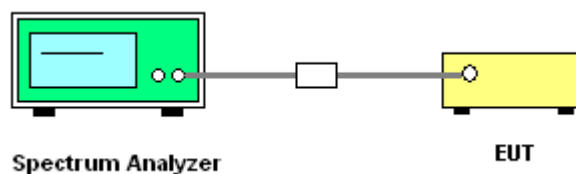

#### 3.3.5. Test Deviation

There is no deviation with the original standard.

**3.3.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.3.7. Test Result of Power Spectral Density**

<b>Temperature</b>	25.6	<b>Humidity</b>	57%
<b>Test Engineer</b>	Sam	<b>Configurations</b>	802.11b/g


**Configuration IEEE 802.11b**

<b>Channel</b>	<b>Frequency</b>	<b>Power Density (dBm)</b>	<b>Max. Limit (dBm)</b>	<b>Result</b>
1	2412 MHz	0.99	8.00	<b>Complies</b>
6	2437 MHz	2.10	8.00	<b>Complies</b>
11	2462 MHz	2.41	8.00	<b>Complies</b>

**Configuration IEEE 802.11g**


<b>Channel</b>	<b>Frequency</b>	<b>Power Density (dBm)</b>	<b>Max. Limit (dBm)</b>	<b>Result</b>
1	2412 MHz	-19.73	8.00	<b>Complies</b>
6	2437 MHz	-19.62	8.00	<b>Complies</b>
11	2462 MHz	-19.77	8.00	<b>Complies</b>

**Power Density Plot on Configuration IEEE 802.11b / 2412 MHz**

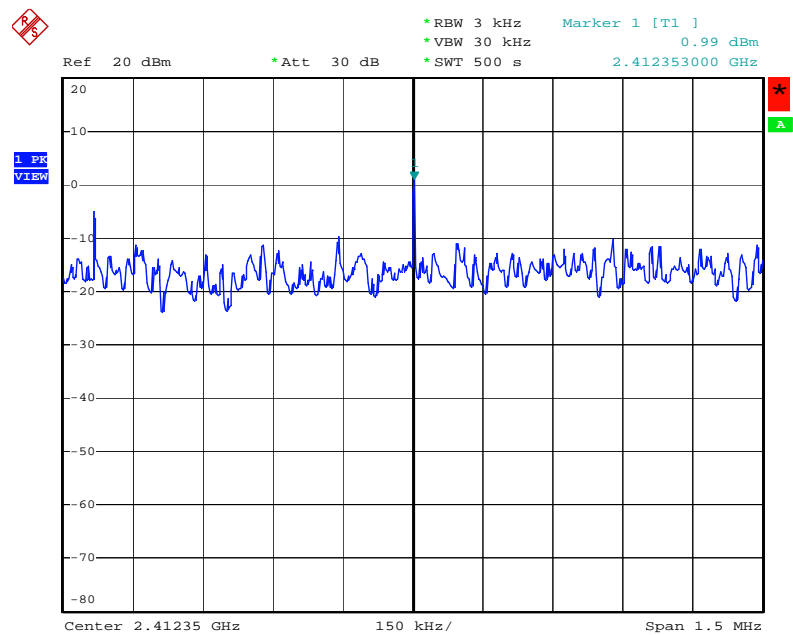


Date: 26.FEB.2007    08:52:54

**Power Density Plot on Configuration IEEE 802.11b / 2437 MHz**

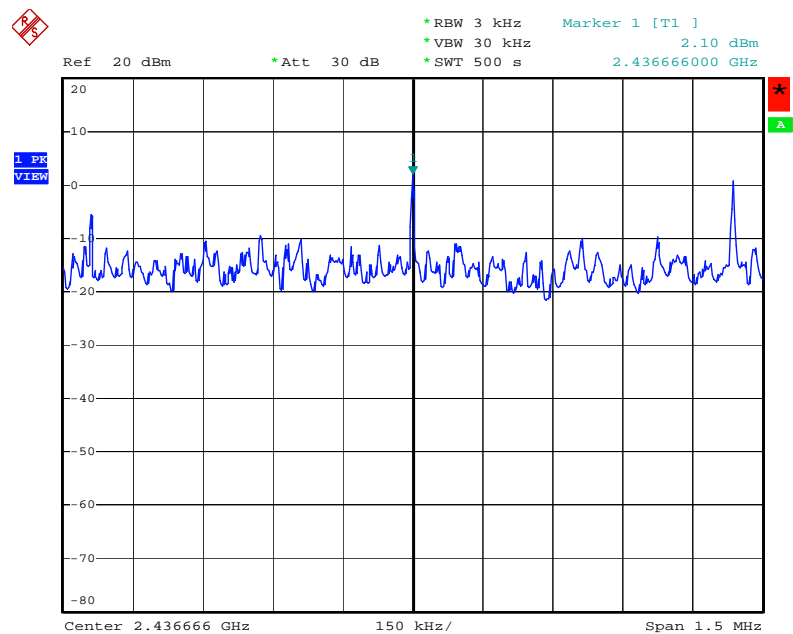


Date: 26.FEB.2007    08:57:40

## Power Density Plot on Configuration IEEE 802.11b / 2462 MHz

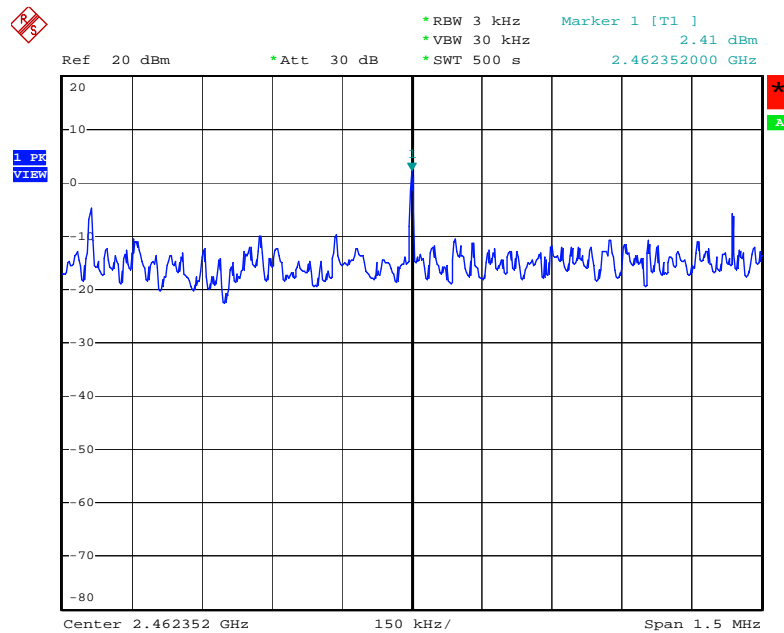


Date: 26.FEB.2007 09:07:20

## Power Density Plot on Configuration IEEE 802.11g / 2412 MHz

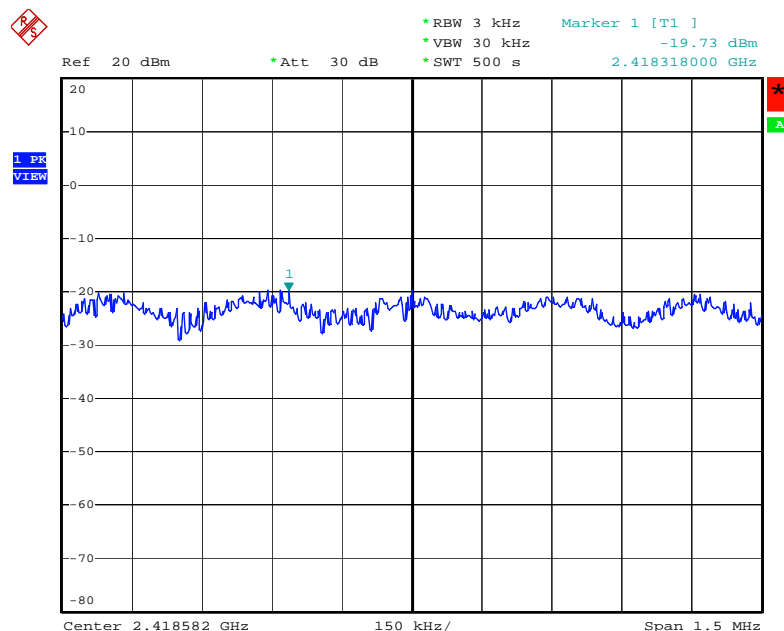


Date: 26.FEB.2007 09:32:10

## Power Density Plot on Configuration IEEE 802.11g / 2437 MHz

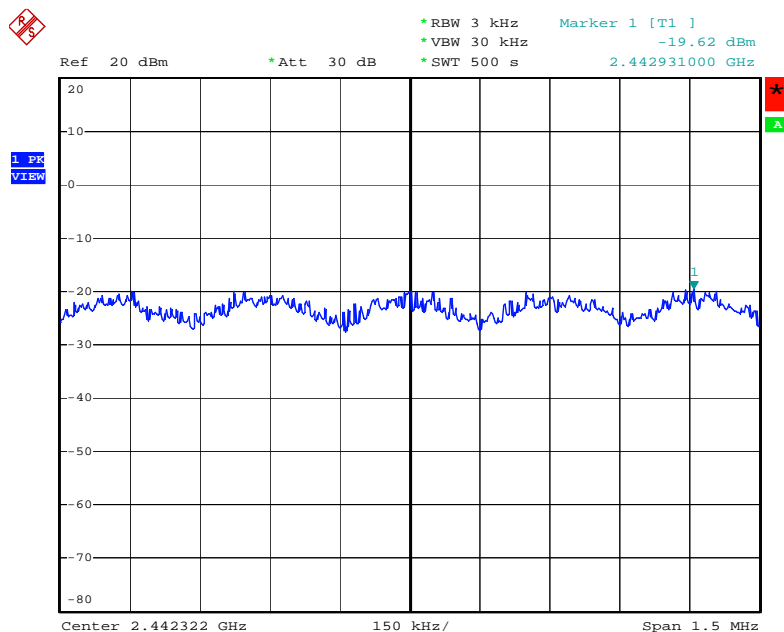

Date: 26.FEB.2007 09:26:13

## Power Density Plot on Configuration IEEE 802.11g / 2462 MHz

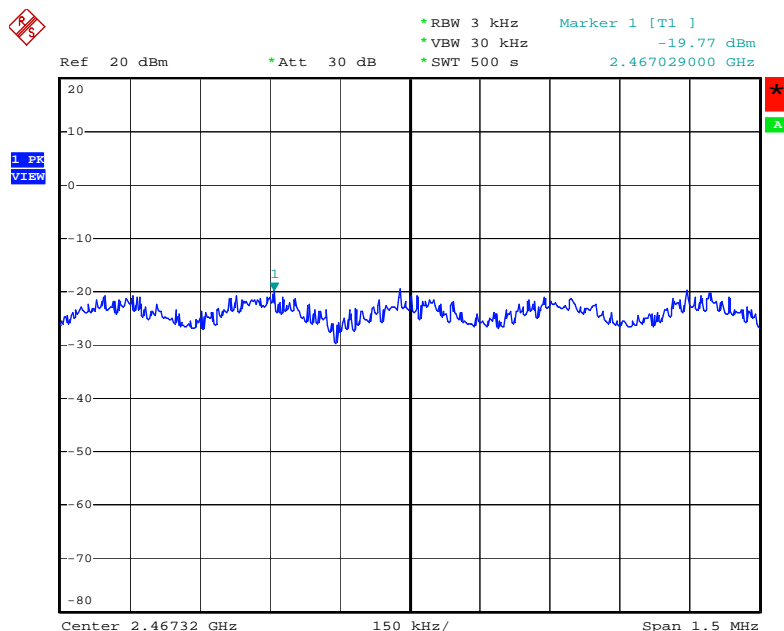

Date: 26.FEB.2007 09:24:25



### 3.4. 6dB Spectrum Bandwidth Measurement

#### 3.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

#### 3.4.2. Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 3.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.

#### 3.4.4. Test Setup Layout

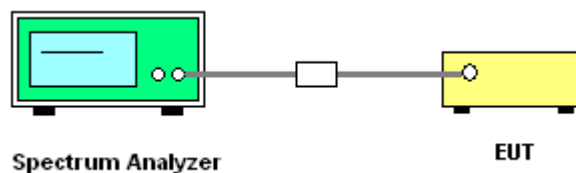

**3.4.5. Test Deviation**

There is no deviation with the original standard.

**3.4.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.4.7. Test Result of 6dB Spectrum Bandwidth**

<b>Temperature</b>	25.6	<b>Humidity</b>	57%
<b>Test Engineer</b>	Sam	<b>Configurations</b>	802.11b/g


**Configuration IEEE 802.11b**

<b>Channel</b>	<b>Frequency</b>	<b>6dB Bandwidth (MHz)</b>	<b>99% Occupied Bandwidth (MHz)</b>	<b>Min. Limit (kHz)</b>	<b>Test Result</b>
1	2412 MHz	10.48	13.56	500	<b>Complies</b>
6	2437 MHz	9.04	13.52	500	<b>Complies</b>
11	2462 MHz	9.96	13.48	500	<b>Complies</b>

**Configuration IEEE 802.11g**


<b>Channel</b>	<b>Frequency</b>	<b>6dB Bandwidth (MHz)</b>	<b>99% Occupied Bandwidth (MHz)</b>	<b>Min. Limit (kHz)</b>	<b>Test Result</b>
1	2412 MHz	16.40	16.48	500	<b>Complies</b>
6	2437 MHz	16.44	16.48	500	<b>Complies</b>
11	2462 MHz	16.44	16.48	500	<b>Complies</b>

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz

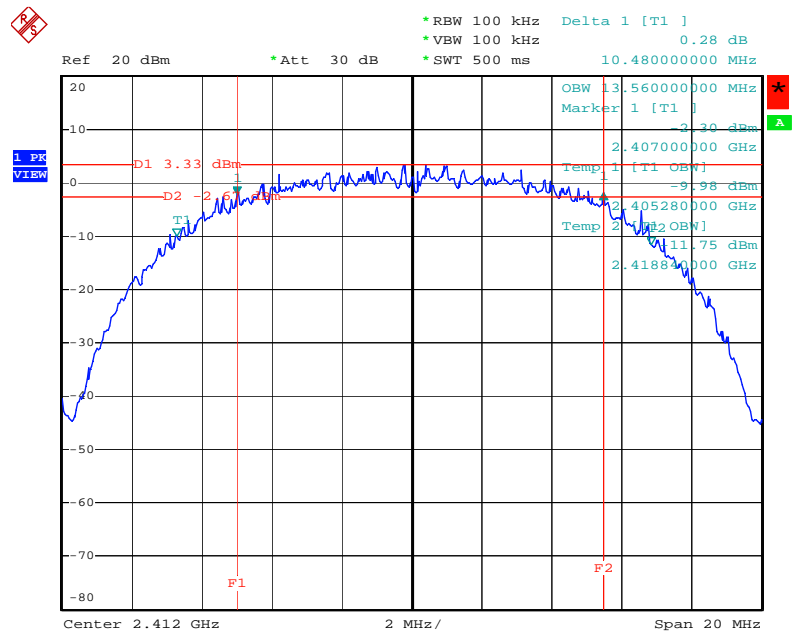


Date: 26.FEB.2007 08:50:30

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz

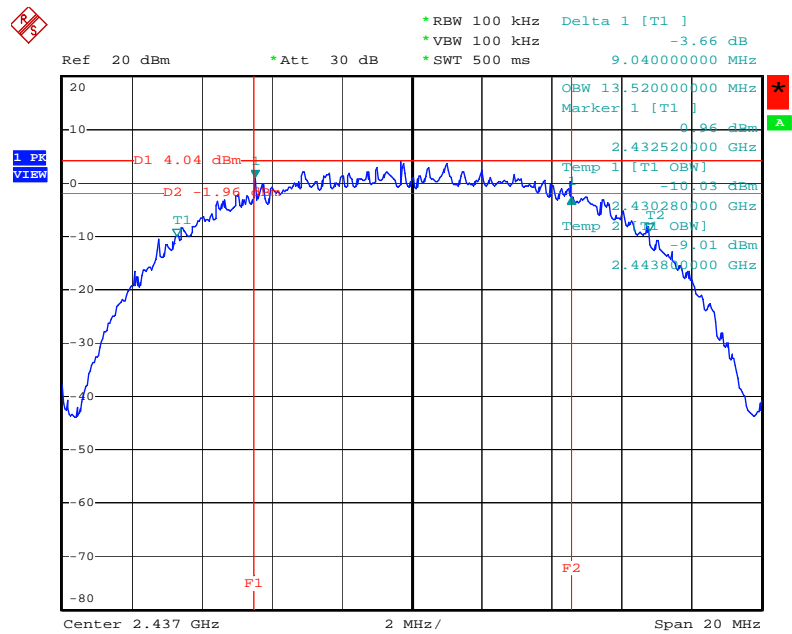


Date: 26.FEB.2007 08:59:13

## 6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz

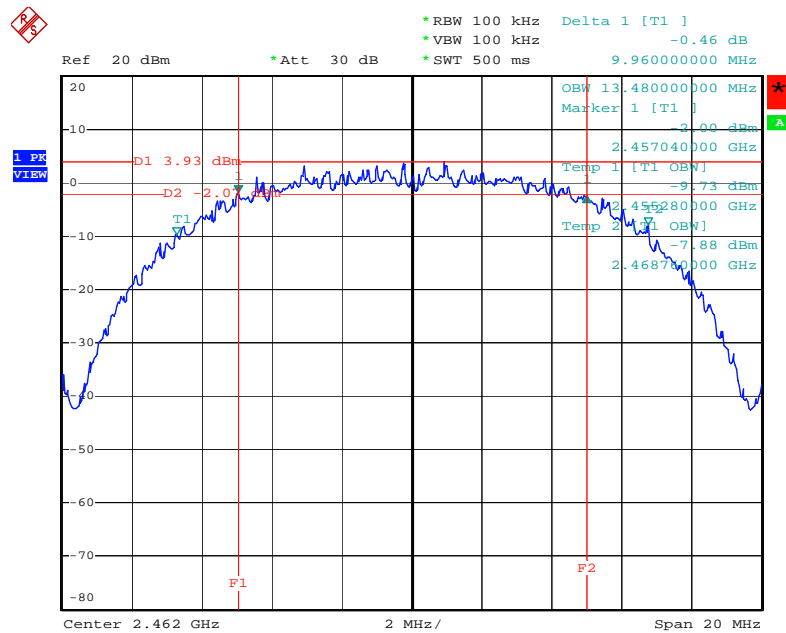


Date: 26.FEB.2007 09:03:25

## 6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz

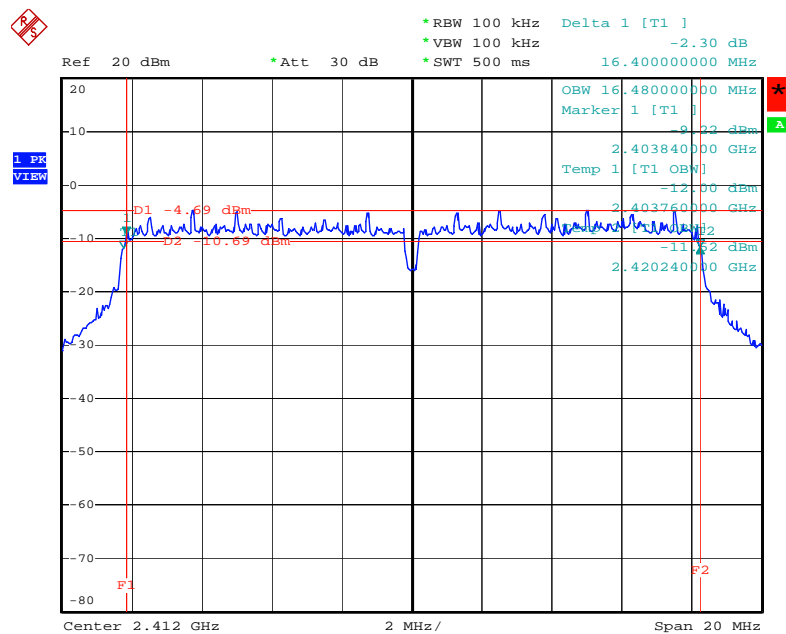


Date: 26.FEB.2007 09:29:12

## 6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz

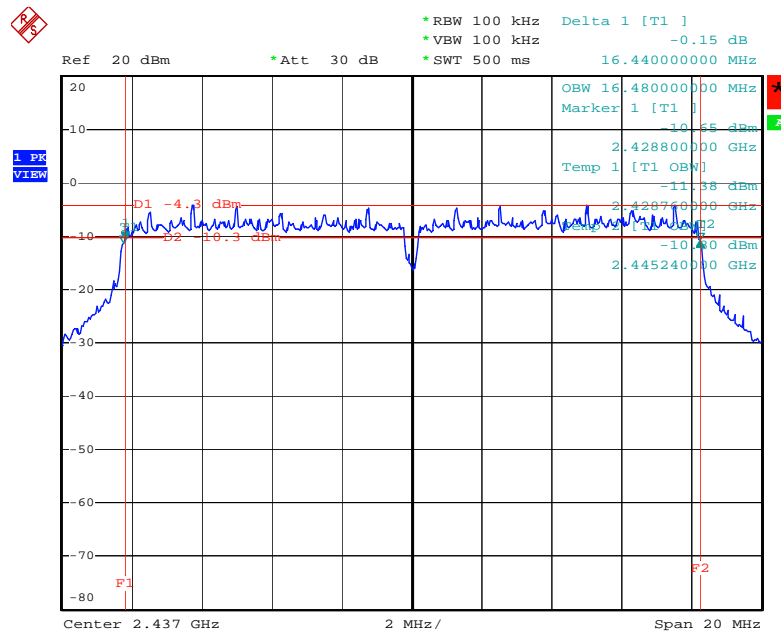

Date: 26.FEB.2007 09:27:44

## 6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2462 MHz

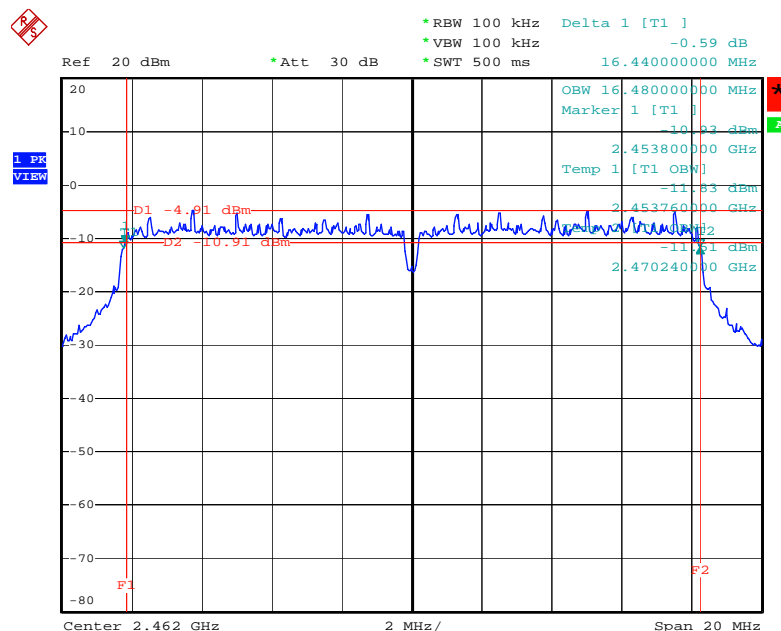

Date: 26.FEB.2007 09:21:33

### 3.5. Radiated Emissions Measurement

#### 3.5.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### 3.5.2. Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100KHz / 100KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

**3.5.3. Test Procedures**


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

### 3.5.4. Test Setup Layout

For radiated emissions below 30MHz

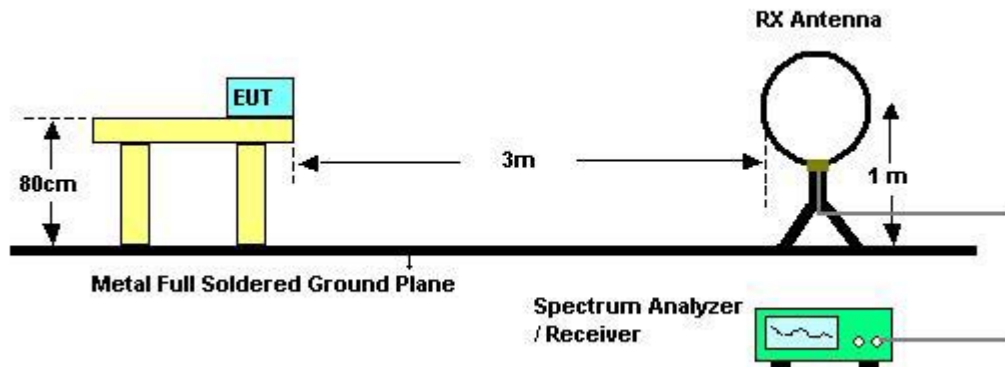

For radiated emissions above 30MHz

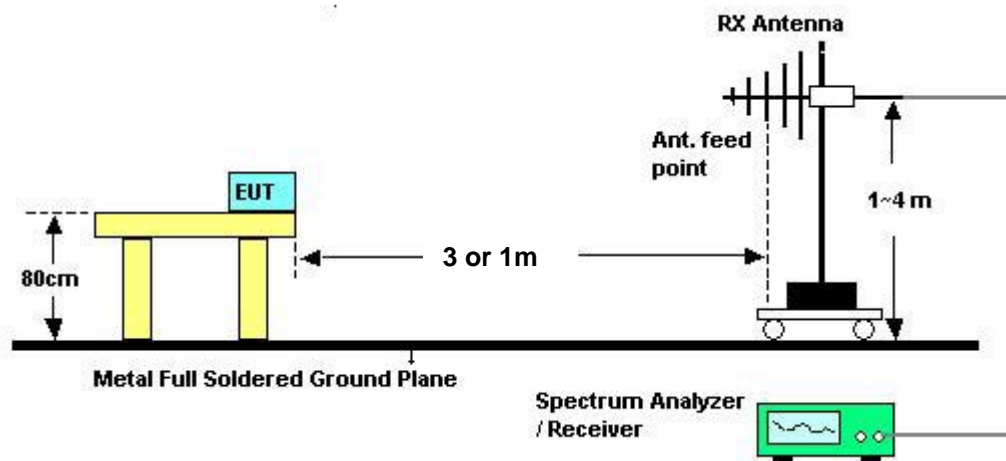

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

### 3.5.5. Test Deviation

There is no deviation with the original standard.

### 3.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



**3.5.7. Results of Radiated Emissions (9kHz~30MHz)**

<b>Temperature</b>	26	<b>Humidity</b>	55%
<b>Test Engineer</b>	Vic		

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

## 3.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	26	Humidity	55%
Test Engineer	Vic	Configurations	802.11g CH 6 (Adapter 1: DVE /DSA-10P-05)

## Horizontal

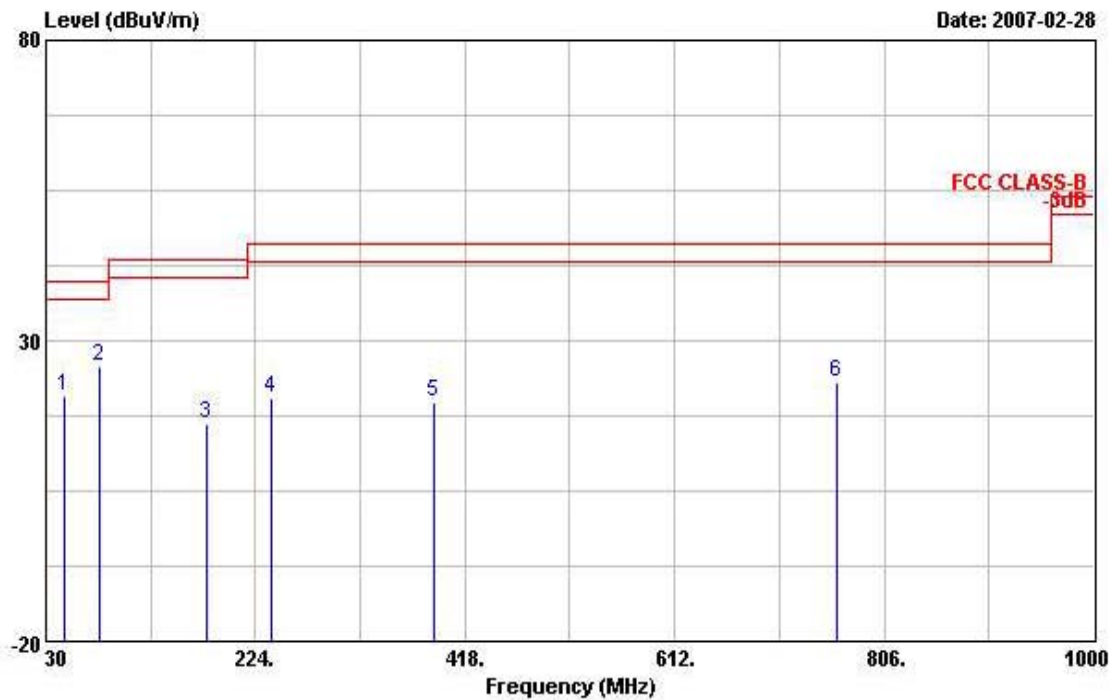

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	47.460	20.65	-19.35	40.00	36.05	9.27	3.08	27.76	Peak	---	---
2 @	79.470	25.73	-14.27	40.00	43.32	7.15	2.92	27.66	Peak	---	---
3	179.380	16.30	-27.20	43.50	32.03	9.10	3.00	27.83	Peak	---	---
4	238.550	20.58	-25.42	46.00	33.73	11.44	3.62	28.20	Peak	---	---
5	388.900	19.73	-26.27	46.00	28.52	16.08	4.09	28.96	Peak	---	---
6	761.380	23.14	-22.86	46.00	27.06	20.73	5.03	29.69	Peak	---	---

## Vertical

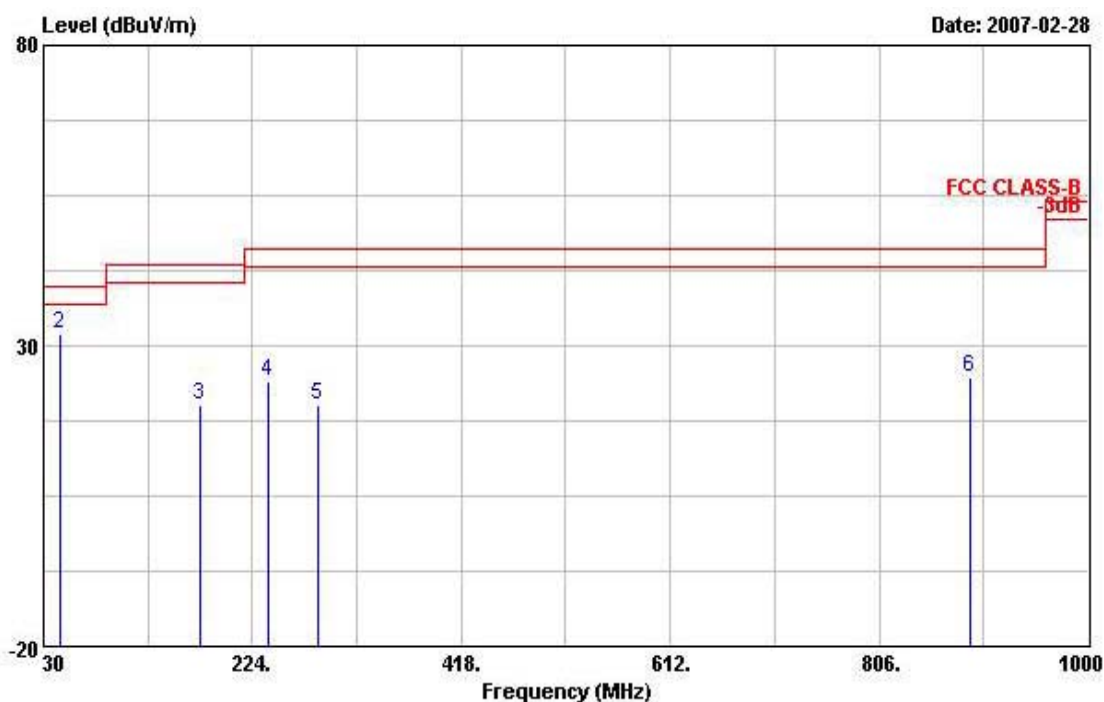

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	30.000	31.19	-8.81	40.00	38.42	18.48	1.97	27.68	QP	---	---
2 @	44.550	32.02	-7.98	40.00	46.00	10.51	3.27	27.76	Peak	---	---
3	175.500	20.16	-23.34	43.50	35.46	9.38	3.15	27.83	Peak	---	---
4	238.550	24.19	-21.81	46.00	37.34	11.44	3.62	28.20	Peak	---	---
5	284.140	20.23	-25.77	46.00	31.70	13.30	3.67	28.44	Peak	---	---
6	890.390	24.64	-21.36	46.00	27.41	21.00	6.09	29.86	Peak	---	---


## Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	26	Humidity	55%
Test Engineer	Vic	Configurations	802.11g CH 6 (Adapter 2: PHIHONG / PSB05R-050Q)

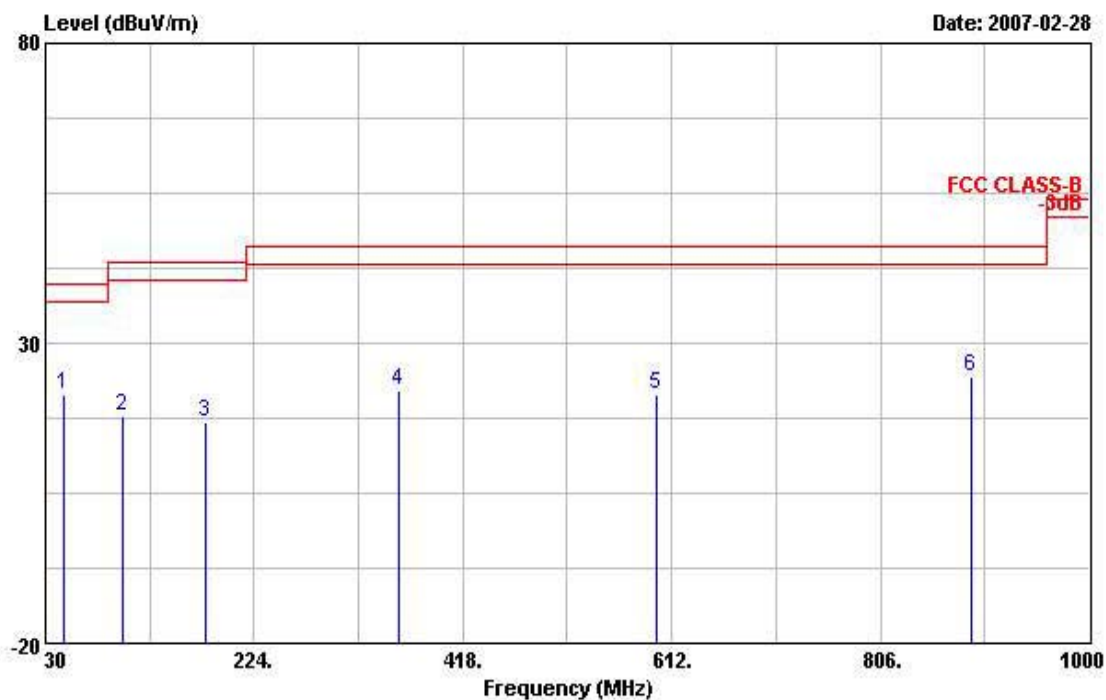**Horizontal**

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	47.460	21.47	-18.53	40.00	36.87	9.27	3.08	27.76	Peak	---	---
2	101.780	17.96	-25.54	43.50	31.43	11.44	2.83	27.74	Peak	---	---
3	179.380	16.97	-26.53	43.50	32.70	9.10	3.00	27.83	Peak	---	---
4	358.830	22.17	-23.83	46.00	31.26	15.20	4.42	28.71	Peak	---	---
5	598.420	21.32	-24.68	46.00	26.64	19.30	4.94	29.56	Peak	---	---
6	890.390	24.55	-21.45	46.00	27.32	21.00	6.09	29.86	Peak	---	---

## Vertical

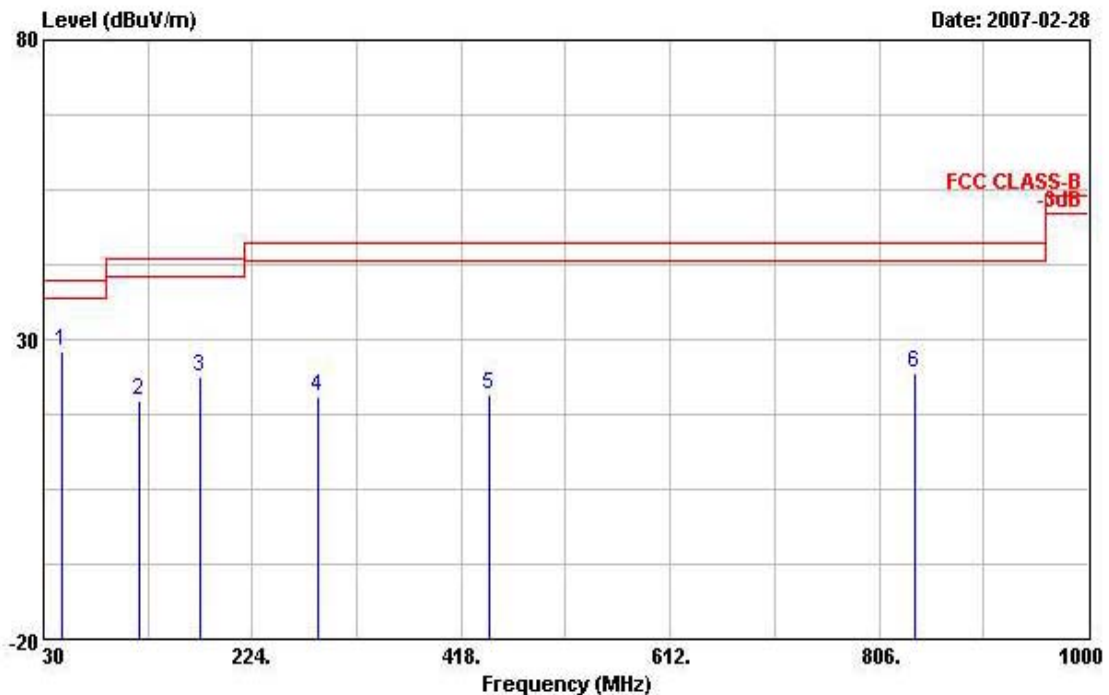

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	47.460	28.04	-11.96	40.00	43.44	9.27	3.08	27.76	Peak	---	---
2	118.270	19.89	-23.61	43.50	31.89	12.61	3.20	27.81	Peak	---	---
3	175.500	23.86	-19.64	43.50	39.16	9.38	3.15	27.83	Peak	---	---
4	284.140	20.41	-25.59	46.00	31.88	13.30	3.67	28.44	Peak	---	---
5	443.220	20.63	-25.37	46.00	28.23	17.00	4.44	29.05	Peak	---	---
6	838.980	24.55	-21.45	46.00	27.40	20.82	5.89	29.57	Peak	---	---

## Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


3.5.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

Temperature	26	Humidity	55%
Test Engineer	Vic	Configurations	802.11b CH 1

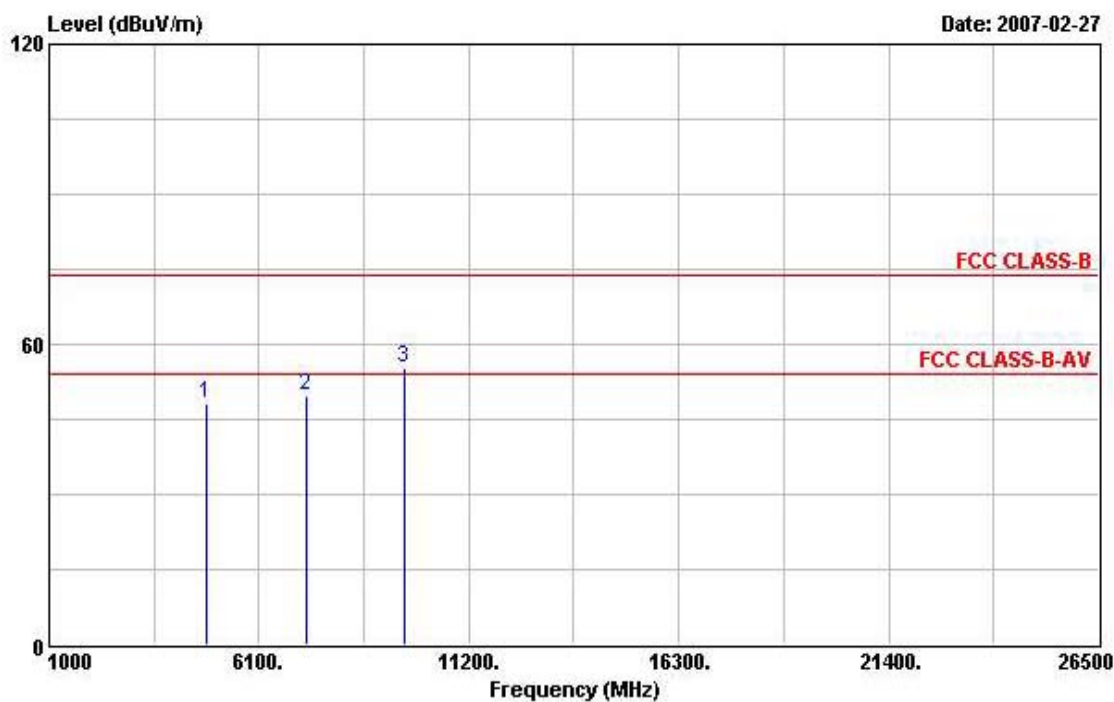**Horizontal**


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4824.000	48.20	-25.80	74.00	43.09	33.09	4.34	32.32	PEAK	---	---
2	7236.000	49.88	-24.12	74.00	41.29	35.98	5.18	32.57	PEAK	---	---
3	9652.000	55.24	-18.76	74.00	43.02	38.58	6.43	32.80	PEAK	---	---

## Vertical

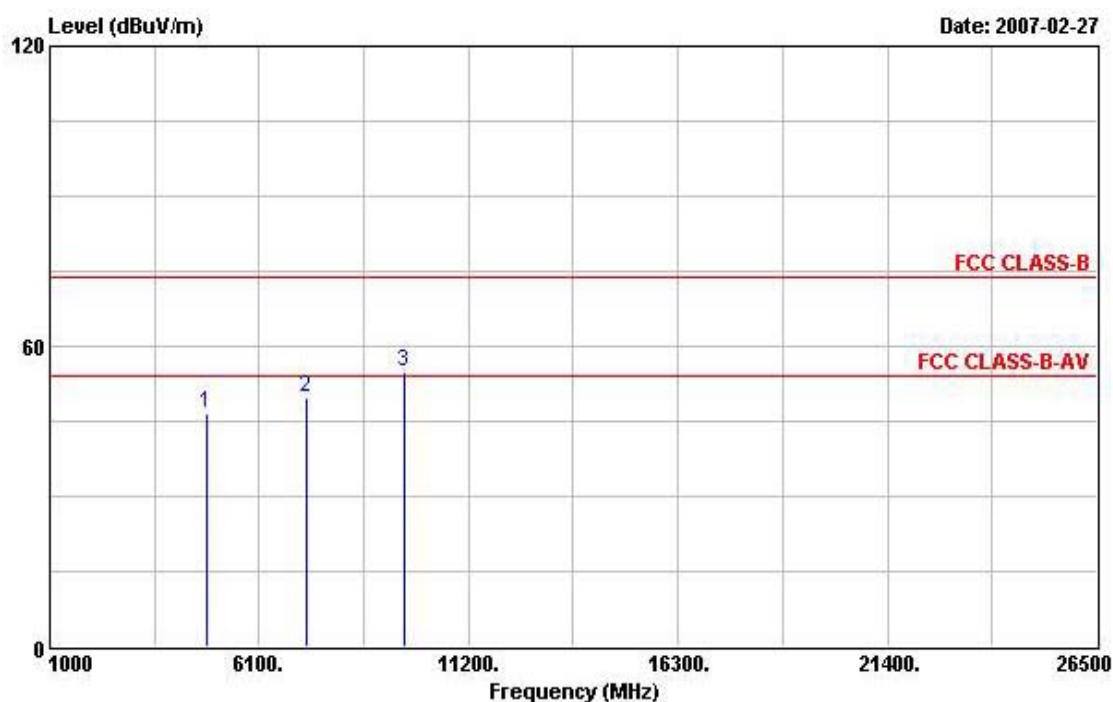

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4828.000	46.74	-27.26	74.00	41.64	33.09	4.34	32.32	PEAK	---	---
2	7236.000	49.85	-24.15	74.00	41.26	35.98	5.18	32.57	PEAK	---	---
3	9652.000	54.71	-19.29	74.00	42.49	38.58	6.43	32.80	PEAK	---	---


Temperature	26	Humidity	55%
Test Engineer	Vic	Configurations	802.11b CH 6

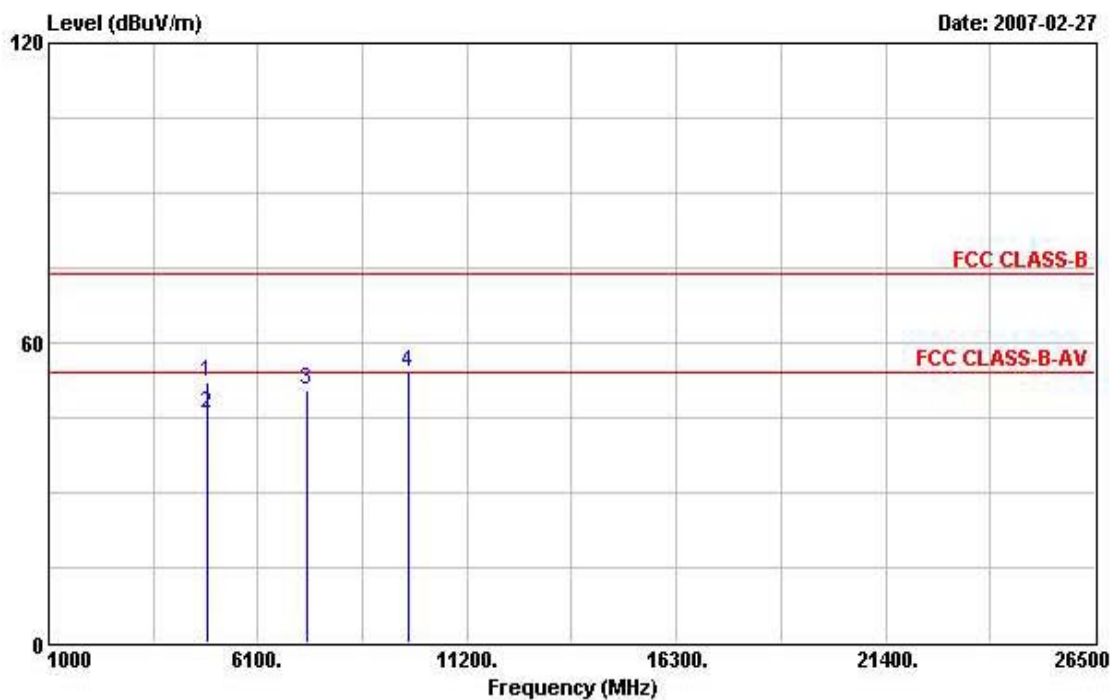**Horizontal**

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4874.000	52.02	-21.98	74.00	46.76	33.18	4.38	32.30	PEAK	---
2 @	4874.000	45.86	-8.14	54.00	40.60	33.18	4.38	32.30	Average	---
3	7315.000	50.59	-23.41	74.00	41.76	36.14	5.29	32.61	PEAK	---
4	9748.000	54.05	-19.95	74.00	41.47	38.77	6.61	32.80	PEAK	---




## Vertical

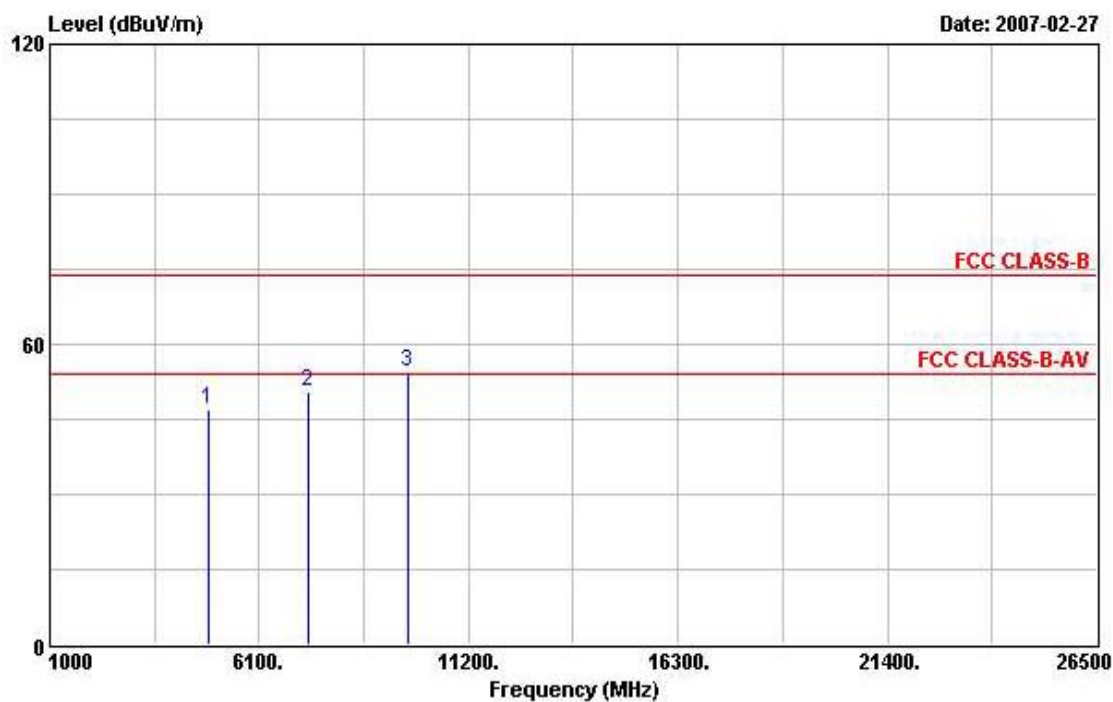


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4874.000	46.97	-27.03	74.00	41.71	33.18	4.38	32.30	PEAK	---	---
2	7315.000	50.44	-23.56	74.00	41.60	36.14	5.29	32.61	PEAK	---	---
3	9744.000	54.35	-19.65	74.00	41.81	38.73	6.61	32.80	PEAK	---	---

Temperature	26	Humidity	55%
Test Engineer	Vic	Configurations	802.11b CH 11

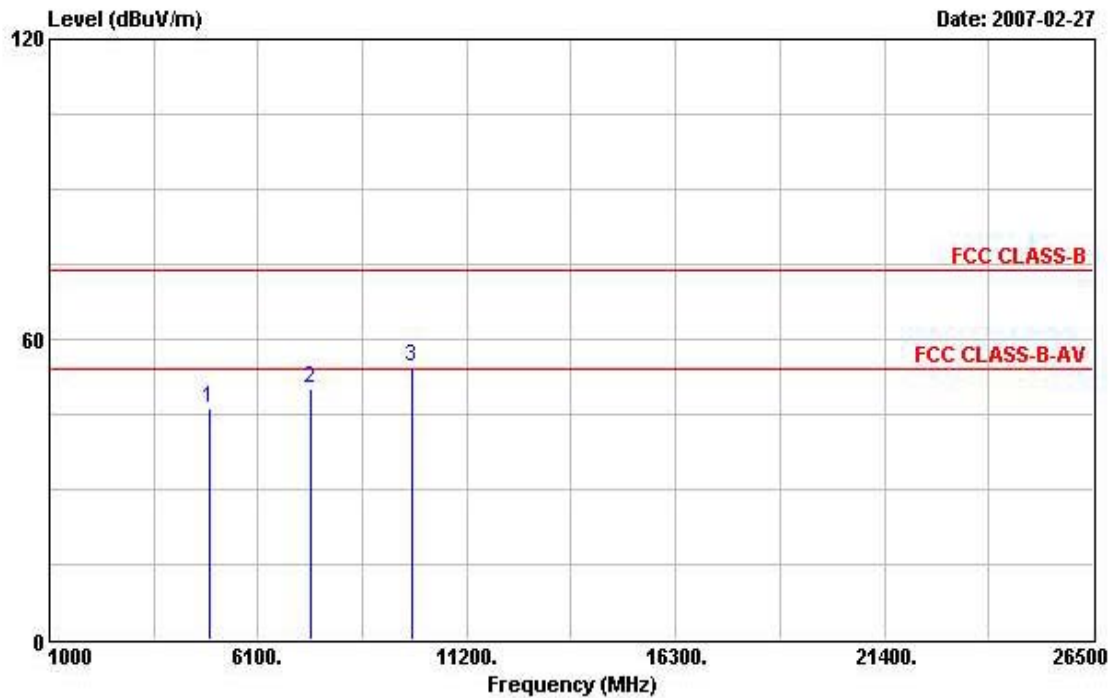**Horizontal**


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4924.000	46.20	-27.80	74.00	40.81	33.28	4.39	32.28	Peak	---	---
2	7386.000	50.20	-23.80	74.00	41.07	36.35	5.41	32.63	PEAK	---	---
3	9852.000	54.65	-19.35	74.00	41.71	38.95	6.78	32.79	PEAK	---	---

## Vertical

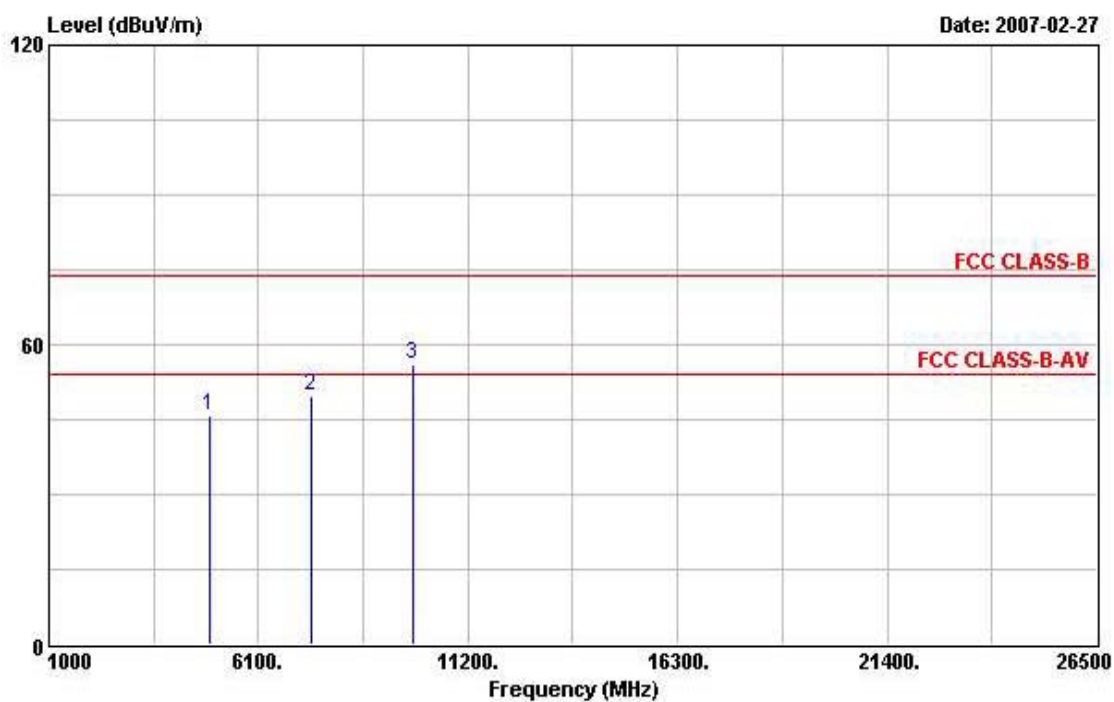


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4924.000	45.89	-28.11	74.00	40.50	33.28	4.39	32.28	PEAK	---	---
2	7382.000	49.91	-24.09	74.00	40.82	36.31	5.41	32.63	PEAK	---	---
3	9852.000	56.05	-17.95	74.00	43.10	38.95	6.78	32.79	PEAK	---	---

Temperature	26	Humidity	55%
Test Engineer	Vic	Configurations	802.11g CH 1

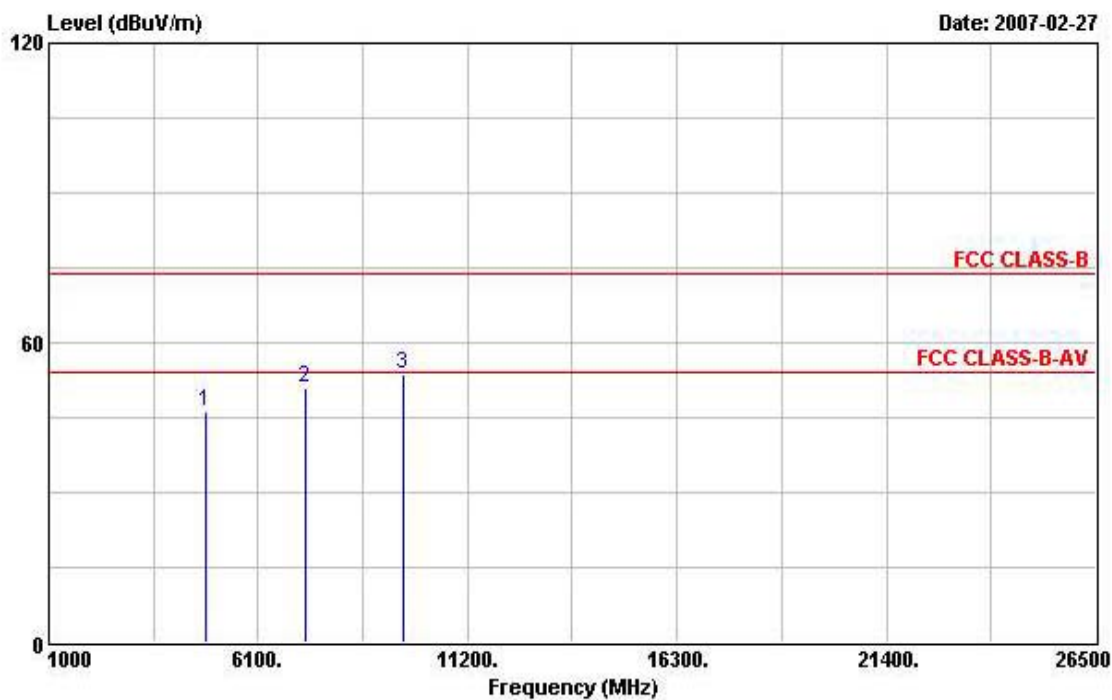**Horizontal**


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4824.000	46.36	-27.64	74.00	41.25	33.09	4.34	32.32	PEAK	---
2	7236.000	50.80	-23.20	74.00	42.21	35.98	5.18	32.57	PEAK	---
3	9644.000	53.77	-20.23	74.00	41.59	38.55	6.43	32.80	PEAK	---

## Vertical

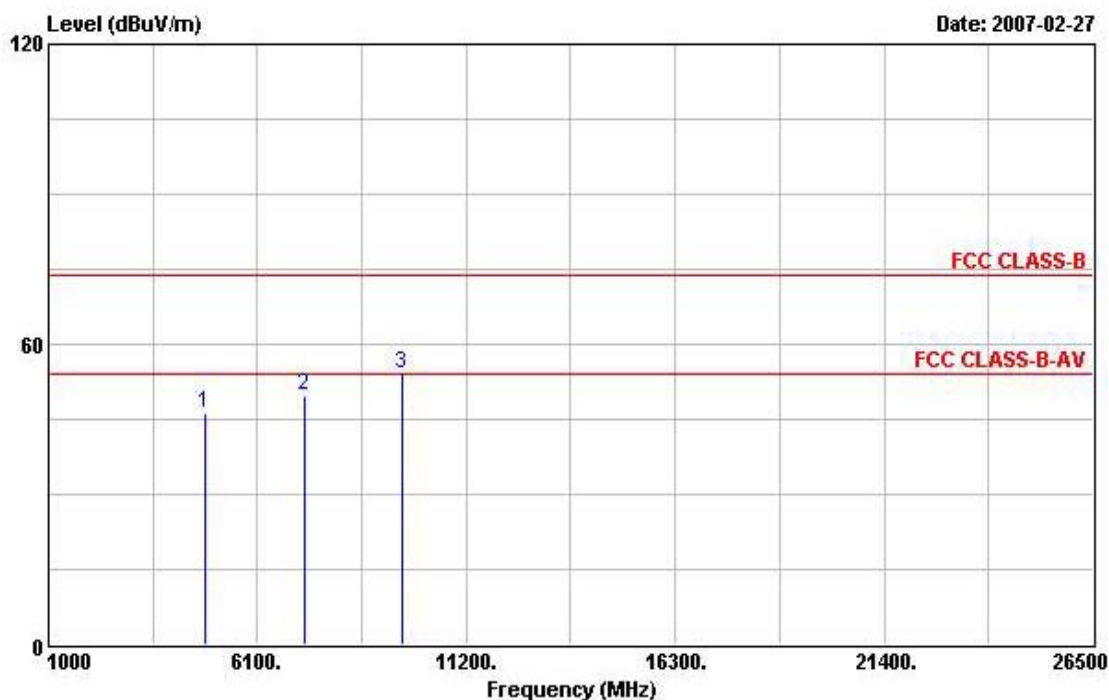


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4820.000	46.36	-27.64	74.00	41.25	33.09	4.34	32.32	PEAK	---
2	7236.000	49.82	-24.18	74.00	41.22	35.98	5.18	32.57	PEAK	---
3	9648.000	54.20	-19.80	74.00	41.99	38.58	6.43	32.80	PEAK	---

Temperature	26	Humidity	55%
Test Engineer	Vic	Configurations	802.11g CH 6

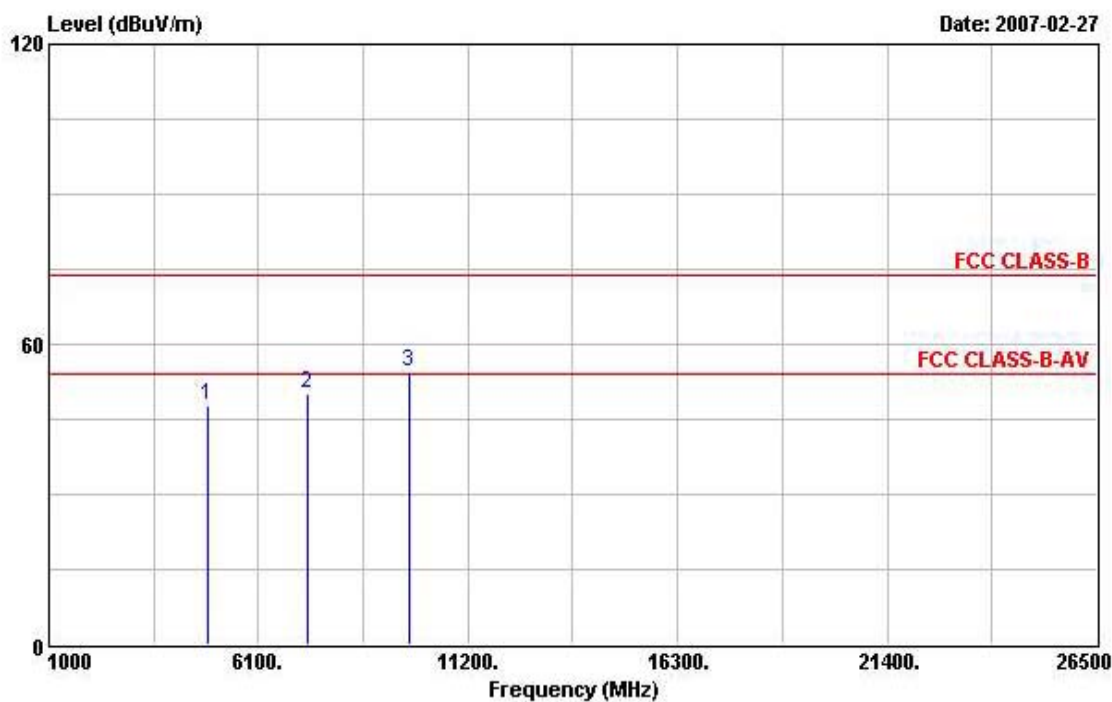**Horizontal**


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4878.000	47.60	-26.40	74.00	42.34	33.18	4.38	32.30 Peak	---	---
2	7315.000	50.26	-23.74	74.00	41.42	36.14	5.29	32.61 PEAK	---	---
3	9748.000	54.33	-19.67	74.00	41.75	38.77	6.61	32.80 PEAK	---	---

## Vertical

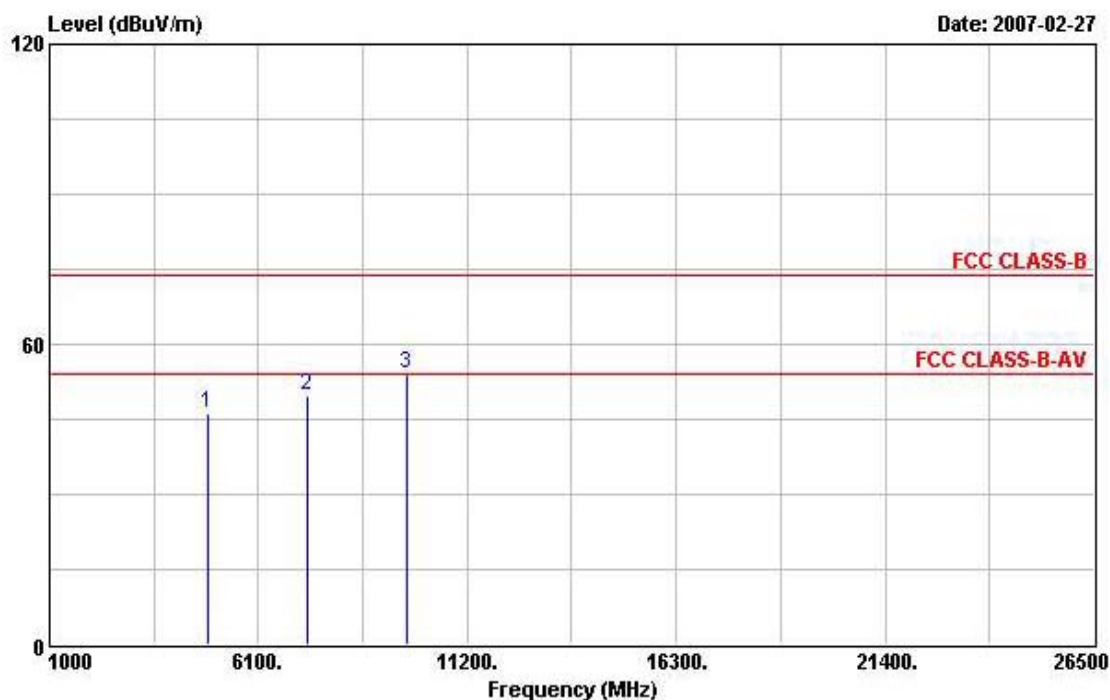

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4874.000	46.16	-27.84	74.00	40.90	33.18	4.38	32.30	PEAK	---	---
2	7307.000	49.89	-24.11	74.00	41.04	36.14	5.29	32.59	PEAK	---	---
3	9744.000	53.94	-20.06	74.00	41.39	38.73	6.61	32.80	PEAK	---	---


Temperature	26	Humidity	55%
Test Engineer	Vic	Configurations	802.11g CH 11

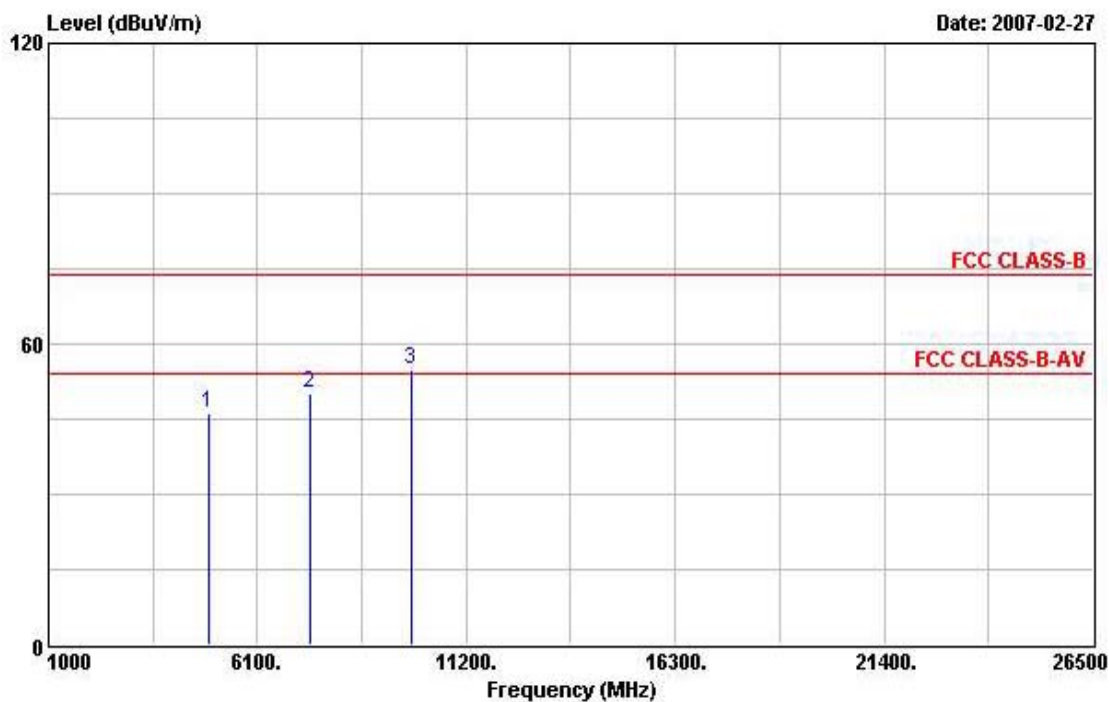**Horizontal**

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4920.000	46.25	-27.75	74.00	40.85	33.28	4.39	32.28	PEAK	---	---
2	7382.000	50.09	-23.91	74.00	41.00	36.31	5.41	32.63	PEAK	---	---
3	9844.000	54.69	-19.31	74.00	41.84	38.92	6.73	32.79	PEAK	---	---



## Vertical

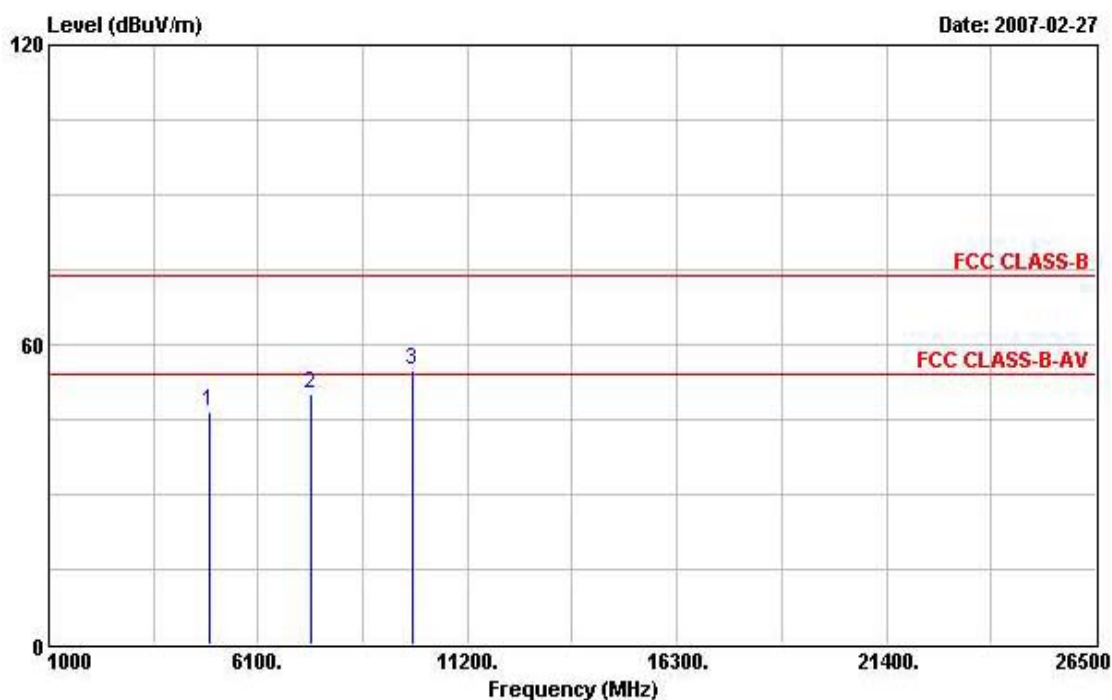

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4920.000	46.61	-27.39	74.00	41.21	33.28	4.39	32.28	PEAK	---	---
2	7390.000	50.15	-23.85	74.00	41.03	36.35	5.41	32.65	PEAK	---	---
3	9848.000	54.83	-19.17	74.00	41.97	38.92	6.73	32.79	PEAK	---	---

### 3.6. Band Edge Emissions Measurement

#### 3.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### 3.6.2. Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz /100 KHz for Peak

#### 3.6.3. Test Procedures

1. The test procedure is the same as section 2.5, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

#### 3.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 2.9.1.

#### 3.6.5. Test Deviation

There is no deviation with the original standard.

#### 3.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 3.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	26	Humidity	55%
Test Engineer	Vic	Configurations	802.11b CH 1, 11

## Channel 1

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	2370.420	56.68	-17.32	74.00	25.64	28.26	2.79	0.00	Peak	---	---
2 @	2413.170				75.08	28.33	2.81	0.00	Peak	---	---
1 @	2370.420	44.89	-9.11	54.00	13.85	28.26	2.79	0.00	Average	---	---
2 @	2413.170				54.92	28.33	2.81	0.00	Average	---	---

## Channel 11

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	2463.330				70.97	28.43	2.85	0.00	Peak	---	---
2	2487.650	57.44	-16.56	74.00	26.09	28.50	2.85	0.00	Peak	---	---
1 @	2463.330				51.99	28.43	2.85	0.00	Average	---	---
2 @	2487.650	45.43	-8.57	54.00	14.08	28.50	2.85	0.00	Average	---	---

Temperature	26	Humidity	55%
Test Engineer	Vic	Configurations	802.11g CH 1, 11


## Channel 1

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	2390.000	56.05	-17.95	74.00	24.95	28.29	2.81	0.00	Peak	---	---
2 @	2418.300				70.21	28.33	2.81	0.00	Peak	---	---
1 @	2390.000	44.16	-9.84	54.00	13.06	28.29	2.81	0.00	Average	---	---
2 @	2418.300				54.15	28.33	2.81	0.00	Average	---	---

## Channel 11


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	2464.850				70.71	28.43	2.85	0.00	Peak	---	---
2 @	2483.500	62.82	-11.18	74.00	31.50	28.47	2.85	0.00	Peak	---	---
1 @	2464.850				54.48	28.43	2.85	0.00	Average	---	---
2 @	2483.500	46.67	-7.33	54.00	15.35	28.47	2.85	0.00	Average	---	---

**For Emission not in Restricted Band**  
**Low Band Edge Plot on Configuration IEEE 802.11b / 2412 MHz**

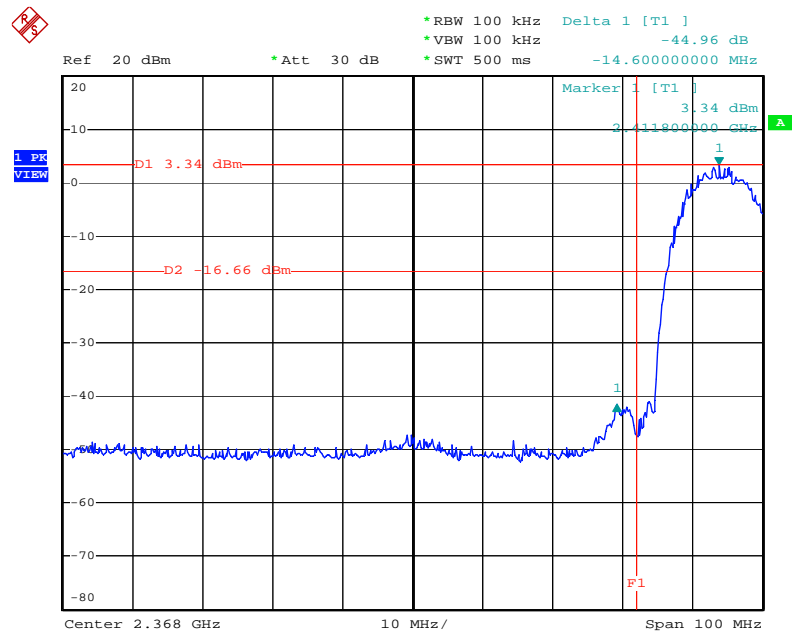


Date: 26.FEB.2007 08:48:43

**High Band Edge Plot on Configuration IEEE 802.11b / 2462 MHz**

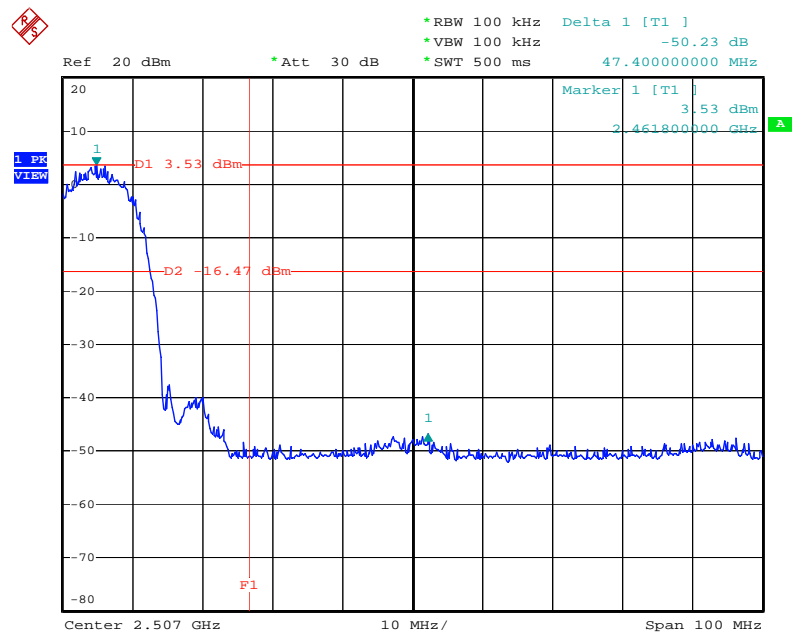


Date: 26.FEB.2007 09:05:04

Low Band Edge Plot on Configuration IEEE 802.11g / 2412 MHz

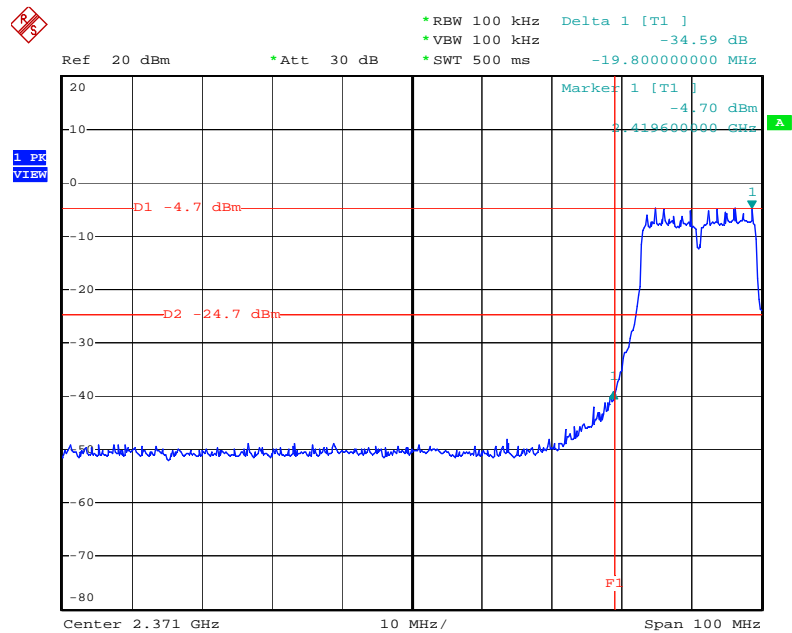

Date: 26.FEB.2007 09:30:21

High Band Edge Plot on Configuration IEEE 802.11g / 2462 MHz

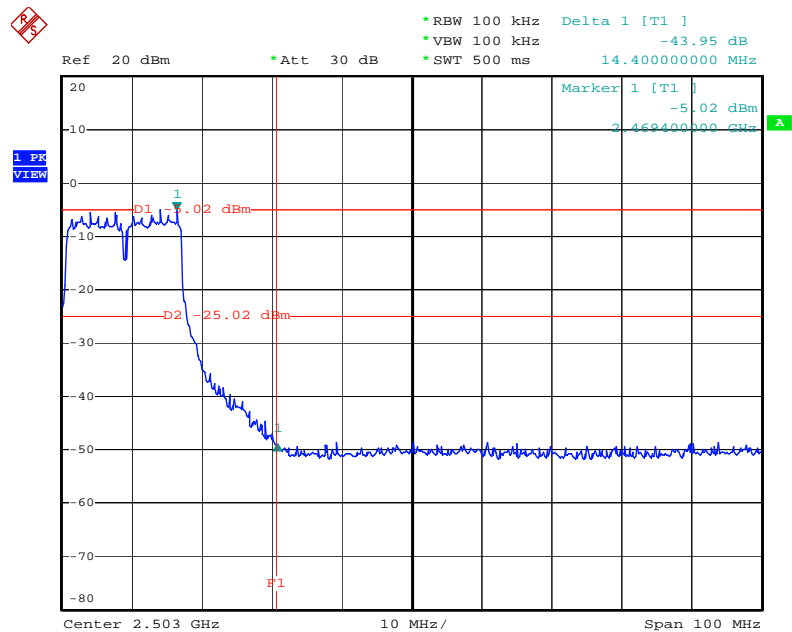

Date: 26.FEB.2007 09:22:50

### **3.7. Antenna Requirements**

#### **3.7.1. Limit**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

#### **3.7.2. Antenna Connector Construction**

Please refer to section 2.3 in this test report; antenna connector complied with the requirements.

## 4. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP30	100023	9kHz ~ 30GHz	Dec. 17, 2006	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100764	DC ~ 40GHz	Jul. 20, 2006	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100666	DC ~ 40GHz	Jul. 20, 2006	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jun. 10, 2006	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Dec. 27, 2006	Conducted (TH01-HY)
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 02, 2006	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 01, 2006	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 01, 2006	Conducted (TH01-HY)
Oscilloscope	Tektronix	TDS1012	CO38515	100MHz / 1GS/s	Jun. 20, 2006	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Dec. 29, 2006	Conducted (TH01-HY)
Data Generator	Tektronix	DG2030	063-2920-50	0.1Hz~400MHz	Jun. 16, 2006	Conducted (TH01-HY)
EMC Receiver	R&S	ESCS 30	100359	9kHz – 2.75GHz	Set. 21, 2006	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Mar. 28, 2006	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Mar. 17, 2006	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2006	Conduction (CO04-HY)
ISN	SCHAFFNER	ISN T400	21653	9kHz – 30MHz	Mar. 27, 2006	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 15, 2006	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	CPA9231A	1886	9 kHz - 2 GHz	Jan. 22, 2007	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	May 29, 2006	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100004/040	9 kHz - 40 GHz	Sep. 21, 2006	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Jul. 24, 2006	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	Apr. 27, 2006	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	NCR	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Dec. 02, 2006	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Dec. 02, 2006	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is one year. NCR: Non-Calibration required.





Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Apr. 21, 2005*	Conducted (TH01-HY)
Amplifier	MITEQ	AMF-6F-260400	923364	26.5 GHz - 40 GHz	Jan. 22, 2007*	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	May 23, 2006*	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is two year.

**5. TEST LOCATION**

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

## 6. TAF CERTIFICATE OF ACCREDITATION

United States Department of Commerce National Institute of Standards and Technology	
	
<b>Certificate of Accreditation to ISO/IEC 17025:2005</b>	
NVLAP LAB CODE: 200079-0	
<b>Sporton International, Inc. Hwa Ya EMC Laboratory</b> Tao Yuan Hsien 333 TAIWAN	
<i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i>	
<b>ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS</b>	
<i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated 18 June 2005).</i>	
2007-01-01 through 2007-12-31 Effective dates	  For the National Institute of Standards and Technology

NVLAP-01C (REV. 2006-09-13)