

# FCC Radio Test Report

## FCC ID: VOZ-TBK104

**Report No.** : TB-FCC143930  
**Applicant** : JINGHONG INDUSTRIAL (HONGKONG)CO.,LIMITED  
**Equipment Under Test (EUT)**  
**EUT Name** : Industrial Wireless Keyboard  
**Model No.** : JH-TBK104  
**Serial No.** : N/A  
**Brand Name** : N/A  
**Receipt Date** : 2015-04-17  
**Test Date** : 2015-04-18 to 2015-04-22  
**Issue Date** : 2015-04-23  
**Standards** : FCC Part 15, Subpart C (15.249: 2014)  
**Test Method** : ANSI C63.10: 2013  
**Conclusions** : **PASS**


In the configuration tested, the EUT complied with the standards specified above,  
The EUT technically complies with the FCC requirements

**Test/Witness Engineer** :

WANG SU

**Approved & Authorized** :

Long Ha

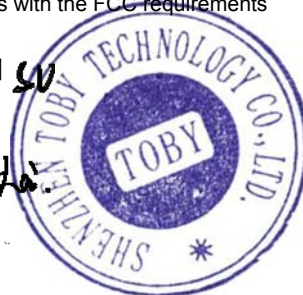

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

## Contents

<b>CONTENTS.....</b>	<b>2</b>
<b>1. GENERAL INFORMATION ABOUT EUT .....</b>	<b>3</b>
1.1 Client Information.....	3
1.2 General Description of EUT (Equipment Under Test) .....	3
1.3 Block Diagram Showing the Configuration of System Tested.....	4
1.4 Description of Support Units .....	4
1.5 Description of Test Mode.....	4
1.6 Description of Test Software Setting .....	5
1.7 Test Facility.....	6
<b>2. TEST SUMMARY.....</b>	<b>7</b>
<b>3. CONDUCTED EMISSION TEST .....</b>	<b>8</b>
3.1 Test Standard and Limit.....	8
3.2 Test Setup.....	8
3.3 Test Procedure.....	8
3.4 Test Equipment Used.....	9
3.5 EUT Operating Mode .....	9
3.6 Test Data.....	9
<b>4. RADIATED EMISSION TEST .....</b>	<b>10</b>
4.1 Test Standard and Limit.....	10
4.2 Test Setup.....	11
4.3 Test Procedure.....	12
4.4 EUT Operating Condition .....	13
4.5 Test Equipment.....	13
4.6 Test Data.....	13
<b>5. BANDWIDTH TEST.....</b>	<b>28</b>
5.1 Test Setup.....	28
5.2 Test Procedure.....	28
5.3 EUT Operating Condition .....	28
5.4 Test Equipment.....	28
5.5 Test Data.....	28
<b>6. ANTENNA REQUIREMENT.....</b>	<b>32</b>
6.1 Standard Requirement.....	32
6.2 Antenna Connected Construction .....	32
6.3 Result.....	32

# 1. General Information about EUT

## 1.1 Client Information

<b>Applicant</b>	:	JINGHONG INDUSTRIAL (HONGKONG)CO.,LIMITED
<b>Address</b>	:	La 2, Block B, Hengmingzhu, Bao Tian Industry, Qianjin 2 Rd., Baoan District, Shenzhen, China
<b>Manufacturer</b>	:	Shenzhen Baoan Xixiang Jinghong Conductive Rubber Manufactory
<b>Address</b>	:	1st & 2nd Floor, Block 25, Chentian Industrial Zone, Baomin 2nd Road, Xixiang, Baoan, Shenzhen, China

## 1.2 General Description of EUT (Equipment Under Test)

<b>EUT Name</b>	:	Industrial Wireless Keyboard	
<b>Models No.</b>	:	JH-TBK104	
<b>Model Difference</b>	:	N/A	
<b>Product Description</b>	:	Operation Frequency:2402~2474 MHz	
		Number of Channels:	73channels
		Out Power:	86.45 dBuV/m@3m Peak 86.20 dBuV/m@3m Avg
		Antenna Gain:	0 dBi
		Modulation Type:	GFSK
<b>Power Supply</b>	:	DC Voltage supplied by AAA battery.	
<b>Power Rating</b>	:	DC 3.0V (2*AAA battery).	
<b>Connecting I/O Port(S)</b>	:	Please refer to the User's Manual	

### Note:


(1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

(2) Channel List:

Channel List		
Low Channel (MHz)	MID Channel (MHz)	HIGH Channel (MHz)
2402	2442	2474

### 1.3 Block Diagram Showing the Configuration of System Tested

#### Mode 1: TX Mode

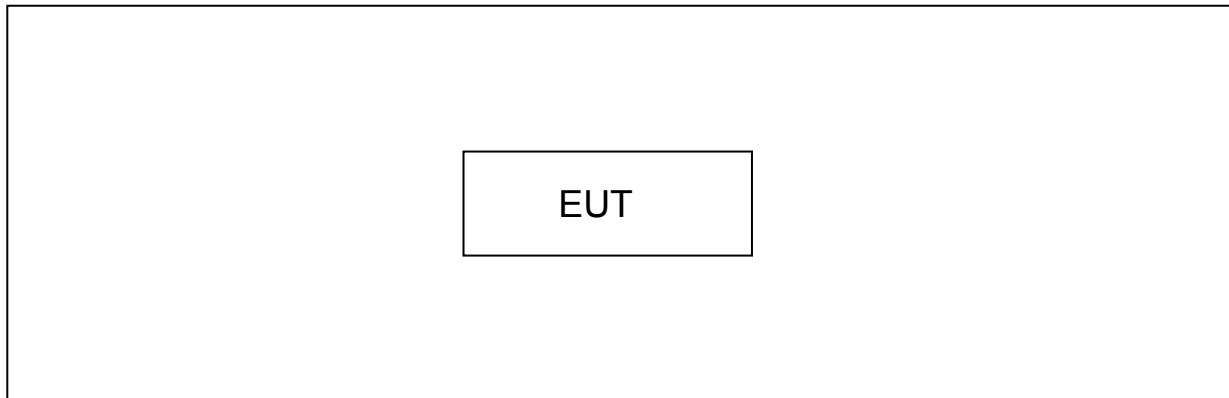

### 1.4 Description of Support Units

The EUT has been tested as an independent unit.

Name	Model	S/N	Manufacturer	Used “√”
---	---	---	---	---

### 1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Test	
Final Test Mode	Description
N/A	N/A

For Radiated Test	
Final Test Mode	Description
Mode 1	TX Mode

#### Note:

For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate.

(1)According to ANSI C63.4 standards, the measurements are performed at the highest,

middle, lowest available channels.

(2) During the testing procedure, the continuously transmitting with the maximum power mode was programmed by the customer.

(3) The EUT is considered a portable unit; it was pre-tested on the positioned of each 3 axis, X-plane, Y-plane and Z-plane. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.

## 1.6 Description of Test Software Setting

During testing channel & Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of RF mode.

<b>Product SW/HW Version :</b>	N/A		
<b>Radio SW/HW Version:</b>	N/A		
<b>Test Software Version</b>	N/A		
Frequency	2402 MHz	2441MHz	2480 MHz
GFSK	DEF	DEF	DEF

## 1.7 Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

Test Item	Parameters	Expanded Uncertainty ( $U_{Lab}$ )
Conducted Emission	Level Accuracy: 9kHz~150kHz	$\pm 3.42$ dB
	150kHz to 30MHz	$\pm 3.42$ dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	$\pm 4.60$ dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	$\pm 4.40$ dB
Radiated Emission	Level Accuracy: Above 1000MHz	$\pm 4.20$ dB

## 1.8 Test Facility

The testing was performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at:

1A/F., Bldg.6, Yusheng Industrial Zone, The National Road No.107 Xixiang Section 467, Xixiang, Bao'an, Shenzhen, Guangdong, China.

At the time of testing, the following bodies accredited the Laboratory:

### **CNAS (L5813)**

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

### **FCC List No.: (811562)**

The Laboratory is listed in the United States of American Federal Communications Commission (FCC), and the registration number is 811562.

### **IC Registration No.: (11950A-1)**

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A-1.

## 2. Test Summary

FCC Part 15 Subpart C(15.249)			
Standard Section	Test Item	Judgment	Remark
15.203	Antenna Requirement	PASS	N/A
15.205	Restricted Bands	PASS	N/A
15.207	AC Power Conducted Emission	N/A	N/A
15.249 & 15.209	Radiated Spurious Emission	PASS	N/A
15.215(C)	20dB Bandwidth	PASS	N/A
<b>Note:</b> N/A is an abbreviation for Not Applicable.			

### 3. Conducted Emission Test

#### 3.1 Test Standard and Limit

##### 3.1.1 Test Standard

FCC Part 15.207

##### 3.1.2 Test Limit

**Conducted Emission Test Limit**

Frequency	Maximum RF Line Voltage (dB $\mu$ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50


Notes:

(1) \*Decreasing linearly with logarithm of the frequency.

(2) The lower limit shall apply at the transition frequencies.

(3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

#### 3.2 Test Setup

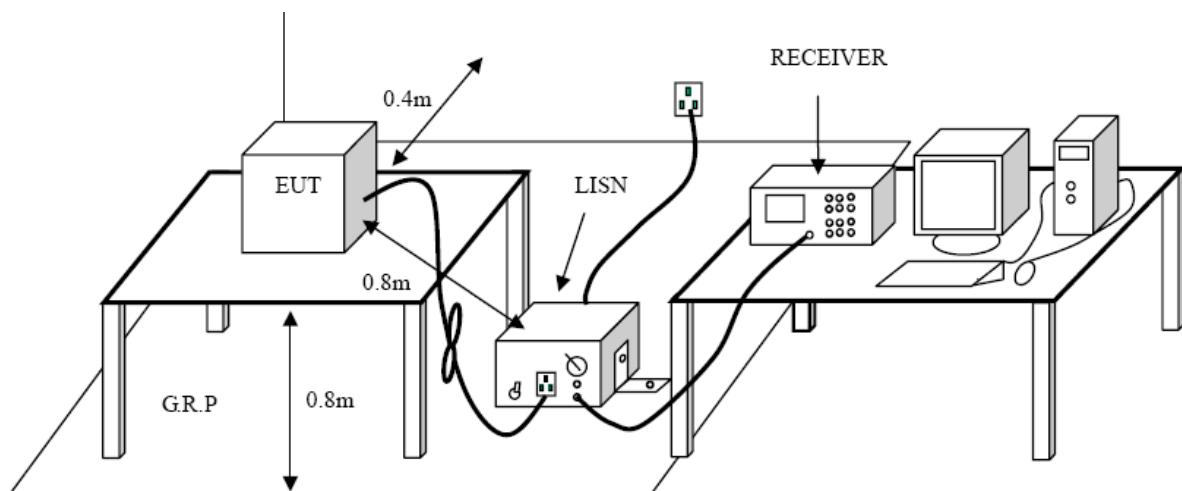

#### 3.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.



I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN is at least 80 cm from nearest part of EUT chassis.

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.

### 3.4 Test Equipment Used

Description	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	ROHDE& SCHWARZ	ESCI	100321	Aug. 08, 2014	Aug. 07, 2015
50ΩCoaxial Switch	Anritsu	MP59B	X10321	Aug. 08, 2014	Aug. 07, 2015
L.I.S.N	Rohde & Schwarz	ENV216	101131	Aug. 08, 2014	Aug. 07, 2015
L.I.S.N	SCHWARZBECK	NNBL 8226-2	8226-2/164	Aug. 08, 2014	Aug. 07, 2015

### 3.5 EUT Operating Mode

Please refer to the description of test mode.

### 3.6 Test Data

The EUT is powered by battery, so no requirement for this test item.

## 4. Radiated Emission Test

### 4.1 Test Standard and Limit

#### 4.1.1 Test Standard

FCC Part 15.209

#### 4.1.2 Test Limit

#### Radiated Emission Limit (9kHz~1000MHz)

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### Radiated Emission Limit (Above 1000MHz)

Frequency (MHz)	Class B (dBuV/m)(at 3 M)	
	Peak	Average
Above 1000	74	54

#### Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level(dBuV/m)=20log Emission Level(Uv/m)


#### Limits of radiated emission measurement (15.249)

FCC Part 15 (15.249), Subpart C	
Limit	Frequency Range (MHz)
Field strength of fundamental 50000 $\mu$ V/m (94 dB $\mu$ V/m) @ 3 m	2400~2483.5
Field strength of fundamental 500 $\mu$ V/m (94 dB $\mu$ V/m) @ 3 m	Above 2483.5


**Restricted bands requirement for equipment operating in 2400MHz to 2483.5 MHz (15.249)**

Restricted Frequency Band (MHz)	(dBuV/m)(at 3 M)
2310~2390	Attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in 15.209, whichever is the lesser attenuation
2483.5~2500	


## 4.2 Test Setup

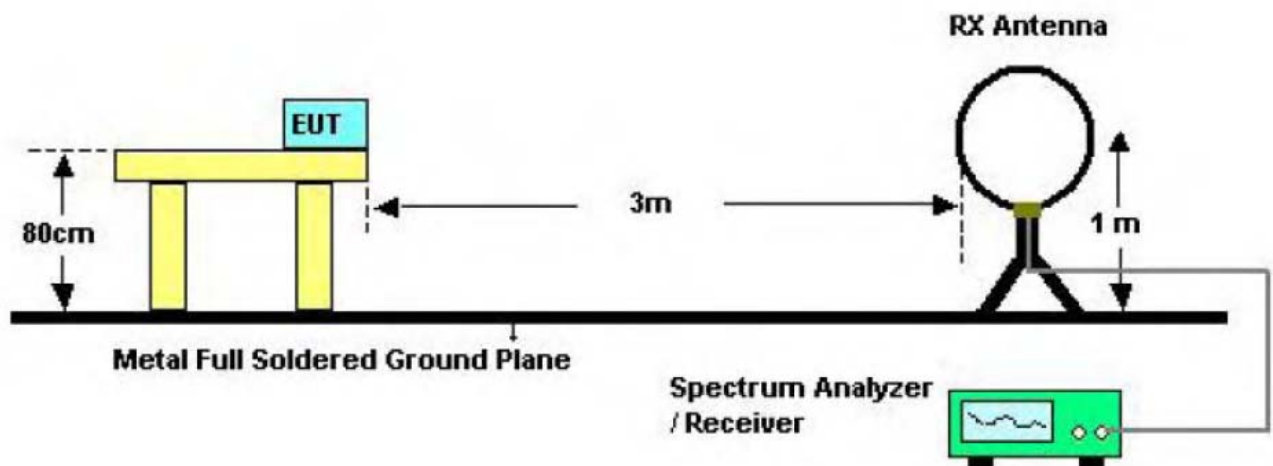

### Bellow 30MHz Test Setup

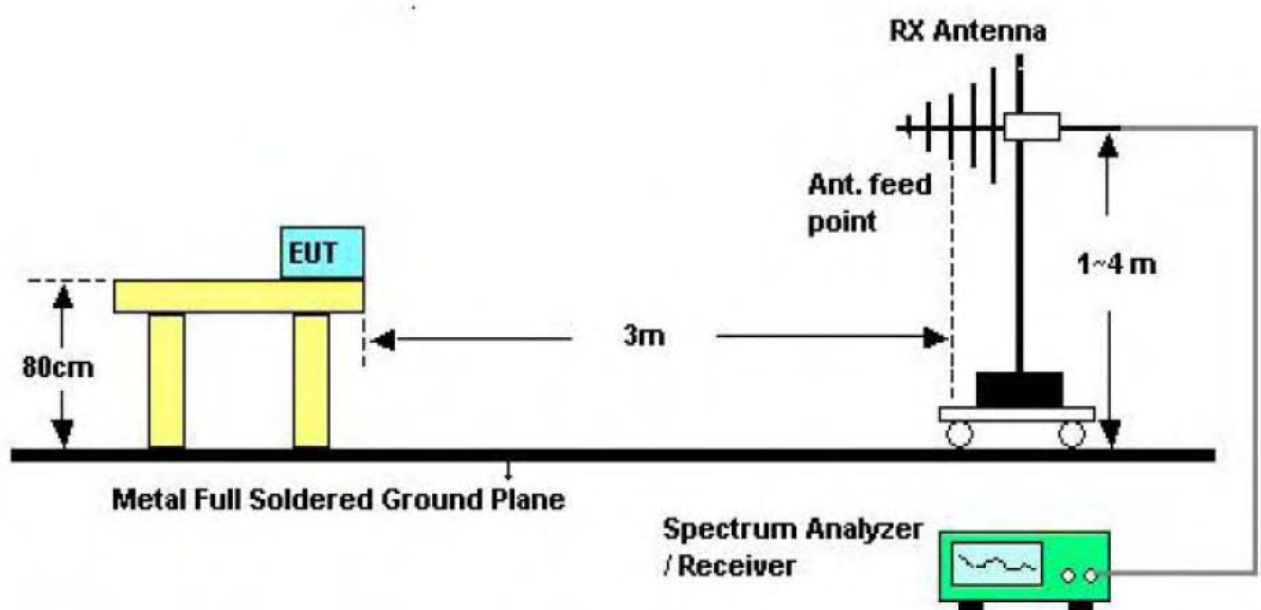

### Bellow 1000MHz Test Setup

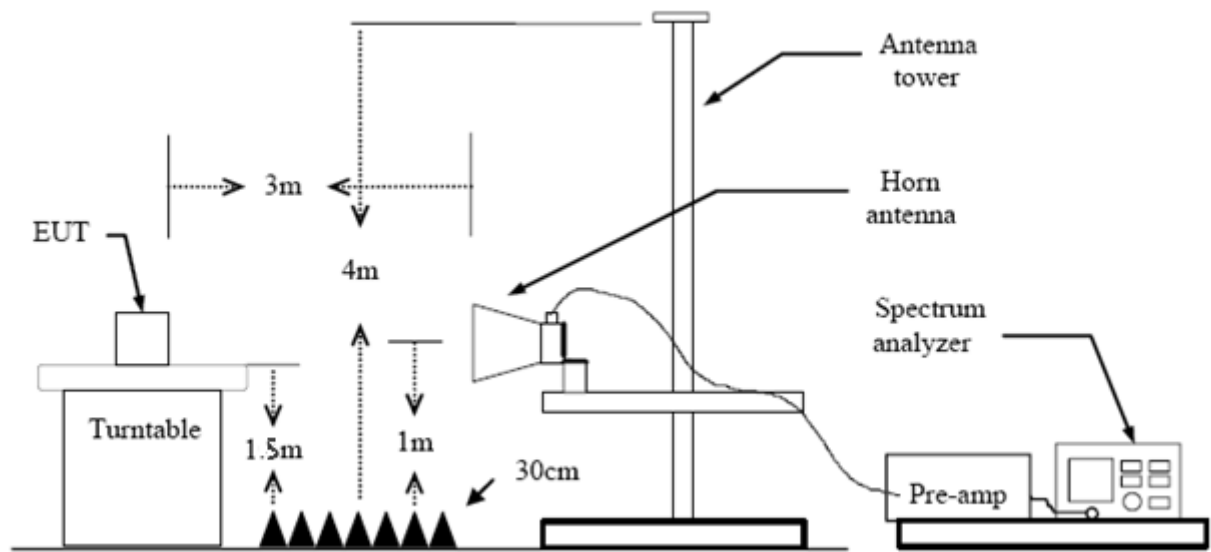

Above 1GHz Test Setup

### 4.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

#### 4.4 EUT Operating Condition

The EUT was set to Continual Transmitting in maximum power, and new batteries are used during testing.

#### 4.5 Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Aug. 08, 2014	Aug.07, 2015
Spectrum Analyzer	Rohde & Schwarz	FSP30	DE25181	Aug. 08, 2014	Aug.07, 2015
EMI Test Receiver	Rohde & Schwarz	ESCI	101165	Aug. 08, 2014	Aug.07, 2015
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Mar. 06, 2015	Mar.05, 2016
Horn Antenna	ETS-LINDGREN	3117	00143207	Mar. 06, 2015	Mar.05, 2016
Pre-amplifier	HP	11909A	185903	Mar. 06, 2015	Mar.05, 2016
Pre-amplifier	HP	8447B	3008A00849	Mar. 06, 2015	Mar.05, 2016
Cable	HUBER+SUHNER	100	SUCOFLEX	Mar. 06, 2015	Mar.05, 2016
Signal Generator	Rohde & Schwarz	SML03	IKW682-054	Feb. 10, 2015	Feb.09, 2016
Positioning Controller	ETS-LINDGREN	2090	N/A	N/A	N/A

#### 4.6 Test Data

Please see the next page.

#### 4.6.1 Field Strength of the Fundamental

<b>EUT:</b>	Industrial Wireless Keyboard	<b>Model Name :</b>	JH-TBK104
<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 2402MHz		
<b>Remark:</b>			

100.0 dBuV/m


2312.000 2322.00 2332.00 2342.00 2352.00 2362.00 2372.00 2382.00 2392.00 2412.00 MHz

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	42.71	3.40	46.11	74.00	-27.89	peak
2		2390.000	30.12	3.40	33.52	54.00	-20.48	AVG
3		2400.000	59.71	3.41	63.12	74.00	-10.88	peak
4		2400.000	47.80	3.41	51.21	54.00	-2.79	AVG
5	*	2402.000	78.17	3.41	81.58	94.00	-12.42	AVG
6	X	2402.100	78.49	3.41	81.90	114.00	-32.10	peak

**Emission Level= Read Level+ Correct Factor**


<b>EUT:</b>	Industrial Wireless Keyboard	<b>Model Name :</b>	JH-TBK104
<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 2402MHz		
<b>Remark:</b>			

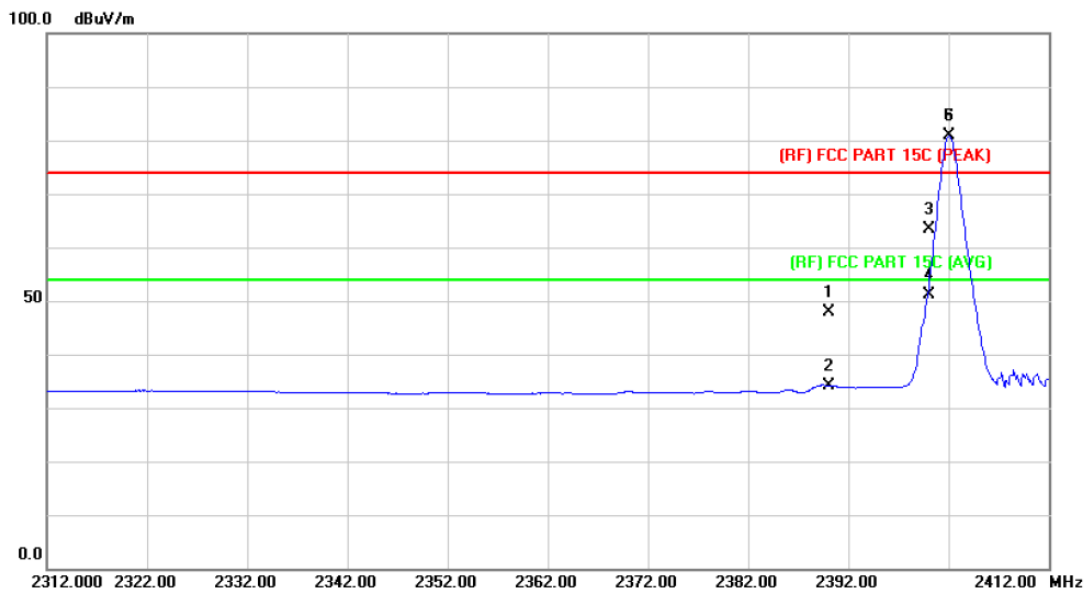

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	44.52	3.40	47.92	74.00	-26.08	peak
2		2390.000	30.79	3.40	34.19	54.00	-19.81	AVG
3		2400.000	60.00	3.41	63.41	74.00	-10.59	peak
4		2400.000	47.72	3.41	51.13	54.00	-2.87	AVG
5	*	2402.000	77.35	3.41	80.76	94.00	-13.24	AVG
6	X	2402.100	77.58	3.41	80.99	114.00	-33.01	peak

Emission Level= Read Level+ Correct Factor

<b>EUT:</b>	Industrial Wireless Keyboard	<b>Model Name :</b>	JH-TBK104
<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 2442MHz		
<b>Remark:</b>			

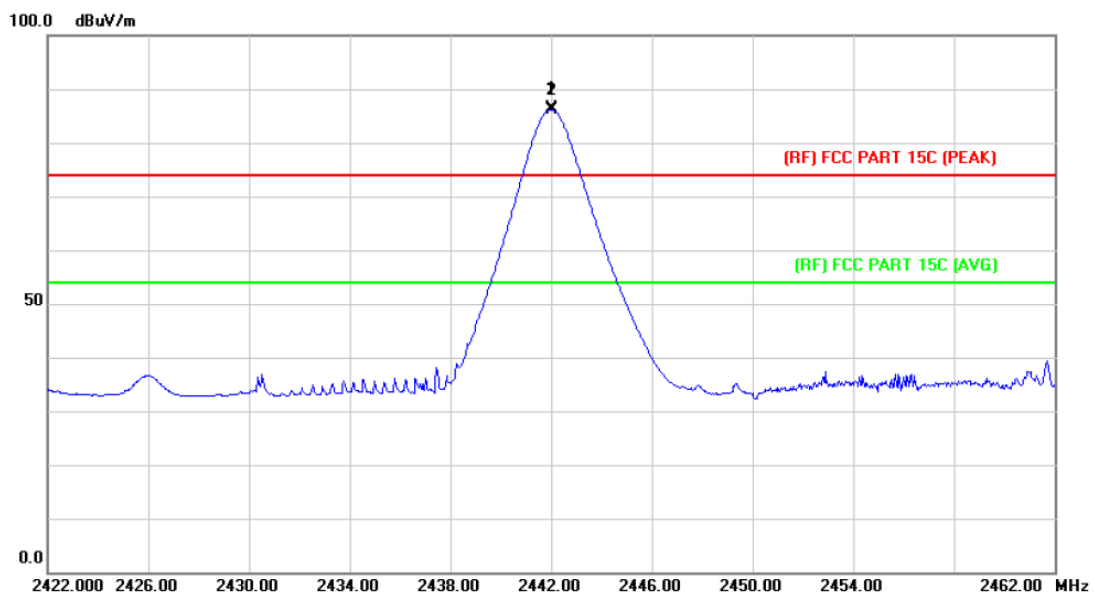


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	X	2442.000	82.99	3.46	86.45	114.00	-27.55	peak
2	*	2442.000	82.74	3.46	86.20	94.00	-7.80	AVG

Emission Level= Read Level+ Correct Factor




<b>EUT:</b>	Industrial Wireless Keyboard	<b>Model Name :</b>	JH-TBK104
<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 2442MHz		
<b>Remark:</b>			

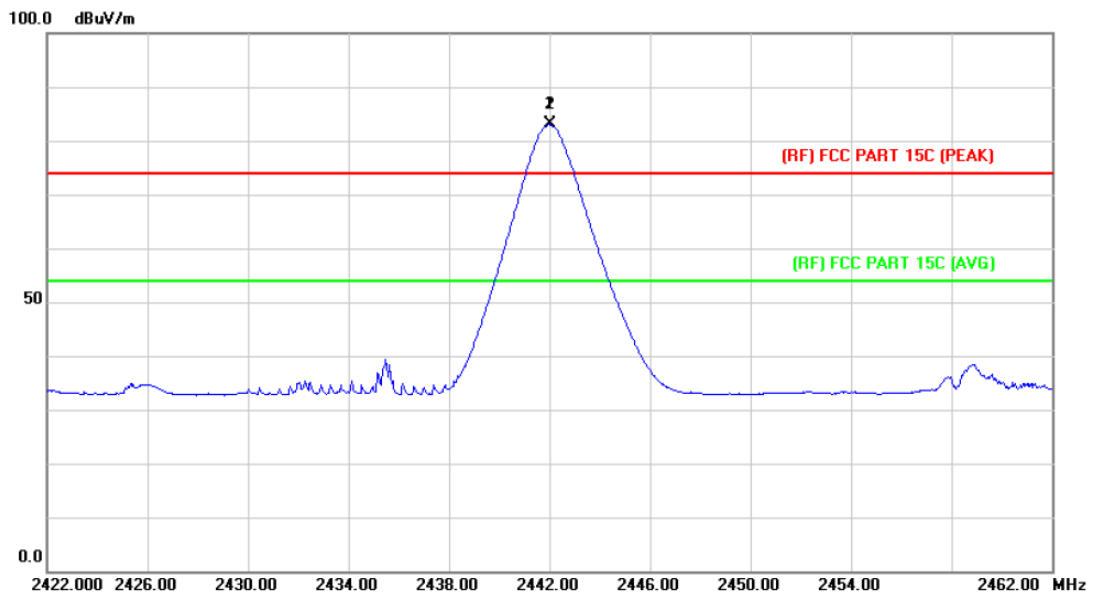

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	X	2442.000	79.76	3.46	83.22	114.00	-30.78	peak
2	*	2442.000	79.55	3.46	83.01	94.00	-10.99	AVG

Emission Level= Read Level+ Correct Factor


<b>EUT:</b>	Industrial Wireless Keyboard	<b>Model Name :</b>	JH-TBK104
<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 2474MHz		
<b>Remark:</b>			

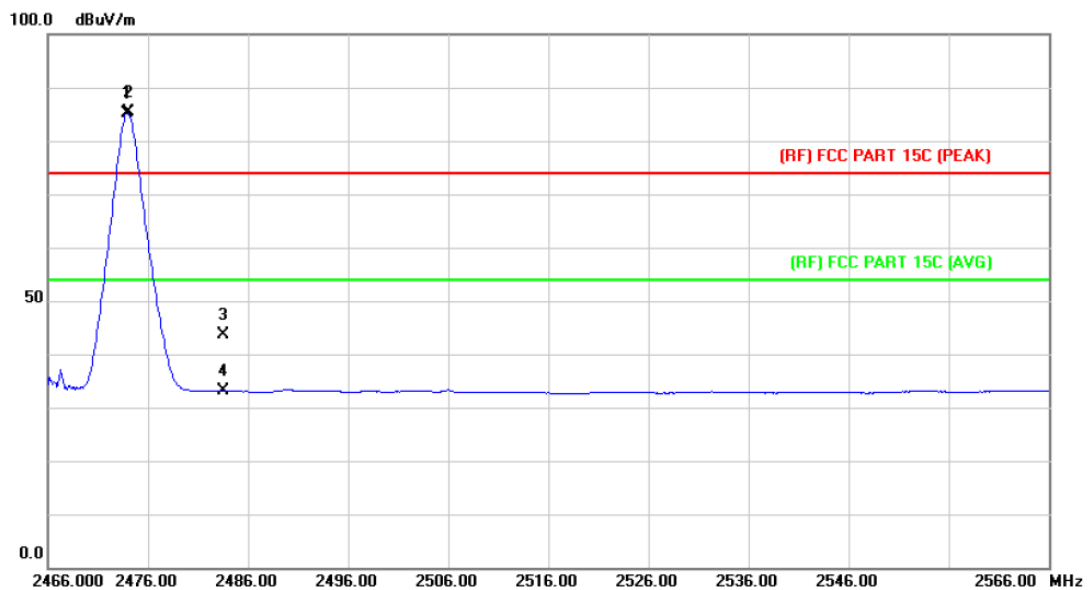

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV		dB/m	dBuV/m	dB	Detector
1	*	2473.900	81.69	3.50	85.19	94.00	-8.81	AVG
2	X	2474.000	81.90	3.50	85.40	114.00	-28.60	peak
3		2483.500	40.16	3.51	43.67	74.00	-30.33	peak
4		2483.500	29.62	3.51	33.13	54.00	-20.87	AVG

Emission Level= Read Level+ Correct Factor

<b>EUT:</b>	Industrial Wireless Keyboard	<b>Model Name :</b>	JH-TBK104
<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 2474MHz		
<b>Remark:</b>			

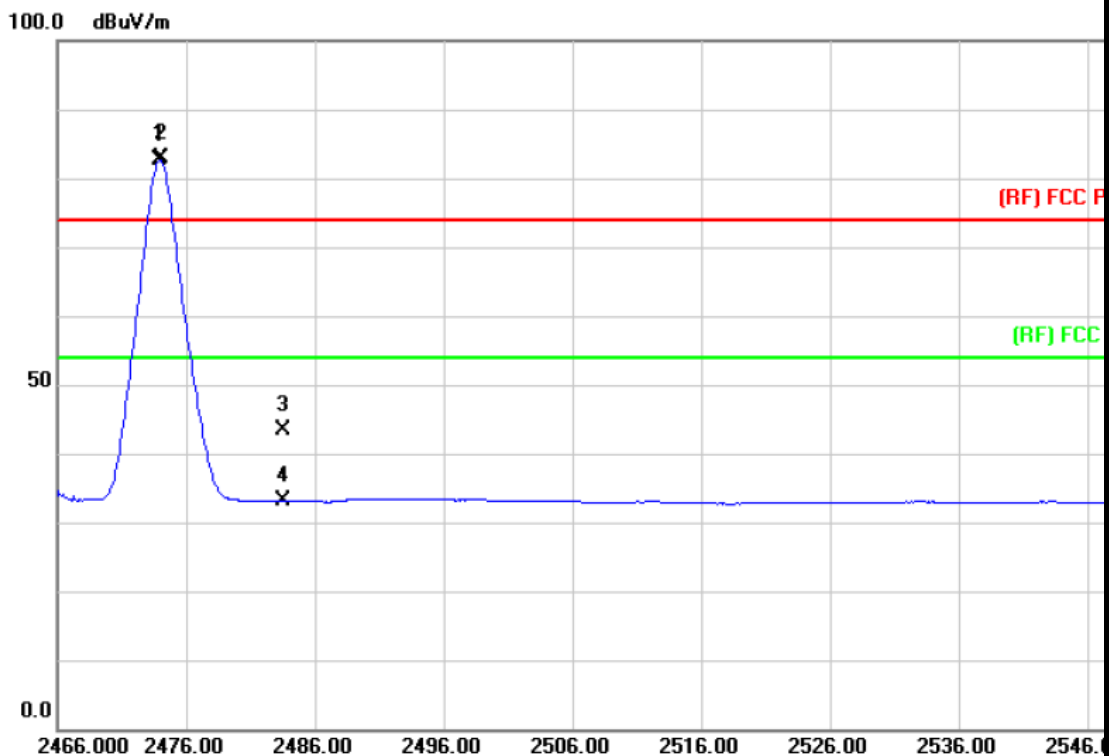


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	2473.900	79.12	3.50	82.62	94.00	-11.38	AVG
2	X	2474.000	79.33	3.50	82.83	114.00	-31.17	peak
3		2483.500	39.98	3.51	43.49	74.00	-30.51	peak
4		2483.500	29.70	3.51	33.21	54.00	-20.79	AVG

Emission Level= Read Level+ Correct Factor

#### 4.6.2 Radiated Spurious Emission (Below 1 GHz)


<b>EUT:</b>	Industrial Wireless Keyboard	<b>Model Name :</b>	JH-TBK104
<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 2402MHz		
<b>Remark:</b>	Only worse case is reported		

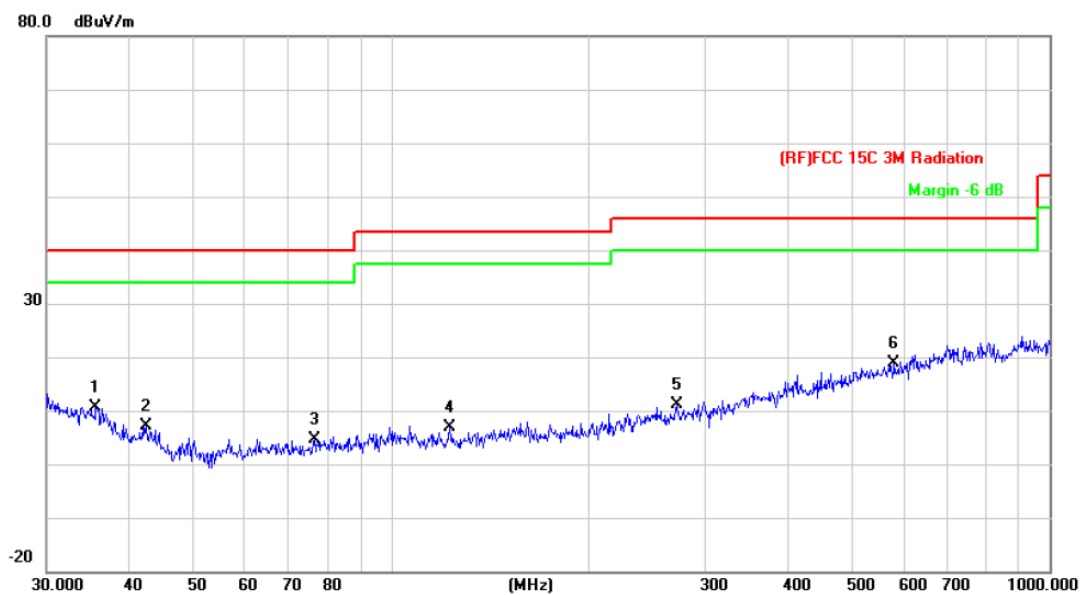

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		35.6240	28.07	-17.45	10.62	40.00	-29.38	peak
2		42.4508	28.29	-21.19	7.10	40.00	-32.90	peak
3		76.5121	27.98	-23.39	4.59	40.00	-35.41	peak
4		122.8340	29.20	-22.41	6.79	43.50	-36.71	peak
5		271.3246	28.74	-17.65	11.09	46.00	-34.91	peak
6	*	580.7026	28.74	-9.98	18.76	46.00	-27.24	peak

Emission Level= Read Level+ Correct Factor

<b>EUT:</b>	Industrial Wireless Keyboard	<b>Model Name :</b>	JH-TBK104
<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 2402MHz		
<b>Remark:</b>	Only worse case is reported		

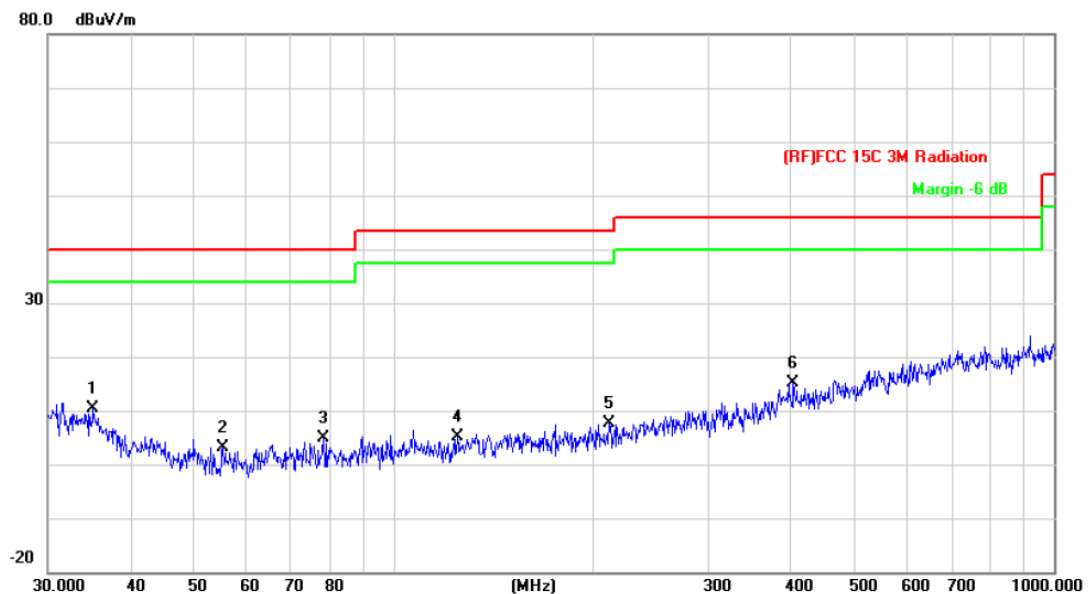


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	35.1278	27.61	-17.14	10.47	40.00	-29.53	peak
2		55.2207	27.69	-24.46	3.23	40.00	-36.77	peak
3		78.4133	28.14	-23.34	4.80	40.00	-35.20	peak
4		125.0066	27.47	-22.34	5.13	43.50	-38.37	peak
5		212.2695	27.40	-19.86	7.54	43.50	-35.96	peak
6		403.2500	27.96	-12.82	15.14	46.00	-30.86	peak

Emission Level= Read Level+ Correct Factor

### 4.6.3 Radiated Spurious Emission (Above 1 GHz)




<b>EUT:</b>	Industrial Wireless Keyboard	<b>Model Name :</b>	JH-TBK104
<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 2402MHz		
<b>Remark:</b>			

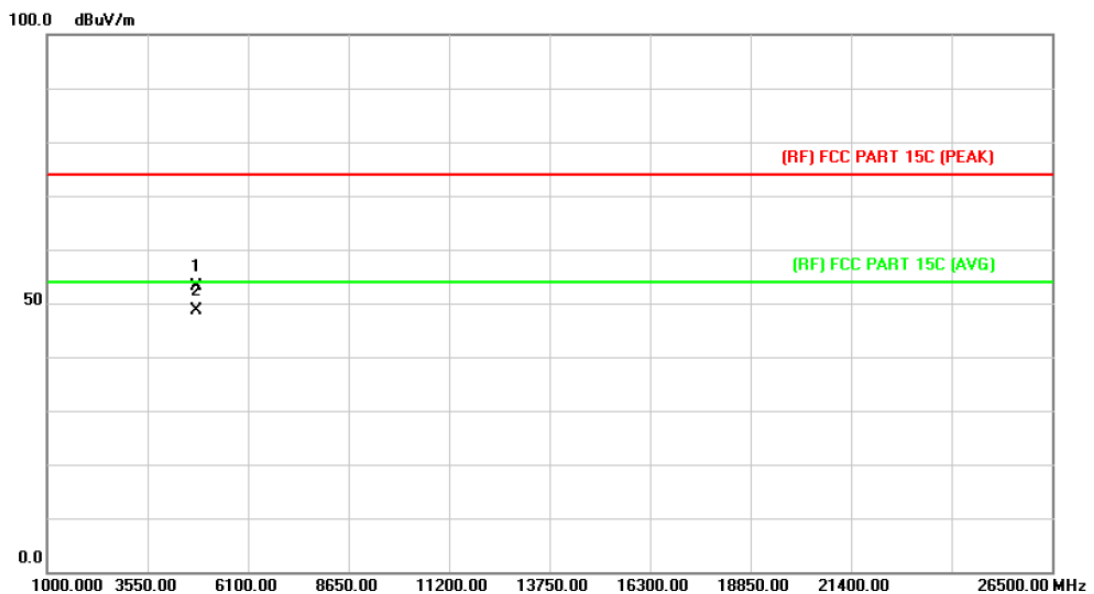

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4803.934	44.86	8.18	53.04	74.00	-20.96	peak
2	*	4803.970	40.40	8.18	48.58	54.00	-5.42	AVG

Emission Level= Read Level+ Correct Factor

<b>EUT:</b>	Industrial Wireless Keyboard	<b>Model Name :</b>	JH-TBK104
<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 2442MHz		
<b>Remark:</b>			

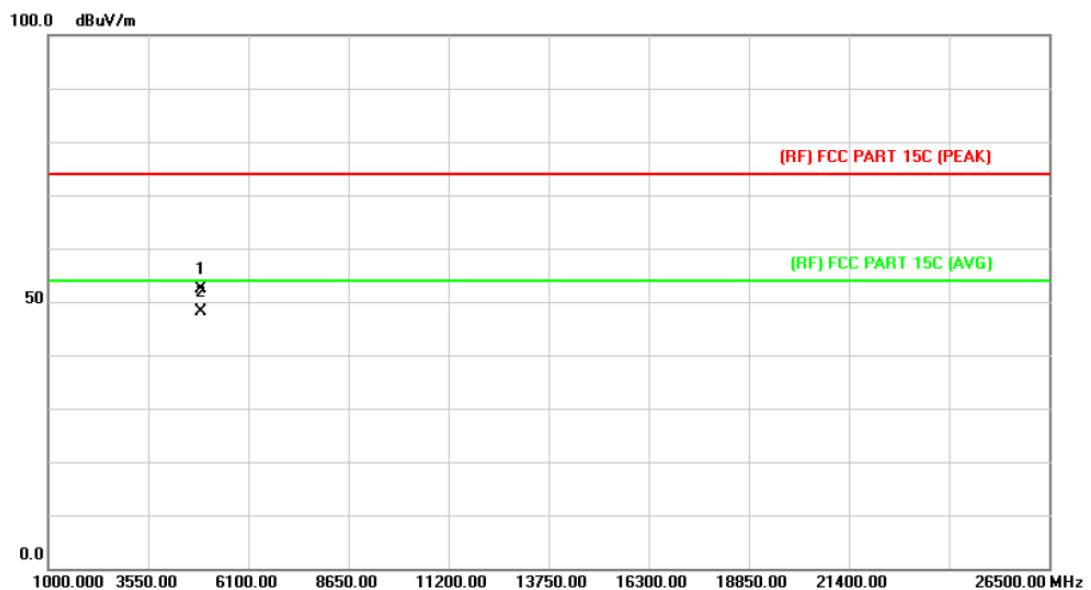


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4883.967	44.12	8.21	52.33	74.00	-21.67	peak
2	*	4883.970	39.90	8.21	48.11	54.00	-5.89	AVG

Emission Level= Read Level+ Correct Factor




<b>EUT:</b>	Industrial Wireless Keyboard	<b>Model Name :</b>	JH-TBK104
<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 2442MHz		
<b>Remark:</b>			

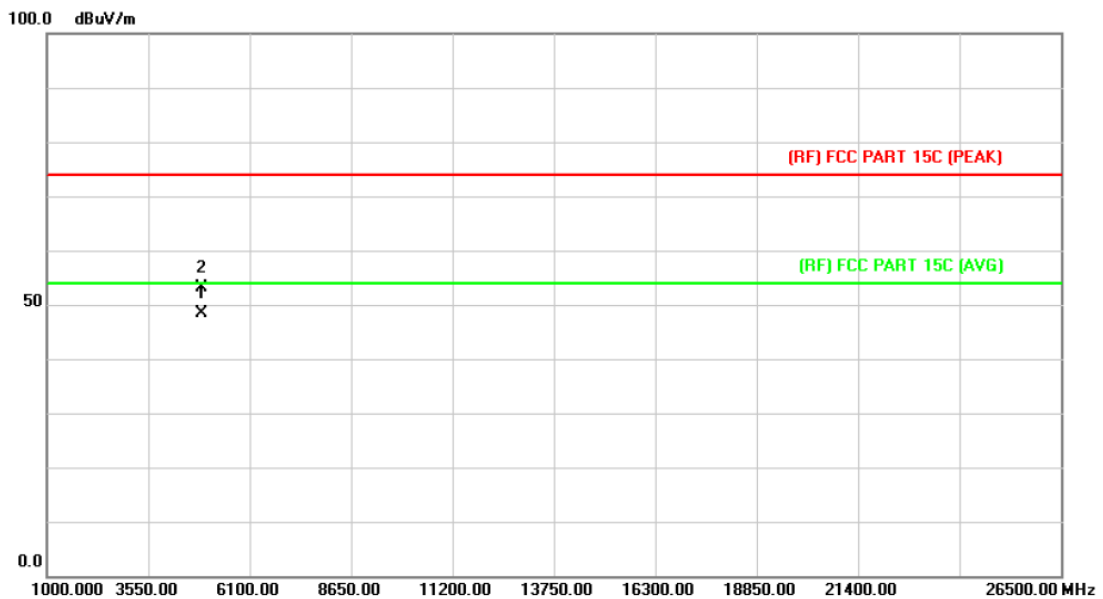

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	4883.970	40.06	8.21	48.27	54.00	-5.73	AVG
2		4883.988	44.80	8.21	53.01	74.00	-20.99	peak

Emission Level= Read Level+ Correct Factor


<b>EUT:</b>	Industrial Wireless Keyboard	<b>Model Name :</b>	JH-TBK104
<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 2474MHz		
<b>Remark:</b>			

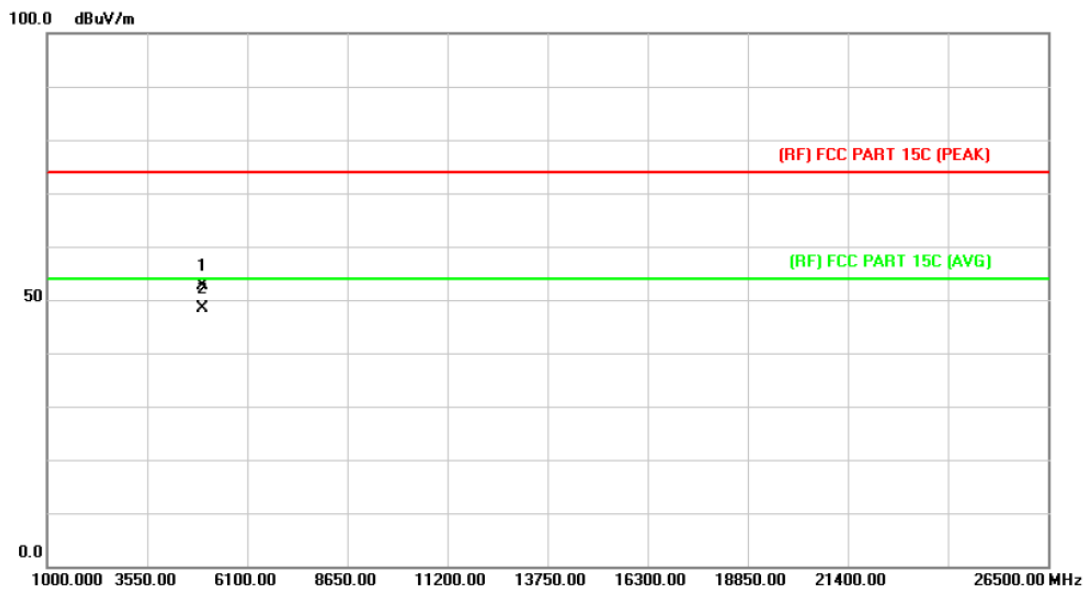

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4947.937	44.38	8.23	52.61	74.00	-21.39	peak
2	*	4947.952	40.07	8.23	48.30	54.00	-5.70	AVG

Emission Level= Read Level+ Correct Factor

<b>EUT:</b>	Industrial Wireless Keyboard	<b>Model Name :</b>	JH-TBK104
<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 2474MHz		
<b>Remark:</b>			

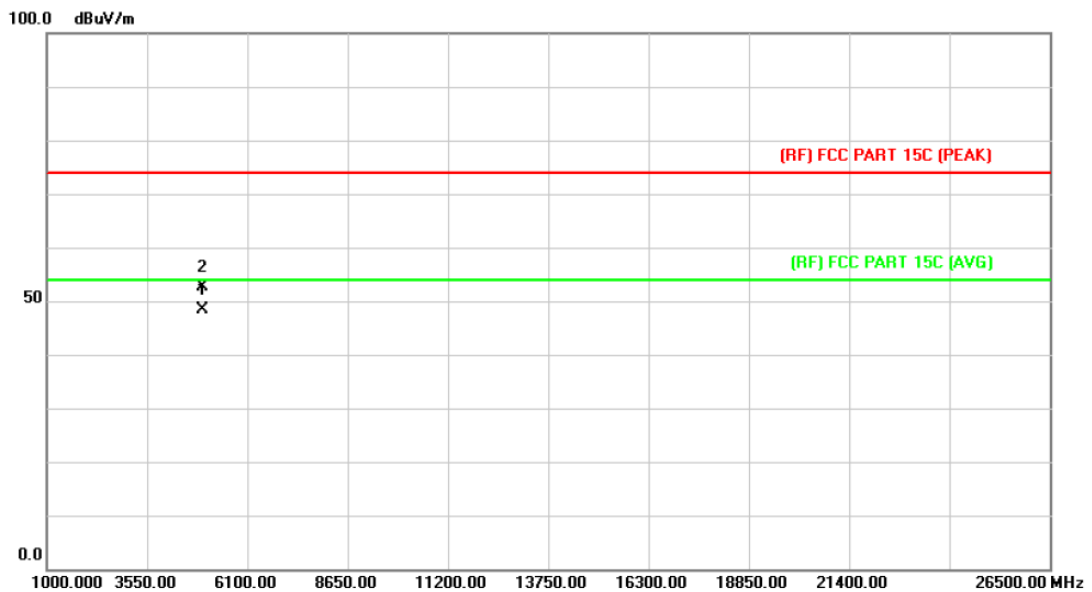


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4947.949	40.11	8.23	48.34	54.00	-5.66	AVG
2		4947.985	44.44	8.23	52.67	74.00	-21.33	peak

Emission Level= Read Level+ Correct Factor

## 5. Bandwidth Test

### 5.1 Test Setup

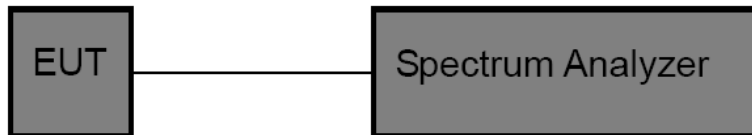

### 5.2 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:  
Bandwidth: RBW=100 kHz, VBW=300kHz.
- (3) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst –case (i.e the widest) bandwidth.

### 5.3 EUT Operating Condition

The EUT was set to continuously transmitting for the Bandwidth Test.


### 5.4 Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Rohde & Schwarz	FSP30	DE25181	Aug. 08, 2014	Aug. 07, 2015
EMI Test Receiver	Rohde & Schwarz	ESCI	101165	Aug. 08, 2014	Aug. 07, 2015

### 5.5 Test Data


Low Channel Frequency (MHz)	20dB Bandwidth (kHz)
2402	370.00

### 2402 MHz

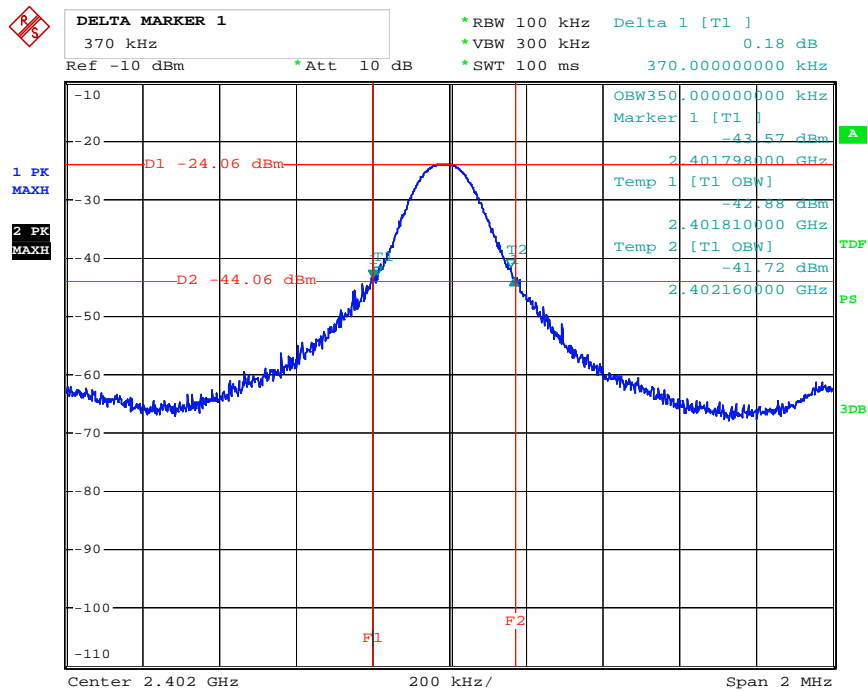

Date: 21.APR.2015 08:10:20


MID Channel Frequency (MHz)	20dB Bandwidth (kHz)
2442	370

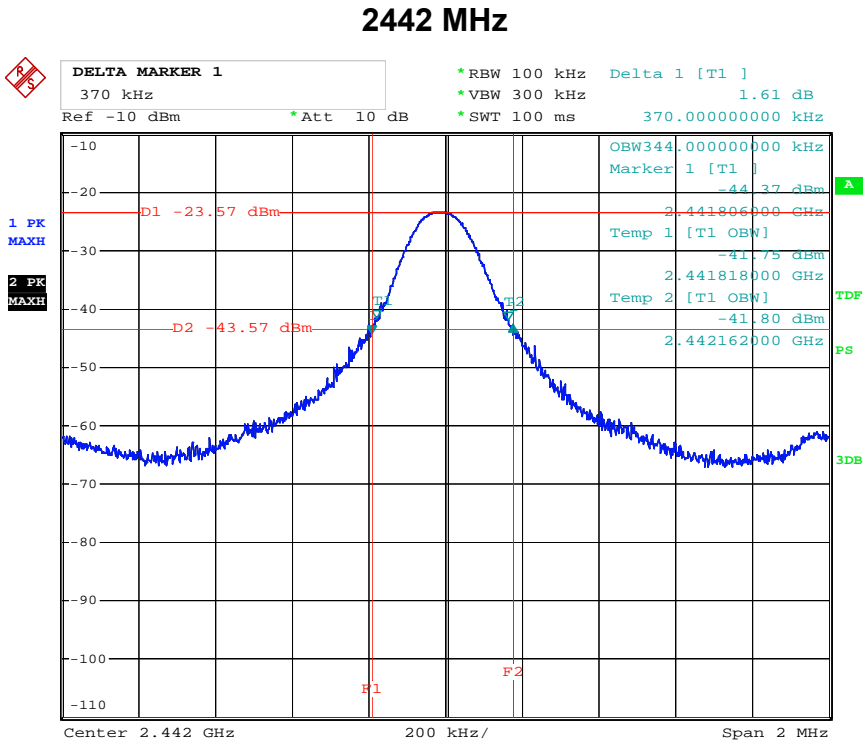

Date: 21.APR.2015 08:14:33

<b>HIGH Channel Frequency (MHz)</b>	<b>20dB Bandwidth (kHz)</b>
2474	358

**2474 MHz**

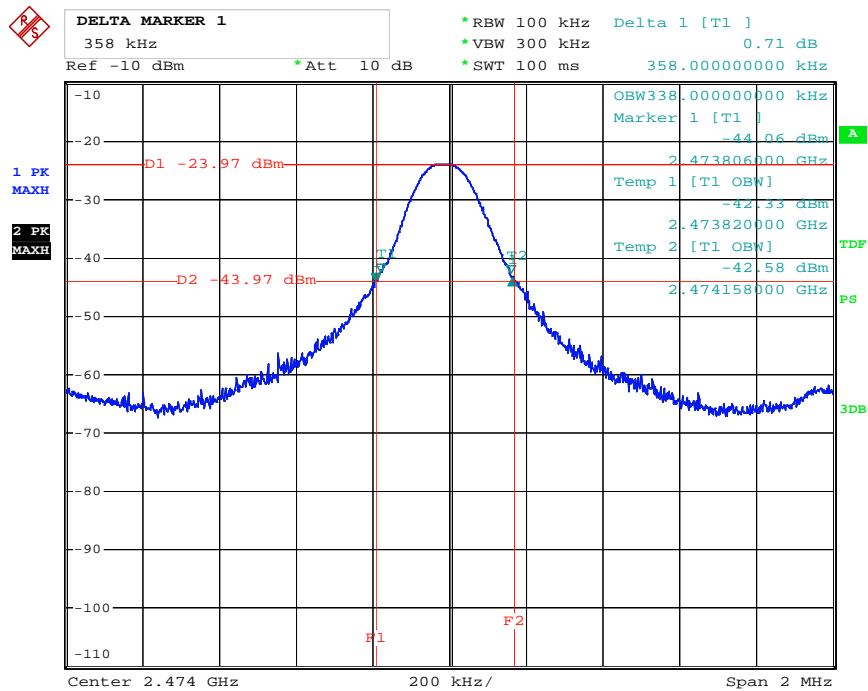

Date: 21.APR.2015 08:21:07

## 6. Antenna Requirement

### 6.1 Standard Requirement

#### 6.1.1 Standard

FCC Part 15.203

#### 6.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 6.2 Antenna Connected Construction

The directional gains of the antenna used for transmitting is 0 dBi, and the antenna de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.

### 6.3 Result

The EUT antenna is a Printed Antenna. It complies with the standard requirement.

Antenna Type
<input checked="" type="checkbox"/> Permanent attached antenna
<input type="checkbox"/> Unique connector antenna
<input type="checkbox"/> Professional installation antenna