


ssue Date: August 17, 2010 Report No.: RY1008J17R1

Model: F-01C

3 Test setup photographs

3.1 Antenna Port Measurements

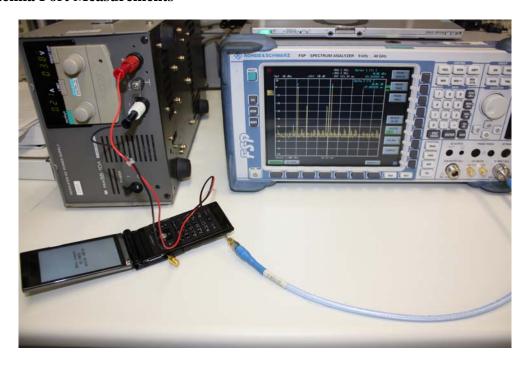

4 List of utilized test equipment/ calibration

RFT ID No.	Kind of Equipment and Precision	Manufacturer	Model No.	Serial Number	Calibration Date	Calibrated until
CL26	RF Cable 2.0m	SUHNER	SUCOFLEX104	274754	2010/6/15	2011/6/30
CL27	RF Cable 0.5m	SUHNER	SUCOFLEX104	230286	2010/6/15	2011/6/30
PM04R	Power Meter	Anritsu	ML2487A	6K00004724	2009/09/10	2010/09/30
PU05R	Power Sensor	Anritsu	MA2475A	011720	2009/09/10	2010/09/30
SA06	Spectrum Analyzer (F/W: 3.60 SP1)	Rohde & Schwarz	FSP40	100071	2009/11/10	2010/11/30

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

RF Technologies Ltd. Page 16 of 16

472, Nippa-cho, Kohoku-ku, Yokohama, 223-0057, Japan Telephone: +81+(0)45-534-0645, FAX: +81+(0)45-534-0646, Web: http://www.rft.jp