







ISO/IEC17025Accredited Lab.

Report No: FCC 1503074-01 File reference No: 2015-03-19

Applicant: Xiamen Yasen Electronics Co., Ltd.

Product: Bluetooth Speaker

Model No: MO7, MO1, MO2, MO3, MO4, MO5, MO6, MO8, MO9,

MO10, MO11, MO12, MO13, MO14, MO15, MO16, MO17,

MO18, MO19

Trademark: VISENTA

Test Standards: FCC Part 15 Subpart C, Paragraph 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4,FCC Part 15 Subpart C, Paragraph 15.247 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: March 19, 2015

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Room 512-519, 5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen, Guangdong, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timewaytech.com

Report No: FCC1503074-01 Page 2 of 47

Date: 2015-03-19



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC- Registration No.: IC5205A-02

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-02.

Page 3 of 47

Report No: FCC1503074-01

Date: 2015-03-19



Test Report Conclusion

Content

| 1.0 | General Details | 4 |
|------|-------------------------------------|----|
| 1.1 | Test Lab Details. | 4 |
| 1.2 | Applicant Details | 4 |
| 1.3 | Description of EUT | 4 |
| 1.4 | Submitted Sample | 4 |
| 1.5 | Test Duration. | 5 |
| 1.6 | Test Uncertainty. | 5 |
| 1.7 | Test By | 5 |
| 2.0 | List of Measurement Equipment. | 6 |
| 3.0 | Technical Details | 7 |
| 3.1 | Summary of Test Results. | 7 |
| 3.2 | Test Standards. | 7 |
| 4.0 | EUT Modification. | 7 |
| 5.0 | Power Line Conducted Emission Test. | 8 |
| 5.1 | Schematics of the Test. | 8 |
| 5.2 | Test Method and Test Procedure. | 8 |
| 5.3 | Configuration of the EUT. | 8 |
| 5.4 | EUT Operating Condition. | 9 |
| 5.5 | Conducted Emission Limit. | 9 |
| 5.6 | Test Result. | 9 |
| 6.0 | Radiated Emission test. | 12 |
| 6.1 | Test Method and Test Procedure. | 12 |
| 6.2 | Configuration of the EUT. | 12 |
| 6.3 | EUT Operation Condition. | 12 |
| 6.4 | Radiated Emission Limit. | 13 |
| 7.0 | 6dB Bandwidth Measurement Bandwidth | 22 |
| 8.0 | Maximum Peak Output Power | 27 |
| 9.0 | Power Spectral Density Measurement. | 29 |
| 10.0 | Out of Band Measurement. | 34 |
| 11.0 | Antenna Requirement. | 37 |
| 12.0 | FCC ID Label | 38 |
| 13.0 | Photo of Test Setup and EUT View. | 39 |

Date: 2015-03-19



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Room 512-519,5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen,

Guangdong China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: Xiamen Yasen Electronics Co., Ltd.

Address: 3rd Floor, No.6 CATIC Building, No.1 Huli Road, Xiamen, China 361006

Telephone: 0592-5633250 Fax: 0592-5761921

1.3 Description of EUT

Product: Bluetooth Speaker

Manufacturer: Xiamen Yasen Electronics Co., Ltd.

Address: 3rd Floor, No.6 CATIC Building, No.1 Huli Road, Xiamen, China 361006

Brand Name: VISENTA

Additional Brand Name: N/A Model Number: MO7

Additional Model Number: MO1, MO2, MO3, MO4, MO5, MO6, MO8, MO9, MO10, MO11, MO12, MO13,

MO14, MO15, MO16, MO17, MO18, MO19

Type of Modulation GFSK (Bluetooth BLE)

Frequency range 2402-2480MHz Frequency Selection By software

Channel Number 40

Input Voltage: DC3.7V powered by Lion-Battery

1.4 Submitted Sample: 2 Samples

1.5 Test Duration

2015-03-12 to 2015-03-18

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 5 of 47

Report No: FCC1503074-01 Date: 2015-03-19

1.6 Test Uncertainty Conducted Emissions Uncertainty = 3.6dB Radiated Emissions Uncertainty =4.7dB

Terry lang 1.7 Test Engineer

The sample tested by

Print Name: Terry Tang

Page 6 of 47

Report No: FCC1503074-01

Date: 2015-03-19



| 2.0 Test Equipments | | | | | |
|------------------------|--------------|------------|-------------------|--------------|------------|
| Instrument Type | Manufacturer | Model | Serial No. | Date of Cal. | Due Date |
| ESPI Test Receiver | R&S | ESPI 3 | 100379 | 2014-08-21 | 2015-08-20 |
| TWO Line-V-NETW | R&S | EZH3-Z5 | 100294 | 2014-08-22 | 2015-08-21 |
| TWO Line-V-NETW | R&S | EZH3-Z5 | 100253 | 2014-08-22 | 2015-08-21 |
| Ultra Broadband ANT | R&S | HL562 | 100157 | 2014-08-23 | 2015-08-22 |
| ESDV Test Receiver | R&S | ESDV | 100008 | 2014-08-22 | 2015-08-21 |
| Impuls-Begrenzer | R&S | ESH3-Z2 | 100281 | 2014-08-21 | 2015-08-20 |
| System Controller | CT | SC100 | - | | |
| Printer | EPSON | РНОТО ЕХЗ | CFNH234850 | | |
| Computer | IBM | 8434 | 1S8434KCE99BLXLO* | - | - |
| Loop Antenna | EMCO | 6502 | 00042960 | 2014-08-22 | 2015-08-21 |
| ESPI Test Receiver | R&S | ESI26 | 838786/013 | 2014-08-22 | 2015-08-21 |
| 3m OATS | | | N/A | 2014-08-21 | 2015-08-20 |
| Horn Antenna | R&S | BBHA 9170 | BBHA9170265 | 2014-08-23 | 2015-08-22 |
| Horn Antenna | R&S | BBHA 9120D | 9120D-631 | 2014-08-23 | 2015-08-22 |
| Power meter | Anritsu | ML2487A | 6K00003613 | 2014-08-22 | 2015-08-21 |
| Power sensor | Anritsu | MA2491A | 32263 | 2014-08-22 | 2015-08-21 |
| Bilog Antenna | Schwarebeck | VULB9163 | 9163/340 | 2014-08-23 | 2015-08-22 |
| LISN | AFJ | LS16C | 10010947251 | 2014-08-21 | 2015-08-20 |
| LISN (Three Phase) | Schwarebeck | NSLK 8126 | 8126453 | 2014-08-22 | 2015-08-21 |
| 9*6*6 Anechoic | | | N/A | 2014-08-21 | 2015-08-20 |
| EMI Test Receiver | RS | ESCS30 | 100139 | 2014-08-22 | 2015-08-21 |

2.1 Auxiliary Equipment

| Name | Model No. | Rating | Manufacturer | FCC ID/DOC |
|--------------|----------------|-------------------------|--------------|------------|
| | | Input: 100-240V, | | |
| | | 50/60Hz, 0.45A; Output: | | VOC |
| Power Supply | TSHA10U-050200 | 5V, 2A | TSH | |

Date: 2015-03-19



3.0 Technical Details

3.1 Summary of test results

| Standard | Test Type | Result | Notes |
|---|--|--------|----------|
| CC Part 15, Paragraph 15.107 & 15.207 | Conducted Emission Test | PASS | Complies |
| FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit | Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz | PASS | Complies |
| FCC Part 15, Paragraph 15.247(b) | Maximum peak output power Limit: max. 30dBm | PASS | Complies |
| FCC Part 15, Paragraph 15.109,15.205 & 15.209 | Transmitter Radiated Emission Limit: Table 15.209 | PASS | Complies |
| FCC Part 15, Paragraph 15.247(e) | Power Spectral Density Limit: max. 8dBm | PASS | Complies |
| FCC Part 15, Paragraph 15.247(d) | Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209 | PASS | Complies |

3.2 Test Standards

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 EUT Modification

No modification by Shenzhen Timeway Technology Consulting Co., Ltd


Page 8 of 47

Report No: FCC1503074-01

Date: 2015-03-19



5.Power Line Conducted Emission Test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2009. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2009.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

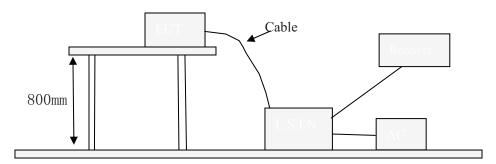

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2009. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

| Device | Manufacturer | Model | FCC ID |
|----------------------|---------------------------------------|--|--------|
| Bluetooth Speaker | Xiamen Yasen Electronics Co., Ltd. | MO7, MO1, MO2, MO3, MO4, MO5, MO6, MO9, MO10, MO11, MO12, MO13, MO14, MO15, MO16, MO17, MO18, MO19 | W28-MO |

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: FCC1503074-01 Page 9 of 47

Date: 2015-03-19



B. Internal Device

| Device | Manufacturer | Model | Rating |
|--------|--------------|-------|--------|
| | | | |

C. Peripherals

| Device | Manufacturer | Model | Rating |
|--------|--------------|-------|--------|
| | | | |

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2009.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207 and 15.107

| Frequency | Class A Lim | its (dB µ V) | Class B Limits (dB \(\mu \) V) | | |
|------------------|------------------|---------------|---------------------------------|---------------|--|
| (MHz) | Quasi-peak Level | Average Level | Quasi-peak Level | Average Level | |
| $0.15 \sim 0.50$ | 79.0 | 66.0 | 66.0~56.0* | 56.0~46.0* | |
| $0.50 \sim 5.00$ | 73.0 | 60.0 | 56.0 | 46.0 | |
| 5.00 ~ 30.00 | 73.0 | 60.0 | 60.0 | 50.0 | |

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2015-03-19



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Charging and Keep Bluetooth Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

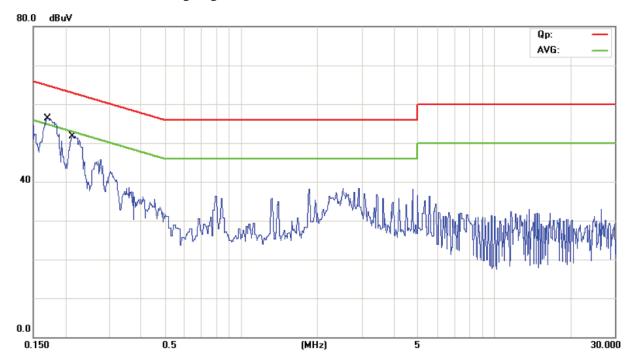

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Over | | |
|-----|-----|--------|------------------|-------------------|------------------|-------|--------|----------|---------|
| | | MHz | dBuV | dB | dBu∀ | dBuV | dB | Detector | Comment |
| 1 | * | 0.1707 | 43.60 | 11.02 | 54.62 | 64.93 | -10.31 | QP | |
| 2 | | 0.1707 | 19.30 | 11.02 | 30.32 | 54.93 | -24.61 | AVG | |
| 3 | | 0.2141 | 37.80 | 11.07 | 48.87 | 63.04 | -14.17 | QP | |
| 4 | | 0.2141 | 13.70 | 11.07 | 24.77 | 53.04 | -28.27 | AVG | |

Date: 2015-03-19



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Charging and Keep Bluetooth Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

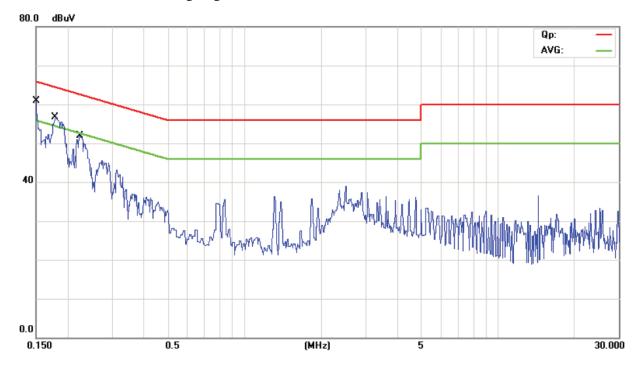

| No. Mk. | Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Over | | |
|---------|--------|------------------|-------------------|------------------|-------|--------|----------|---------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | Detector | Comment |
| 1 | 0.1502 | 35.50 | 11.00 | 46.50 | 65.99 | -19.49 | QP | |
| 2 | 0.1502 | -3.50 | 11.00 | 7.50 | 55.99 | -48.49 | AVG | |
| 3 * | 0.1788 | 44.00 | 11.03 | 55.03 | 64.54 | -9.51 | QP | |
| 4 | 0.1788 | 19.20 | 11.03 | 30.23 | 54.54 | -24.31 | AVG | |
| 5 | 0.2232 | 38.40 | 11.08 | 49.48 | 62.70 | -13.22 | QP | |
| 6 | 0.2232 | 19.30 | 11.08 | 30.38 | 52.70 | -22.32 | AVG | |

Date: 2015-03-19



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.4 –2009. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2009.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=1MHz, VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization : Vertical polarization and Horizontal polarization.

Block diagram of Test setup Distance = 3m Computer Pre – Amplifier EUT Turn-table Receiver

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No: FCC1503074-01 Page 13 of 47

Date: 2015-03-19



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109 and RSS-210

| Frequency Range (MHz) | Distance (m) | Field strength (dB µ V/m) |
|-----------------------|--------------|---------------------------|
| 30-88 | 3 | 40.0 |
| 88-216 | 3 | 43.5 |
| 216-960 | 3 | 46.0 |
| Above 960 | 3 | 54.0 |

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Report No: FCC1503074-01 Page 14 of 47

Date: 2015-03-19



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Charging and Keep Bluetooth Transmitting

Results: Pass

| Frequency (MHz) | Level@3m (dB \u03b4 V/m) | Antenna Polarity | Limit@3m (dB \u03b4 V/m) |
|-----------------|--------------------------|------------------|--------------------------|
| 314.320 | 31.82 | Н | 46.00 |
| 221.720 | 31.19 | Н | 46.00 |
| | | | |
| 160.000 | 25.00 | V | 43.50 |
| 212.280 26.52 | | V | 43.50 |


Page 15 of 47

Report No: FCC1503074-01

Date: 2015-03-19



Test Figure:

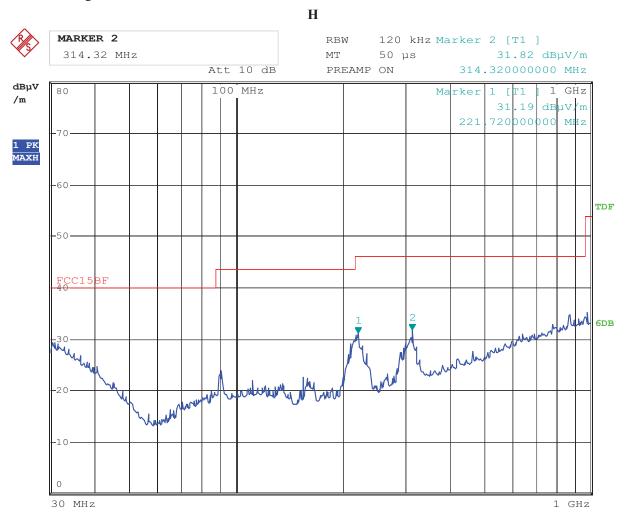

Date: 16.MAR.2015 09:47:39


Page 16 of 47

Report No: FCC1503074-01

Date: 2015-03-19



Test Figure:

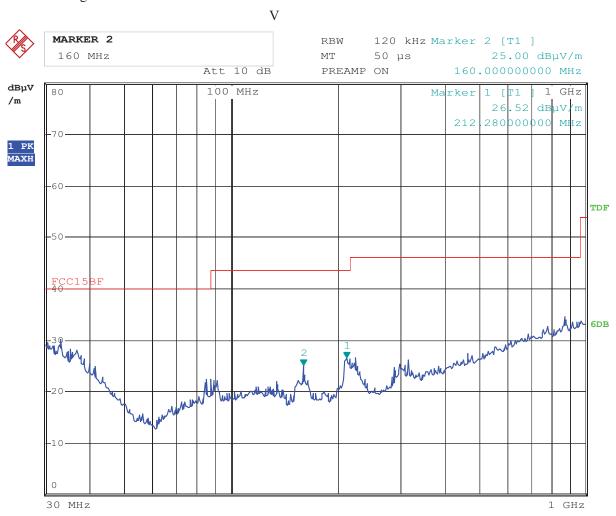

Date: 16.MAR.2015 09:51:33

Date: 2015-03-19



Operation Mode: Transmitting under Low Channel (2402MHz)

| Frequency (MHz) | Level@3m (dB \u03b4 V/m) | Antenna Polarity | Limit@3m (dB µ V/m) |
|-----------------|--------------------------|------------------|---------------------|
| 4804 | | H/V | 74(Peak)/ 54(AV) |
| 7206 | | H/V | 74(Peak)/ 54(AV) |
| 9608 | | H/V | 74(Peak)/ 54(AV) |
| 12010 | | H/V | 74(Peak)/ 54(AV) |
| 14412 | | H/V | 74(Peak)/ 54(AV) |
| 16814 | | H/V | 74(Peak)/ 54(AV) |
| 19216 | | H/V | 74(Peak)/ 54(AV) |
| 21618 | | H/V | 74(Peak)/ 54(AV) |
| 24020 | | H/V | 74(Peak)/ 54(AV) |

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Operation Mode: Transmitting g under Middle Channel (2440MHz)

| | 8.6 | ` | |
|-----------------|--------------------------|------------------|-----------------------|
| Frequency (MHz) | Level@3m (dB \u03b4 V/m) | Antenna Polarity | Limit@3m (dB \mu V/m) |
| 4880 | | H/V | 74(Peak)/ 54(AV) |
| 7320 | | H/V | 74(Peak)/ 54(AV) |
| 9760 | | H/V | 74(Peak)/ 54(AV) |
| 12200 | | H/V | 74(Peak)/ 54(AV) |
| 14640 | | H/V | 74(Peak)/ 54(AV) |
| 17080 | | H/V | 74(Peak)/ 54(AV) |
| 19520 | | H/V | 74(Peak)/ 54(AV) |
| 21960 | | H/V | 74(Peak)/ 54(AV) |
| 24400 | | H/V | 74(Peak)/ 54(AV) |

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Report No: FCC1503074-01 Page 18 of 47

Date: 2015-03-19



Operation Mode: Transmitting under High Channel (2480MHz)

| | | • | - |
|-----------------|--------------------------|------------------|--------------------------|
| Frequency (MHz) | Level@3m (dB \u03b4 V/m) | Antenna Polarity | Limit@3m (dB \u03b4 V/m) |
| 4960 | | H/V | 74(Peak)/ 54(AV) |
| 7440 | | H/V | 74(Peak)/ 54(AV) |
| 9920 | | H/V | 74(Peak)/ 54(AV) |
| 12400 | | H/V | 74(Peak)/ 54(AV) |
| 14880 | | H/V | 74(Peak)/ 54(AV) |
| 17360 | | H/V | 74(Peak)/ 54(AV) |
| 19840 | | H/V | 74(Peak)/ 54(AV) |
| 22320 | | H/V | 74(Peak)/ 54(AV) |
| 24800 | | H/V | 74(Peak)/ 54(AV) |

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit


^{2.} Remark "---" means that the emissions level is too low to be measured

Date: 2015-03-19




Please refer to the following test plots for details:

Low Channel: Horizontal

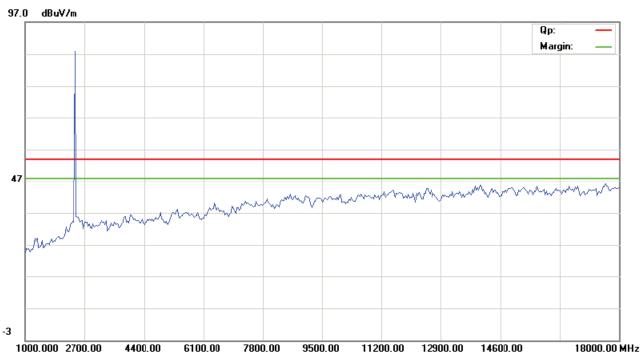

Low Channel: Vertical

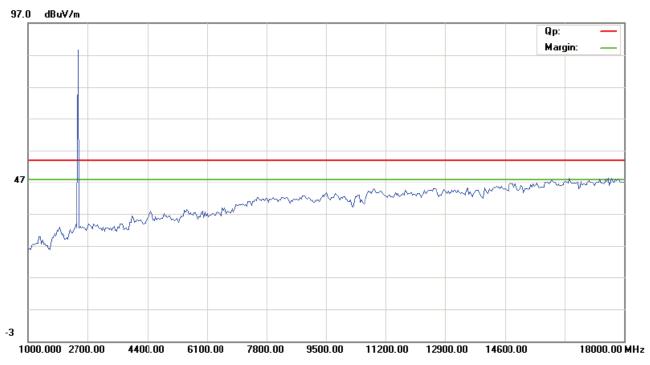


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2015-03-19



Middle Channel: Horizontal

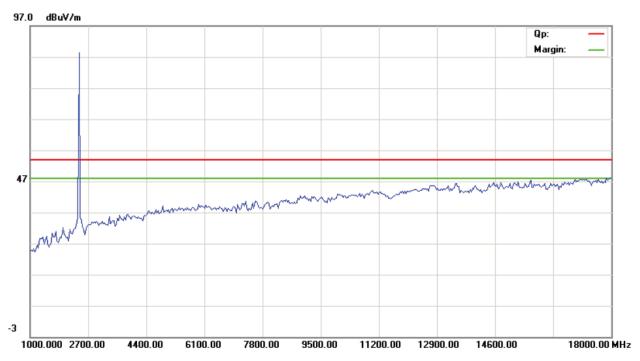

Middle Channel: Vertical

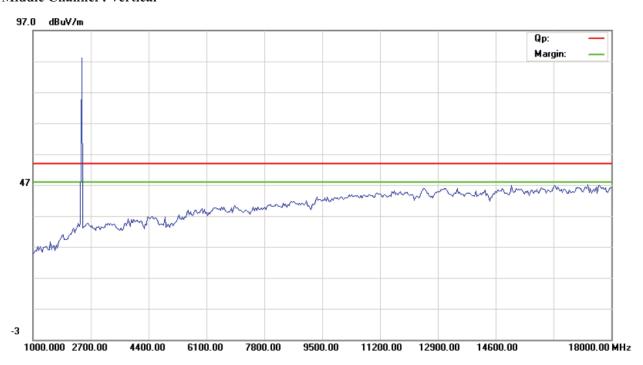


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2015-03-19



High Channel: Horizontal

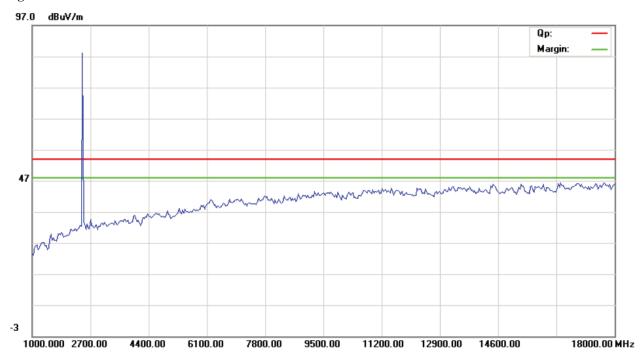

High Channel: Vertical

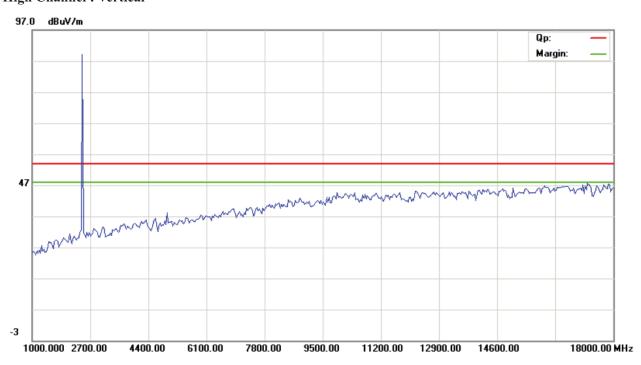

Note: for the radiated emissions above 18G, it is the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Report No: FCC1503074-01 Page 22 of 47

Date: 2015-03-19



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW) \geq 3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Report No: FCC1503074-01 Page 23 of 47

Date: 2015-03-19



| EUT | | Bluetooth Speaker | | Model | | MO7 | |
|----------|--|---------------------|-----|------------------------|--------|------------|------|
| Mode | | Keep Transmitting | | Input Voltage | | DC3.7V | |
| Temperat | ure | 24 deg. C, Humidity | | | 56% RH | | |
| Channel | Channel Frequency 6 dB Bandwid (MHz) (kHz) | | dth | Maximum Limit (kHz) | | Pass/ Fail | |
| Low | | 2402 | 739 | 739 | | 0.5 | Pass |
| Middle | | 2440 | 739 | | 0.5 | | Pass |
| High | | 2480 | 739 | | | 0.5 | Pass |

Page 24 of 47


Report No: FCC1503074-01

Date: 2015-03-19



Test Figure:

1. Condition: Low Channel

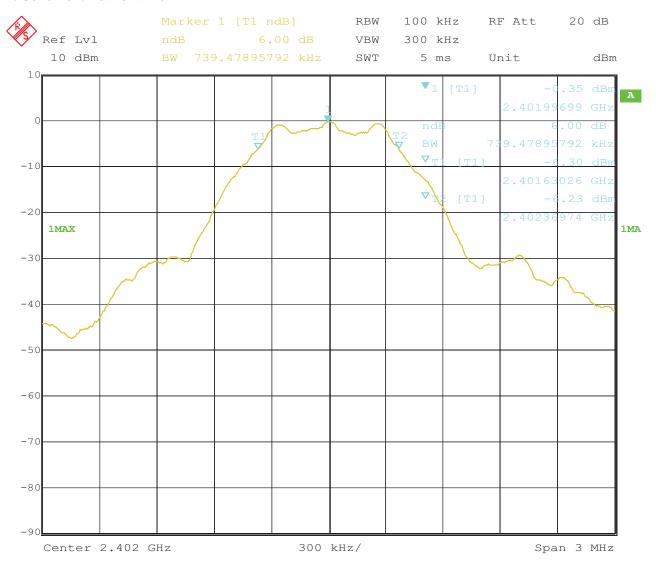


Date: 19.MAR.2015 09:13:00

Date: 2015-03-19



2. Condition: Middle Channel

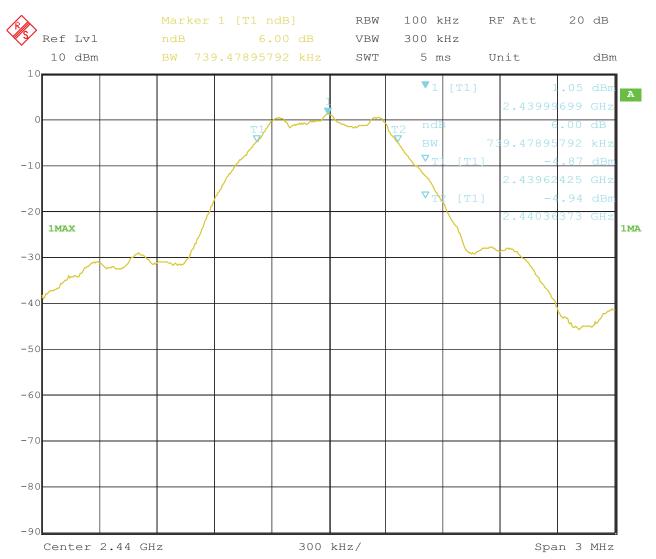

Date: 19.MAR.2015 09:14:10


Page 26 of 47

Report No: FCC1503074-01

Date: 2015-03-19



3. High Channel

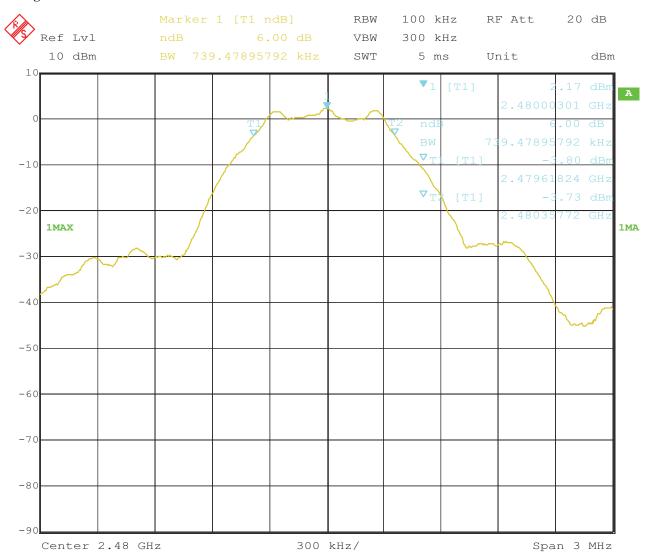

Date: 19.MAR.2015 09:15:05


Date: 2015-03-19



Page 27 of 47

8. Maximum Peak Output Power

8.1 Test Setup



8.2 Limits of Maximum Peak Output Power

The Maximum Peak Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the peak power was measured

Report No: FCC1503074-01 Page 28 of 47

Date: 2015-03-19



8.4Test Results

| EUT | Bluetoo | Bluetooth Speaker | | MO7 | |
|------------|-------------------------|-------------------------|----|------------------------|------------|
| Mode | Keep T | Keep Transmitting | | DC3.7V | |
| Temperatur | re 24 | 24 deg. C, | | 56% RH | |
| Channel | Channel Frequency (MHz) | Peak Power Output (dBm) | | Peak Power Limit (dBm) | Pass/ Fail |
| Low | 2402 | -0.5 | 56 | 30 | Pass |
| Middle | 2440 | 0.9 |)4 | 30 | Pass |
| High | 2480 | 2.1 | 9 | 30 | Pass |

Note: 1. the result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss + Attenuator


Report No: FCC1503074-01 Page 29 of 47

Date: 2015-03-19



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW \geq 30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be ≤ 8 dBm.

Report No: FCC1503074-01 Page 30 of 47

Date: 2015-03-19



9.4Test Result

| EUT | | Blue | tooth Speaker Model | | Bluetooth Speaker Model MO7 | | 107 | | |
|----------|-----|-------------------------|----------------------------|------------------------------------|--------------------------------|---------------------------|---------------------------------|--|-------|
| Mode | | Keep | Transmitting Input Voltage | | eep Transmitting Input Voltage | | Transmitting Input Voltage DC3. | | 23.7V |
| Temperat | ure | 24 deg. C, Humidity 56% | | deg. C, Humidity | | % RH | | | |
| Channel | Re | Power ading | Cable Loss (dB) | Final Power Spectral Density (dBm) | | Maximum Limit (dBm) | Pass/ Fail | | |
| Low | - | 7.98 | 0.2 | -7.78 | | 8 | Pass | | |
| Middle | - | 5.96 | 0.2 | -5.76 | | 8 | Pass | | |
| High | | 4.94 | 0.2 | | -4.74 | 8 | Pass | | |

Note: The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss

Page 31 of 47


Report No: FCC1503074-01

Date: 2015-03-19



Test Figure:

1. Condition: Low Channel

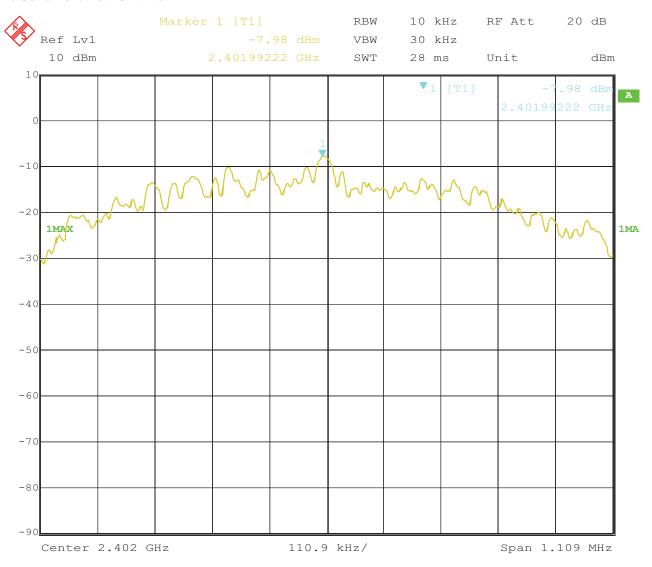

Date: 19.MAR.2015 09:20:30


Page 32 of 47

Report No: FCC1503074-01

Date: 2015-03-19



2. Condition: Middle Channel

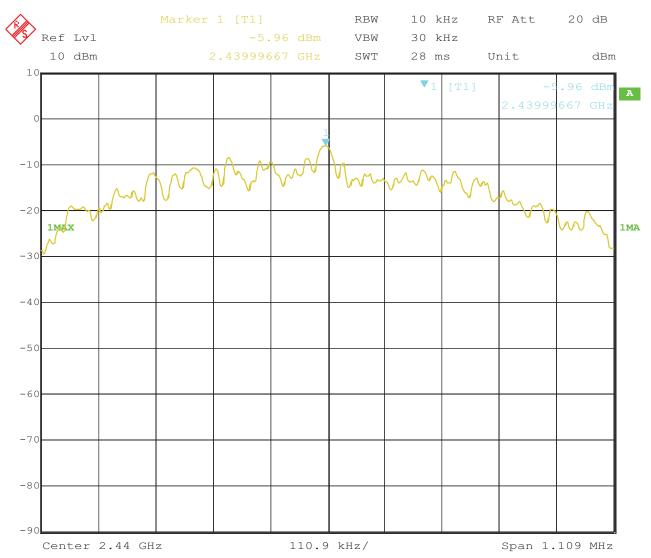

Date: 19.MAR.2015 09:21:05


Page 33 of 47

Report No: FCC1503074-01

Date: 2015-03-19



3. High Channel

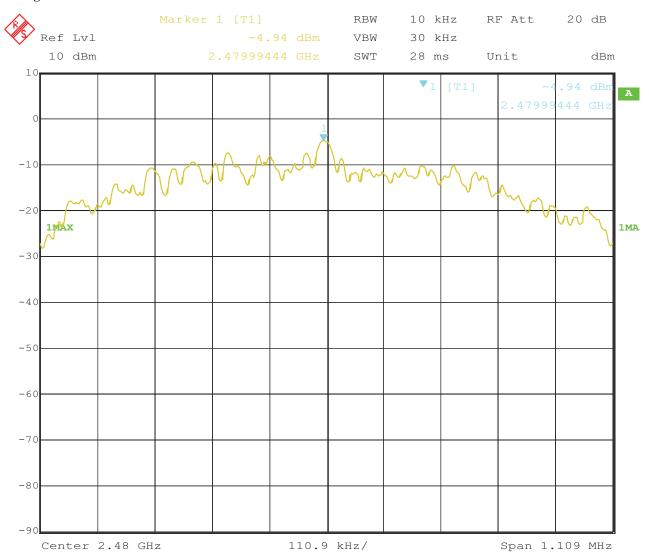

Date: 19.MAR.2015 09:21:45


Report No: FCC1503074-01 Page 34 of 47

Date: 2015-03-19



10 Out of Band Measurement

10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test.(Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector)

For bandage test, the spectrum set as follows: RBW=VBW=100 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.


Date: 2015-03-19



10.4 Band-edge and Restricted band Measurement

| EUT | Bluetooth Speaker | | Model | MO7 |
|--------------|----------------------|-------|---------------|-----------------|
| Mode | Keeping Transmitting | | Input Voltage | DC3.7V |
| Temperature | 24 deg. C, | | Humidity | 56% RH |
| Test Result: | Pass | | Detector | PK |
| 2400 | PK (dBµV/m) | 40.28 | Limit | $74(dB\mu V/m)$ |
| | AV (dBμV/m) | | Limit | $54(dB\mu V/m)$ |
| 2390 | PK (dBµV/m) | 36.69 | Limit | $74(dB\mu V/m)$ |
| | AV (dBμV/m) | | LIIIII | $54(dB\mu V/m)$ |

Test Figure:

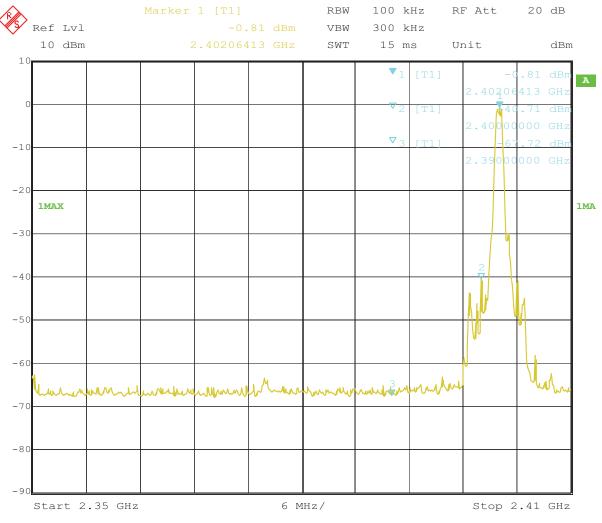

Date: 19.MAR.2015 09:24:27

Note: The Max. FS in Restrict Band are measured in conventional method.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2015-03-19



10.4 Band-edge and Restricted band Measurement

| EUT | Bluete | ooth Speaker | Model | MO7 |
|--------------|-------------|---------------------|---------------|------------|
| Mode | Keepin | g Transmitting | Input Voltage | DC3.7V |
| Temperature | 24 | 4 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | | Detector | PK |
| 2483.5 | PK (dBµV/m) | $(dB\mu V/m)$ 38.42 | T ::4 | 74(dBμV/m) |
| | AV (dBμV/m) | | Limit | 54(dBµV/m) |

Test Figure:

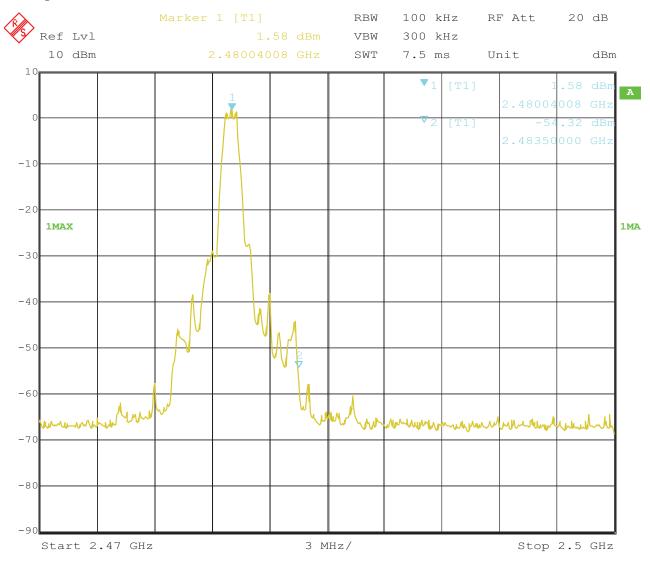

Date: 19.MAR.2015 09:23:31

Note: The Max. FS in Restrict Band are measured in conventional method.

Date: 2015-03-19



Page 37 of 47

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

Integral antenna used. The maximum Gain of the antennas is -0.61 dBi.

Report No: FCC1503074-01 Page 38 of 47

Date: 2015-03-19



12.0 FCC Label


FCC ID: W28-MO

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

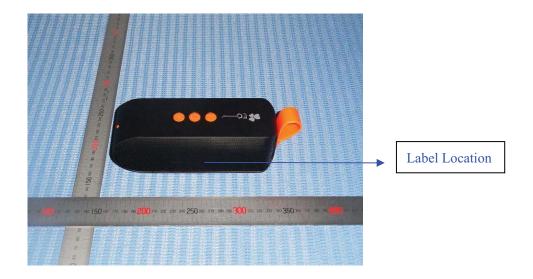


Report No: FCC1503074-01 Page 39 of 47

Date: 2015-03-19



13.0 **Photo of testing**

Conducted Emission Test Setup:

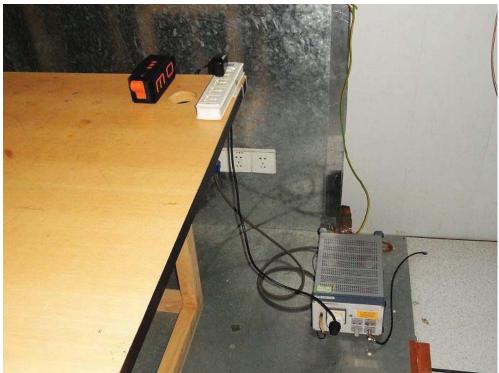

Date: 2015-03-19



Radiated Emission Test Setup:





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2015-03-19



Photographs - EUT

Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2015-03-19



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2015-03-19



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2015-03-19



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2015-03-19



Inside view



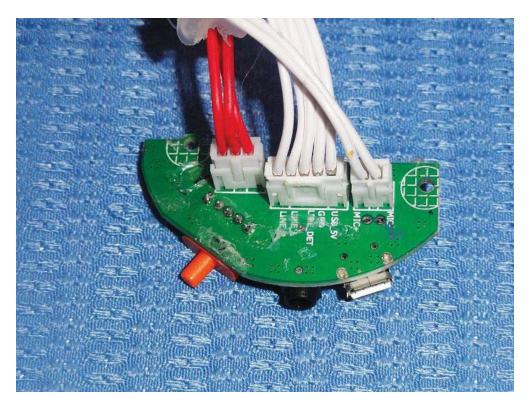

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any


discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2015-03-19



Inside view

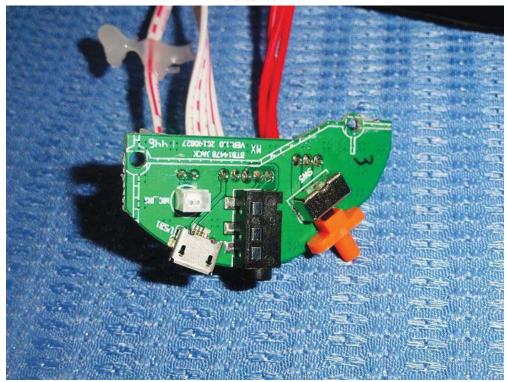



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 47 of 47 Report No: FCC1503074-01

Date: 2015-03-19



Inside view

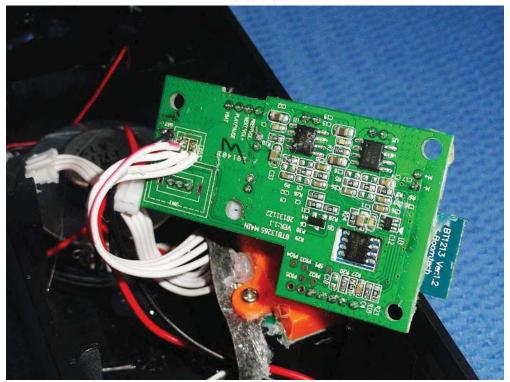

End of the report