

FCC PART 15B
MEASUREMENT AND TEST REPORT
FOR

RONG HUA DA (SHENZHEN) ELECTRONIC FACTORY

Building A, XinYuan Industrial Park, GuShu, XiXiang, BaoAn, ShenZhen,

China

FCC ID: WCLD2100

Report Concerns: Original Report	Equipment Type: Digital Camera
Model:	<u>DC2100</u>
Report No.:	<u>STR08058121I</u>
Test/Witness Engineer:	<u>Susan Su</u>
Test Date:	<u>2008-05-27 to 2008-05-28</u>
Issue Date:	<u>2008-05-31</u>
Prepared By:	Shenzhen SEM.Test Compliance Service Co., Ltd. 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C. (518101)
Approved & Authorized By:	 _____ Jandy So / PSQ Manager

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by SEM.Test Compliance Service Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS	3
1.3 RELATED SUBMITTAL(S)/GRANT(S).....	3
1.4 TEST METHODOLOGY	3
1.5 TEST FACILITY	4
1.6 EUT EXERCISE SOFTWARE	4
1.7 ACCESSORIES EQUIPMENT LIST AND DETAILS	4
1.8 EUT CABLE LIST AND DETAILS	4
2. SUMMARY OF TEST RESULTS	5
3. §15.107 (A)- CONDUCTED EMISSION	6
3.1 MEASUREMENT UNCERTAINTY	6
3.2 TEST EQUIPMENT LIST AND DETAILS	6
3.3 TEST PROCEDURE.....	6
3.4 BASIC TEST SETUP BLOCK DIAGRAM.....	6
3.5 ENVIRONMENTAL CONDITIONS	7
3.6 TEST RECEIVER SETUP	7
3.7 SUMMARY OF TEST RESULTS/PLOTS	7
3.8 CONDUCTED EMISSIONS TEST DATA.....	7
4. §15.109(A)- RADIATED EMISSION	10
4.1 MEASUREMENT UNCERTAINTY	10
4.2 TEST EQUIPMENT LIST AND DETAILS	10
4.3 TEST PROCEDURE.....	10
4.4 TEST RECEIVER SETUP	11
4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	11
4.6 ENVIRONMENTAL CONDITIONS	11
4.7 SUMMARY OF TEST RESULTS/PLOTS	11

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: RONG HUA DA (SHENZHEN) ELECTRONIC FACTORY
Address of applicant: Building A, XinYuan Industrial Park, GuShu, XiXiang, BaoAn, ShenZhen, China

Manufacturer: RONG HUA DA (SHENZHEN) ELECTRONIC FACTORY
Address of manufacturer: Building A, XinYuan Industrial Park, GuShu, XiXiang, BaoAn, ShenZhen, China

General Description of E.U.T

Items	Description
EUT Description:	Digital Camera
Trade Name:	/
Model No.:	DC2100
Rated Voltage:	DC 3V battery
Rated Current:	300 mA
Packaging Size:	9.0X5.1X3.3 cm
For more information refer to the circuit diagram form and the user's manual.	

The test data is gathered from a production sample, provided by the manufacturer.

1.2 Test Standards

The following report is prepared on behalf of the RONG HUA DA (SHENZHEN) ELECTRONIC FACTORY in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart B, and section 15.205, 15.107, and 15.109 rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission/immunity, should be checked to ensure compliance has been maintained.

1.3 Related Submittal(s)/Grant(s)

No Related Submittal(s).

1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in

the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible susceptibility against the tested phenomena. The test modes were adapted accordingly in reference to the Operating Instructions.

1.5 Test Facility

The Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files which the Registration No.: **994117**. Measurement required was performed at laboratory of SEM. Test Compliance Service Co., Ltd. at 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C

1.6 EUT Exercise Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the system components. The test software, provided by the customer, is started while the EUT is on to simulate the normal work.

1.7 Accessories Equipment List and Details

Manufacturer	Description	Model	Serial Number
IBM	Notebook	R51e	LV14893
TP-LINK	Modem	TM-EC5658V	KT99CTQC-508
Lenovo	Printer	3110	OD65133711480

1.8 EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
USB Cable	1.4	Shielded	With Core

2. SUMMARY OF TEST RESULTS

Description of Test	Result
§15.107 (a) Conducted Emission	Compliant
§15.109(a) Radiated Emission	Compliant

3. §15.107 (a)- CONDUCTED EMISSION

3.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 1.5 dB.

3.2 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESCS30	830245/009	2007-06-30	2008-06-29
AMN	Rohde & Schwarz	ESH2-Z5	100002	2007-06-30	2008-06-29
Limiter	Rohde & Schwarz	ESH3-Z2	357.8810.52	2007-06-30	2008-06-29
AMN	Rohde & Schwarz	ESH3-Z5	828304/014	2007-06-30	2008-06-29
Spectrum Analyzer	Aglient	E4402B-ESA	US41192821	2007-06-30	2008-06-29

3.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.107 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

3.4 Basic Test Setup Block Diagram

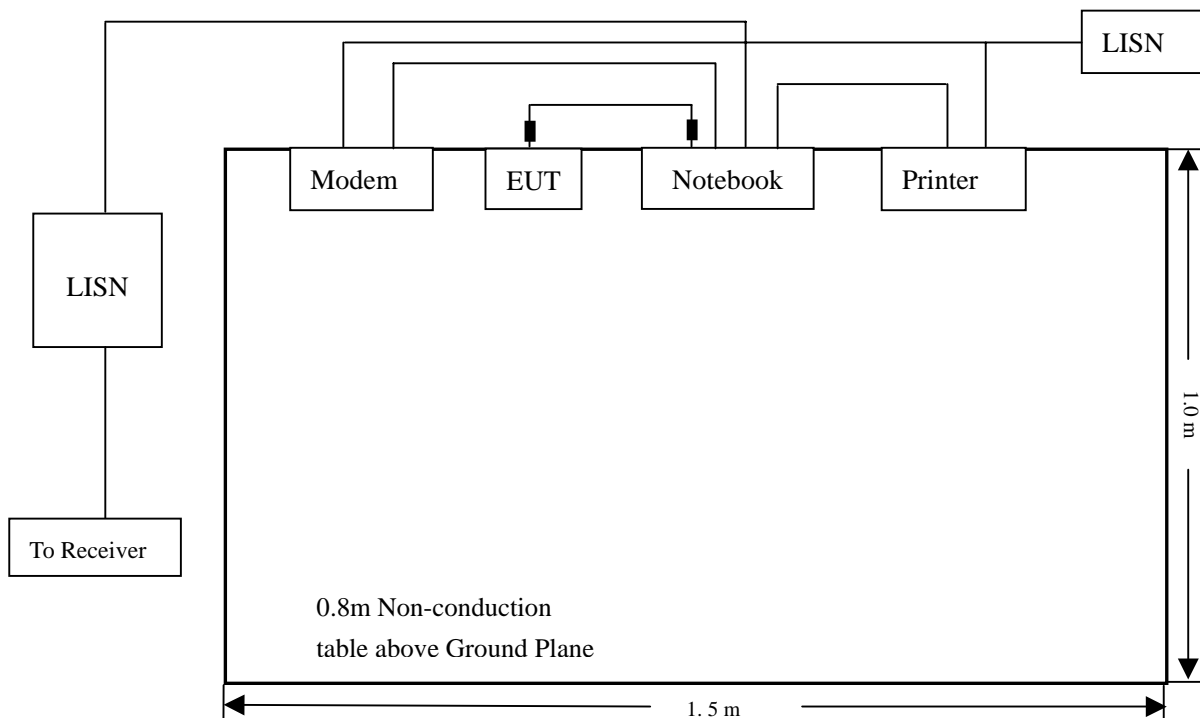

3.5 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

3.6 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
 Stop Frequency 30 MHz
 Sweep Speed Auto
 IF Bandwidth 10 kHz
 Quasi-Peak Adapter Bandwidth 9 kHz
 Quasi-Peak Adapter Mode Normal

3.7 Summary of Test Results/Plots

According to the data in section 3.8, the EUT complied with the FCC 15B Conducted margin for a Class B device, with the *worst* margin reading of:

-1.6 dBμV at 0.17 MHz in the Neutral mode, 0.15-30MHz


3.8 Conducted Emissions Test Data

LINE CONDUCTED EMISSIONS				FCC 15 CLASS B	
Frequency	Amplitude	Detector	Phase	Limit	Margin
MHz	dBμV	QP/Ave/Pk	Line/Neutral	dBμV	dB
0.17	53.38	PK	Neutral	54.96	-1.6
0.17	52.63	PK	Line	54.96	-2.3
0.19	50.59	PK	Line	54.04	-3.4
0.23	46.49	PK	Neutral	52.45	-6.0
0.23	46.44	PK	Line	52.45	-6.0
0.26	45.18	PK	Neutral	51.43	-6.3

Since the peak reading is below the AV limit, the AV reading can be omitted.


Plot of Conducted Emissions Test Data

Conducted Disturbance
EUT: Digital Camera
M/N: DC2100
Operating Condition: Downloading
Test Specification: N
Comment: AC120V/60Hz; USB 5V

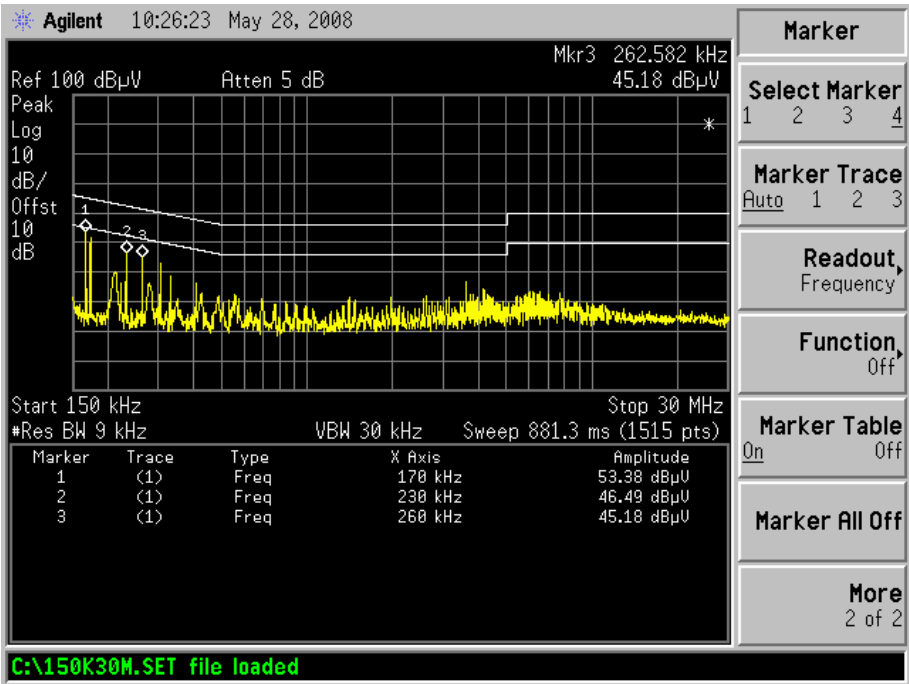

Plot of Conducted Emissions Test Data

Conducted Disturbance
EUT: Digital Camera
M/N: DC2100
Operating Condition: Downloading
Test Specification: L
Comment: AC120V/60Hz; USB 5V

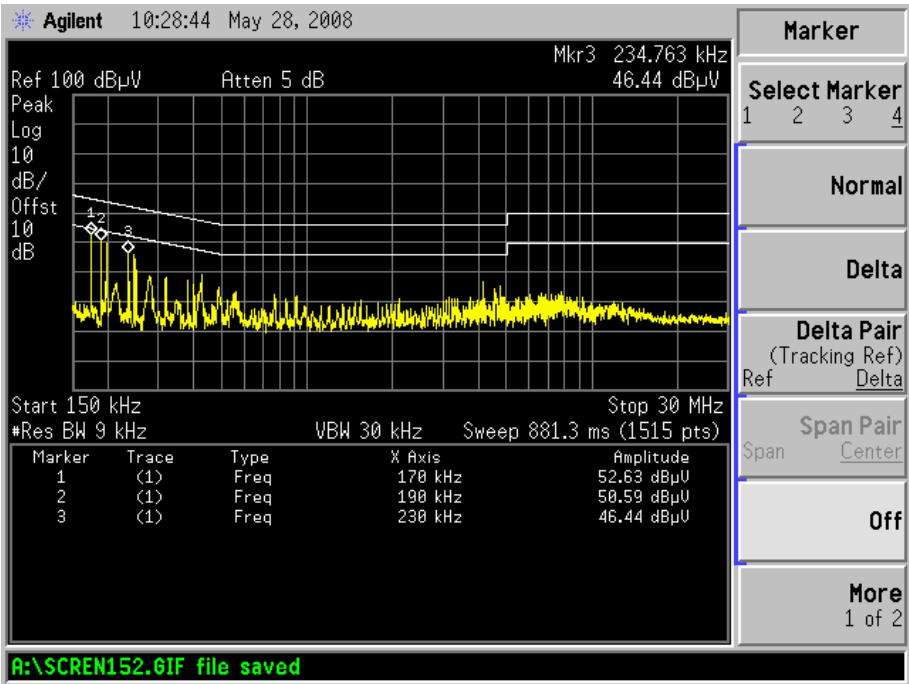

4. §15.109(a)- RADIATED EMISSION

4.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any radiation emissions measurement is ± 3.0 dB.

4.2 Test Equipment List and Details


Manufacturer	Description	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	ROHDE&SCHWARZ	FSEA20	DE25181	2008-01-25	2009-01-24
Positioning Controller	C&C	CC-C-1F	N/A	2008-01-25	2009-01-24
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2008-01-25	2009-01-24
Horn Antenna	SCHWARZBECK	BBHX 9120	9120-426	2008-01-25	2009-01-24
RF Switch	EM	EMSW18	SW060023	2008-01-25	2009-01-24
Amplifier	Agilent	8447F	3113A06717	2008-01-25	2009-01-24
Coaxial Cable	SCHWARZBECK	AK9513	9513-10	2008-01-25	2009-01-24
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	25498514	2008-01-25	2009-01-24

4.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.205 and FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

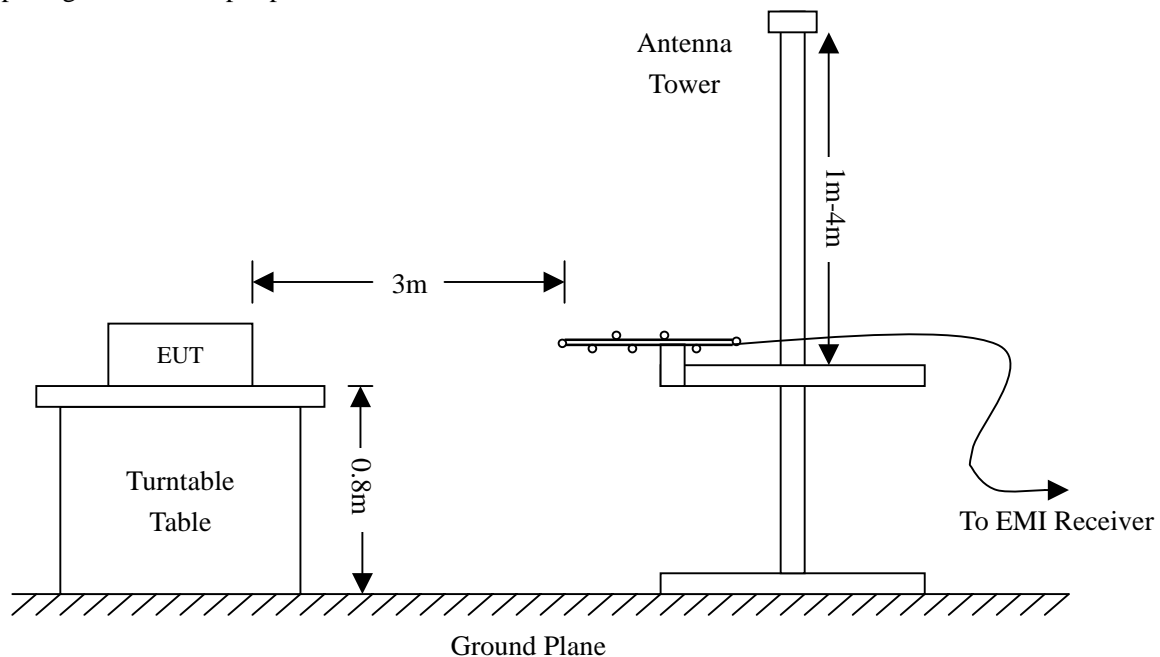

4.4 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 30 MHz
 Stop Frequency 1000 MHz
 Sweep Speed Auto
 IF Bandwidth 10 kHz
 Quasi-Peak Adapter Bandwidth 120 kHz
 Quasi-Peak Adapter Mode Normal

4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15B Limit}$$

4.6 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

4.7 Summary of Test Results/Plots

According to the data, the EUT complied with the FCC 15B Class B standards, and had the worst margin of:

-1.10 dB μ V at 288.2840 MHz in the Horizontal polarization, Downloading mode, 30 MHz to 1 GHz, 3Meters

Plot of Radiation Emissions Test Data

Radiated Disturbance

EUT: Digital Camera


M/N: DC2100

Operating Condition: Downloading

Test Specification: Horizontal & Vertical


Comment: AC 120V/60Hz; USB 5V

Horizontal

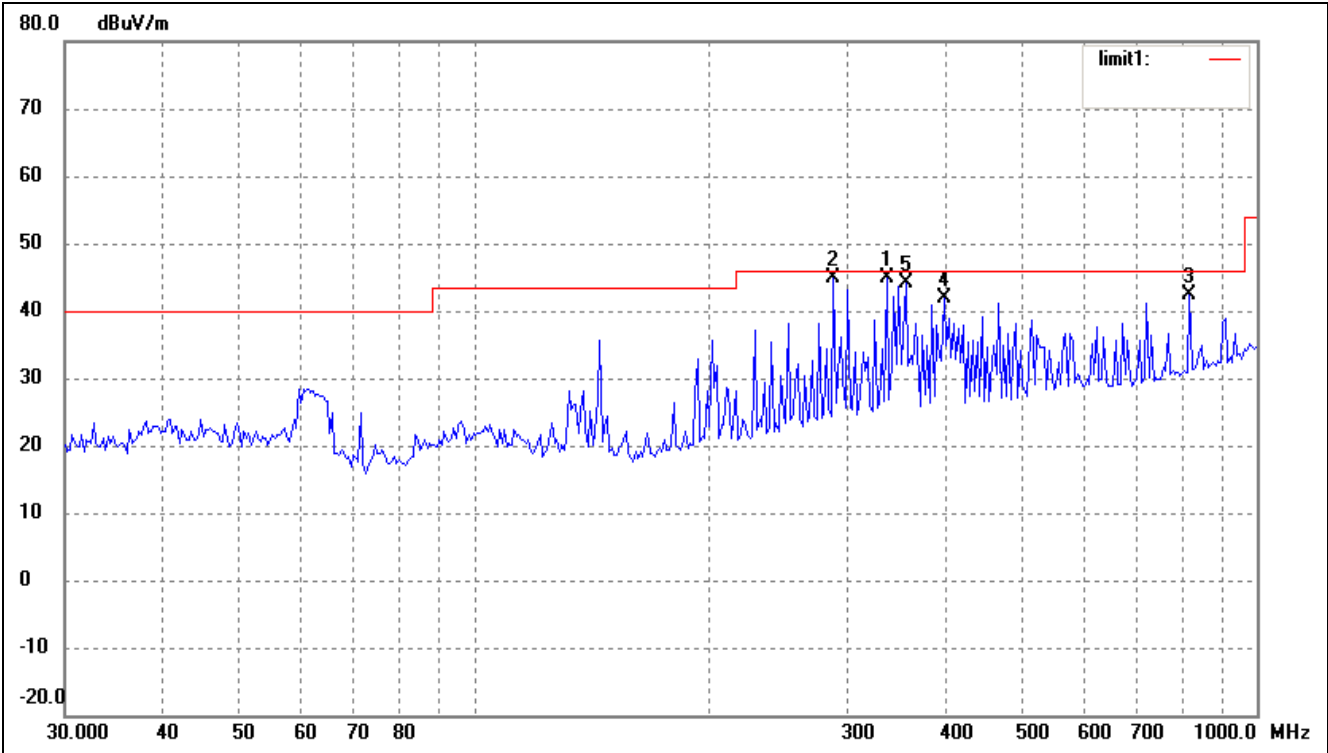

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	336.4817	34.47	10.35	44.82	46.00	-1.18	323	100	QP
2	288.2840	35.27	9.63	44.90	46.00	-1.10	0	100	QP
3	821.3871	26.49	15.80	42.29	46.00	-3.71	0	200	QP
4	398.2962	30.37	11.40	41.77	46.00	-4.23	27	100	QP
5	355.9397	33.26	10.80	44.06	46.00	-1.94	329	200	QP

Vertical

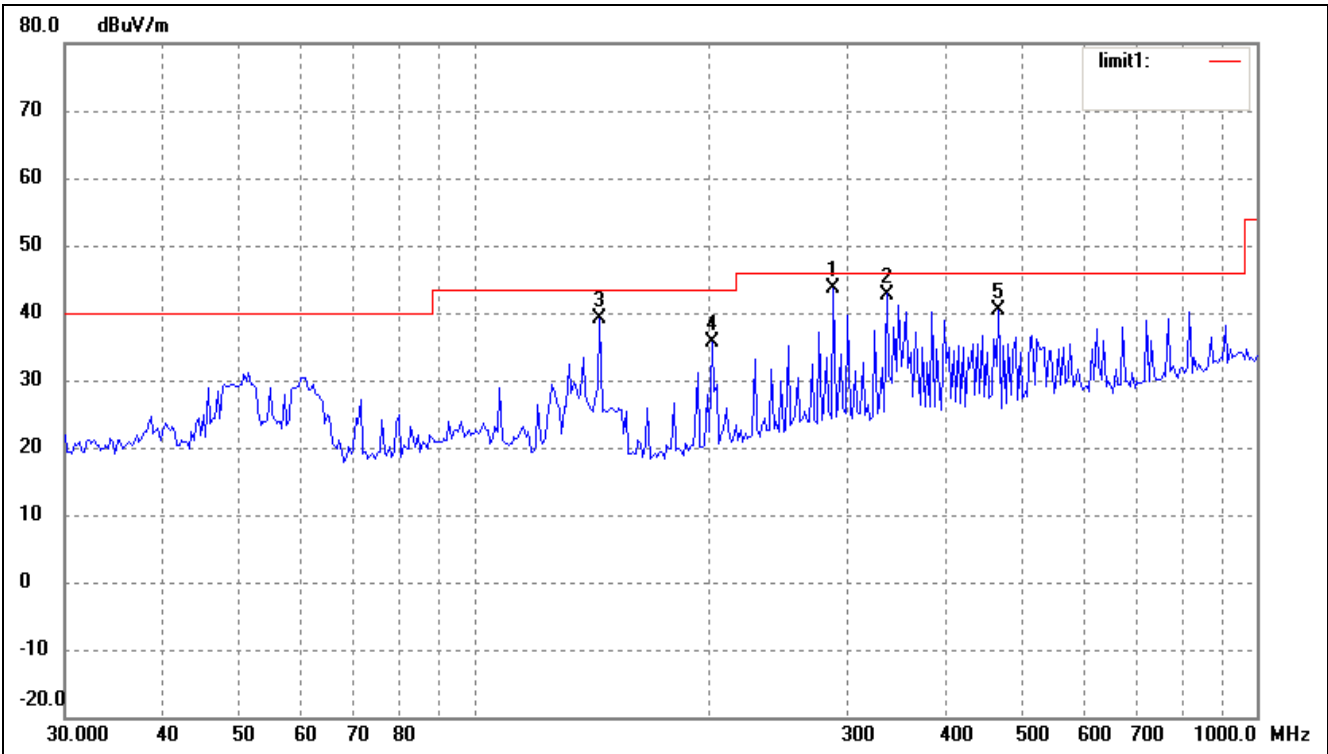

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	288.2840	33.96	9.63	43.59	46.00	-2.41	360	100	QP
2	336.4817	32.40	10.35	42.75	46.00	-3.25	318	100	QP
3	144.7899	35.09	4.01	39.10	43.50	-4.40	18	200	QP
4	201.4539	28.97	6.63	35.60	43.50	-7.90	76	200	peak
5	468.1650	29.21	11.28	40.49	46.00	-5.51	328	100	QP

Radiated Disturbance

EUT: Digital Camera


M/N: DC2100

Operating Condition: Playing

Test Specification: Horizontal & Vertical


Comment: DC 3V battery

Horizontal

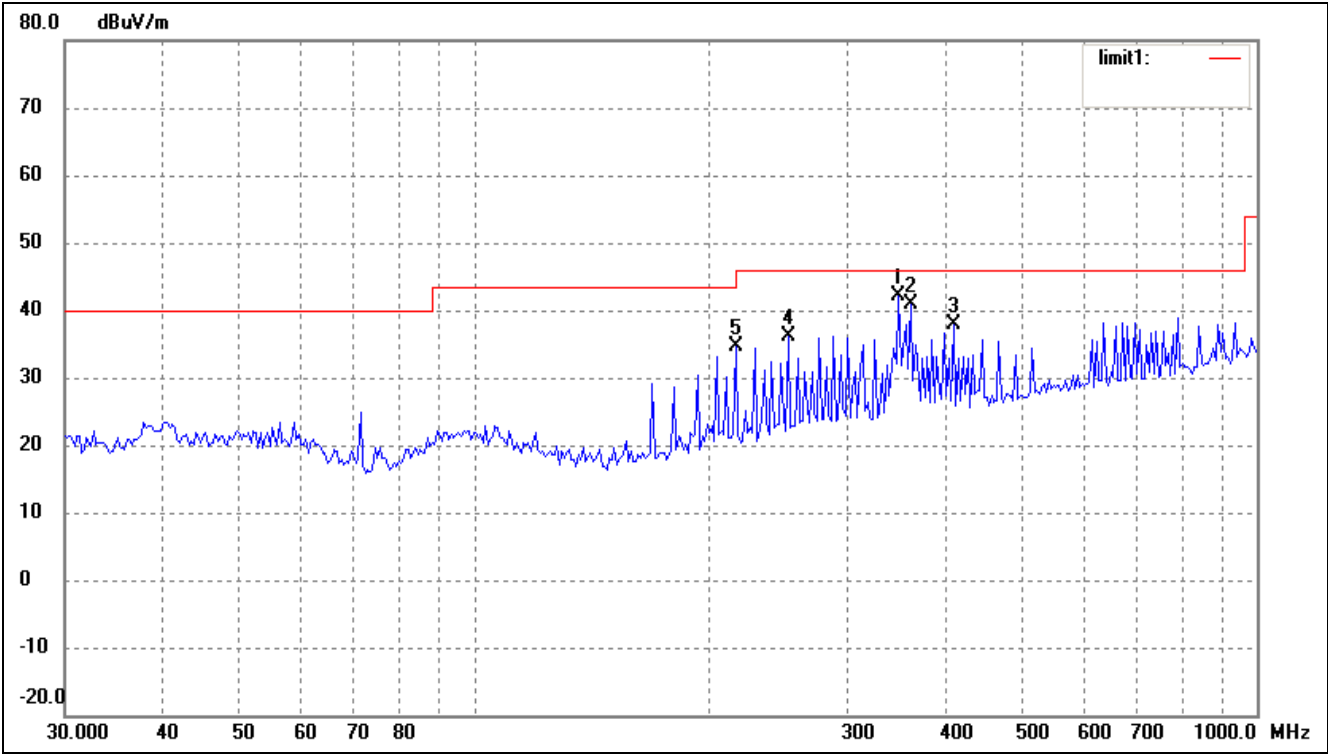

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	348.5144	31.48	10.63	42.11	46.00	-3.89	352	100	QP
2	360.9775	30.00	10.90	40.90	46.00	-5.10	360	100	peak
3	409.6505	26.44	11.38	37.82	46.00	-8.18	29	100	peak
4	252.2522	27.44	8.75	36.19	46.00	-9.81	17	100	peak
5	216.1196	27.40	7.15	34.55	46.00	-11.45	46	100	peak

Vertical

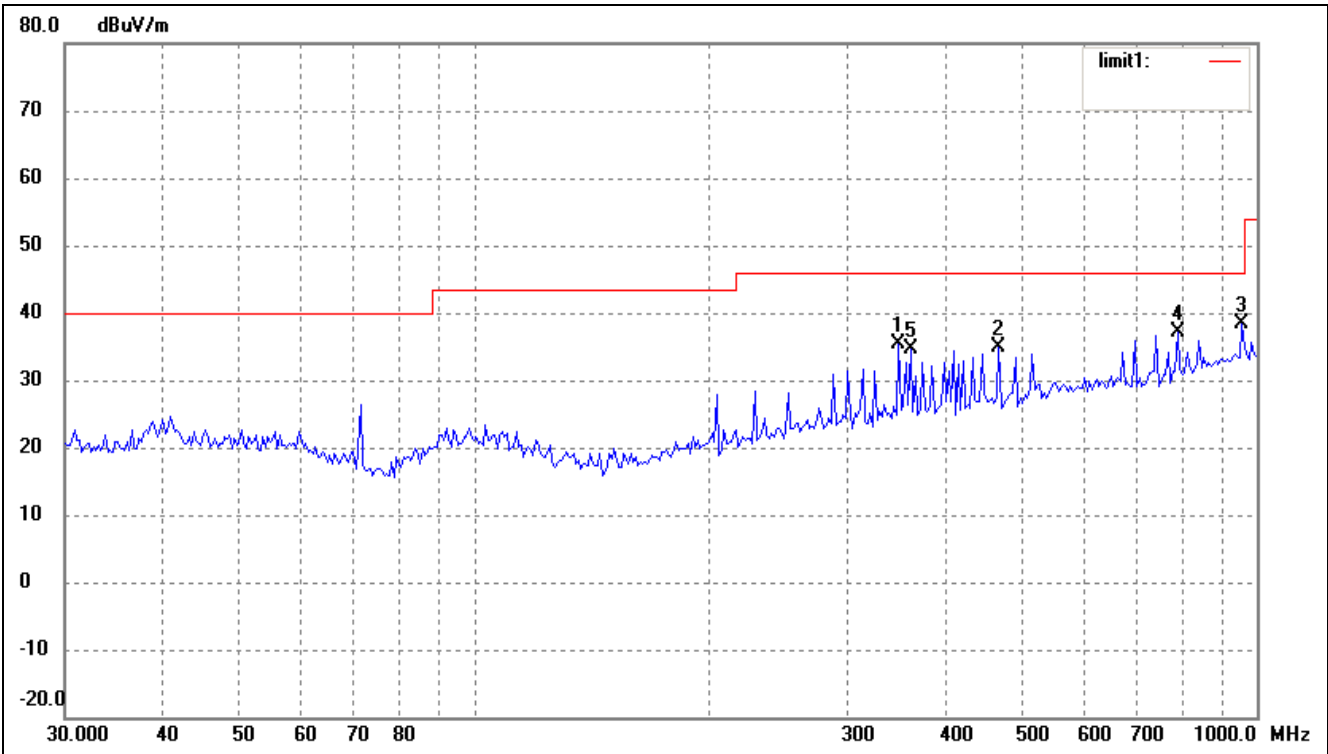

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	348.5144	24.81	10.63	35.44	46.00	-10.56	0	100	peak
2	468.1650	23.59	11.28	34.87	46.00	-11.13	16	200	peak
3	958.7134	20.60	17.68	38.28	46.00	-7.72	30	100	peak
4	793.0280	21.63	15.44	37.07	46.00	-8.93	74	200	peak
5	360.9775	23.72	10.90	34.62	46.00	-11.38	318	200	peak