



INSTALLATION

REMOTE CONTROL FOR LIZARD/INFINITY LIGHTS 4799

COMPATIBLE WITH KÜRYAKYN LIZARD LIGHTS ONLY

PARTS INCLUDED

- 1 Switch Receiver
- 1 Keychain Remote Control
- 1 Alcohol Pad
- 1 Dielectric Grease Pack
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

TOOLS SUGGESTED

Set of hex wrenches, combination wrenches or sock set and ratchet, mineral spirits.

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

PROCEDURE

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.

STEP 2 Disconnect the power and ground wires from the currently installed lizard control switch.

STEP 3 Disconnect the lizard light extensions from the controller switch.

STEP 4 Remove the control switch from the motorcycle.

STEP 5 Clean any remaining residue from the motorcycle using mineral spirits.

STEP 6 Clean the installation area with the included alcohol-cleaning pad and allow the area to dry.

STEP 7 Using the back of your fingernail, rub the back of the adhesive pad on the new switch to activate the catalyst, and then remove the backing.

-cont.-

4799-11HD-0308

CUSTOMER SERVICE
877.370.3604 (toll free)

INSTALLATION QUESTIONS
techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Küryakyn warrants that any Küryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Küryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Küryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Küryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Küryakyn product, failure to deliver, delay in delivery, delivery in non-conforming condition, or for any breach of contract or duty between Küryakyn and a customer.
- Küryakyn products are often intended for use in specific applications. Küryakyn makes no warranty if a Küryakyn product is used in applications other than intended.
- Küryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Küryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Küryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Küryakyn. Küryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

For purchasing Küryakyn® products, you can receive a complete catalog free of charge. Send the Proof-of-Purchase below with your address to: Küryakyn, P.O. Box 339, Somerset, WI 54025. Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Küryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2005 Küryakyn USA® All Rights reserved.

PROOF-OF-PURCHASE

kuryakyn.com



ATTENTION! Ensure the area of installation is free of grease, oil, dirt or other debris to ensure proper adhesion. Kuryakyn WILL NOT warranty any parts lost due to improper installation.

ATTENTION! The adhesive will not bond correctly if applied at temperatures less than 50° F. Do not attempt this installation in temperatures less than 50° F.

STEP 8 Remove the backing from the adhesive and press and hold the switch in place for one (1) minute. Full bonding strength will occur in 24 hours.

ATTENTION! Secure all wiring away from any moving parts, pinch points or extreme heat. Kuryakyn WILL NOT warranty any electrical component that fails due to pinched, crimped, broken, abraded, melted or frayed wires.

STEP 9 Reconnect the power and ground wires from the switch/receiver to the locations that they were connected before for the previous controller switch.

STEP 10 Reconnect the lizard lights to the switch/receiver ensuring that the wires line up (red to red and black to black.)

ATTENTION! Kuryakyn recommends the use of dielectric grease on electrical connections.

OPERATING THE LIGHTS USING THE REMOTE CONTROL

STEP 1 The switch on the receiver must be in the ON position for in order for the lights to function using the remote control.

CAUTION! When the switch on the receiver is in the on position, it will continue to draw a small amount of power from the battery even though the lights have been switched OFF with the remote. Therefore when leaving your bike for any extended period of time turn the switch OFF.

STEP 2 The top (power) button turns the lights ON or OFF.

STEP 3 The Mode Selector button allows the choice of one of three light functions:

- **STEADY ON**


Once in steady on mode, you can choose the color by pressing the speed/color selector (+ or – buttons).

- **FLASH**

Pressing the mode selector again will bring you to the flash; you must choose the color before entering the FLASH mode, in the STEADY ON mode. Pressing the speed selectors will speed up or slow down flash rate of the lights.

- **PAINT MODE**

Pressing the mode selector again will bring you to the paint mode that will cycle through the seven colors. To select the speed at which it changes color, you must enter the flash mode and use the speed selectors to choose the speed, and then reenter the paint mode and the change in the speed will carry to the paint mode.

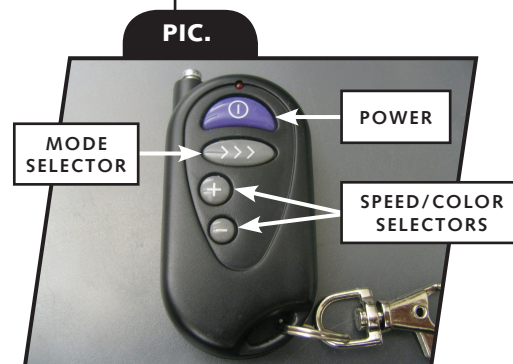

PROGRAMMING NEW REMOTES

STEP 1 Turn the selector on the receiver to the SET mode.

STEP 2 Press the power button on the remote and hold until the lights turn on.

STEP 3 Turn the selector back to the ON position.

PAGE

2

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FEDERAL COMMUNICATIONS COMMISSION INTERFERENCE STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.