## Spezifikation für Freigabe / specification for release

Kunde / customer :

Artikelnummer / part number : 74271142

Bezeichnung: STAR-TEC mit Sicherheitsverschluß


description: STAR-TEC with Safety Lock






**DATUM / DATE : 2006-11-13** 

### A Mechanische Abmessungen / dimensions:





а	18,8	mm
b	28,5	mm
С	13,2	mm
Α	10,0	mm
В	20,0	mm
С	10,2	mm
D	5,4	mm

B Elektrische Eigenschaften / electrical properties:

B Elektrisone Eigenschaften 7 electrical properties.							
Eigenschaften / properties	Testbedingungen / test conditions		Wert / value	Einheit / unit	Tol.		
Impedanz @ 1 Wg./ impedance @ 1 turn	25 MHz	Z	98	Ω	± 25%		
Impedanz @ 1 Wg./ impedance @ 1 turn	100 MHz	Z	182	Ω	± 25%		
Impedanz @ 2 Wg./ impedance @ 2 turn	25 MHz	Z	401	Ω	± 25%		
Impedanz @ 2 Wg./ impedance @ 2 turn	100 MHz	Z	709	Ω	± 25%		



### D Prüfgeräte / test equipment:

**HP 4191 B** für/for Z und/and material

16092A - Klemme / clamp

AWG26 - Ø 0,5mm - Länge/length: 165 mm

### E Testbedingungen / test conditions:

Luftfeuchtigkeit / humidity: 33%

Umgebungstemperatur / temperature: + 20°C

### F Werkstoffe & Zulassungen / material & approvals:

# Basismaterial / base material: 4 W 620

Kunststoff / plastic material: PA 6

UL-Zulassungen / UL-approval: UL94-V0 / E96725

Farbe / colour: elektrograu / electronic grey

### G Eigenschaften / general specifications:

Curietemperatur / curie temperature: + 150°C

für Kabeldurchmesser / for cable diameter: 3,5 - 5 mm

Lagertemperatur / storage temperature: -40°C ~ + 85°C

Betriebstemp. / operating temperature: -25°C ~ +105°C

Freignbe artailt / general release:	Kunde / customer			
Freigabe erteilt / general release:				
Datum / date	Unterschrift / signature	AF	Update	06-11-13
	Würth Elektronik	SMU	Update / Material	06-11-13
		LF	RoHS update	04-10-11
		JH	Neugestaltung	00-12-06
Geprüft / checked	Kontrolliert / approved	Name	Änderung / modification	Datum / date

Würth Elektronik eiSos GmbH & Co. KG

D-74638 Waldenburg · Max-Eyth-Strasse 1 - 3 · Germany · Telefon (+49) (0) 7942 - 945 - 0 · Telefax (+49) (0) 7942 - 945 - 400 http://www.we-online.com

## Spezifikation für Freigabe / specification for release

74271142


Bezeichnung: STAR-TEC mit Sicherheitsverschluß

description: STAR-TEC with Safety Lock



**DATUM / DATE : 2006-11-13** 

### H Impedanzverlauf / impedance curve:

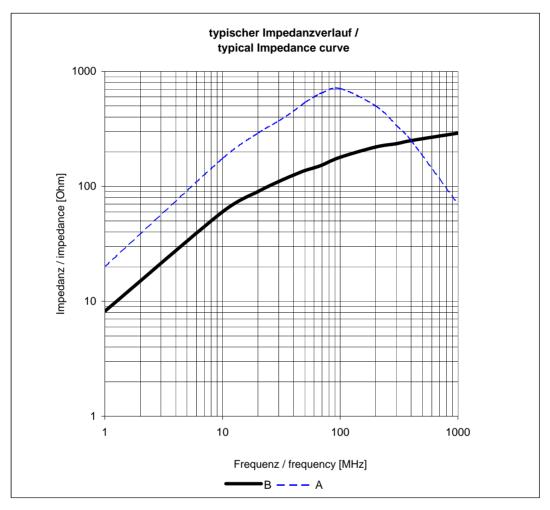

A: 2 x durch Bohrung Ferrit / 2 x times through ferrite

B: 1 x durch Bohrung Ferrit / 1 x times trough ferrite

Freigabe erteilt / general release:	Kunde / customer			
Treigabe ertelit / general release.				
Datum / date	Unterschrift / signature	AF	Update	06-11-13
	Würth Elektronik	SMU	Update / Material	06-11-13
		LF	RoHS update	04-10-11
		JH	Neugestaltung	00-12-06
Geprüft / checked	Kontrolliert / approved	Name	Änderung / modification	Datum / date

This electronic component has been designed and developed for usage in general electronic equipment. Before incorporating this component into any equipment where higher safety and reliability is especially required or if there is the possibility of direct damage or injury to human body, for example in the range of aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc, Würth Elektronik eiSos GmbH must be informed before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance

#### Würth Elektronik eiSos GmbH & Co. KG