



# FCC RADIO TEST REPORT

Applicant : LIFEWORKS TECHNOLOGY GROUP LLC.

Address : 1412 Broadway New York, NY 10018

Equipment : Wireless charging Car Mount

Model No. : IHBLQI3000B

Trademark : iHome

FCC ID : WWEIHQI3000

## I HEREBY CERTIFY THAT :

The sample was received on Sept. 19, 2019 and the test items were conducted during Sept. 25, 2019 at Cerpass Technology (Suzhou) Co., Ltd. The test result refers exclusively to the test presented test model / sample. Without written approval of Cerpass Technology (Suzhou) Co., Ltd., the test report shall not be reproduced except in full.

Approved by:

Laboratory Accreditation:

Cerpass Technology Corporation Test Laboratory



**TAF LAB Code: 1439**

Cerpass Technology (SuZhou) Co., Ltd.

Miro Chueh  
EMC/RF Manager



**A2LA LAB Code: 4981.01**



## Contents

<b>1. Report of Measurements and Examinations</b>	<b>4</b>
1.1 List of Measurements and Examinations	4
<b>2. Test Configuration of Equipment under Test</b>	<b>5</b>
2.1 Feature of Equipment under Test	5
2.2 Description of the test mode	5
2.3 Description of Test System	5
2.4 General Information of Test	6
2.5 Measurement Uncertainty	6
<b>3. Test Equipment and Ancillaries Used for Tests</b>	<b>7</b>
<b>4. Antenna Requirements</b>	<b>8</b>
4.1 Standard Applicable	8
4.2 Antenna Construction	8
4.3 Result	8
<b>5. Test of Conducted Emission</b>	<b>9</b>
5.1 Test Limit	9
5.2 Test Procedures	9
5.3 Typical Test Setup	10
5.4 Test Result and Data	11
<b>6. Test of Radiated Emission</b>	<b>13</b>
6.1 Test Limit	13
6.2 Test Procedures	14
6.3 Typical Test Setup	15
6.4 Test Result and Data	16



## History of this test report

## ■ ORIGINAL

☐ Additional attachment as following record:

Attachment No.	Issue Date	Description
SEFU1909089	Sept. 25, 2019	Original



## 1. Report of Measurements and Examinations

### 1.1 List of Measurements and Examinations

FCC CFR Title 47 Part 15 Subpart C Section 15.209

FCC Rule	Description of Test	Result
§ 15.203	. Antenna Requirement	Pass
§ 15.207(a)	. Conducted Emission	Pass
§ 15.209(a)	. Radiated Emission	Pass



## 2. Test Configuration of Equipment under Test

### 2.1 Feature of Equipment under Test

Product	Wireless charging Car Mount
Test Model	IHBLQI3000B
Model Discrepancy	N/A
Frequency Range	110KHz~205KHz
Antenna Type	Loop antenna
Modulation Type	ASK
Power Rating	Input:5V $\overline{\text{---}}$ 2.0A Output: 5V $\overline{\text{---}}$ 1.0A

Note: For more details, please refer to the User's manual of the EUT.

### 2.2 Description of the test mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

The following test mode was performed for conduction and radiation test:

Test Mode 1: TX+ Wireless Charging

### 2.3 Description of Test System

No	Device	Manufacturer	Model No.	Description
1	LOAD	N/A	5 $\Omega$	N/A
2	Adapter	ChengGuo	CD122	N/A

Use cable

No.	Cable	Quantity	Description
1	Micro usb Cable	1	1.0m Non Shielding



## 2.4 General Information of Test

<input type="checkbox"/>	Test Site	<b>Cerpass Technology Corporation Test Laboratory</b> Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881
	FCC	TW1079, TW1061, TW1439
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication Test C-4663 for Conducted emission test R-4399, R-4218 for Radiated emission test G-10812, G-10813 for radiated disturbance above 1GHz
<input checked="" type="checkbox"/>	Test Site	Cerpass Technology (Suzhou) Co., Ltd Address: No.66, Tangzhuang Road, Suzhou Industrial Park, Jiangsu 215006, China Tel: +86-512-6917-5888 Fax: +86-512-6917-5666
	CNAS	L5515
	FCC	CN1243
	A2LA	4981.01
	IC	7290A-1, 7290A-2
	VCCI	T-11945 for Telecommunication Test C-12919 for Conducted emission test R-12670 for Radiated emission test G-10227 for radiated disturbance above 1GHz

## 2.5 Measurement Uncertainty

Measurement Item	Measurement Uncertainty
Conducted Emission	±2.71 dB
Radiation test (10m) below 1GHz	Vertical : ±3.89 dB
	Horizontal: ±4.11 dB
Radiation test (3m) below 1GHz	Vertical : ±4.11 dB
	Horizontal: ±4.10 dB



### 3. Test Equipment and Ancillaries Used for Tests

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
Test Receiver	R&S	ESCI	100565	2019.07.13	2020.07.12
AMN	R&S	ESH2-Z5	100182	2019.08.22	2020.08.21
LISN	FCC	FCC-LISN-50-200-2-02	112087	2019.08.22	2020.08.21
LISN	SCHWARZBECK	NSLK 8127	8127-920	2019.08.22	2020.08.21
LISN	R&S	ENV216	100325	2019.08.22	2020.08.21
Pulse Limiter	R&S	ESH3-Z2	100529	2019.03.11	2020.03.10
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-004	2019.03.17	2020.03.16
EZ-EMC	Fala	Ver CT3A1	N/A	N/A	N/A
EMI Test Receiver	R&S	ESCI	101183	2019.07.05	2020.07.04
Preamplifier	songyi	EM330	60618	2019.03.11	2020.03.10
Preamplifier	HP	8447F	3113A05582	2019.03.11	2020.03.10
Bilog Antenna	Sunol Science	JB1	A072414-1	2019.06.26	2020.06.26
Loop Antenna	R&S	HFH2-Z2	100150	2019.03.11	2020.03.10
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-002	2019.03.17	2020.03.16
EZ-EMC	Fala	Ver CT3A1	N/A	N/A	N/A



## 4. Antenna Requirements

### 4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 4.2 Antenna Construction

The antenna is Coil Antenna, and the antenna connector is de-signed with permanent attachment and on consideration of replacement. Please see the EUT photo for details.

### 4.3 Result

The EUT antenna is a Loop Antenna. It complies with the standard requirement.





## 5. Test of Conducted Emission

### 5.1 Test Limit

According to §15.207: For all the consumer devices which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency (MHz)	Quasi Peak (dB $\mu$ V)	Average (dB $\mu$ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50

Remark: (1)\*Decreases with the logarithm of the frequency.


(2)The lower limit shall apply at the transition frequency.

### 5.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




### 5.3 Typical Test Setup

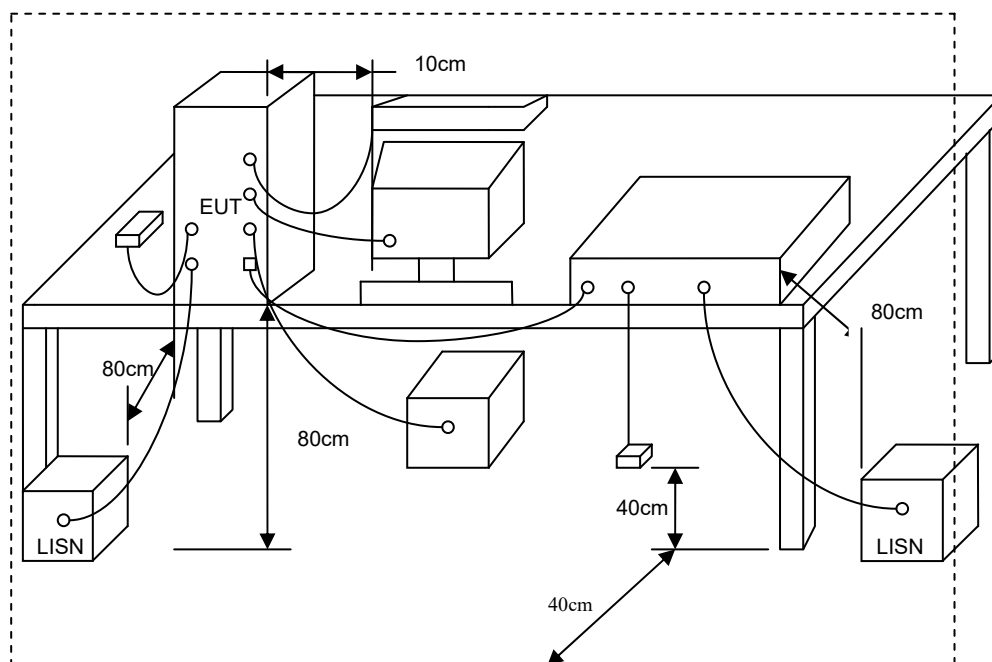



## 5.4 Test Result and Data

Test Mode :	TX+ Wireless Charging	Phase :	Line
Temperature :	20°C	Humidity:	51%
Pressur(mbar) :	1002	Date:	Sept. 23, 2019

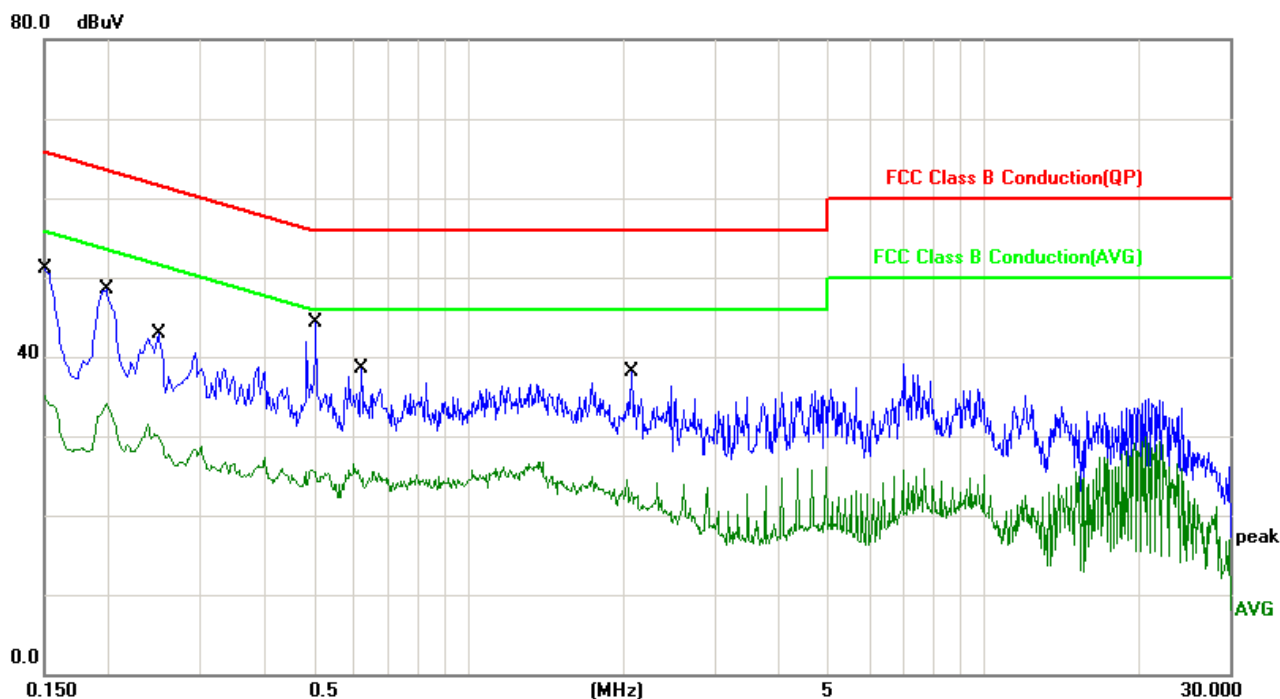


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	10.06	36.50	46.56	65.99	-19.43	QP
2	0.1500	10.06	25.75	35.81	55.99	-20.18	AVG
3	0.1980	10.06	34.85	44.91	63.69	-18.78	QP
4	0.1980	10.06	24.27	34.33	53.69	-19.36	AVG
5	0.2500	10.03	27.43	37.46	61.75	-24.29	QP
6	0.2500	10.03	19.15	29.18	51.75	-22.57	AVG
7	0.5060	9.90	21.82	31.72	56.00	-24.28	QP
8	0.5060	9.90	15.33	25.23	46.00	-20.77	AVG
9	0.6180	10.00	19.92	29.92	56.00	-26.08	QP
10	0.6180	10.00	14.72	24.72	46.00	-21.28	AVG
11	2.0740	11.04	17.87	28.91	56.00	-27.09	QP
12	2.0740	11.04	11.11	22.15	46.00	-23.85	AVG

Note: Measurement Level = Reading Level + Correct Factor+ Attenuator



Test Mode :	TX+ Wireless Charging	Phase :	Neutral
Temperature :	20 °C	Humidity:	51%
Pressur(mbar) :	1002	Date:	Sept. 23, 2019

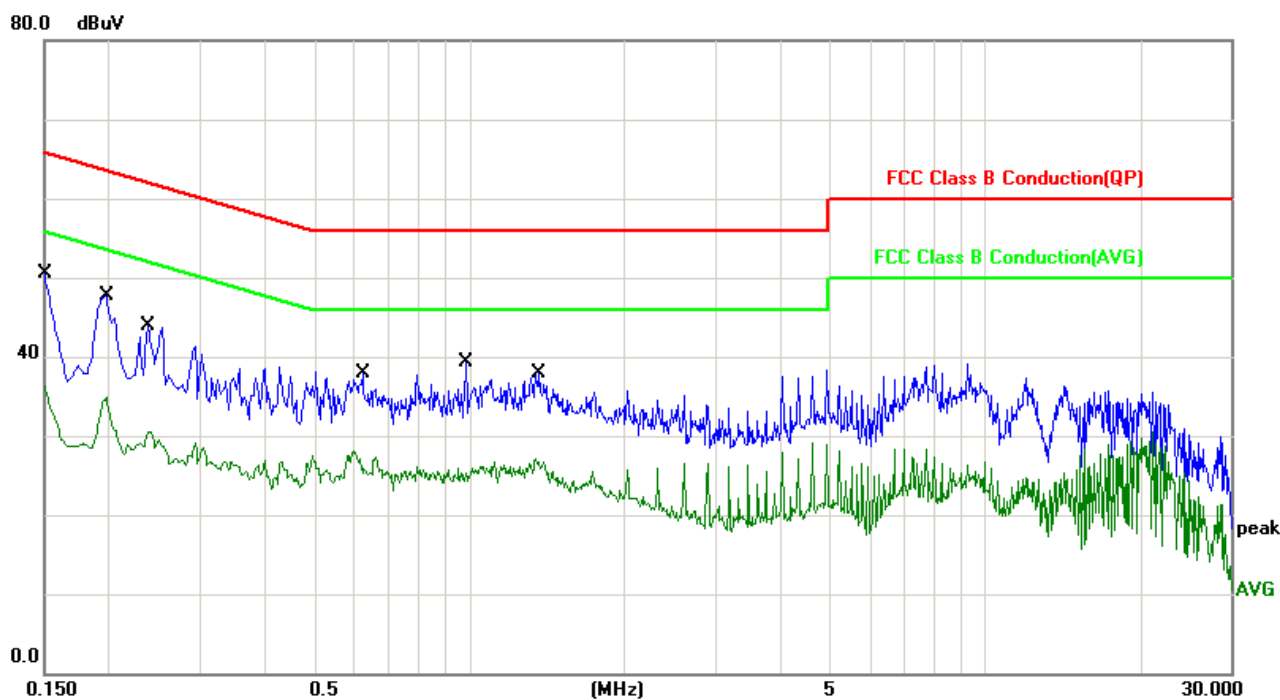

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	10.06	34.82	44.88	65.99	-21.11	QP
2	0.1500	10.06	26.06	36.12	55.99	-19.87	AVG
3	0.1980	10.06	34.46	44.52	63.69	-19.17	QP
4	0.1980	10.06	23.80	33.86	53.69	-19.83	AVG
5	0.2380	10.04	28.52	38.56	62.16	-23.60	QP
6	0.2380	10.04	19.65	29.69	52.16	-22.47	AVG
7	0.6220	10.00	21.30	31.30	56.00	-24.70	QP
8	0.6220	10.00	15.84	25.84	46.00	-20.16	AVG
9	0.9860	10.13	20.61	30.74	56.00	-25.26	QP
10	0.9860	10.13	14.80	24.93	46.00	-21.07	AVG
11	1.3700	10.14	22.02	32.16	56.00	-23.84	QP
12	1.3700	10.14	15.94	26.08	46.00	-19.92	AVG

Note: Measurement Level = Reading Level + Correct Factor+ Attenuator



## 6. Test of Radiated Emission

### 6.1 Test Limit

In any 100kHz bandwidth outside the frequency band, the radio frequency power produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205 Section 8.10 table 6 must also comply with the radiated emission limits specified as below.

#### Radiated Emission Limit (9KHz~1000MHz)

FREQUENCIES(MHz)	FIELD STRENGTH(microvolts/meter)	MEASUREMENT DISTANCE(meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level(uV/m)




## 6.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.




### 6.3 Typical Test Setup

Below 30MHz Test Setup

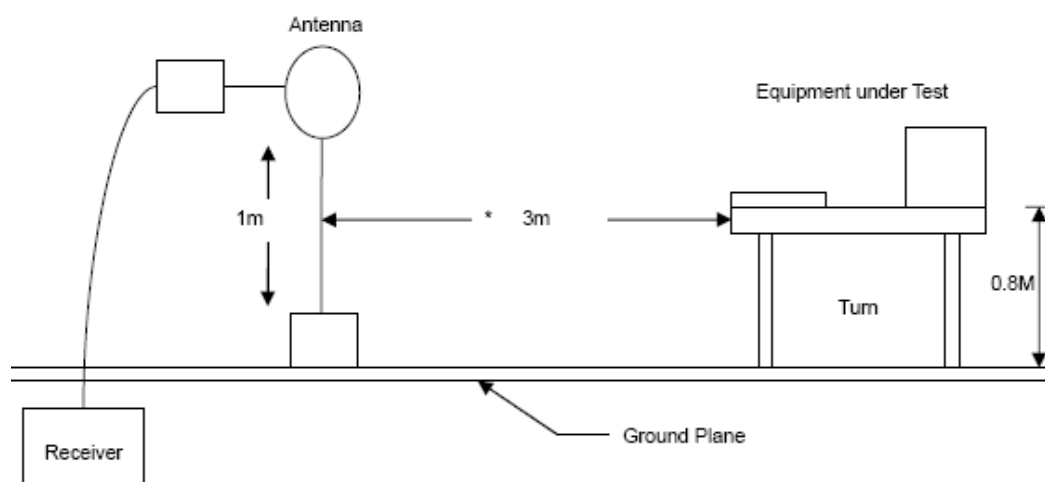

30M - 1GHz Test Setup

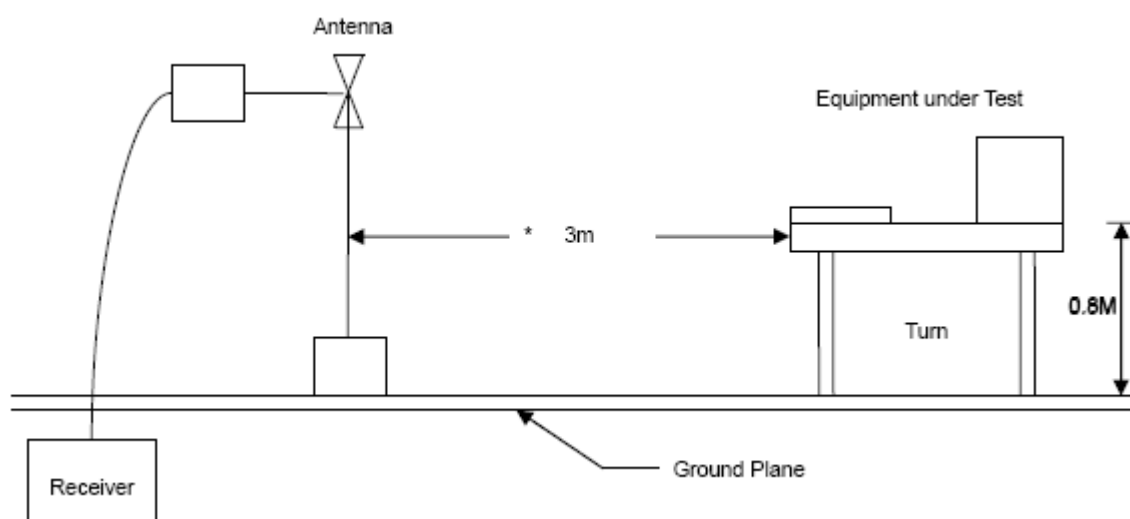




## 6.4 Test Result and Data

### 9KHz~30MHz

Power	: AC 120V/60Hz	Temperature	: 23°C
Test Mode	: TX+ Wireless Charging	Humidity	: 64 %
Test Date	: Sept. 23, 2019	Polarization	: X

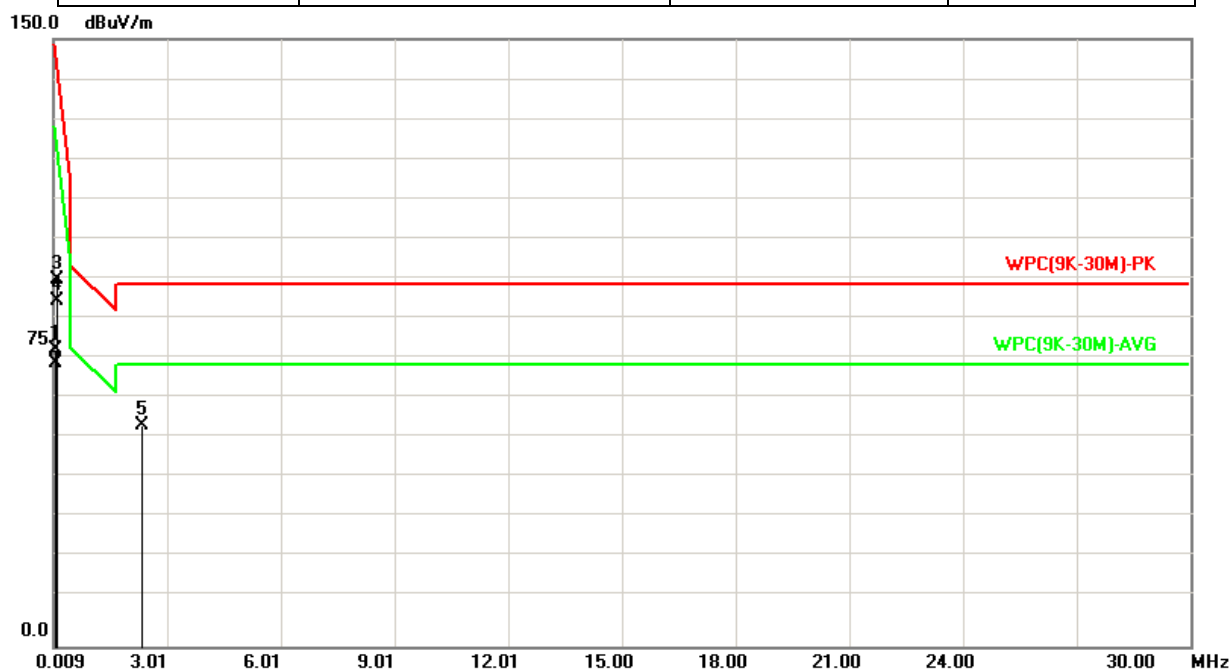

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	0.0583	20.70	52.72	73.42	132.29	-58.87	peak
2	0.0583	20.70	49.08	69.78	112.29	-42.51	AVG
3	0.1167	20.60	70.08	90.68	126.26	-35.58	peak
4	0.1167	20.60	64.83	85.43	106.26	-20.83	AVG
5	2.3335	20.87	33.76	54.63	89.54	-34.91	QP

Note: Level = Reading + Factor


Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor





Power	: AC 120V/60Hz	Temperature	: 23°C
Test Mode	: TX+ Wireless Charging	Humidity	: 64 %
Test Date	: Sept. 23, 2019	Polarization	: Y

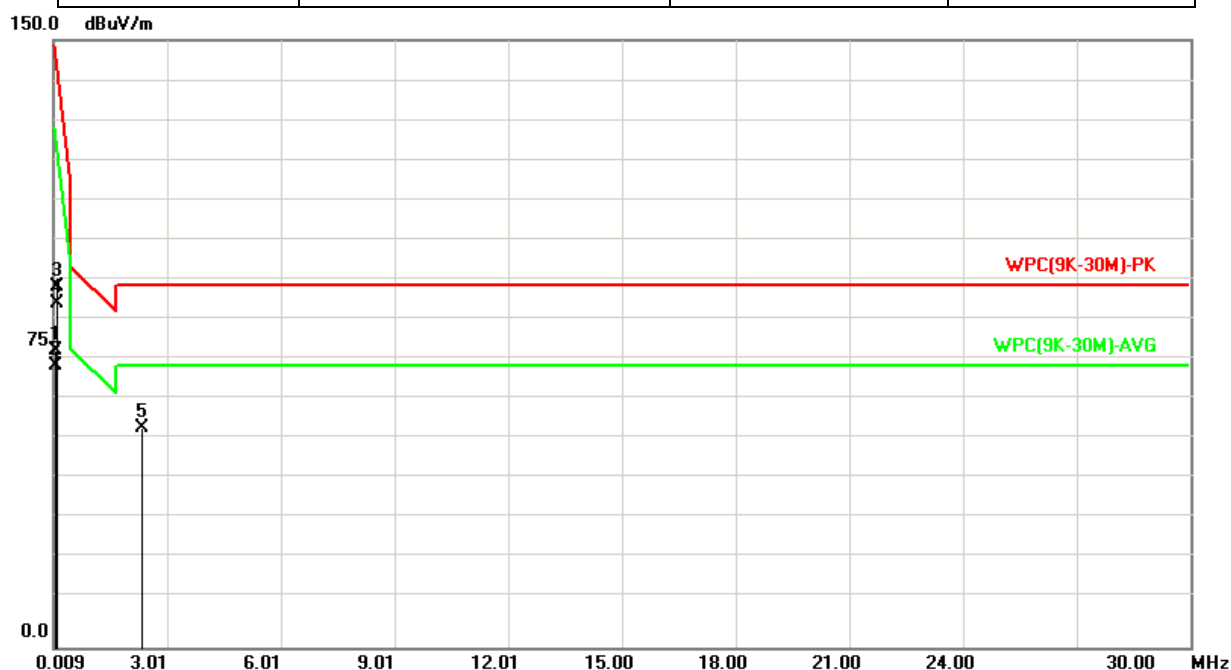

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	0.0586	20.70	52.55	73.25	132.25	-59.00	peak
2	0.0586	20.70	49.04	69.74	112.25	-42.51	AVG
3	0.1172	20.60	68.35	88.95	126.23	-37.28	peak
4	0.1172	20.60	64.23	84.83	106.23	-21.4	AVG
5	2.3449	20.86	33.50	54.36	89.54	-35.18	QP


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V/60Hz	Temperature	: 23°C
Test Mode	: TX+ Wireless Charging	Humidity	: 64 %
Test Date	: Sept. 23, 2019	Polarization	: Z

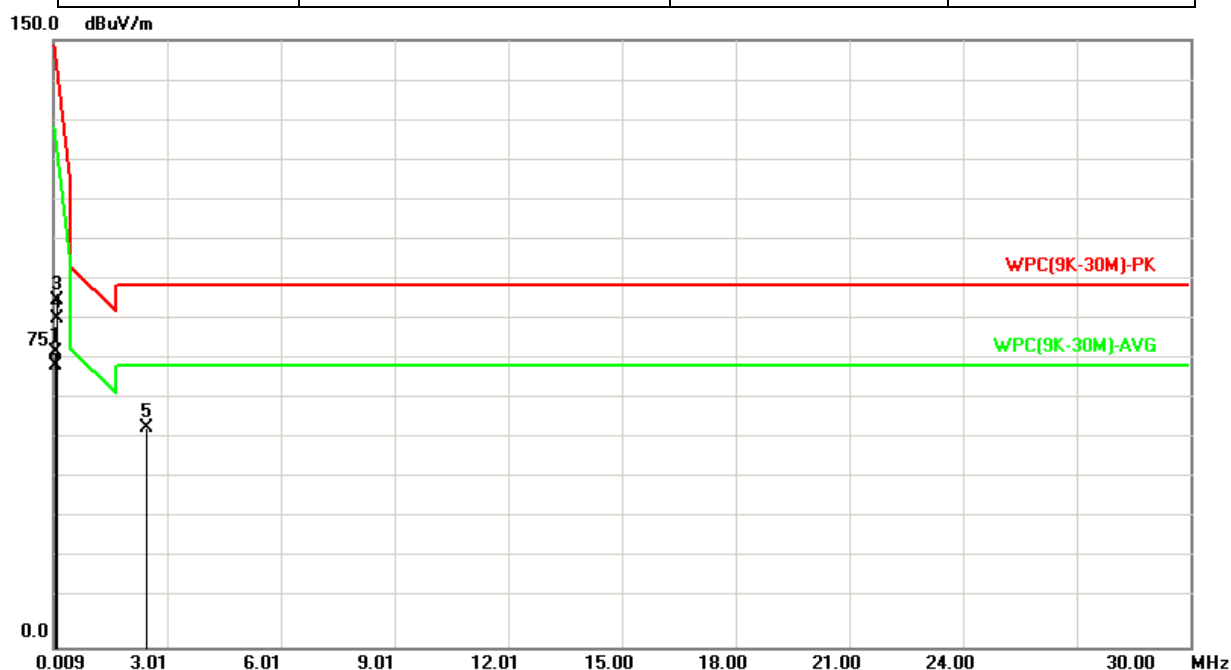

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	0.0617	20.70	52.40	73.10	131.8	-58.70	peak
2	0.0617	20.70	48.83	69.53	111.8	-42.27	AVG
3	0.1232	20.56	65.07	85.63	125.79	-40.16	peak
4	0.1232	20.56	60.73	81.29	105.79	-24.50	AVG
5	2.4650	20.81	33.32	54.13	89.54	-35.41	QP

Note: Level = Reading + Factor


Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



## 30MHz~1GHz

Power	: AC 120V/60Hz	Pol/Phase	: VERTICAL
Test Mode	: TX+ Wireless Charging	Temperature	: 18 °C
Test Date	: Sept. 23, 2019	Humidity	: 49 %

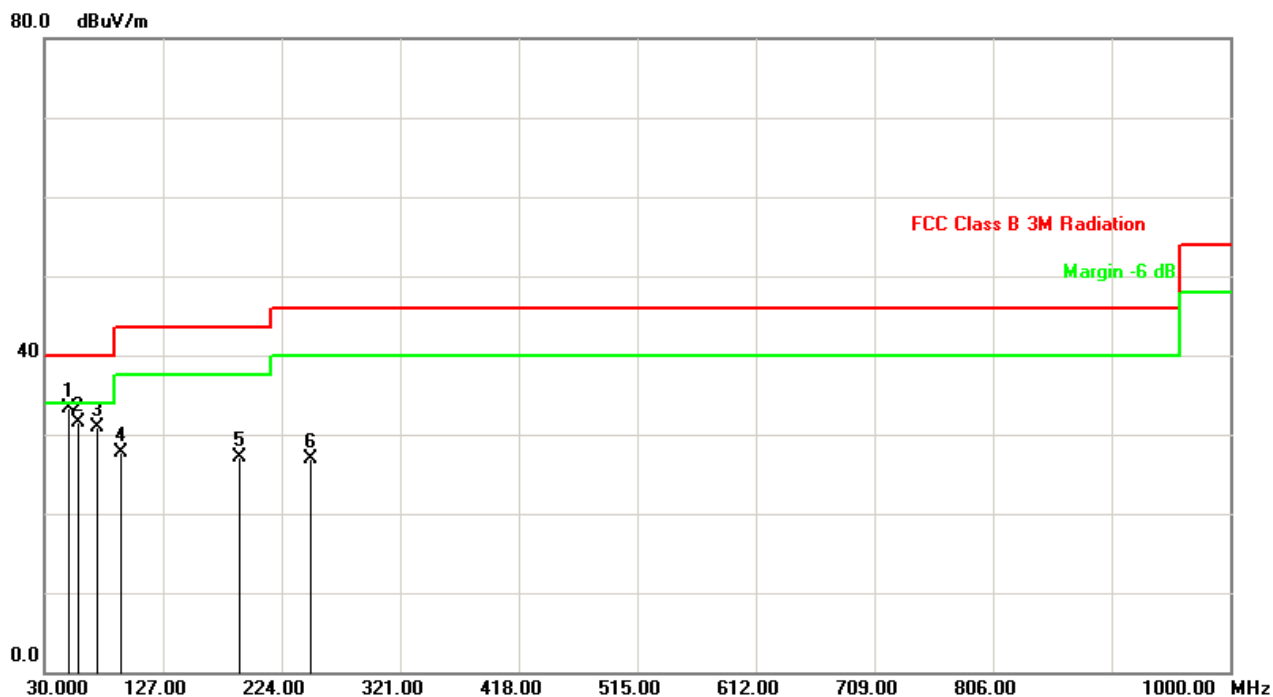

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	49.4000	-15.93	49.20	33.27	40.00	-6.73	peak	100	72
2	57.1600	-17.98	49.55	31.57	40.00	-8.43	peak	100	103
3	73.6500	-16.56	47.46	30.90	40.00	-9.10	peak	100	204
4	93.0500	-13.00	40.78	27.78	43.50	-15.72	peak	100	158
5	189.0800	-10.63	37.81	27.18	43.50	-16.32	peak	100	19
6	248.2500	-9.28	36.27	26.99	46.00	-19.01	peak	100	301


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V/60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: TX+ Wireless Charging	Temperature	: 18 °C
Test Date	: Sept. 23, 2019	Humidity	: 49 %

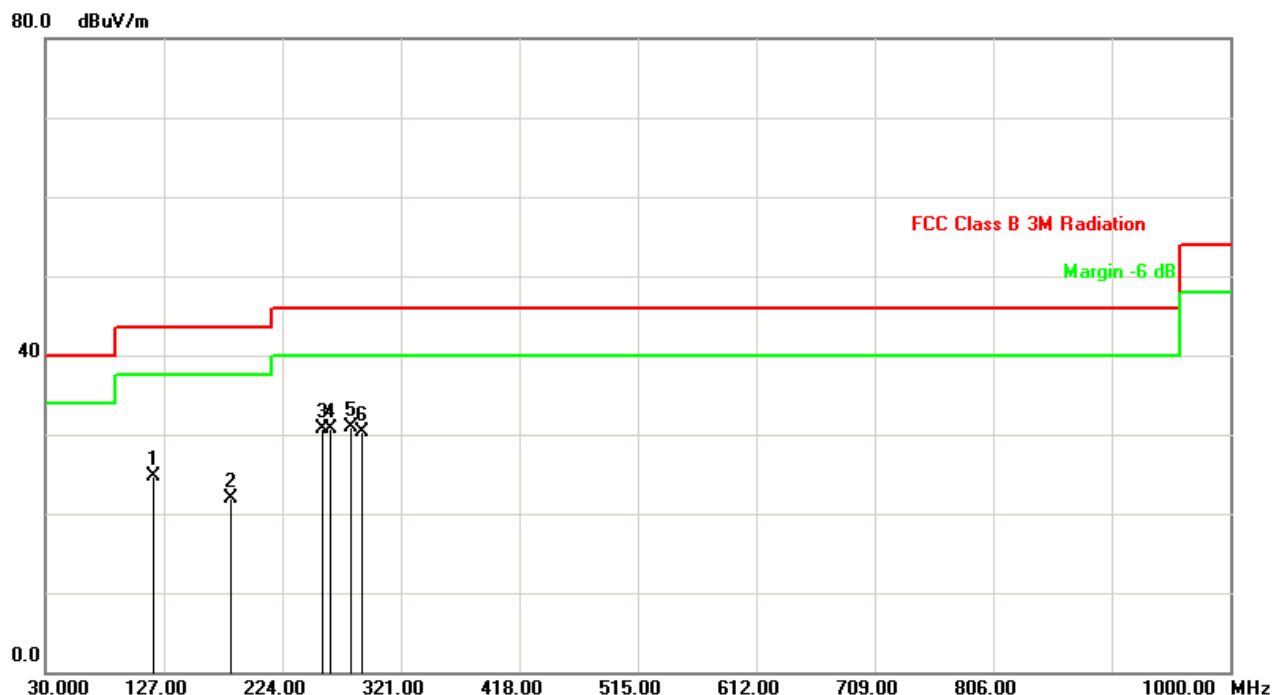

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	118.2700	-10.36	35.00	24.64	43.50	-18.86	peak	100	201
2	181.3200	-9.92	31.86	21.94	43.50	-21.56	peak	200	157
3	256.9800	-6.00	36.80	30.80	46.00	-15.20	peak	100	13
4	262.8000	-6.23	36.87	30.64	46.00	-15.36	peak	200	228
5	280.2600	-6.18	37.14	30.96	46.00	-15.04	peak	300	26
6	288.9900	-6.57	36.87	30.30	46.00	-15.70	peak	200	304

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor

----- End of the report -----