

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT**

OF

Wireless Dock

MODEL No.: Rothdock

BRAND NAME:



FCC ID: WXO-ROTHDOCK

REPORT NO: E0811068F

ISSUE DATE: December 08, 2008

Prepared for

TL AUDIO LIMITED

**Unit 2 Icen Court, Icknield Way, Letchworth Garden City, Hertfordshire, SG6
1TN, UK**

Prepared by


SHENZHEN EMTEK CO., LTD

**Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China**

TEL: 86-755-26954280

FAX: 86-755-26954282

VERIFICATION OF COMPLIANCE

Applicant:	TL AUDIO LIMITED Unit 2 Icen Court, Icknield Way, Letchworth Garden City, Hertfordshire, SG6 1TN, UK
Product Description:	Wireless Dock
Brand Name:	
Model Number:	Rothdock
Serial Number:	N/A
File Number:	E0811068F
Date of Test:	November 17, 2008 to December 08, 2008

We hereby certify that:

The above equipment was tested by SHENZHEN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

Approved By



David Lee / Q.A. Manager
SHENZHEN EMTEK CO., LTD.

Table of Contents

1.	GENERAL INFORMATION	5
1.1	PRODUCT DESCRIPTION	5
1.2	RELATED SUBMITTAL(S) / GRANT (S)	5
1.3	TEST METHODOLOGY	5
1.4	SPECIAL ACCESSORIES	5
1.5	EQUIPMENT MODIFICATIONS	6
1.6	TEST FACILITY	6
2.	SYSTEM TEST CONFIGURATION	7
2.1	EUT CONFIGURATION	7
2.2	EUT EXERCISE	7
2.3	TEST PROCEDURE	7
2.4	LIMITATION	7
2.5	CONFIGURATION OF TESTED SYSTEM	11
3.	SUMMARY OF TEST RESULTS	13
4.	DESCRIPTION OF TEST MODES	13
5.	CONDUCTED EMISSIONS TEST	14
5.1	MEASUREMENT PROCEDURE:	14
5.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
5.3	MEASUREMENT EQUIPMENT USED:	14
5.4	CONDUCTED EMISSION LIMIT	15
5.5	MEASUREMENT RESULT:	15
5.6	CONDUCTED MEASUREMENT PHOTOS:	18
6.	RADIATED EMISSION TEST	19
6.1	MEASUREMENT PROCEDURE	19
6.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	20
6.3	MEASUREMENT EQUIPMENT USED:	21
6.4	MEASUREMENT RESULT	21
6.5	RADIATED MEASUREMENT PHOTOS:	27
7.	CHANNEL SEPARATION TEST	28
7.1	MEASUREMENT PROCEDURE	28
7.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	28
7.3	MEASUREMENT EQUIPMENT USED:	28
7.4	MEASUREMENT RESULTS:	28
8.	20DB BANDWIDTH TEST	31
8.1	MEASUREMENT PROCEDURE	31
8.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	31

8.3	MEASUREMENT EQUIPMENT USED:	31
8.4	MEASUREMENT RESULTS:	31
9.	QUANTITY OF HOPPING CHANNEL TEST	34
9.1	MEASUREMENT PROCEDURE	34
9.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	34
9.3	MEASUREMENT EQUIPMENT USED:	34
9.4	MEASUREMENT RESULTS:	34
10.	TIME OF OCCUPANCY (DWELL TIME) TEST	36
10.1	MEASUREMENT PROCEDURE	36
10.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	36
10.3	MEASUREMENT EQUIPMENT USED:	36
10.4	MEASUREMENT RESULTS:	36
11.	MAXIMUM PEAK OUTPUT POWER TEST	40
11.1	MEASUREMENT PROCEDURE	40
11.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	40
11.3	MEASUREMENT EQUIPMENT USED:	40
11.4	MEASUREMENT RESULTS:	40
12.	BAND EDGE TEST	43
12.1	MEASUREMENT PROCEDURE	43
12.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	43
12.3	MEASUREMENT EQUIPMENT USED:	43
12.4	MEASUREMENT RESULTS:	43
13.	ANTENNA APPLICATION	45
13.1	ANTENNA REQUIREMENT	45
13.2	RESULT	45
14.	RF EXPOSURE EVALUATION	46
14.1	FRIIS TRANSMISSION FORMULA: $P_D=(P_{OUT}*G)/(4*\pi*R^2)$	46
14.2	MEASUREMENT RESULT $P_D=(P_{OUT}*G)/(4*\pi*R^2)$	46

1. GENERAL INFORMATION

1.1 Product Description

A major technical descriptions of EUT is described as following:

- A). Operation Frequency: 2406~2472MHz
- B). Channel Space: 2MHz
- C). Modulation: GFSK
- D). Number of Channel: 34
- E). Transmit Power: <16dBm
- F). Antenna Type: PIFA Antenna
- G). Antenna Gain: 1.7dBi
- H). Power Supply: DC7V/700mA with external adaptor (Input: AC100~240V 50/60Hz 0.2A
Output: 7VDC/0.7A)

This EUT is controlled by a microchip (IA2 embedded up) to generate the pseudorandom frequency Hopping Sequence, The RF module of this EUT normal operation mode support 15 hopping channel/ Per Sequence. There are four hopping sequences listed below:

Sequence A: 2404, 2420, 2422, 2424, 2426, 2428, 2444, 2446, 2448, 2450, 2452, 2456, 2468, 2470, 2472MHz

Sequence B: 2406, 2408, 2410, 2412, 2414, 2416, 2418, 2420, 2422, 2424, 2426, 2428, 2430, 2438, 2446MHz

Sequence C: 2432, 2440, 2448, 2450, 2452, 2454, 2456, 2458, 2460, 2462, 2464, 2466, 2468, 2470, 2472MHz

Sequence D: 2406, 2408, 2410, 2412, 2414, 2416, 2418, 2426, 2454, 2462, 2464, 2466, 2468, 2470, 2472MHz

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: W XO-ROTHDOCK filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules. The composite system (receiver) is compliance with Subpart B is authorized under a DoC procedure.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

1.6 Test Facility

Site Description

EMC Lab.

: Accredited by CNAS, 2005.11.02
The certificate is valid until 2010.11
The Laboratory has been assessed and proved to be in compliance
with CNAS/CL01:2005(identical to ISO/IEC17025:2006)
The Certificate Registration Number is L2291

Accredited by TUV Rheinland Guangzhou, 2008.3
The Laboratory has been assessed according to the requirements
ISO/IEC 17025

Accredited by FCC, March 18 2008
The Certificate Registration Number is 709623.

Accredited by Industry Canada, April 24, 2008
The Certificate Registration Number is 46405-4480

Name of Firm

: SHENZHEN EMTEK CO., LTD

Site Location

: Bldg 69, Majialong Industry Zone,
Nanshan District, Shenzhen, Guangdong, China

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner, which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. the Tx frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the **frequency range between 0.15 MHz and 30MHz** using **CISPR Quasi-Peak and average detector mode**.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2003.

2.4 Limitation

(1) Channel Separation test

FCC Part 15, Subpart C Section 12.247(a)(1). Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 Bandwidth of the hopping channel, whichever is greater.

Frequency Range (MHz)	Limit(kHz)
902-928	>25kHz
2400-2483.5	>25kHz
5725-5850	>25kHz

(2)	20dB Bandwidth					
	Frequency	Limit(kHz)				
	Range(MHz)	Quantity of Hopping Channel	50	25	15	75
	902-928		<250	>250	NA	NA
	2400-2483.5		NA	NA	>1000	<1000

(3) Quantity of Hopping Channel

FCC Part 15, Subpart C Section 12.247

Frequency Range (MHz)	Limit(Quantity of Hopping Channel)			
	20dB bandwidth <250kHz	20dB bandwidth >250kHz	20dB bandwidth <1MHz	20dB bandwidth >1MHz
902-928	50	25	NA	NA
2400-2483.5	NA	NA	75	15
5725-5850	NA	NA	75	NA

(4) Time of Occupancy(Dwell Time)

FCC Part 15, Subpart C Section 12.247

Frequency Range (MHz)	Number of channels	Measurement periode	LIMIT(rms)
902-928	≥ 50	20s	400
	$49 \geq 25$	10S	400
2400-2483.5	≥ 15	0.4*number of used channels	400
5725-5850	≥ 15	30s	400

(5) Maximum Peak Output Power

FCC Part 15, Subpart C Section 12.247

Frequency Range (MHz)	Quantity of Hopping Channel	LIMIT(W)			
		50	25	15	75
902-928		1(30dBm)	0.125(21dBm)	NA	NA
2400-2483.5		NA	NA	0.125(21dBm)	1(30dBm)
5725-5850		NA	NA	NA	1(30dBm)

(6) Band edge

FCC Part15, Subpart C Section 15.247, In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

Operating Frequency Range(MHz)	Spurious emission frequency	Limit Peak power ration to emission(dBc)	Emission level(dBuV/m)
902-928	<902	>20	NA
	>928	>20	NA
	960-1240	NA	54
2400-2483.5	<2400	>20	NA
	>2483.5-2500	NA	54
5725-5850	<5350-5460	NA	54
	<5725	>20	NA
	>5850	>20	NA

(7) Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

(8) Radiated Emission

FCC Part 15, Subpart C Section 15.209 limit of radiated emission for frequency below 1000GHz. The emissions from an intentional radiator shall not exceed the field strength level specified in the following table:

Frequency (MHz)	Field strength $\mu\text{V/m}$	Distance(m)	Field strength at 3m $\text{dB}\mu\text{V/m}$
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

Remark: 1. Emission level in $\text{dB}\mu\text{V/m}=20 \log (\text{uV/m})$
2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

FCC Part 15, Section 15.35(b) limit of radiated emission for frequency above 1000MHz

Frequency(MHz)	Class A($\text{dB}\mu\text{V/m}$)(at 3m)		Class B($\text{dB}\mu\text{V/m}$)(at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80.0	60.0	74.0	54.0

FCC Part 15, Subpart C Section 15.249. The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Frequency(MHz)	Filed Strength of Fundamental(at 3m)		Filed Strength of Harmonics(at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
902-928	114	94	74.0	54.0
2400-2483.5	114	94	74.0	54.0
5725-5875	114	94	74.0	54.0
24000-24250	128	108	88.0	68.0

2.5 Configuration of Tested System

Fig. 2-1 Configuration of Tested System





Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
1.	Wireless Dock		Rothdock	WXO-ROTHDOCK	N/A	EUT
2.	Ipod player	Apple	A1136	N/A	N/A	

Note:

- (1) Unless otherwise denoted as EUT in 『Remark』 column , device(s) used in tested system is a support equipment.

3. Summary of Test Results

FCC Rules	Description Of Test	Result
§ 15.247(a)(1)	Channel Separation test	Compliant
§ 15.247(a)(1)	20dB Bandwidth	Compliant
§ 15.247(a)(1)(iii)	Quantity of Hopping Channel	Compliant
§ 15.247(a)(1)(iii)	Time of Occupancy(Dwell Time)	Compliant
§ 15.247(b)	Max Peak output Power test	Compliant
§ 15.247(d)	Band edge test	Compliant
§ 15.207	AC Power Conducted Emission	Compliant
§ 15.247(d), § 15.209	Radiated Emission	Compliant
§ 15.203	Antenna Requirement	Compliant
§ 1.1310	RF Exposure	Compliant

4. Description of test modes

The EUT (Wireless Dock) has been tested under normal operating condition.

This EUT is a FHSS system, we use blue test to control the EUT with LPT1, Let EUT hopping on and transmit at every channel with highest power, Only output power use conducted method, others are using radiated method. After sirfdemo330R1 send the command to EUT, it can be removed, and the EUT keep hopping. 34 Channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for best.


Channel	Frequency(MHz)
1	2406
17	2440
34	2472

5. Conducted Emissions Test

5.1 Measurement Procedure:

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

5.2 Test SET-UP (Block Diagram of Configuration)

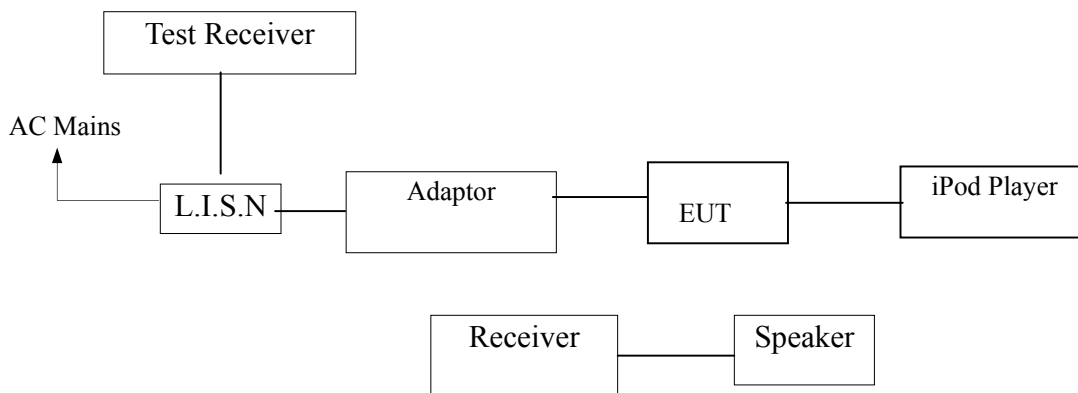

5.3 Measurement Equipment Used:

Conducted Emission Test Site # 4					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/29/2008	05/29/2009
L.I.S.N	Rohde & Schwarz	ESH2-Z5	834549/005	05/29/2008	05/29/2009
L.I.S.N	Rohde & Schwarz	ESH2-Z5	834549/005	05/29/2008	05/29/2009
50ΩCoaxial Switch	Anritsu	MP59B	M20531	005/29/2008	05/29/2009

5.4 Conducted Emission Limit (7) Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.5 Measurement Result:

Date of Test:	November 20, 2008	Temperature:	22℃
Frequency Detector:	0.15~30MHz	Humidity:	50%
Test Result:	PASS	Test Mode:	Channel 1

Test Line	Frequency MHz	Emission Level QP dB(μV)	Emission Level AV dB(μV)	Limits QP dB(μV)	Limits AV dB(μV)	Margin QP dB(μV)	Margin AV dB(μV)
Neutral	0.190	52.17	41.37	64.04	54.04	-11.87	-12.67
	0.255	47.77	39.71	61.59	51.59	-13.82	-11.88
	0.320	48.84	33.77	59.71	49.71	-10.87	-15.94
	0.625	46.77	39.58	56.00	46.00	-9.23	-6.42
	2.984	40.67	35.98	56.00	46.00	-15.33	-10.02
	8.254	43.61	40.58	60.00	50.00	-16.39	-9.42
Line	0.195	52.31	43.62	63.82	53.82	-11.51	-10.20
	0.255	47.34	40.45	61.59	51.59	-14.25	-11.14
	0.320	45.38	35.25	59.71	49.71	-14.33	-14.46
	0.681	42.97	38.91	56.00	46.00	-13.03	-7.09
	2.747	40.84	35.17	56.00	46.00	-15.16	-10.83
	8.348	42.97	38.80	60.00	50.00	-17.03	-11.20

Date of Test: November 20, 2008 Temperature: 22°C
Frequency Detector: 0.15~30MHz Humidity: 50%
Test Result: PASS Test Mode: Channel 18

Test Line	Frequency MHz	Emission Level QP dB(μV)	Emission Level AV dB(μV)	Limits QP dB(μV)	Limits AV dB(μV)	Margin QP dB(μV)	Margin AV dB(μV)
Neutral	0.189	48.32	40.13	64.08	54.08	-15.76	-13.95
	0.244	46.93	38.61	61.96	51.96	-15.03	-13.35
	0.325	43.68	38.61	59.58	49.58	-15.90	-10.97
	0.624	44.57	40.36	56.00	46.00	-11.43	-5.64
	2.968	39.64	35.69	56.00	46.00	-16.36	-10.31
	8.202	44.36	40.11	60.00	50.00	-15.64	-9.89
Line	0.190	51.36	42.63	64.04	54.04	-15.13	-11.44
	0.257	46.63	40.32	61.76	51.76	-13.35	-12.82
	0.325	46.31	36.84	59.66	49.66	-14.64	-8.64
	0.624	41.36	37.36	56.00	46.00	-14.64	-9.63
	2.736	41.36	36.37	56.00	46.00	-17.79	-11.75
	8.376	42.21	38.25	60.00	50.00	-15.13	-11.44

Date of Test: November 20, 2008 Temperature: 22°C
Frequency Detector: 0.15~30MHz Humidity: 50%
Test Result: PASS Test Mode: Channel 34

Test Line	Frequency MHz	Emission Level QP dB(μV)	Emission Level AV dB(μV)	Limits QP dB(μV)	Limits AV dB(μV)	Margin QP dB(μV)	Margin AV dB(μV)
Neutral	0.191	51.36	42.63	63.99	53.99	-12.63	-11.36
	0.251	46.39	39.64	61.72	51.72	-15.33	-12.08
	0.326	43.67	34.32	59.55	49.55	-15.88	-15.23
	0.684	42.31	38.92	56.00	46.00	-13.69	-7.08
	2.959	38.35	34.36	56.00	46.00	-17.65	-11.64
	8.234	42.63	38.61	60.00	50.00	-17.37	-11.39
Line	0.194	51.95	42.32	63.86	53.86	-11.91	-11.54
	0.251	45.39	38.61	61.72	51.72	-16.33	-13.11
	0.324	44.36	33.85	59.66	49.66	-15.30	-15.81
	0.665	46.30	37.33	56.00	46.00	-9.70	-8.67
	2.784	43.02	36.321	56.00	46.00	-12.98	-9.68
	8.318	43.15	39.31	60.00	50.00	-16.85	-10.69

5.6 Conducted Measurement Photos:




6. Radiated Emission Test

6.1 Measurement Procedure


- 1 The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured were complete.

6.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

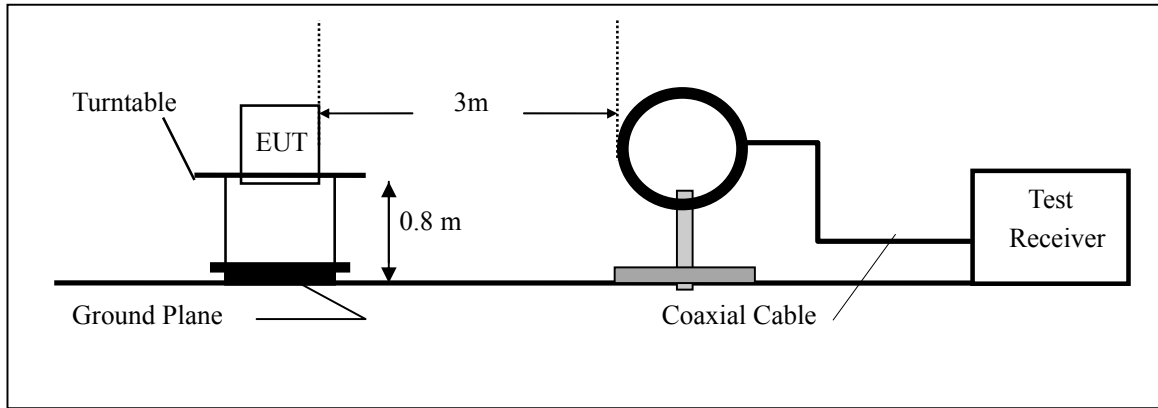

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

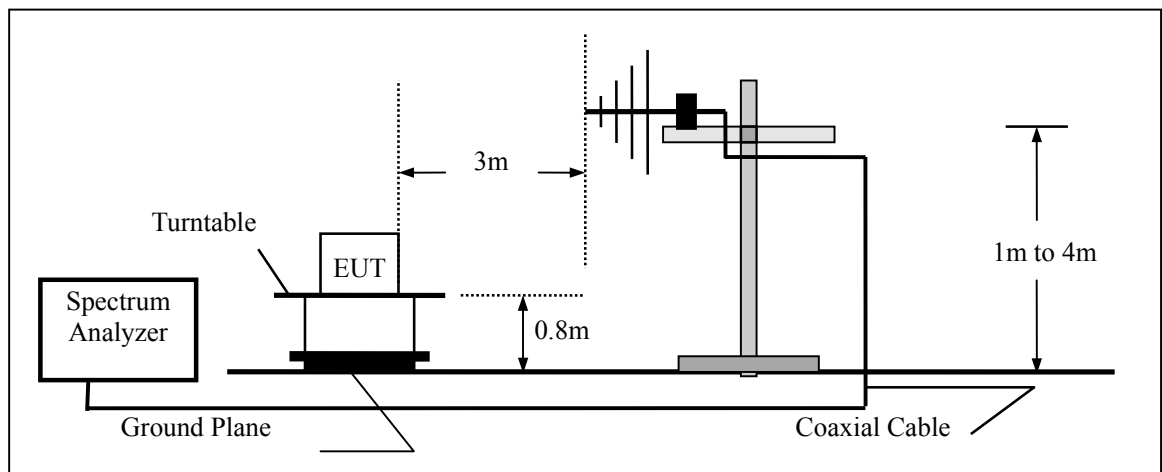

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

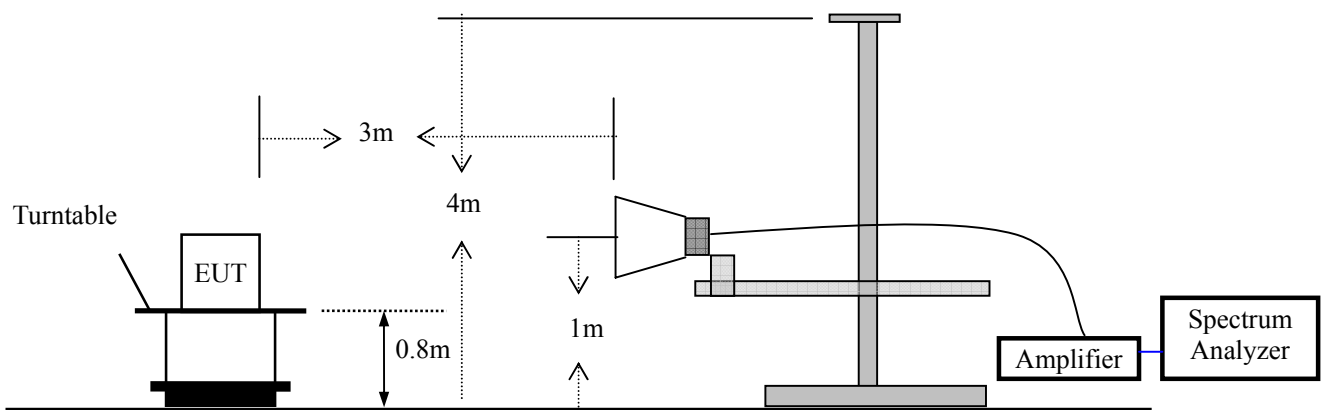

6.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSP7	839511/010	05/29/2008	05/29/2009
Spectrum Analyzer	HP	E4407B	839840481	05/29/2008	05/29/2009
EMI Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/29/2008	05/29/2009
Pre-Amplifier	HP	8447D	2944A07999	05/29/2008	05/29/2009
Bilog Antenna	Schwarzbeck	VULB9163	142	05/29/2008	05/29/2009
Loop Antenna	ARA	PLA-1030/B	1029	05/29/2008	05/29/2009
Horn Antenna	Electro-Metrics	EM-6961	103314	05/29/2008	05/29/2009
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/29/2008	05/29/2009

6.4 Measurement Result

Operation Mode: Channel 1(2406MHz) Test Date : November 21, 2008
 Frequency Range: 30~1000MHz Temperature : 28 °C
 Test Result: PASS Humidity : 65 %
 Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
40.82	V	34.45	40	-5.55	PK
50.74	V	36.62	40	-3.38	PK
102.29	V	39.61	43.5	-3.89	PK
118.18	V	40.84	43.5	-2.66	PK
433.52	V	41.58	46	-4.42	PK
57.16	H	36.14	40	-3.86	PK
105.66	H	38.74	43.5	-4.76	PK
344.28	H	42.15	46	-3.85	PK
435.45	H	40.44	46	-5.56	PK
757.50	H	41.47	46	-4.53	PK

Note: (1) All Readings are Peak Value.
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 (3) The average measurement was not performed when the peak measured data under the limit of average detection.

Operation Mode: Channel 18(2440MHz) Test Date : November 21, 2008
Frequency Range: 30~1000MHz Temperature : 28 °C
Test Result: PASS Humidity : 65 %
Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
38.68	V	34.45	40	-5.55	PK
54.14	V	36.62	40	-3.38	PK
107.70	V	38.61	43.5	-4.89	PK
128.61	V	39.96	43.5	-3.54	PK
406.55	V	41.58	46	-4.42	PK
38.66	H	35.14	40	-4.86	PK
90.10	H	39.61	43.5	-3.89	PK
125.00	H	38.91	43.5	-4.59	PK
406.36	H	36.94	46	-9.06	PK
765.25	H	41.98	46	-4.02	PK

- Note:**
- (1) All Readings are Peak Value.
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 - (3) The average measurement was not performed when the peak measured data under the limit of average detection.

Operation Mode: Channel 34(2472MHz) Test Date : November 21, 2008
Frequency Range: 30~1000MHz Temperature : 28 °C
Test Result: PASS Humidity : 65 %
Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
38.37	V	36.51	40	-3.49	PK
45.52	V	38.24	43.5	-5.26	PK
103.92	V	37.14	43.5	-6.36	PK
125.20	V	38.47	43.5	-5.03	PK
445.16	V	42.4	46	-3.60	PK
43.05	H	35.94	40	-4.06	PK
110.72	H	38.79	43.5	-4.71	PK
123.31	H	39.24	43.5	-4.26	PK
433.51	H	36.94	46	-9.06	PK
547.98	H	41.98	46	-4.02	PK

- Note:**
- (1) All Readings are Peak Value.
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 - (3) The average measurement was not performed when the peak measured data under the limit of average detection.

Operation Mode:	CH1: 2406MHz	Test Date :	November 21, 2008
Frequency Range:	1-25GHz	Temperature :	28 °C
Test Result:	PASS	Humidity :	65 %
Measured Distance:	3m	Test By:	Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4812	V	56.60	50.01	74.00	54.00	-17.40	-3.99
7218	V	51.50	46.21	74.00	54.00	-22.50	-7.79
9624	V	45.97	40.67	74.00	54.00	-28.03	-13.33
12030	V	42.65	35.95	74.00	54.00	-31.35	-18.05
14436	V	38.61	32.64	74.00	54.00	-35.39	-21.36
4812	H	56.58	49.98	74.00	54.00	-17.42	-4.02
7218	H	46.67	41.64	74.00	54.00	-27.33	-12.36
9624	H	44.97	39.64	74.00	54.00	-29.03	-14.36
12030	H	38.87	35.72	74.00	54.00	-35.13	-18.28
14436	H	38.51	37.62	74.00	54.00	-35.49	-16.38

No others harmonics emissions are higher than 20dB below the limits of 47 CFR Part 15.247.

Note: (1) All Readings are Peak Value and AV.
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 (3) The average measurement was not performed when the peak measured data under the limit of average detection.

Operation Mode:	CH18: 2440MHz	Test Date :	November 21, 2008
Frequency Range:	1-25GHz	Temperature :	28 °C
Test Result:	PASS	Humidity :	65 %
Measured Distance:	3m	Test By:	Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4880	V	52.12	45.82	74.00	54.00	-21.88	-8.18
7320	V	48.32	40.61	74.00	54.00	-25.68	-13.39
9760	V	42.95	38.44	74.00	54.00	-31.05	-15.56
12200	V	40.51	36.24	74.00	54.00	-33.49	-17.76
14832	V	38.44	33.58	74.00	54.00	-35.56	-20.42
4880	H	50.51	44.36	74.00	54.00	-23.49	-9.64
7320	H	47.85	41.51	74.00	54.00	-26.15	-12.49
9760	H	42.35	37.51	74.00	54.00	-31.65	-16.49
12200	H	40.45	35.24	74.00	54.00	-33.55	-18.76
14832	H	39.47	34.77	74.00	54.00	-34.53	-19.23

No others harmonics emissions are higher than 20dB below the limits of 47 CFR Part 15.247.

Note: (1) All Readings are Peak Value and AV.

(2) Emission Level= Reading Level+Probe Factor +Cable Loss

(3) The average measurement was not performed when the peak measured data under the limit of average detection.

Operation Mode: CH34: 2472MHz Test Date : November 21, 2008
Frequency Range: 1-25GHz Temperature : 28 °C
Test Result: PASS Humidity : 65 %
Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4944	V	51.57	45.24	74.00	54.00	-22.43	-8.76
7416	V	45.91	40.54	74.00	54.00	-28.09	-13.46
9888	V	42.92	37.68	74.00	54.00	-31.08	-16.32
12360	V	41.17	35.31	74.00	54.00	-32.83	-18.69
14832	V	39.58	34.51	74.00	54.00	-34.42	-19.49
4944	H	50.10	44.61	74.00	54.00	-23.90	-9.39
7416	H	48.61	41.84	74.00	54.00	-25.39	-12.16
9888	H	44.83	41.44	74.00	54.00	-29.17	-12.56
12360	H	43.34	39.13	74.00	54.00	-30.66	-14.87
14832	H	41.73	35.27	74.00	54.00	-32.27	-18.73

No others harmonics emissions are higher than 20dB below the limits of 47 CFR Part 15.247.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) The average measurement was not performed when the peak measured data under the limit of average detection.

6.5 Radiated Measurement Photos:




7. Channel Separation test

7.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

7.2 Test SET-UP (Block Diagram of Configuration)



7.3 Measurement Equipment Used:

Same as 4.3 Radiated Emission Measurement.

7.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	December 01, 2008
Test By:	Andy	Temperature :	28 °C
Test Result:	PASS	Humidity :	65 %

Channel number	Channel frequency (MHz)	Separation Read Value (MHz)	Separation Limit (kHz)
1	2402	2MHz	>25 kHz
18	2440	2MHz	>25 kHz
34	2472	2MHz	>25 kHz






8. 20dB Bandwidth test

8.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

8.2 Test SET-UP (Block Diagram of Configuration)



8.3 Measurement Equipment Used:



Same as 4.3 Radiated Emission Measurement.

8.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	December 08, 2008
Test By:	Andy	Temperature :	28 °C
Test Result:	PASS	Humidity :	65 %

Channel number	Channel frequency (MHz)	20dB Down BW(MHz)
1	2406	1.713
17	2438	1.638
34	2472	1.700

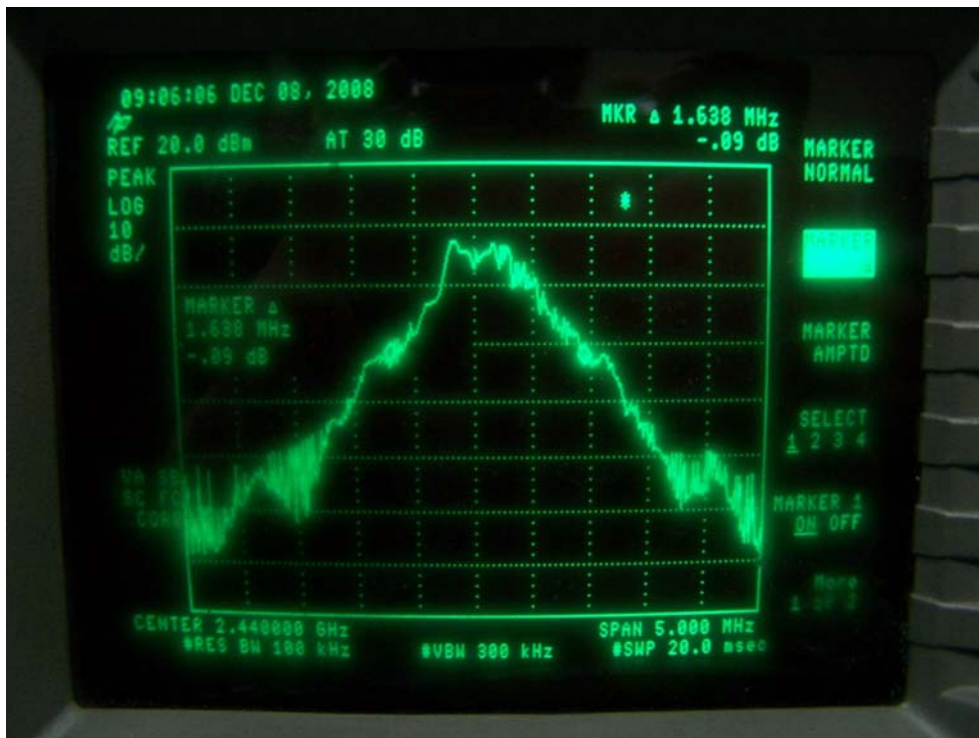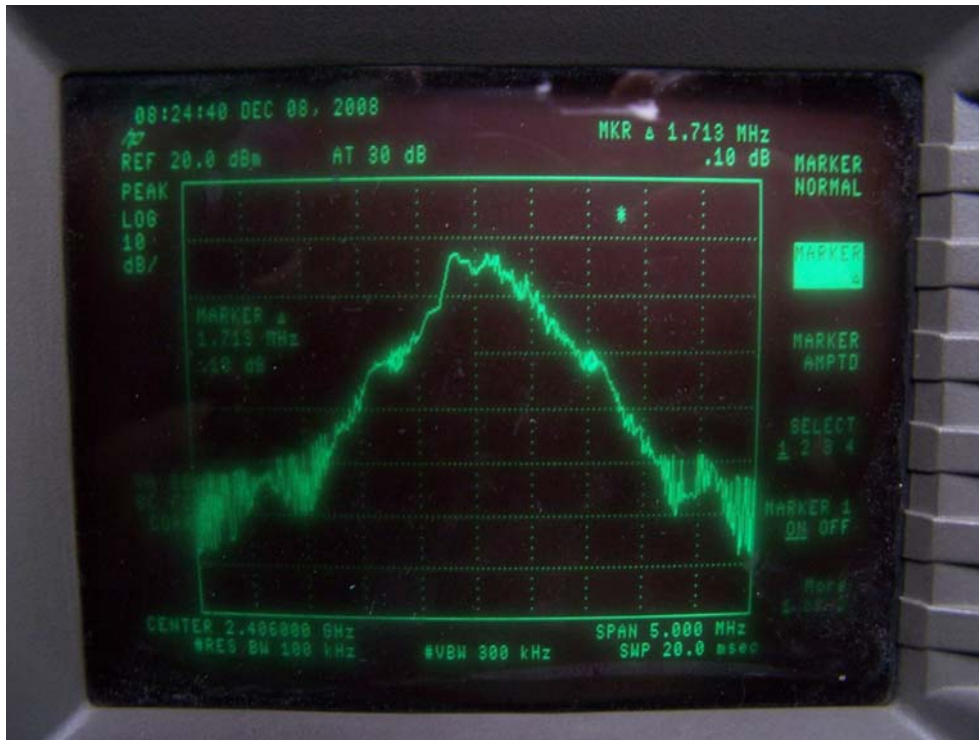




9. Quantity of Hopping Channel Test

9.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

9.2 Test SET-UP (Block Diagram of Configuration)



9.3 Measurement Equipment Used:


Same as 4.3 Radiated Emission Measurement.

9.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	December 01, 2008
Test By:	Andy	Temperature :	28 °C
Test Result:	PASS	Humidity :	65 %

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel (Limited)
2402-2480	34	>15

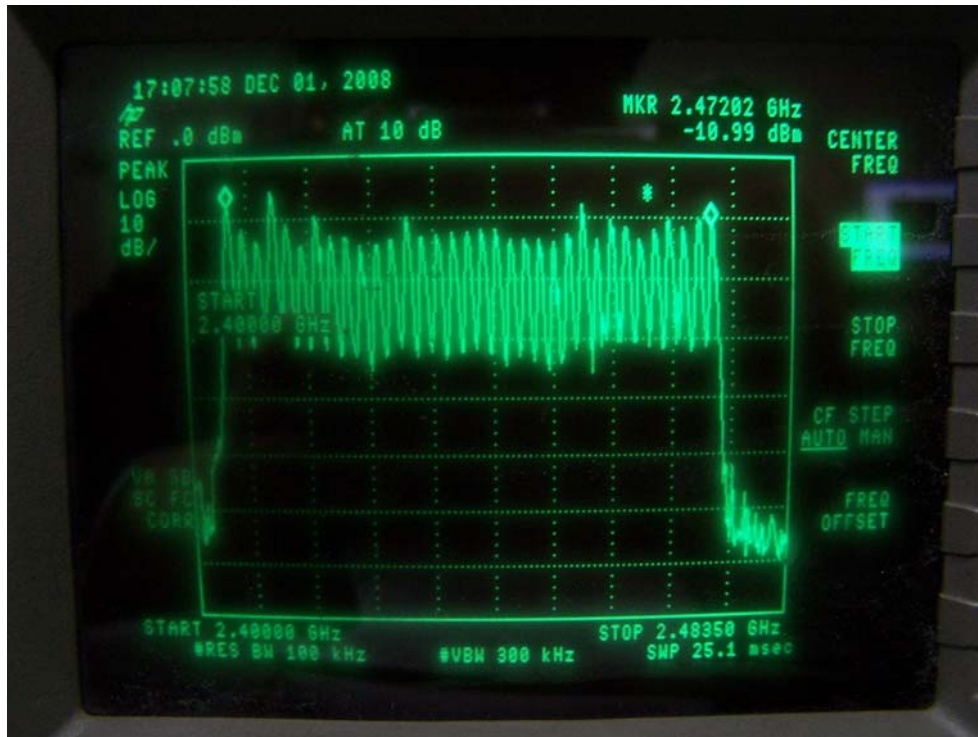


10. Time of Occupancy (Dwell Time) test

10.1 Measurement Procedure

- Check the calibration of the measuring instrument(SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.

10.2 Test SET-UP (Block Diagram of Configuration)



10.3 Measurement Equipment Used:



Same as 4.3 Radiated Emission Measurement.



10.4 Measurement Results:


Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	December 08, 2008
Test By:	Andy	Temperature :	28 °C
Test Result:	PASS	Humidity :	65 %

Mode	Measurement period	Dwell time (msec)	Limit (msec)
CH1 2406MHz	6s	3.69*100=369ms	400
CH18 2440MHz	6s	3.69*100=369ms	400
CH34 2472MHz	6s	3.69*100=369ms	400

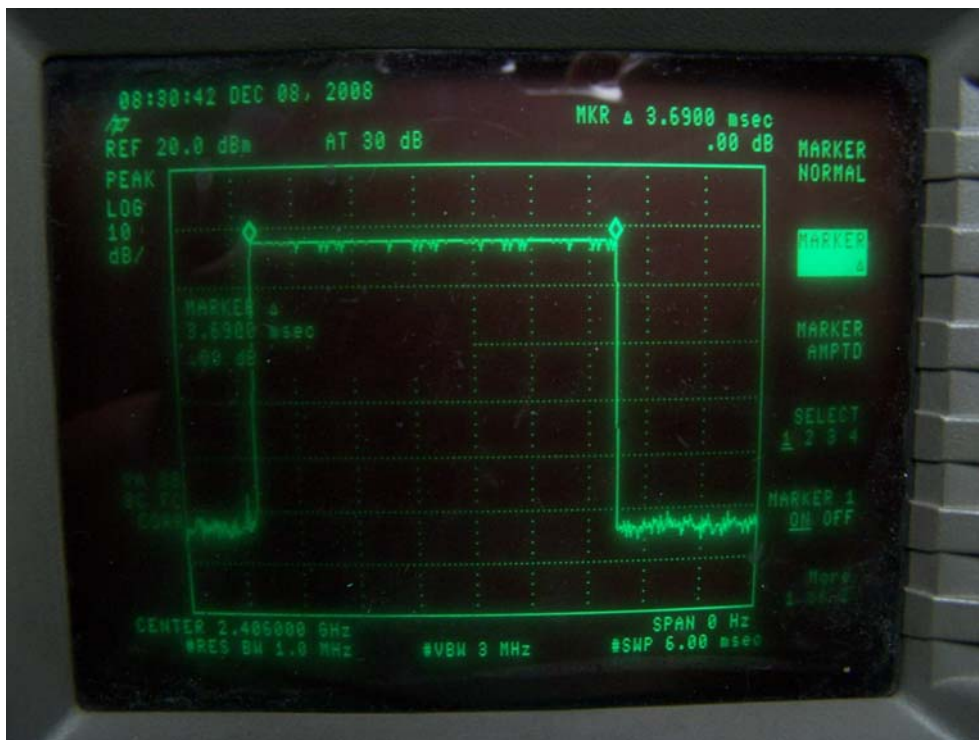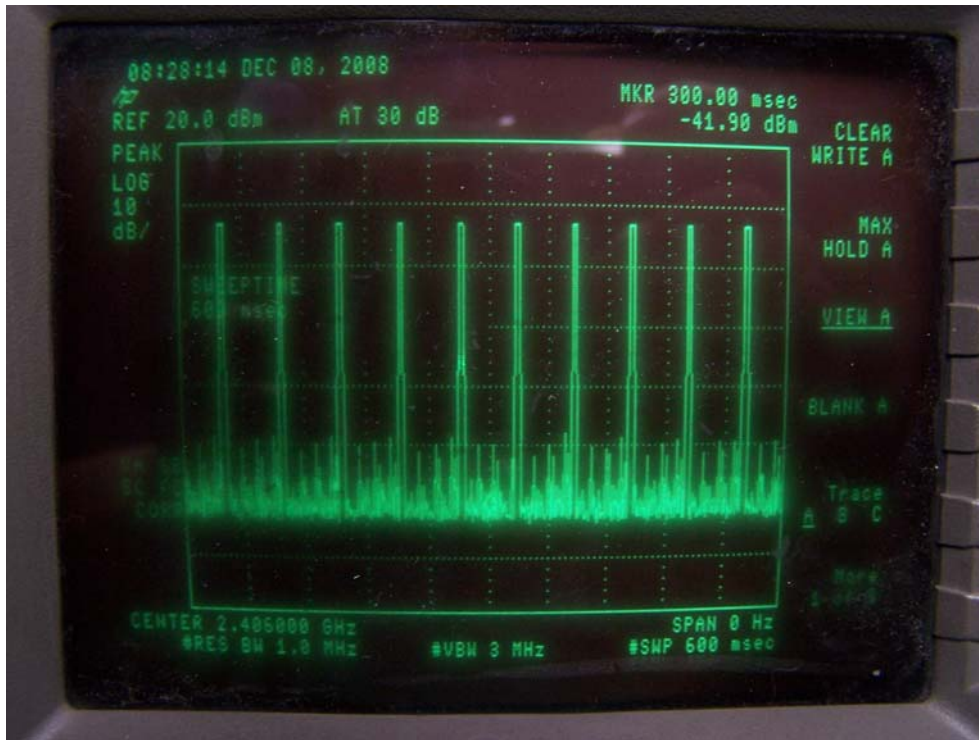

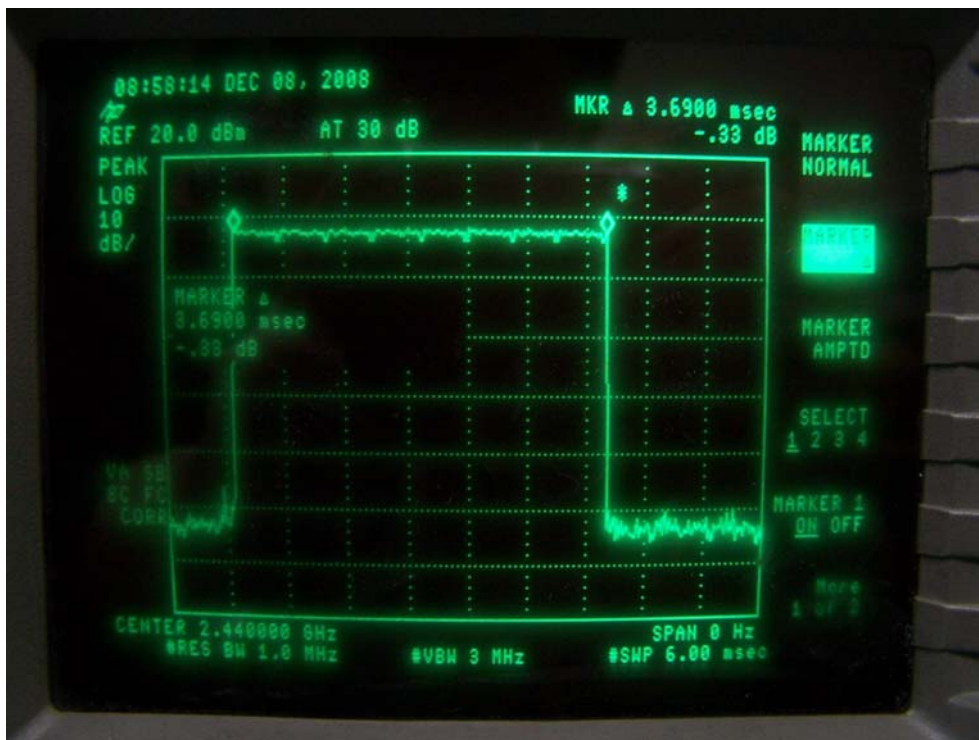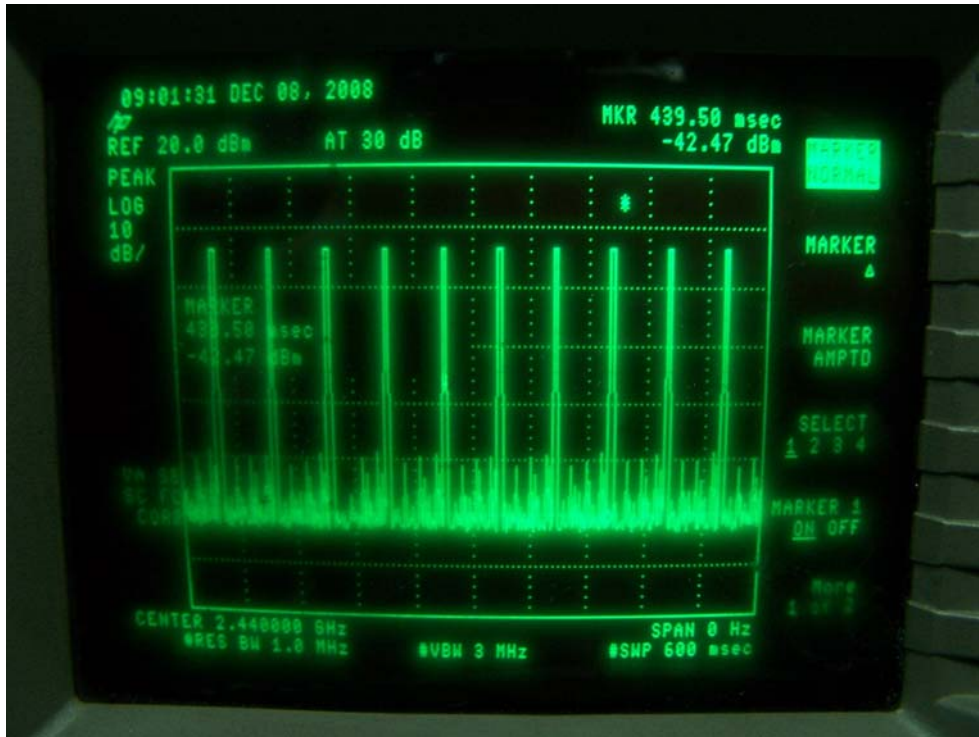

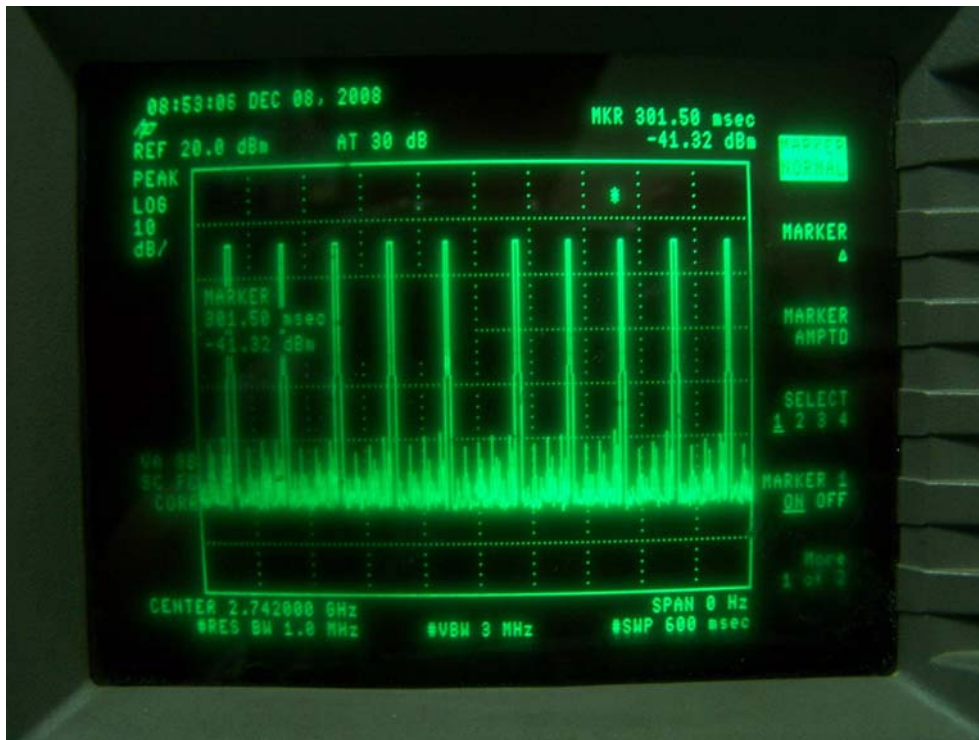


11. MAXIMUM PEAK OUTPUT POWER TEST

11.1 Measurement Procedure

- Check the calibration of the measuring instrument(SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- The center frequency of the spectrum analyzer is set to the fundamental frequency and using proper RBW and VBW setting.
- Measure the captured power within the band and recording the plot.
- Repeat above procedures until all frequencies required were complete.

11.2 Test SET-UP (Block Diagram of Configuration)

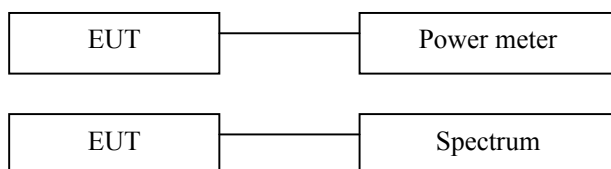

11.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSP7	839511/010	05/29/2008	05/29/2009
Power meter	Boonton	4232A	29001	05/29/2008	05/29/2009
Power sensor	Boonton	51011-EMC	31184	05/29/2008	05/29/2009

11.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	December 08, 2008
Test By:	Andy	Temperature :	28 °C
Test Result:	PASS	Humidity :	65 %

Channel number	Channel Frequency (MHz)	Peak Power output(mW)	Peak Power output(dBm)	Peak Power Limit(mW)	Pass/Fail
1	2406.00	4.709	6.73	125	PASS
18	2440.00	4.355	6.39	125	PASS
34	2472.00	4.074	6.10	125	PASS






12. Band EDGE test

12.1 Measurement Procedure

1. The EUT was Operating in hopping mode or could be controlled its channel. Printed out test result from the spectrum by hard copy function.
2. The EUT was placed on a turn table which is 0.8m above ground plane.
3. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Repeat above procedures until all frequency measured were complete.

12.2 Test SET-UP (Block Diagram of Configuration)



12.3 Measurement Equipment Used:

Same as 4.3 Radiated Emission Measurement.

12.4 Measurement Results:

Refer to attached data chart.



Spectrum Detector:	PK	Test Date :	December 01, 2008
Test By:	Andy	Temperature :	28 °C
Test Result:	PASS	Humidity :	65 %

1. Conducted Test

Frequency (MHz)	Peak Power Output(dBm)	Emission read Value(dBm)	Result of Band edge(dBc)	Band edge Limit(dBc)
<2400	-18.94	-49.27	30.33	>20dBc
>2483.5	-13.71	-47.65	33.94	>20dBc

2. Radiated emission test

Frequency (MHz)	Antenna polarization (H/V)	Emission (dBuV/m)		Band edge Limit (dBuV/m)	
		PK	AV	PK	AV
<2400	V	46.97	30.53	74.00	54.00
>2483.5	V	49.62	31.25	74.00	54.00

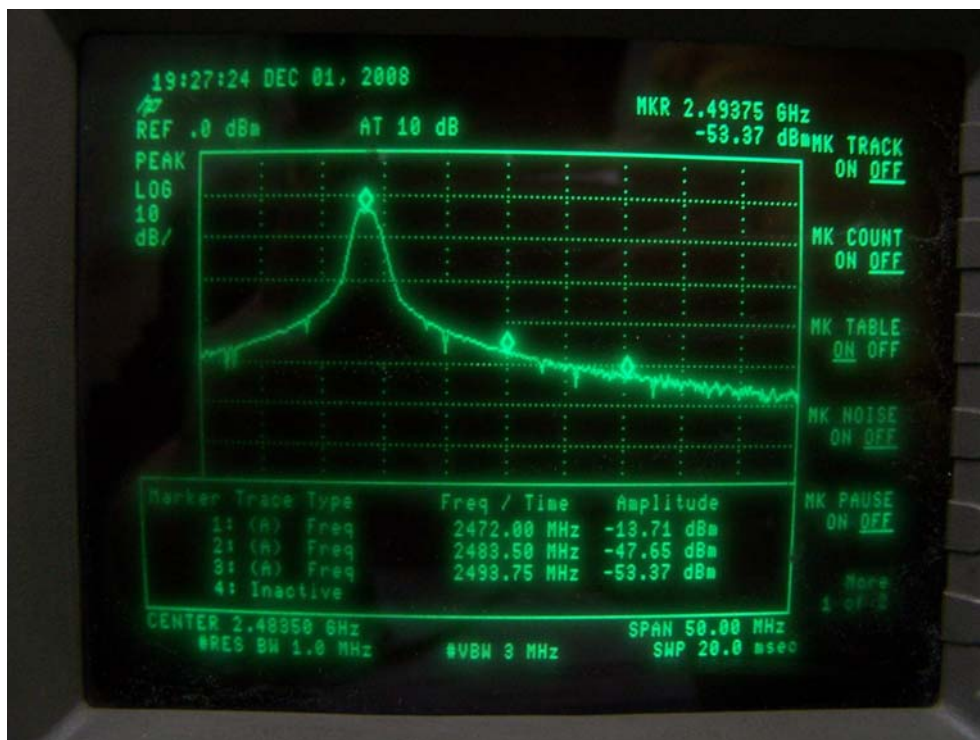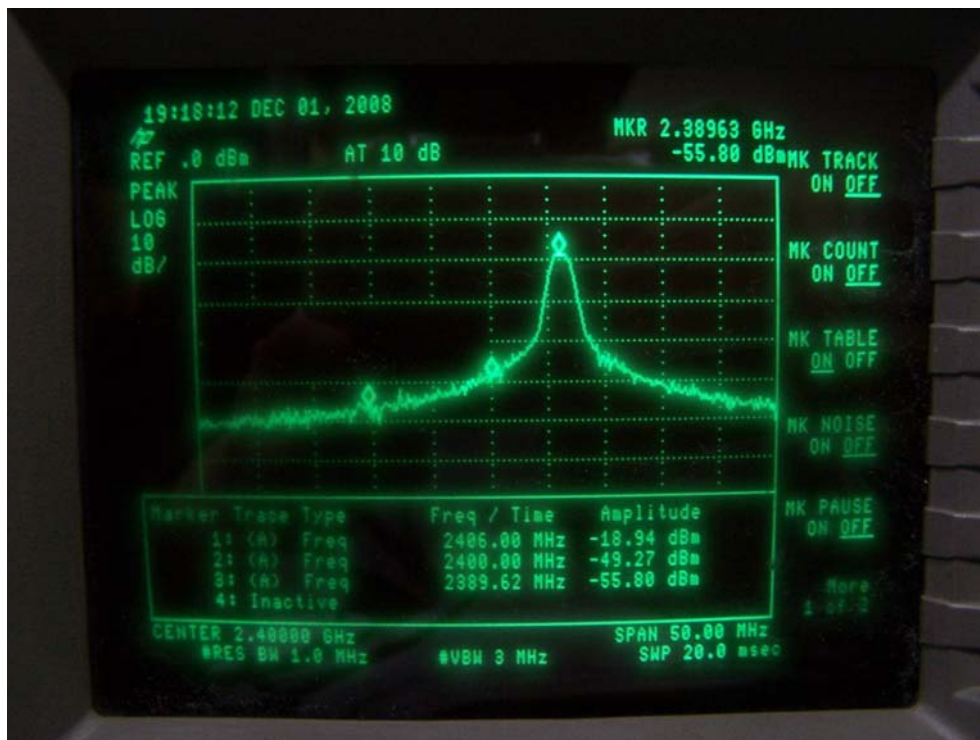

13. Antenna Application

13.1 Antenna requirement

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.240.

FCC part 15C section 15.247 requirements:

Systems operating in the 2406-2472MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

13.2. Result

The EUT's antenna used a chip antenna and integrated on PCB, The antenna's gain is 1.7dBi and meets the requirement.

14.RF EXPOSURE EVALUATION

According to FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency(RF) Radiation as specified in § 1.1307(b)

Limits for Maximum Permissible Exposure(MPE)

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density(mW/cm ²)	Average Time
(A) Limits for Occupational/Control Exposures				
300-1500	--	--	F/300	6
1500-100000	--	--	5	6
(B) Limits for General Population/Uncontrol Exposures				
300-1500	--	--	F/1500	6
1500-100000	--	--	1	30

14.1 Friis transmission formula: $P_d = (P_{out} * G) / (4 * \pi * R^2)$

Where

P_d = Power density in mW/cm²

P_{out} = output power to antenna in Mw

G = gain of antenna in linear scale

π = 3.1416

R = distance between observation point and center of the radiator in cm

P_d the limit of MPE, 1mW/cm². If we know the maximum gain of the antenna and total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.

14.2 Measurement Result $P_d = (P_{out} * G) / (4 * \pi * R^2)$

Antenna gain: 1.7 dBi

Channel	Channel Frequency (MHz)	Output Peak power (mW)	Antenna Gain (dBi)	Power density at 25cm (mW/ cm ²)	Power density Limits (mW/cm ²)
Low	2406	4.709	2	0.001019264	1
Middle	2440	4.355	2	0.000942641	1
High	2472	4.074	2	0.000881818	1