

Date of Tests: April 22, 2009 ~ May 4, 2009
Test Site : LTA CO., LTD.**CERTIFICATION OF COMPLIANCE**

FCC ID.

XCFFIREFOX R1

APPLICANT

Ubiq

Equipment Class	:	Digital Transmission System (DTS)
Manufacturing Description	:	Wireless Synchronizing System
Manufacturer	:	Ubiq
Model name	:	Firefox R1
Test Device Serial No.:	:	Identical prototype
Rule Part(s)	:	FCC Part 15.247 Subpart C; ANSI C-63.4-2003
Frequency Range	:	2405MHz ~ 2480MHz
Max. Output Power	:	10.38dBm - Conducted
Data of issue	:	May 04, 2009

This test report is issued under the authority of:

The test was supervised by:



Dong -Min JUNG, Technical Manager



Kyung-Taek LEE, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. This report must not be used by the applicant to claim product endorsement by any agency.



NVLAP LAB Code.: 200723-0

TABLE OF CONTENTS

1. GENERAL INFORMATION'S	3
2. INFORMATION'S ABOUT TEST ITEM	4
3. TEST REPORT	6
3.1 SUMMARY OF TESTS	6
3.2 TECHNICAL CHARACTERISTICS TEST	7
3.2.1 6dB BANDWIDTH	7
3.2.2 PEAK OUTPUT POWER	10
3.2.3 POWER SPECTRAL DENSITY	13
3.2.4 BAND – EDGE & SPURIOUS	16
3.2.5 FIELD STRENGTH OF HARMONICS	22
3.2.6 AC CONDUCTED EMISSIONS	25
 APPENDIX	
APPENDIX TEST EQUIPMENT USED FOR TESTS	26

1. General information's

1-1 Test Performed

Company name : LTA Co., Ltd.
Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822
Web site : <http://www.ltalab.com>
E-mail : chahn@ltalab.com
Telephone : +82-31-323-6008
Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2009-09-30	ECT accredited Lab.
RRL	KOREA	KR0049	2009-06-20	EMC accredited Lab.
FCC	U.S.A	610755	2011-04-22	FCC filing
VCCI	JAPAN	R2133, C2307	2011-06-21	VCCI registration
IC	CANADA	IC5799	2010-05-03	IC filing

2. Information's about test item

2-1 Applicant & Manufacturer

Company name : Ubiquiti
 Address : 1506ho Samchang APT Chunggye-dong
 Nowon-gu Seoul, KOREA
 Tel / Fax : +82-2-6402-9999 / +82-2-6455-0779

2-2 Equipment Under Test (EUT)

Trade name : Wireless Synchronizing System
 FCC ID : XCFFIREFOX1
 Model name : Firefox R1
 Serial number : Identical prototype
 Date of receipt : April 20, 2009
 EUT condition : Pre-production, not damaged
 Antenna type : PCB Pattern antenna, Max Gain : -4.115 dBi
 Frequency Range : 2405MHz ~ 2480MHz
 RF output power : 10.38dBm - Conducted
 Number of channels : 76
 Type of Modulation : GFSK
 Transfer Rate : 2Mbps
 Power Source for Batt. : Battery : 1.5V (Size AAA Mercury&Cadmium Free battery)

2-3 Tested frequency

	LOW	MID	HIGH
Frequency (MHz)	2405	2440	2480

2-4 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer
-	-	-	-
-	-	-	-
-	-	-	-

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	6 dB Bandwidth	> 500kHz	Conducted	C
15.247(b)	Transmitter Peak Output Power	< 1Watt		C
15.247(d)	Transmitter Power Spectral Density	< 8dBm @ 3kHz		C
15.247(d)	Band Edge & Spurious	> 20 dBc		C
15.209	Field Strength of Harmonics	Emission	Radiated	C
15.207	AC Conducted Emissions	-	-	N/A
15.203	Antenna requirement	-	-	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

→ Antenna Requirement

Ubiq (FCC ID: XCFFIREFOX1) unit complies with the requirement of §15.203.

The antenna is the PCB Pattern antenna.

3.2 Technical Characteristics Test

3.2.1 6 dB Bandwidth

Procedure:

The bandwidth at 6dB below the highest in-band spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

Span = 5 MHz

VBW = 100 kHz (VBW \geq RBW)

Sweep = auto

Trace = max hold

Detector function = peak

Measurement Data:

Frequency (MHz)	Channel No.	Test Results	
		Measured Bandwidth (MHz)	Result
2405	1	0.6729	Complies
2440	36	0.7236	Complies
2480	76	0.7598	Complies



- See next pages for actual measured spectrum plots.


Minimum Standard:

6 dB Bandwidth > 500kHz

Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

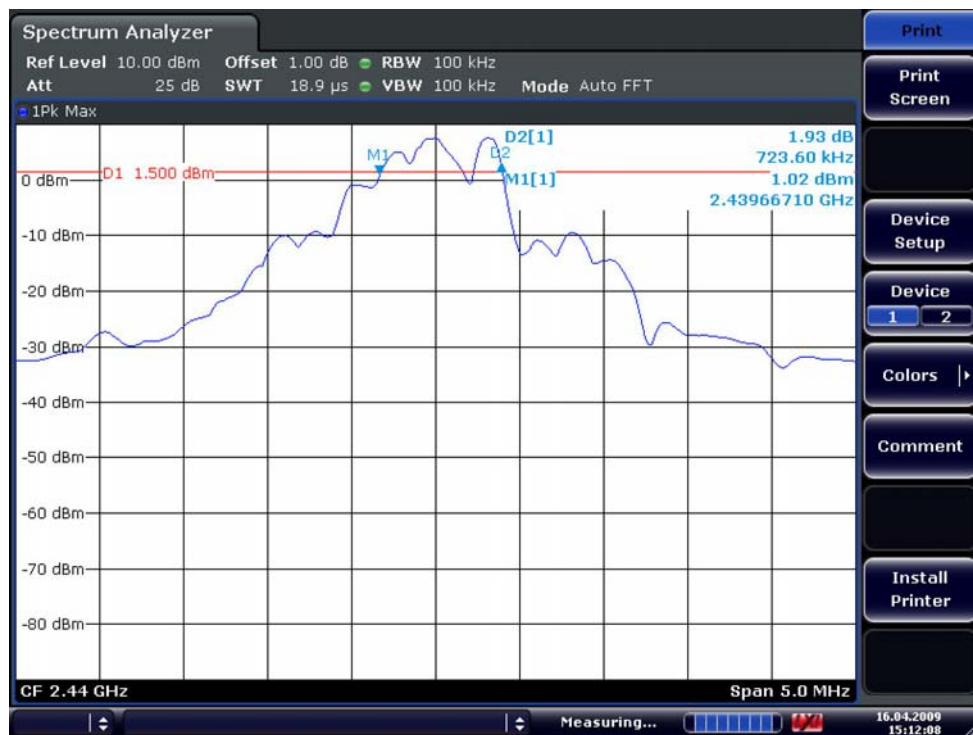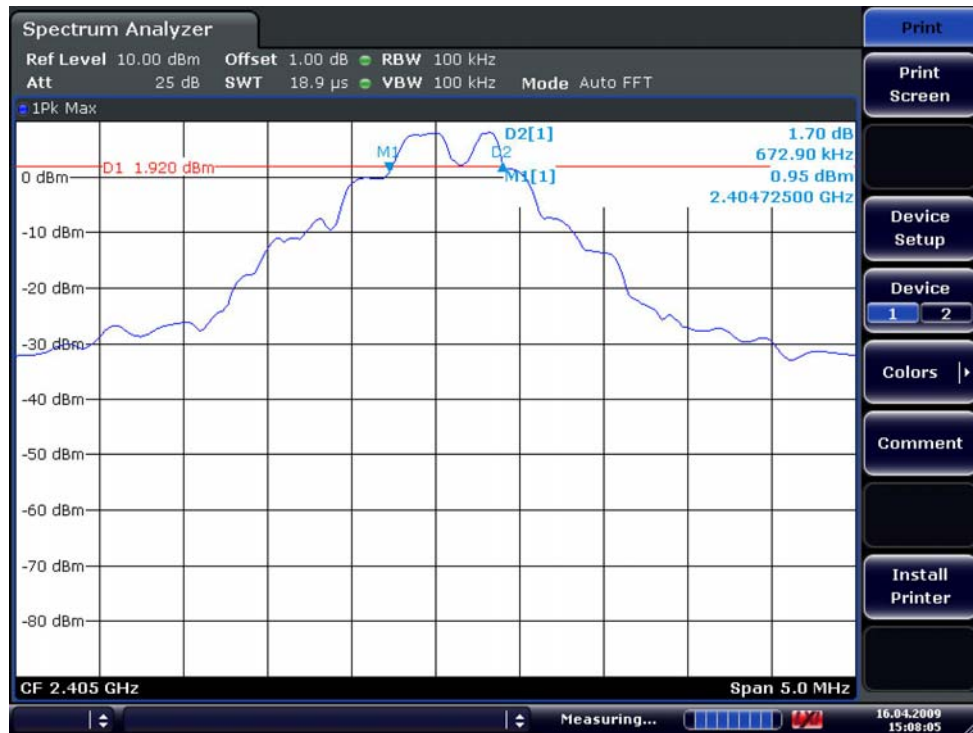

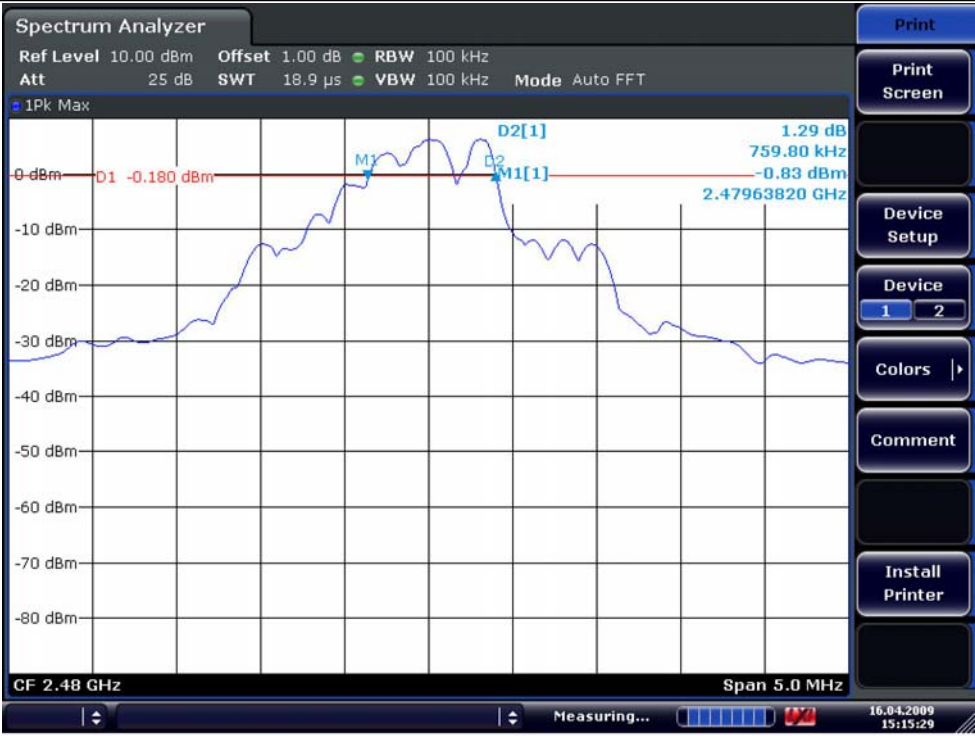

3.2.2 Peak Output Power Measurement

Procedure:

The maximum peak output power was measured with the spectrum analyzer connected to the antenna output of the EUT. The spectrum analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth. The EUT was operating in transmit mode at the appropriate center frequency.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 1MHz

Span = auto

VBW = 3MHz (VBW \geq RBW)

Sweep = auto

Detector function = peak

Measurement Data:

Frequency (MHz)	Channel No.	Test Results	
		Measured Data (dBm)	Result
2405	1	10.38	Complies
2440	36	9.71	Complies
2480	76	8.41	Complies

-


- See next pages for actual measured spectrum plots.

Minimum Standard:


Peak output power	< 1W
-------------------	------

Measurement Data:


CH 1

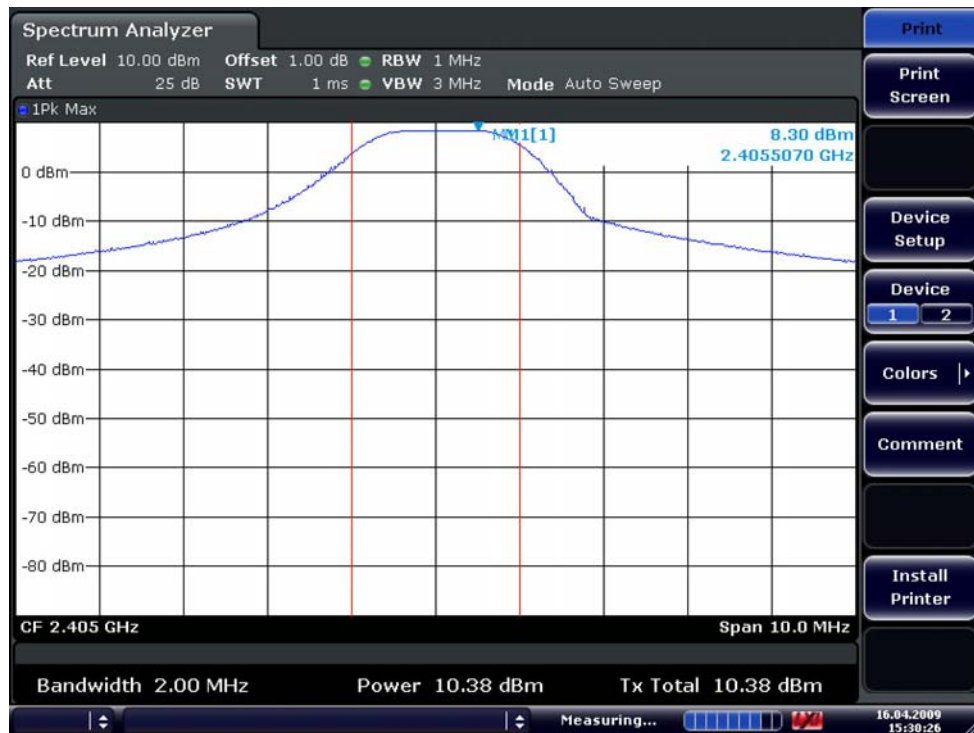

CH3 6

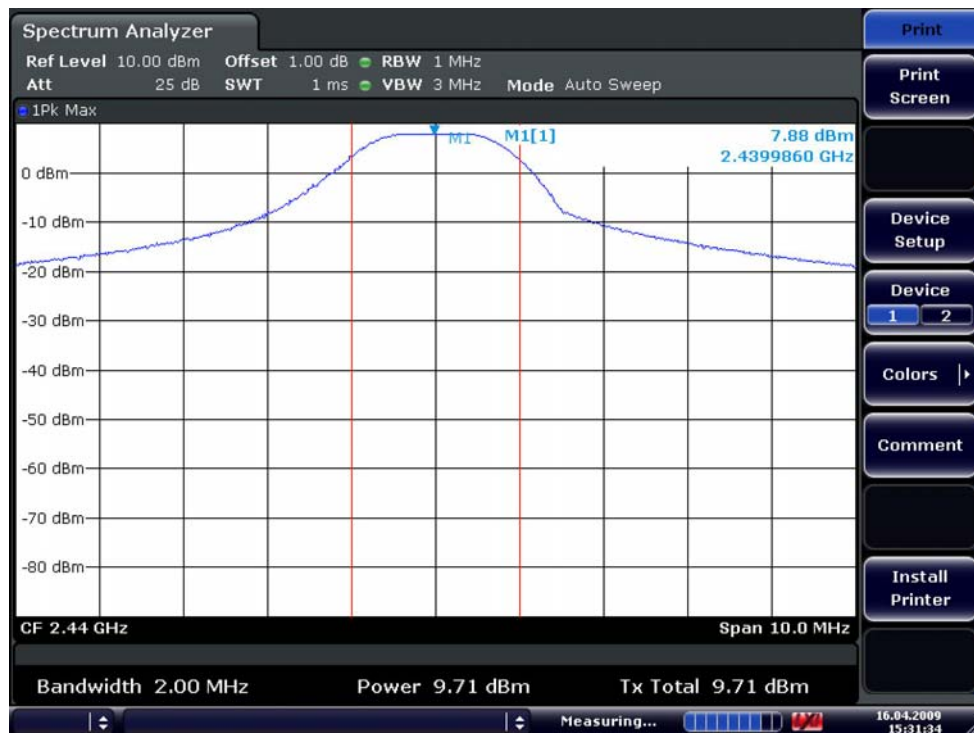

CH 76

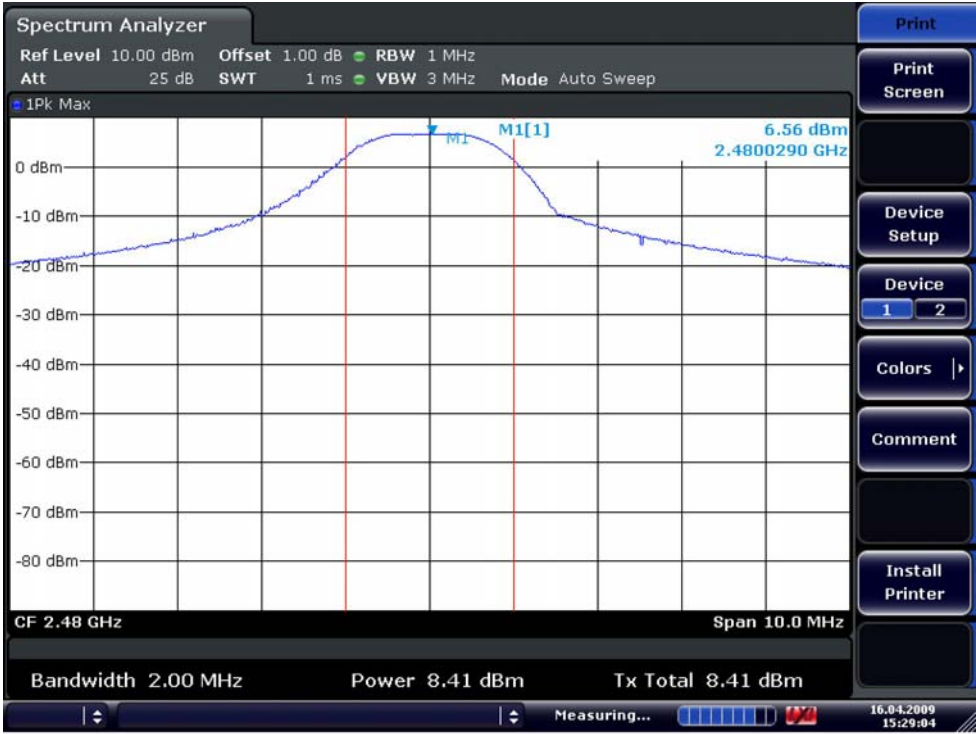

3.2.3 Power Spectral Density

Procedure:

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

The spectrum analyzer is set to:

RBW = 3 kHz

Span = 300 kHz

VBW = 10 kHz

Sweep = 1000 sec

Detector function = peak

Trace = max hold

Measurement Data:

Frequency (MHz)	Ch.	Test Results	
		dBm	Result
2405	1	-7.80	Complies
2440	36	-6.33	Complies
2480	76	-10.45	Complies

- See next pages for actual measured spectrum plots.


Minimum Standard:


Power Spectral Density	< 8dBm @ 3kHz BW
------------------------	------------------

Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

Power Density Measurement

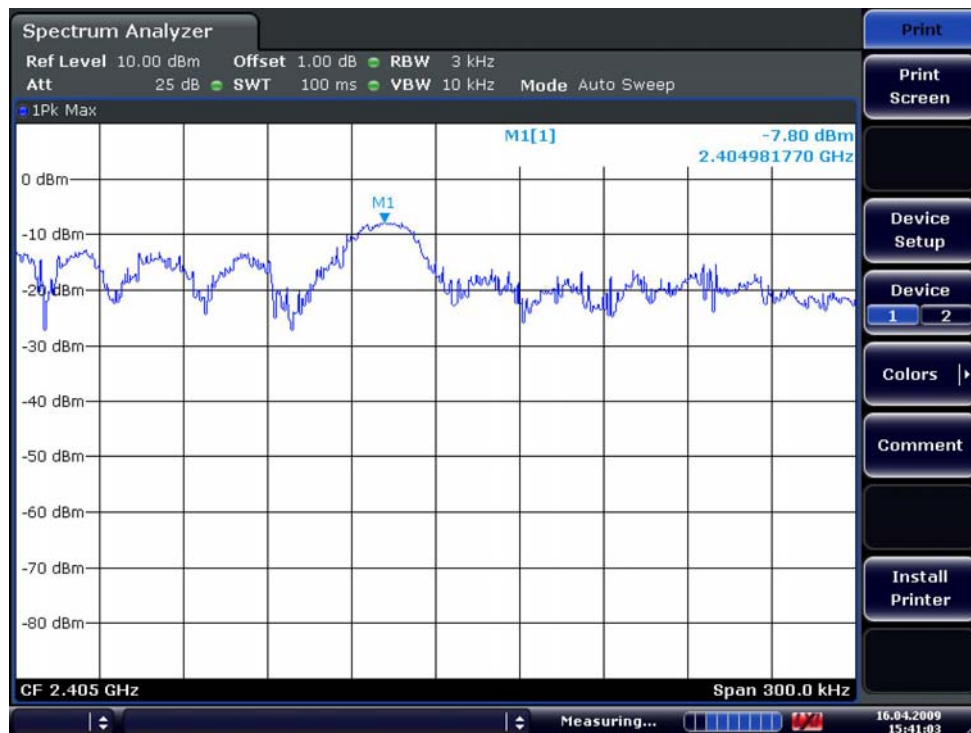

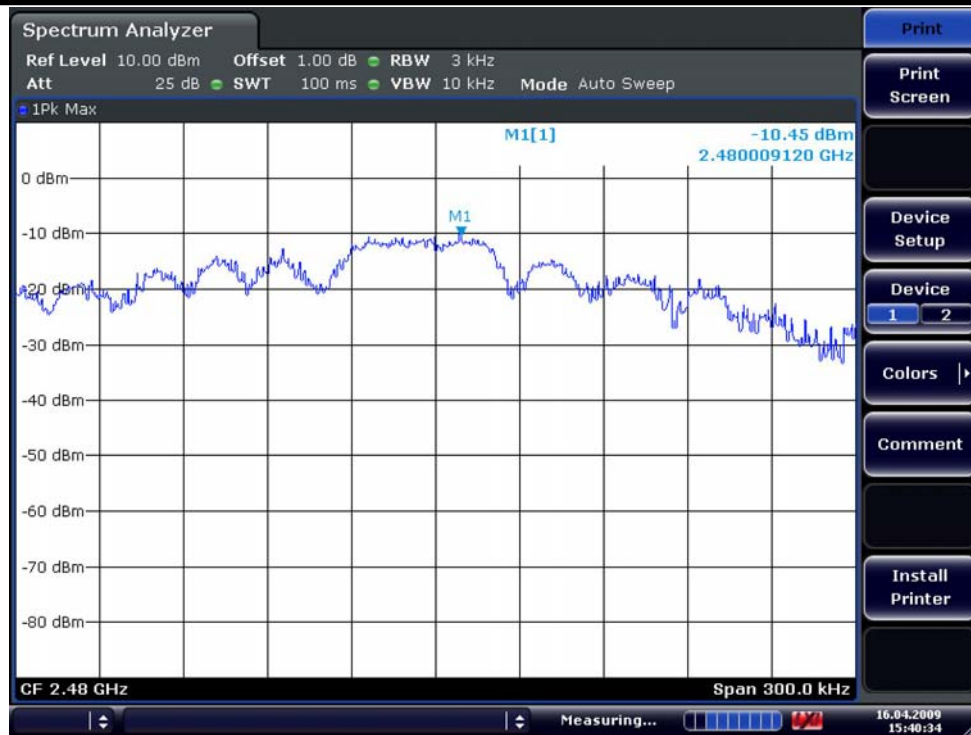

3.2.4 Band - edge & Spurious

Procedure:

The bandwidth at 20dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

VBW = 100 kHz

Span = 40 MHz

Detector function = peak

Trace = max hold

Sweep = auto

Radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a)

The spectrum analyzer is set to:

Center frequency = the highest, the lowest channels

PEAK: RBW = VBW = 1MHz, Sweep=Auto

Average: RBW = 1MHz, VBW=10Hz, Sweep=Auto

Measurement Distance: 3m

Polarization: Horizontal / Vertical

Measurement Data: Complies



- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

Minimum Standard:	> 20 dBc
--------------------------	----------

Minimum Standard: FCC Part 15.209(a)

Frequency (MHz)	Limit (uV/m) @ 3m
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

Band-edge : Conducted Measurements

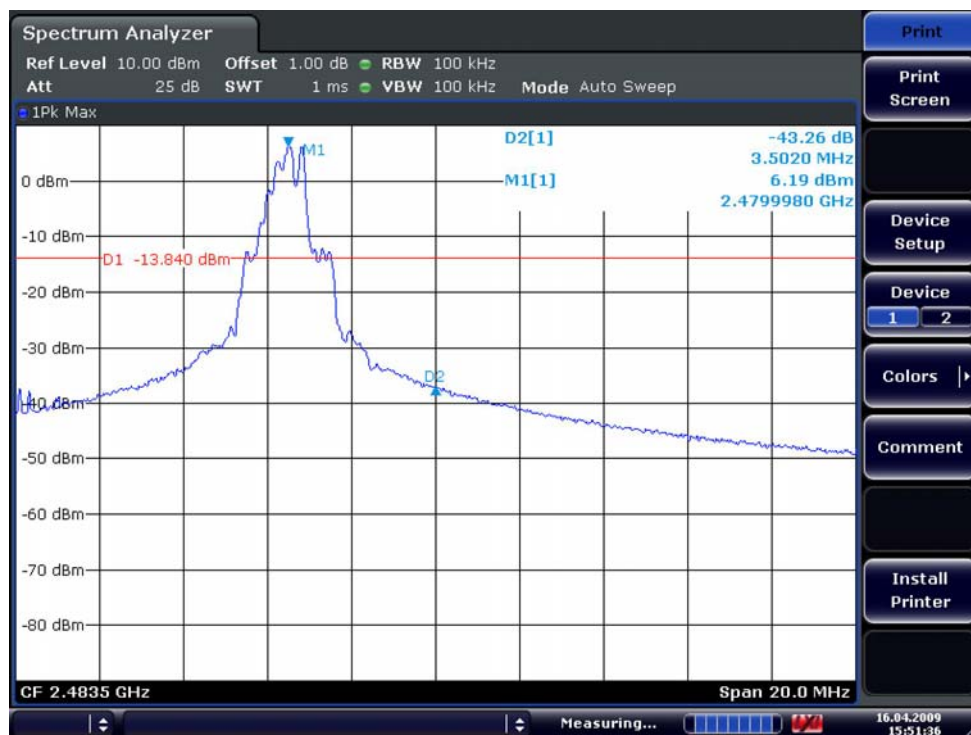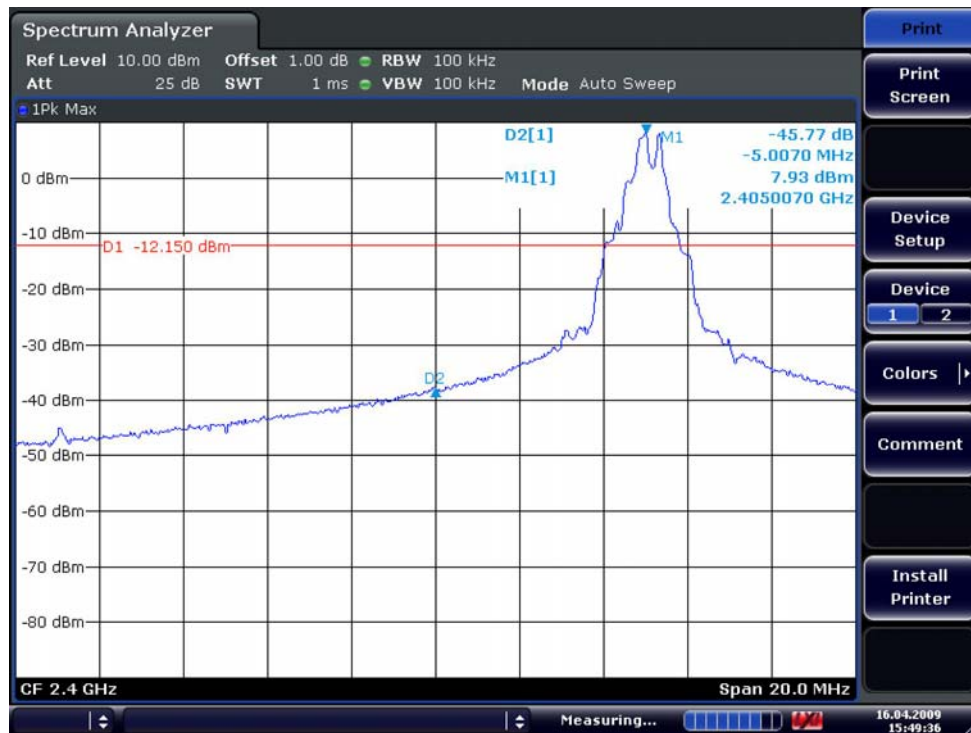

Band-edges in the restricted band 2483.5 ~ 2500 MHz measurement

- Document DA 00-705 Marker Delta Method -Radiation



Frequency (MHz)	Detect mode	Pol.	Reading (dBuV/m)	T.F (dB)	Step 1 Data	delta	Step 3 Data	Limit
2480	PK	V	95.12	-5.06	90.06	43.26	46.80	74
	AV	V	87.49	-5.06	82.43	43.26	39.17	54

Note) Step 1 = Reading + T.F


T.F = Ant.F + Cable loss- PreAmp Gain

Step 3 = Step 1 – Delta Value



Low channel
Frequency Range = 30 MHz ~ 10th harmonic.

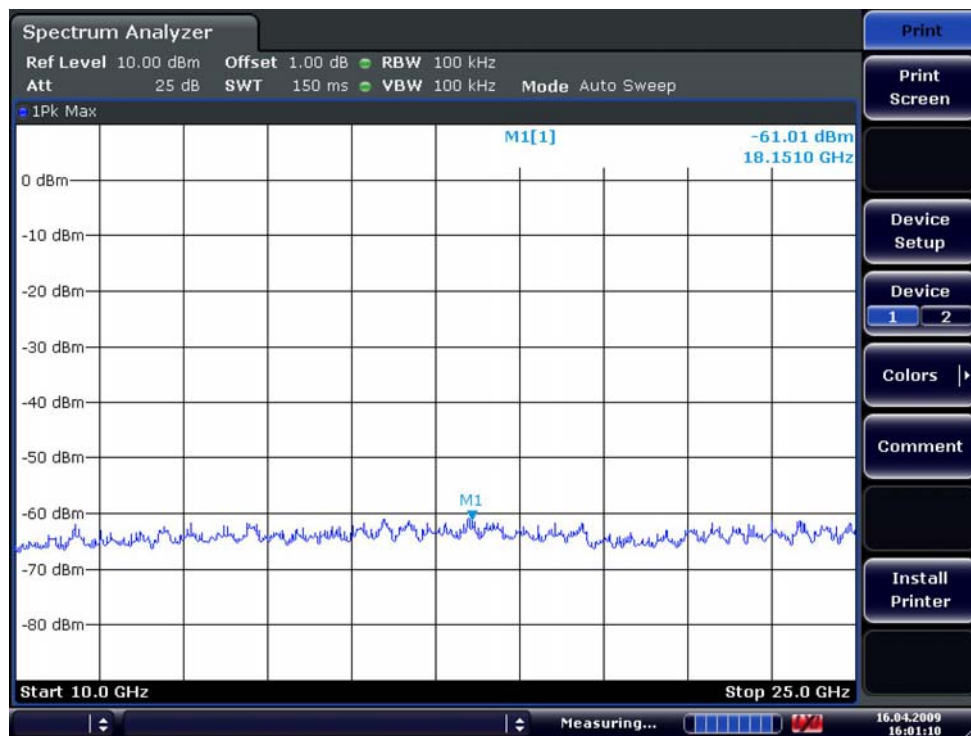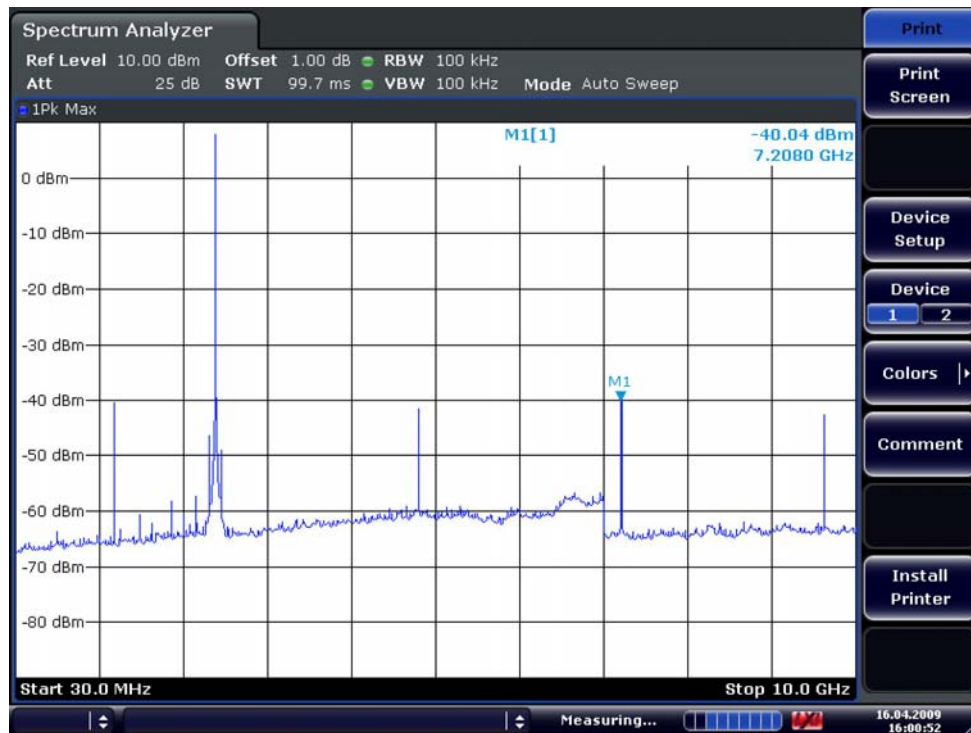

Frequency Range = 30 MHz ~ 10th harmonic.

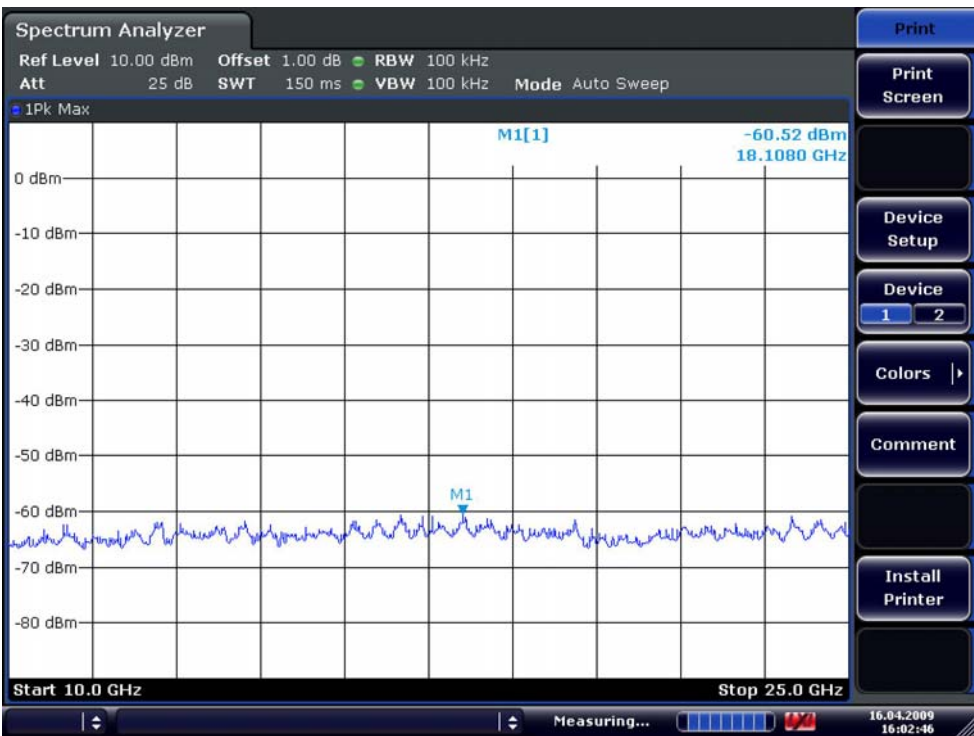

High channel
Frequency Range = 30 MHz ~ 10th harmonic.

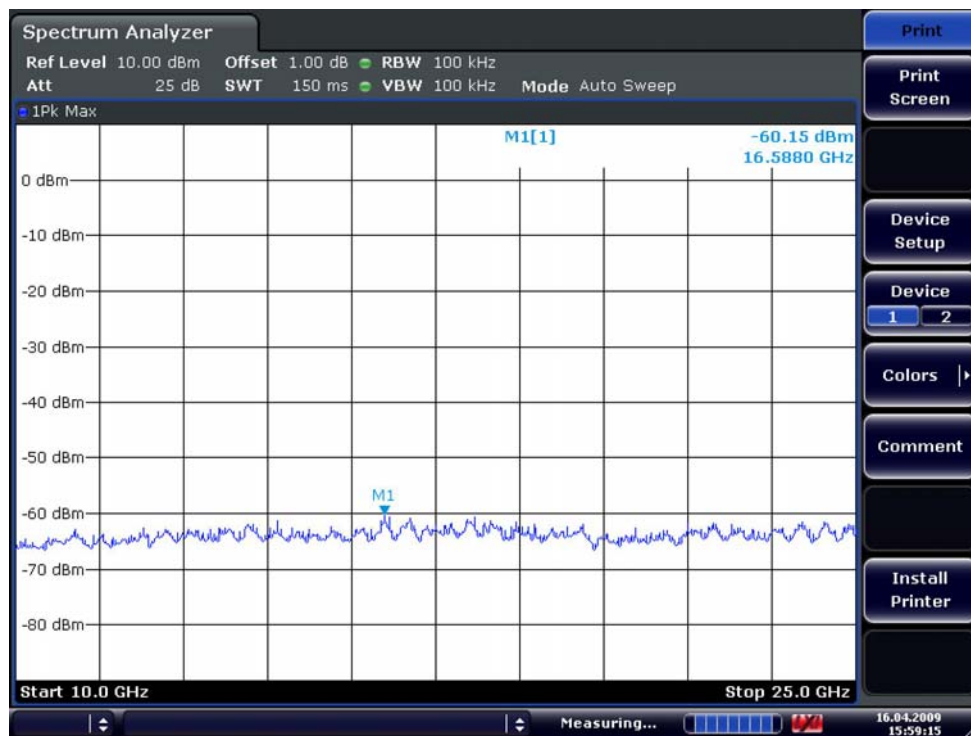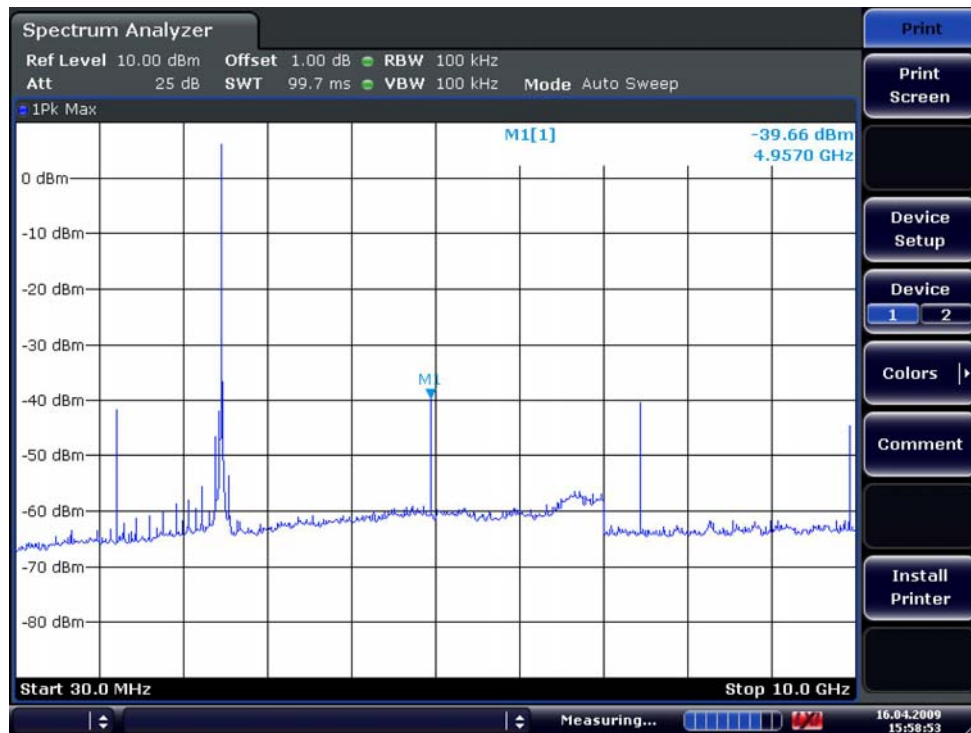

3.2.5 Field Strength of Harmonics

Procedure:

The EUT was placed on a 0.8m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 30 MHz ~ 10th harmonic.

RBW = 100 kHz (30MHz ~ 1 GHz)

VBW ≥ RBW

= 1 MHz (1 GHz ~ 10th harmonic)

Span = 100 MHz

Detector function = peak

Trace = max hold

Sweep = auto

Measurement Data: Complies

- See next pages for actual measured data.

Minimum Standard: FCC Part 15.209(a)

Frequency (MHz)	Limit (uV/m) @ 3m
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Minimum Standard: FCC Part 15.109

Frequency (MHz)	Limit (uV/m) @ 10m
30 ~ 88	90
88 ~ 216	150
216 ~ 960	210
Above 960	300

Measurement Data:**1. PEAK data**


Low channel		Mid channel		High channel	
Frequency (MHz)	Level (dBuV/m)	Frequency (MHz)	Level (dBuV/m)	Frequency (MHz)	Level (dBuV/m)
4809	57.48	4880	58.42	4959	58.98
7215	55.43	7320	56.11	7340	57.04
-	-	-	-	-	-
-	-	-	-	-	-
Measurement uncertainty		± 6 dB			

-- Note) No other emissions were detected at a level greater than 20dB below limit.

2. AVERAGE data

Low channel		Mid channel		High channel	
Frequency (MHz)	Level (dBuV/m)	Frequency (MHz)	Level (dBuV/m)	Frequency (MHz)	Level (dBuV/m)
4809	49.10	4880	51.22	4959	51.18
7215	48.23	7320	49.34	7340	49.53
-	-	-	-	-	-
-	-	-	-	-	-
Measurement uncertainty		± 6 dB			

-- Note) No other emissions were detected at a level greater than 20dB below limit.




TEST MODE: Normal Operation mode

Tested by: KIM.K.I

Level (dBUV/m)

Date: 2009-04-30

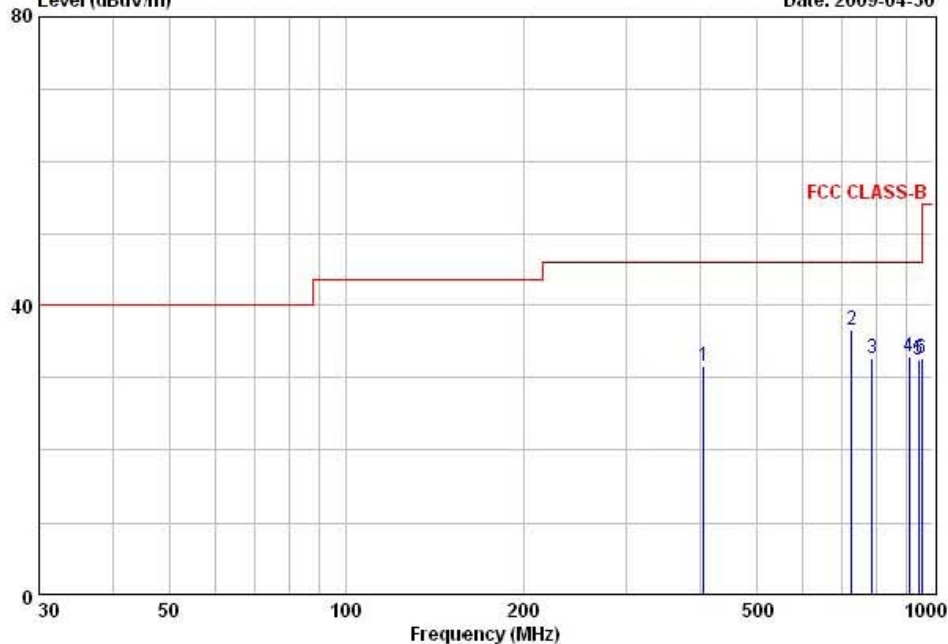

	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dBuV/m	dB/m	dBuV/m	QP dBuV/m	dB	cm	deg	
1	406.09	38.24	-6.70	31.54	46.00	14.46	100	305	HORIZONTAL
2	726.83	37.25	-0.60	36.65	46.00	9.35	100	261	HORIZONTAL
3	787.85	32.15	0.54	32.69	46.00	13.31	100	96	VERTICAL
4	909.52	31.25	1.72	32.97	46.00	13.03	100	304	HORIZONTAL
5	945.44	30.12	2.29	32.41	46.00	13.59	100	221	HORIZONTAL
6	955.44	30.22	2.44	32.66	46.00	13.34	100	152	VERTICAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

3.2.6 AC Conducted Emissions

Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

Measurement Data: N/A

- This equipment is product that used DC battery

Minimum Standard: FCC Part 15.207(a)/EN 55022

Class B

Frequency Range	quasi-peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

Class A

Frequency Range	quasi-peak	Average
0.15 ~ 0.5 MHz	79 dBuV	66 dBuV
0.5 ~ 30 MHz	73 dBuV	60 dBuV

APPENDIX

TEST EQUIPMENT USED FOR TESTS

	Description	Model No.	Serial No.	Manufacturer	Next Cal. Date
1	Spectrum Analyzer	8594E	3649A03649	HP	Apr-10
2	Signal Generator	8648C	3623A02597	HP	Apr-10
3	Attenuator (3dB)	8491A	37822	HP	Oct-09
4	Attenuator (10dB)	8491A	63196	HP	Oct-09
5	EMI Test Receiver	ESVD	843748/001	R&S	Aug-09
6	LISN	ENV216	100408	R&S	Oct-09
7	Two-Line V-Network	ESH3-Z5	893045/017	R&S	Oct-09
8	RF Amplifier	8447D	2944A07684	HP	Oct-09
9	RF Amplifier	8447D	2439A09058	HP	Oct-09
10	RF Amplifier	8449B	3008A02126	HP	Apr-10
11	Test Receiver	ESHS10	828404009	R&S	Aug-09
12	TRILOG Antenna	VULB 9160	9160-3212	SCHWARZBECK	Jul-09
13	Log.-Per. Antenna	VULP 9118	9118 A 401	SCHWARZBECK	Apr-10
14	Biconical Antenna	BBA 9106	VHA 9103-2315	SCHWARZBECK	Apr-10
15	Horn Antenna	3115	00055005	ETS LINDGREN	Apr-10
16	Dipole Antenna	VHA9103	2116	Schwarzbeck	Nov-09
17	Dipole Antenna	VHA9103	2117	Schwarzbeck	Nov-09
18	Dipole Antenna	UHA9105	2261	Schwarzbeck	Nov-09
19	Dipole Antenna	UHA9105	2262	Schwarzbeck	Nov-09
20	Spectrum Analyzer	FSV-30	100757	R&S	Feb-10
21	Spectrum Analyzer	8563E	3425A02505	HP	Apr-10
22	Hygro-Thermograph	THB-36	0041557-01	ISUZU	Apr-10
23	Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	Jun-09
24	RF Switch	MP59B	6200414971	ANRITSU	Jun-09
25	RF Switch	MP59B	6200438565	ANRITSU	Jun-09
26	Power Divider	11636A	6243	HP	Oct-09
27	DC Power Supply	6622A	3448A03079	HP	Oct-09
28	Attenuator (30dB)	11636A	6243	HP	Oct-09
29	Frequency Counter	5342A	2826A12411	HP	Apr-10
30	Power Meter	EPM-441A	GB32481702	HP	Apr-10
31	Power Sensor	8481A	2702A64048	HP	Apr-10
32	Audio Analyzer	8903B	3729A18901	HP	Oct-09
33	Modulation Analyzer	8901B	3749A05878	HP	Oct-09
34	TEMP & HUMIDITY Chamber	YJ-500	L05022	JinYoung Tech	Oct-09
35	LOOP-ANTENNA	FMZB 1516	151602/94	SCHWARZBECK	Apr-10
36	Stop Watch	HS-3	601Q09R	CASIO	Apr-10