


FCC Test Report

APPLICANT : Daron LLC
EQUIPMENT : Electronic Display Device
MODEL NAME : D00801
FCC ID : XDZ-1013
STANDARD : 47 CFR Part 2, 22(H), 24(E)
CLASSIFICATION : PCS Licensed Transmitter (PCB)
Tx/Rx FREQUENCY RANGE : GSM850 : 824.2 ~ 848.8 MHz /
869.2 ~ 893.8 MHz
GSM1900 : 1850.2 ~ 1909.8 MHz /
1930.2 ~ 1989.8 MHz
WCDMA Band V : 826.4 ~ 846.6 MHz /
871.4 ~ 891.6 MHz
WCDMA Band II : 1852.4 ~ 1907.6 MHz /
1932.4 ~ 1987.6 MHz
MAX. ERP/EIRP POWER : GSM850 (GPRS 8) : 1.15 W
GSM850 (EDGE 8) : 0.58 W
GSM1900 (GPRS 8) : 1.75 W
GSM1900 (EDGE 8) : 1.50 W
WCDMA Band V (HSDPA) : 0.15 W
WCDMA Band II (RMC 12.2K) : 0.41 W
EMISSION DESIGNATOR : GSM : 250KGXW
EDGE : 250KG7W
WCDMA : 4M16F9W

The product sample received on May 18, 2009 and completely tested on Jul. 29, 2009. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Roy Wu / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Feature of Equipment Under Test.....	5
1.3 Testing Site	6
1.4 Applied Standards	6
1.5 Ancillary Equipment List.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System	9
3 TEST RESULT	10
3.1 Conducted Output Power Measurement.....	10
3.2 Effective Radiated Power and Effective Isotropic Radiated Power Measurement	13
3.3 Occupied Bandwidth Measurement	19
3.4 Band Edge Measurement.....	26
3.5 Field Strength of Spurious Radiation Measurement	53
3.6 Frequency Stability Measurement.....	91
4 LIST OF MEASURING EQUIPMENT	95
5 UNCERTAINTY OF EVALUATION	96
6 CERTIFICATION OF TAF ACCREDITATION	97

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG971703-01	Rev. 01	Initial issue of report	Jul. 30, 2009

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result
3.1	§2.1046	N/A	Conducted Output Power	N/A	PASS
3.2	§22.913(a)(2)	RSS-132(4.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts for FCC (<6.3 Watts for IC)	PASS
3.2	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS
3.3	§2.1049 §22.917(a) §24.238(a)	N/A	Occupied Bandwidth	N/A	PASS
3.4	§2.1051 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Band Edge Measurement	$< 43 + 10\log_{10}(P[\text{Watts}])$	PASS
3.5	§2.1051 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Conducted Emission	$< 43 + 10\log_{10}(P[\text{Watts}])$	PASS
3.6	§2.1053 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Field Strength of Spurious Radiation	$< 43 + 10\log_{10}(P[\text{Watts}])$	PASS
3.7	§2.1055 §22.355 §24.235	RSS-132(4.3) RSS-133(6.3)	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS

1 General Description

1.1 Applicant

Daron LLC

No. 103, Foulk Rd Suite 202, Wilmington, DE 19803

1.2 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	Electronic Display Device
Model Name	D00801
FCC ID	XDZ-1013
Tx Frequency	GSM850 : 824 MHz ~ 849 MHz GSM1900 : 1850 MHz ~ 1910 MHz WCDMA Band V : 824 MHz ~ 849 MHz WCDMA Band II : 1850 MHz ~ 1910 MHz
Rx Frequency	GSM850 : 869 MHz ~ 894 MHz GSM1900 : 1930 MHz ~ 1990 MHz WCDMA Band V : 869 MHz ~ 894 MHz WCDMA Band II : 1930 MHz ~ 1990 MHz
Maximum Peak Power to Antenna	GSM850 : 32.56 dBm GSM1900 : 29.63 dBm WCDMA Band V : 23.03 dBm WCDMA Band II : 22.92 dBm
Maximum ERP/EIRP	GSM850 (GPRS 8) : 1.15 W (30.61 dBm) GSM850 (EDGE 8) : 0.58 W (27.60 dBm) GSM1900 (GPRS 8) : 1.75 W (32.43 dBm) GSM1900 (EDGE 8) : 1.50 W (31.76 dBm) WCDMA Band V (HSDPA) : 0.15 W (21.73 dBm) WCDMA Band II (RMC 12.2K) : 0.41 W (26.18 dBm)
Antenna Type	Fixed Internal Antenna
HW Version	DVT
SW Version	Production
Type of Modulation	GSM / GPRS : GMSK EDGE : 8PSK WCDMA : QPSK HSDPA : QPSK / 16QAM
Type of Emission	GSM : 250KGXW EDGE : 250KG7W WCDMA : 4M16F9W
EUT Stage	Production Unit

Remark: This test report recorded only product characteristics and test results of PCS Licensed Transmitter (PCB).

List of Accessory:

Specification of Accessory		
AC Adapter	Power Rating	I/P:100-240Vac, 50-60Hz, 0.15A; O/P: 4.9Vdc, 0.85A
USB Cable	Signal Line Type	1.8 meter non-shielded cable without ferrite core
WWAN Module	Brand Name	Anydata
	Model Name	DTP-600W

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.3 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	TH02-HY	03CH07-HY	TW1022/4086B-1

1.4 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ Preliminary Guidance for Receiving Applications for Certification of 3G Device. May 9, 2006.
- ♦ 47 CFR Part 2, 22(H), 24(E)
- ♦ ANSI C63.4-2003
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ IC RSS-132 Issue 2
- ♦ IC RSS-133 Issue 5

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (DoC), recorded in a separate test report.



1.5 Ancillary Equipment List

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU200	N/A	N/A	Unshielded, 1.8 m

2 Test Configuration of Equipment Under Test

2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range.

Frequency range investigated for radiated emission is as follows:

1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
2. 30 MHz to 19000 MHz for GSM1900 and WCDMA Band II.

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	<ul style="list-style-type: none"> ■ GPRS 8 Link ■ EDGE 8 Link 	<ul style="list-style-type: none"> ■ GPRS 8 Link ■ EDGE 8 Link
GSM 1900	<ul style="list-style-type: none"> ■ GPRS 8 Link ■ EDGE 8 Link 	<ul style="list-style-type: none"> ■ GPRS 8 Link ■ EDGE 8 Link
WCDMA Band V	<ul style="list-style-type: none"> ■ HSDPA Link 	<ul style="list-style-type: none"> ■ HSDPA Link
WCDMA Band II	<ul style="list-style-type: none"> ■ RMC 12.2K Link 	<ul style="list-style-type: none"> ■ RMC 12.2K Link

Note: The maximum power levels are multi-slot class 8 mode for GMSK and 8PSK, HSDPA mode for WCDMA Band V, RMC 12.2K mode for WCDMA Band II; only these modes were used for all tests.

The power tables are listed as follows:


Peak Power (dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880	1909.8
GPRS 8	32.55	32.56	32.52	29.63	29.44	29.16
GPRS 10	30.02	30.00	29.94	27.50	27.35	27.09
GPRS 12	27.50	27.50	27.46	24.88	24.76	24.55
EGPRS 8	26.13	26.13	26.10	25.18	25.03	24.79
EGPRS 10	24.61	24.61	24.58	23.62	23.48	23.25
EGPRS 12	22.14	22.15	22.13	21.10	21.02	20.78
Conducted Power						
Band	WCDMA Band V			WCDMA Band II		
Tx Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880.0	1907.6
RMC 12.2K	22.94	23.01	22.79	22.92	22.89	22.68
HSDPA Subtest-1	22.96	23.03	22.88	22.86	22.91	22.63
HSDPA Subtest-2	22.95	22.81	22.88	22.87	22.86	22.68
HSDPA Subtest-3	22.95	22.94	22.86	22.89	22.88	22.73
HSDPA Subtest-4	22.96	22.94	22.66	22.89	22.88	22.73

(*Unit: dBm)

Source-Based Time-Averaged Output Power (dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880	1909.8
GPRS 8	23.55	23.56	23.52	20.63	20.44	20.16
GPRS 10	24.02	24.00	23.94	21.50	21.35	21.09
GPRS 12	24.50	24.50	24.46	21.88	21.76	21.55
EGPRS 8	17.13	17.13	17.10	16.18	16.03	15.79
EGPRS 10	18.61	18.61	18.58	17.62	17.48	17.25
EGPRS 12	19.14	19.15	19.13	18.10	18.02	17.78

(*Unit: dBm)

2.2 Connection Diagram of Test System

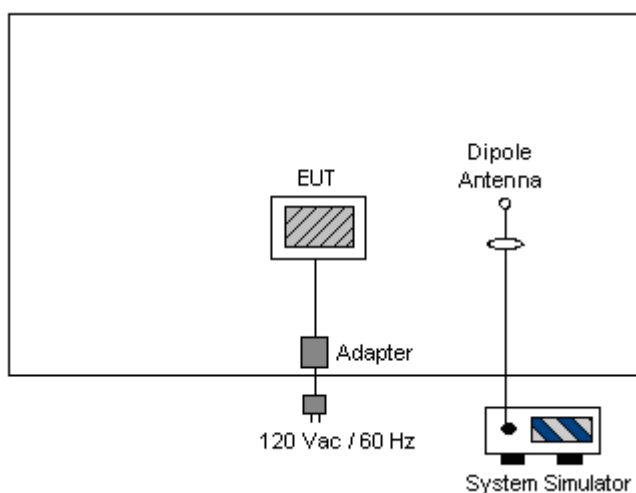

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.

3.1.4 Test Setup

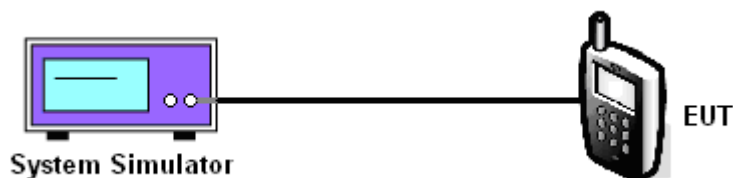

3.1.5 Test Result of Peak Conducted Output Power

Cellular Band			
Modes		Channel	Conducted Power (dBm)
GPRS 8		128 (Low)	824.2
		189 (Mid)	836.4
		251 (High)	848.8
EDGE 8		128 (Low)	824.2
		189 (Mid)	836.4
		251 (High)	848.8
WCDMA Band V	12.2K bps	4132 (Low)	826.4
		4182 (Mid)	836.4
		4233 (High)	846.6
	HSDPA Subtest-1	4132 (Low)	826.4
		4182 (Mid)	836.4
		4233 (High)	846.6
	HSDPA Subtest-2	4132 (Low)	826.4
		4182 (Mid)	836.4
		4233 (High)	846.6
	HSDPA Subtest-3	4132 (Low)	826.4
		4182 (Mid)	836.4
		4233 (High)	846.6
	HSDPA Subtest-4	4132 (Low)	826.4
		4182 (Mid)	836.4
		4233 (High)	846.6

PCS Band			
Modes		Channel	Frequency (MHz)
			Conducted Power (dBm)
GPRS 8		512 (Low)	1850.2
		661 (Mid)	1880.0
		810 (High)	1909.8
EDGE 8		512 (Low)	1850.2
		661 (Mid)	1880.0
		810 (High)	1909.8
WCDMA Band II	12.2K bps	9262 (Low)	1852.4
		9400 (Mid)	1880.0
		9538 (High)	1907.6
	HSDPA Subtest-1	9262 (Low)	1852.4
		9400 (Mid)	1880.0
		9538 (High)	1907.6
	HSDPA Subtest-2	9262 (Low)	1852.4
		9400 (Mid)	1880.0
		9538 (High)	1907.6
	HSDPA Subtest-3	9262 (Low)	1852.4
		9400 (Mid)	1880.0
		9538 (High)	1907.6
	HSDPA Subtest-4	9262 (Low)	1852.4
		9400 (Mid)	1880.0
		9538 (High)	1907.6

3.2 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

3.2.1 Description of the ERP/EIRP Measurement

ERP/EIRP is measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The EUT was placed on an non-conductive rotating platform with 0.8 meter height in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RBW= 3MHz,VBW= 3MHz, and peak detector settings.
2. During the measurement, the EUT was enforced in maximum power and linked with a base station. The highest emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
3. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by dipole antenna (substitution antenna) at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$.

3.2.4 Test Setup

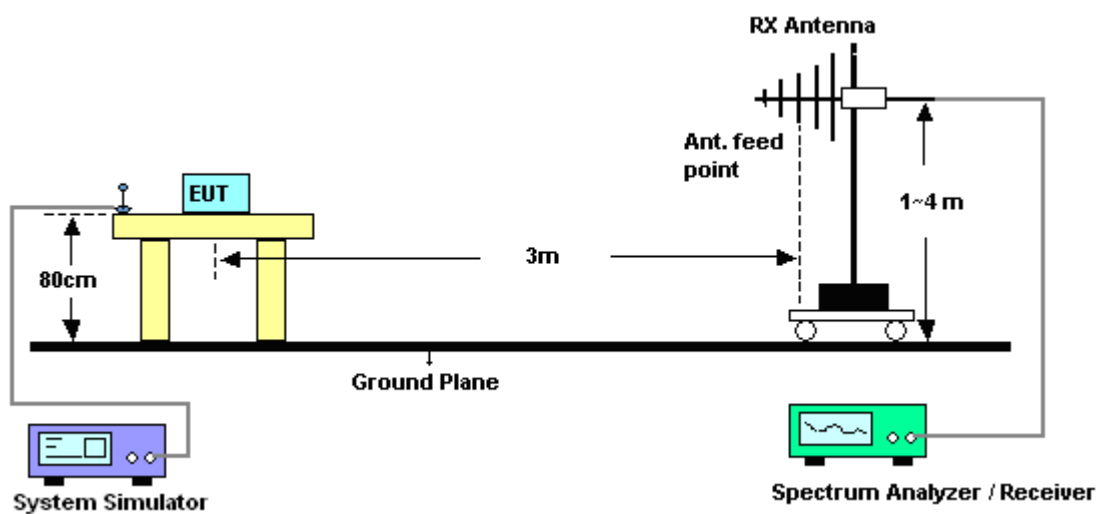

3.2.5 Test Result of ERP

GSM850 (GPRS 8) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-0.80	32.04	29.09	0.81
836.4	-0.48	32.91	30.28	1.07
848.8	-0.08	32.84	30.61	1.15
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-6.90	36.10	27.05	0.51
836.4	-6.34	34.41	25.92	0.39
848.8	-5.49	34.65	27.01	0.50

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

GSM850 (EDGE 8) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-3.32	32.04	26.57	0.45
836.4	-3.42	32.91	27.34	0.54
848.8	-3.09	32.84	27.60	0.58
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-10.34	36.10	23.61	0.23
836.4	-10.07	34.41	22.19	0.17
848.8	-9.08	34.65	23.42	0.22

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

WCDMA Band V (HSDPA) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
826.4	-8.16	32.04	21.73	0.15
836.4	-9.71	32.91	21.05	0.13
846.6	-9.25	32.84	21.44	0.14
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
826.4	-15.06	36.10	18.89	0.08
836.4	-15.20	34.41	17.06	0.05
846.6	-15.16	34.65	17.34	0.05

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

3.2.6 Test Result of EIRP

GSM1900 (GPRS 8) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-9.84	40.91	31.07	1.28
1880.0	-10.11	42.38	32.27	1.69
1909.8	-9.87	42.30	32.43	1.75
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-18.36	43.63	25.27	0.34
1880.0	-19.15	43.55	24.40	0.28
1909.8	-18.57	44.84	26.27	0.42

* EIRP = LVL (dBm) + Correction Factor (dB)

GSM1900 (EDGE 8) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-10.89	40.91	30.02	1.00
1880.0	-11.45	42.38	30.93	1.24
1909.8	-10.54	42.30	31.76	1.50
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-20.62	43.63	23.01	0.20
1880.0	-18.11	43.55	25.44	0.35
1909.8	-19.84	44.84	25.00	0.32

* EIRP = LVL (dBm) + Correction Factor (dB)

WCDMA Band II (RMC 12.2K) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1852.4	-16.37	40.91	24.54	0.28
1880.0	-17.50	42.38	24.88	0.31
1907.6	-16.12	42.30	26.18	0.41
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1852.4	-23.80	43.63	19.83	0.10
1880.0	-22.90	43.55	20.65	0.12
1907.6	-23.99	44.84	20.85	0.12

* EIRP = LVL (dBm) + Correction Factor (dB)

3.3 Occupied Bandwidth Measurement

3.3.1 Description of Occupied Bandwidth Measurement

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures


1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers were measured.
3. The RBW was replaced by 10 kHz, due to the spectrum analyzer IF-Filter including an excess of the limit. A worst case correction factor of $10 \log (1\% \text{ BW/measurement RBW})$ was implemented.

3.3.4 Test Setup

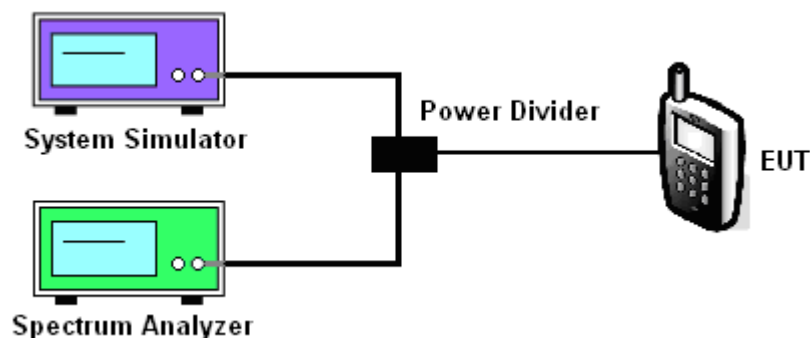


3.3.5 Test Result (Plots) of Occupied Bandwidth

Band :	GSM 850	Power Stage :	High
Test Mode :	GPRS 8 Link		

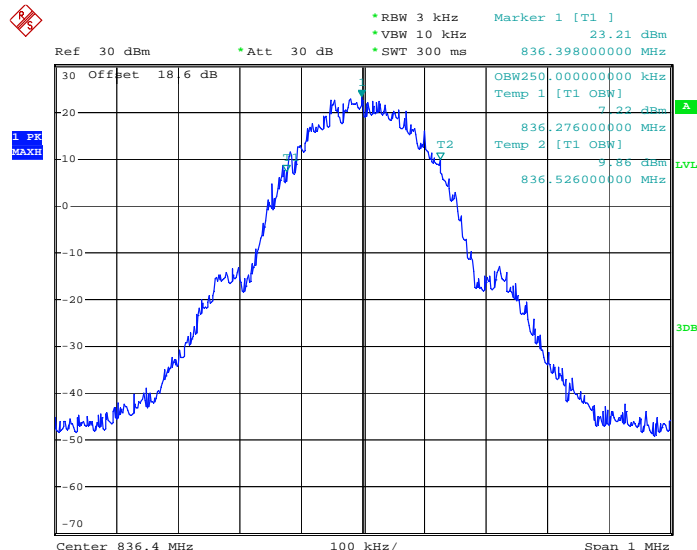99% Occupied Bandwidth Plot on Channel 189


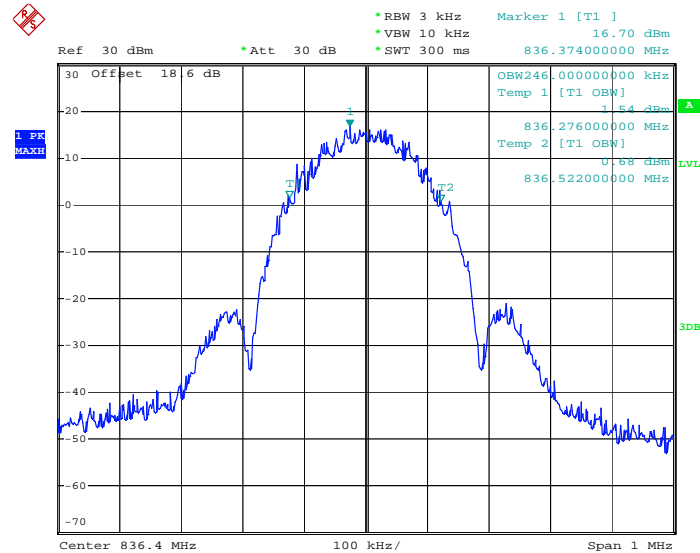
Date: 20.MAY.2009 16:32:48

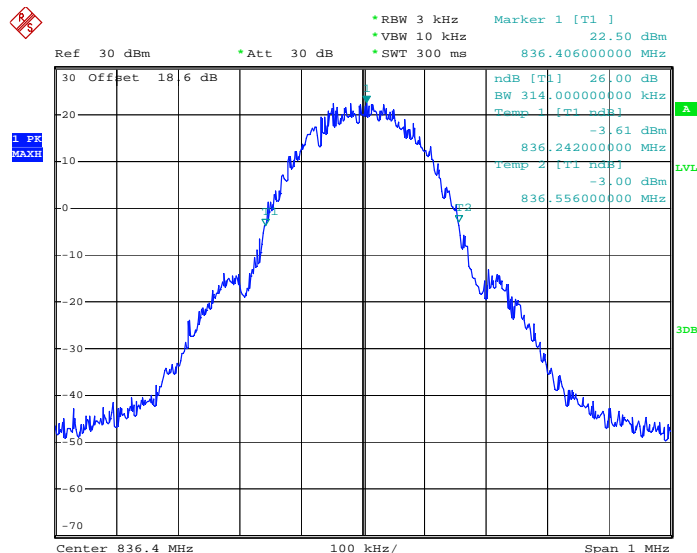26dB Bandwidth Plot on Channel 189


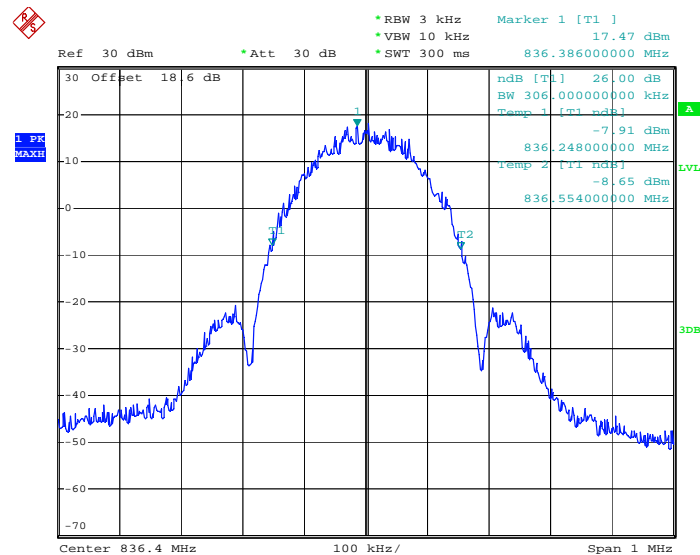
Date: 20.MAY.2009 16:30:38



Band :	GSM 850	Power Stage :	High
Test Mode :	EDGE 8 Link		

99% Occupied Bandwidth Plot on Channel 189


Date: 20.MAY.2009 18:06:33

26dB Bandwidth Plot on Channel 189


Date: 20.MAY.2009 18:04:57



Band :	GSM 1900	Power Stage :	High
Test Mode :	GPRS 8 Link		

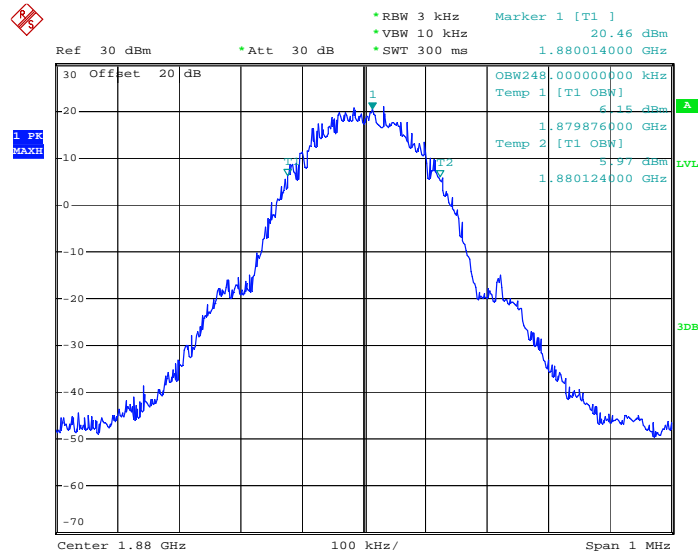99% Occupied Bandwidth Plot on Channel 661


Date: 20.MAY.2009 19:46:04

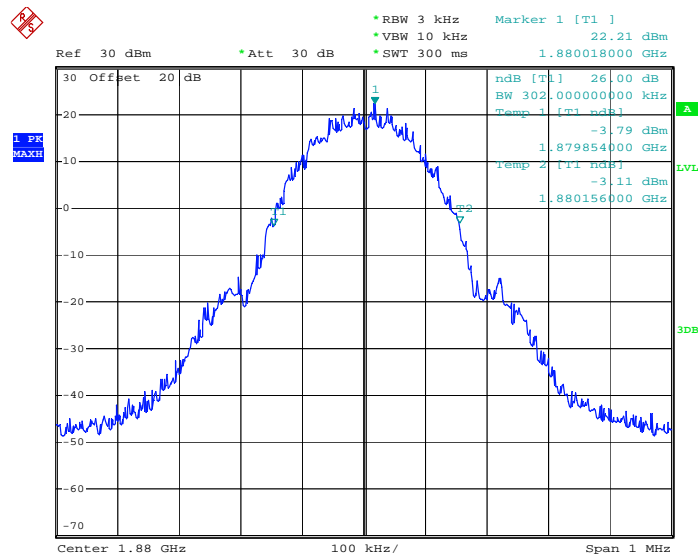26dB Bandwidth Plot on Channel 661


Date: 20.MAY.2009 19:44:26



Band :	GSM 1900	Power Stage :	High
Test Mode :	EDGE 8 Link		

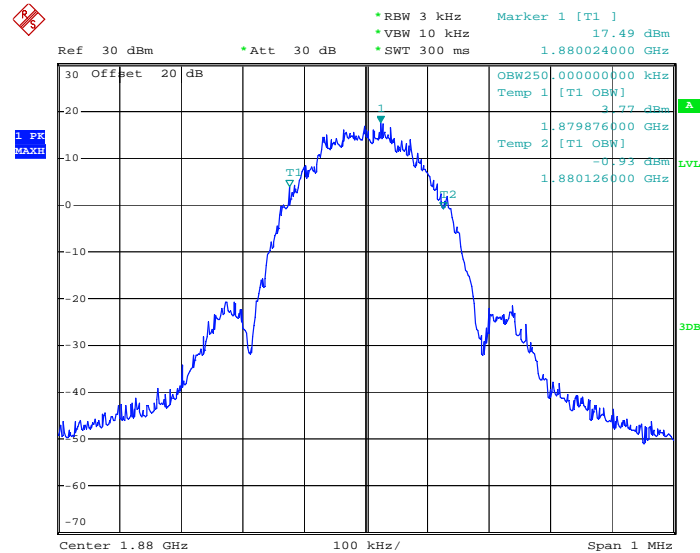
99% Occupied Bandwidth Plot on Channel 661

Date: 20.MAY.2009 18:34:11

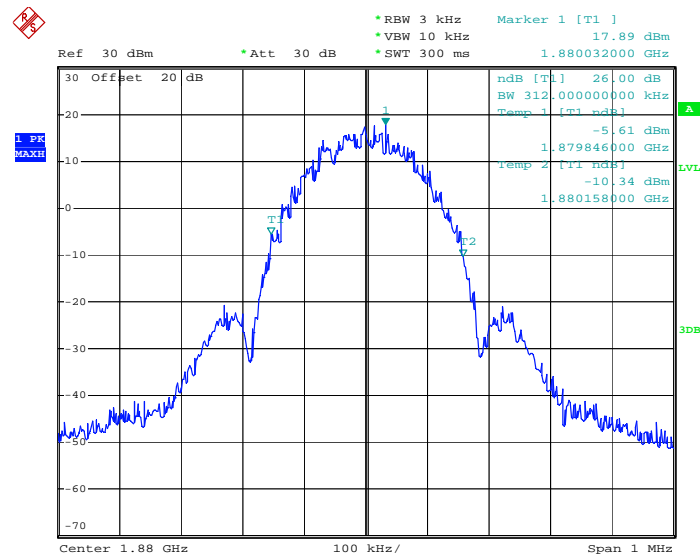
26dB Bandwidth Plot on Channel 661

Date: 20.MAY.2009 18:32:13

Band :	WCDMA Band V	Power Stage :	High
Test Mode :	HSDPA Link		

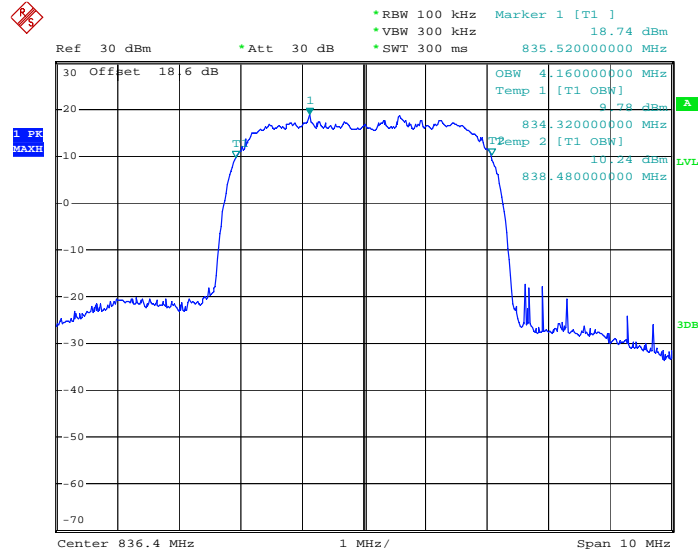99% Occupied Bandwidth Plot on Channel 4182


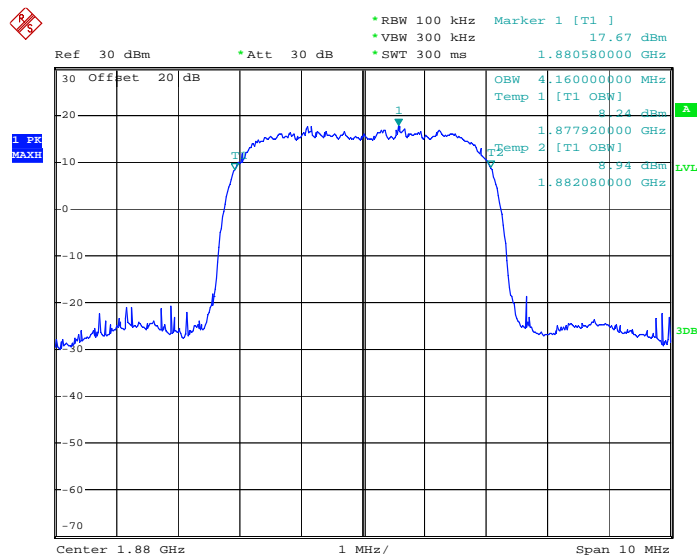
Date: 20.MAY.2009 20:50:44

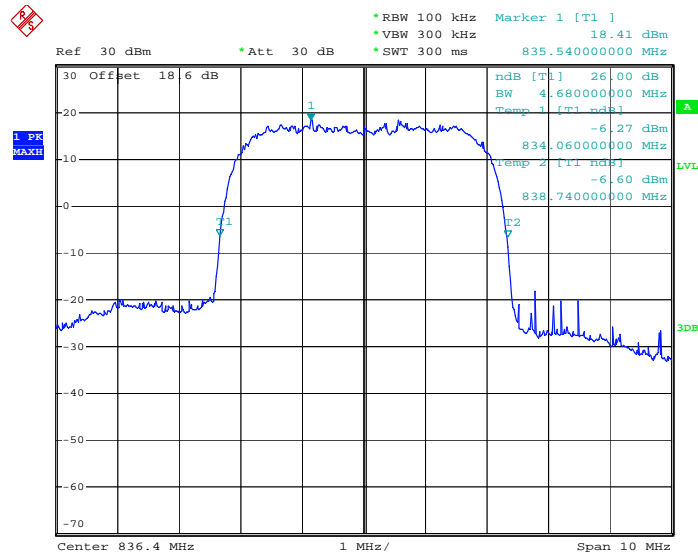26dB Bandwidth Plot on Channel 4182


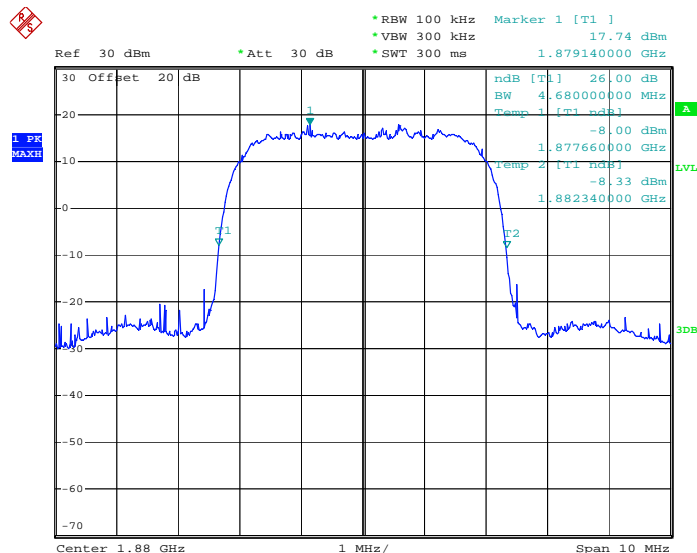
Date: 20.MAY.2009 20:49:39



Band :	WCDMA Band II	Power Stage :	High
Test Mode :	RMC 12.2K Link		

99% Occupied Bandwidth Plot on Channel 9400

Date: 20.MAY.2009 20:24:12

26dB Bandwidth Plot on Channel 9400

Date: 20.MAY.2009 20:22:54

3.4 Band Edge Measurement

3.4.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.4.2 Measuring Instruments


See list of measuring instruments of this test report.

3.4.3 Test Procedures


1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The band edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.

3.4.4 Test Setup

<Conducted Band Edge >

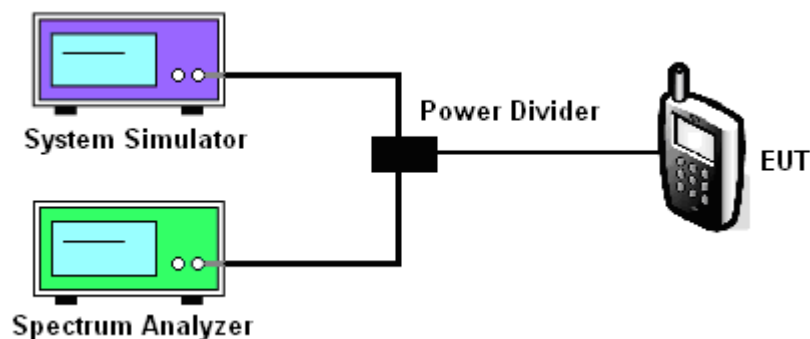


<Radiated Band Edge>

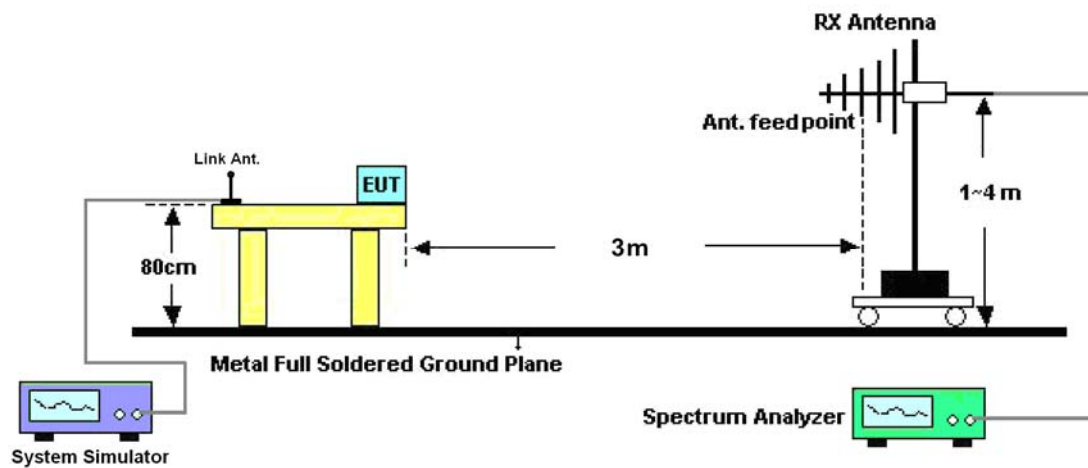

3.4.5 Test Result (Plots) of Conducted Band Edge


Band :	GSM850	Power Stage :	High
Test Mode :	GPRS 8 Link		

Lower Band Edge Plot on Channel 128

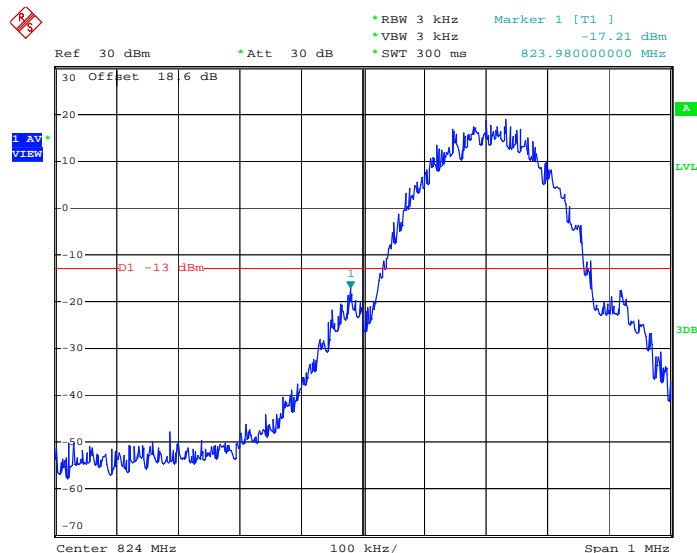

Date: 20.MAY.2009 16:34:44


Higher Band Edge Plot on Channel 251

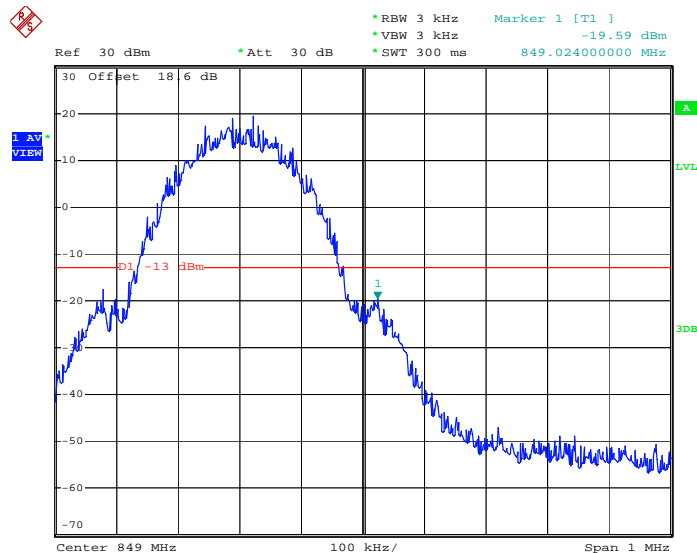


Date: 20.MAY.2009 16:37:06



Band :	GSM850	Power Stage :	High
Test Mode :	EDGE 8 Link		

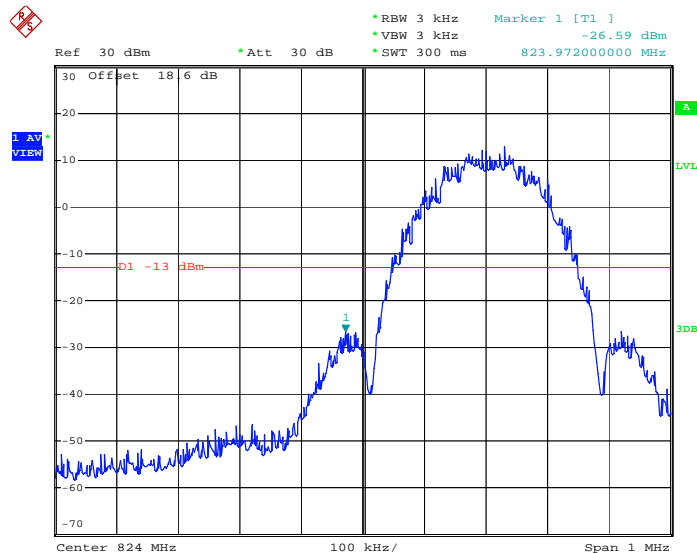
Lower Band Edge Plot on Channel 128

Date: 20.MAY.2009 18:09:06

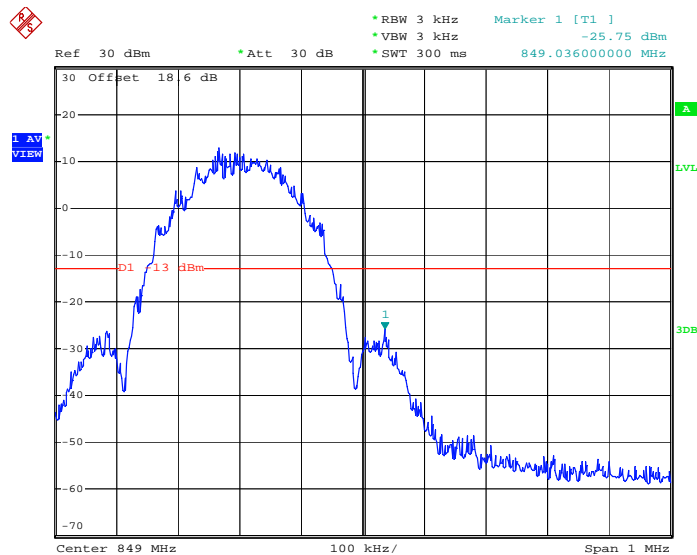
Higher Band Edge Plot on Channel 251

Date: 20.MAY.2009 18:11:39

Band :	GSM1900	Power Stage :	High
Test Mode :	GPRS 8 Link		

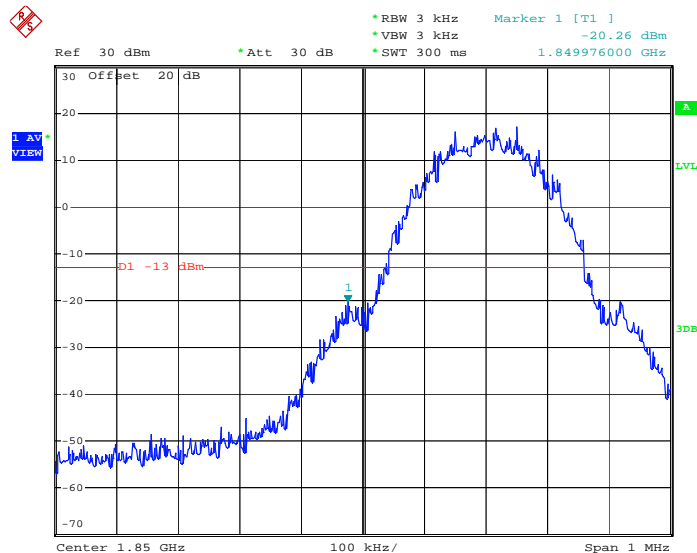
Lower Band Edge Plot on Channel 512


Date: 20.MAY.2009 20:11:37

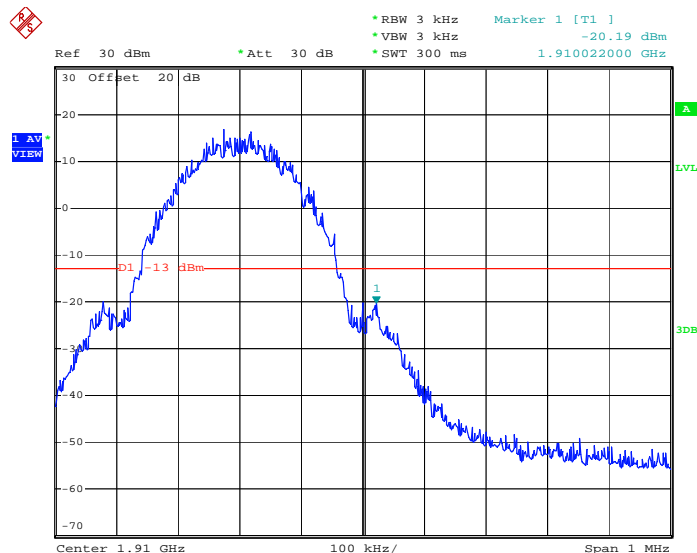
Higher Band Edge Plot on Channel 810


Date: 20.MAY.2009 20:00:57

Band :	GSM1900	Power Stage :	High
Test Mode :	EDGE 8 Link		

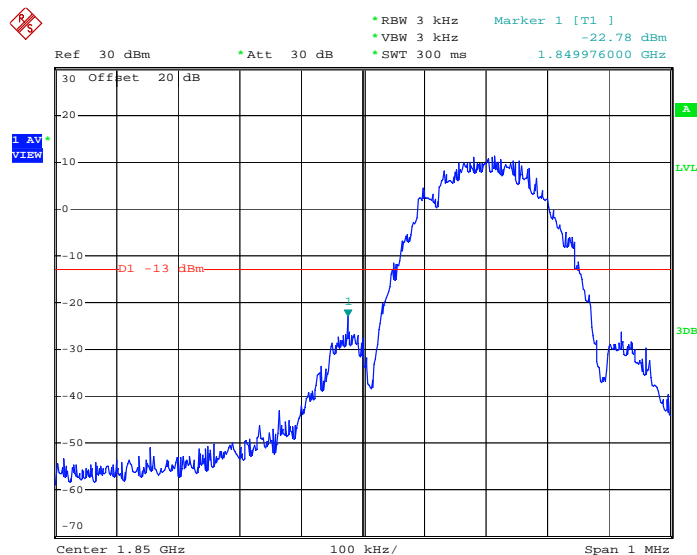Lower Band Edge Plot on Channel 512


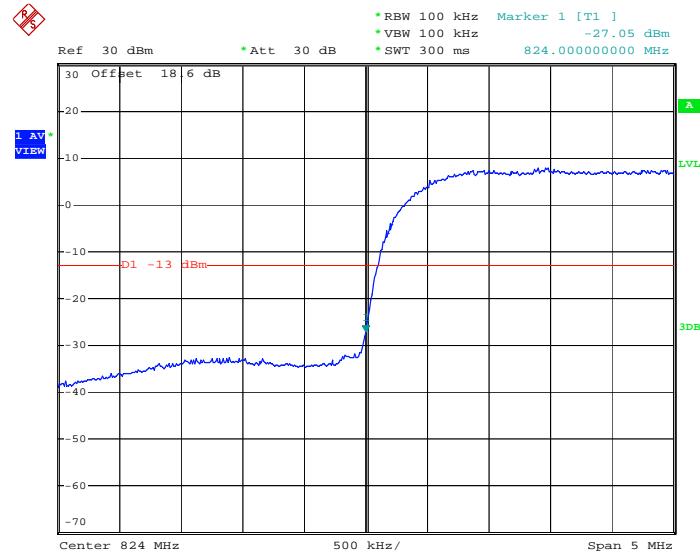
Date: 20.MAY.2009 18:36:49

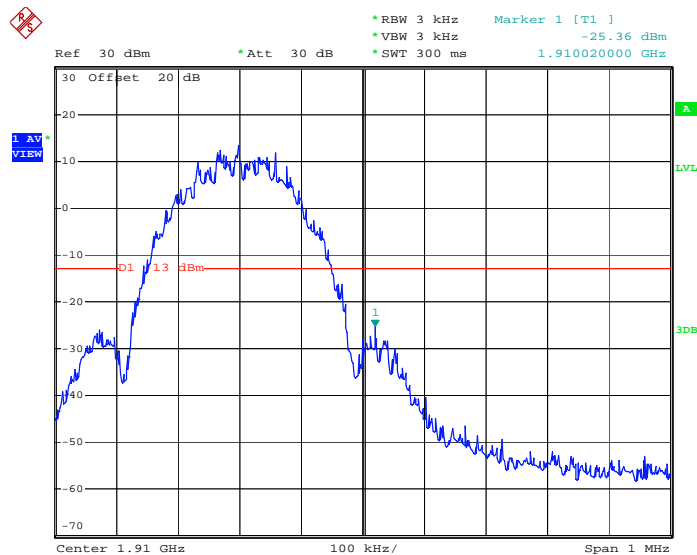Higher Band Edge Plot on Channel 810


Date: 20.MAY.2009 18:40:16


Band :	WCDMA Band V	Power Stage :	High
Test Mode :	HSDPA Link		

Lower Band Edge Plot on Channel 4132




Date: 20.MAY.2009 20:53:01

Higher Band Edge Plot on Channel 4233

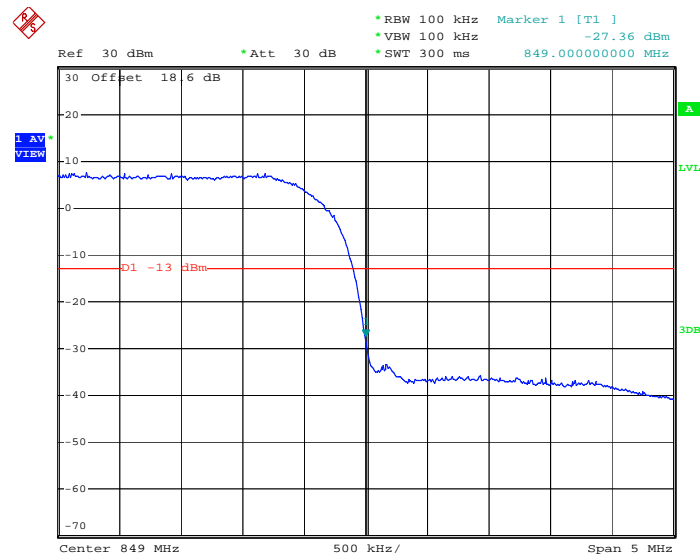


Date: 20.MAY.2009 20:54:36

Band :	WCDMA Band II	Power Stage :	High
Test Mode :	RMC 12.2K Link		

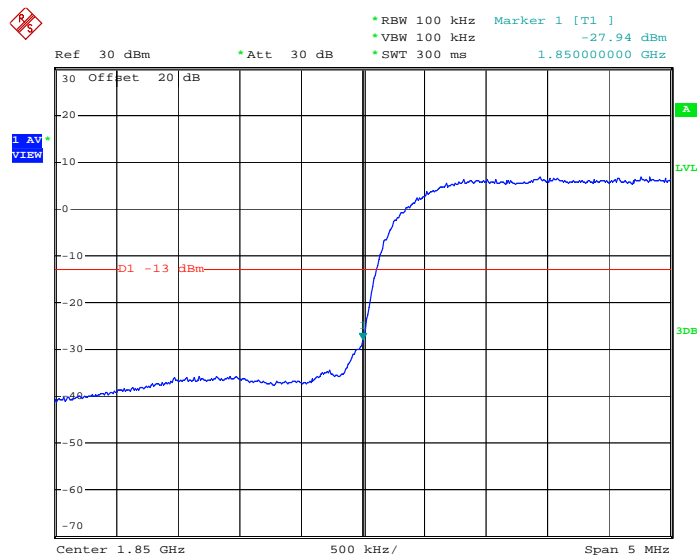Lower Band Edge Plot on Channel 9262


Date: 20.MAY.2009 20:27:50

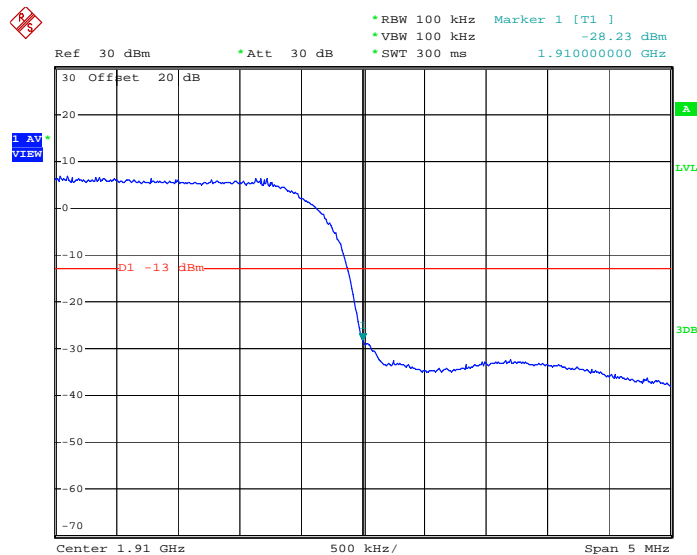Higher Band Edge Plot on Channel 9538


Date: 20.MAY.2009 20:29:55

3.4.6 Test Result of Radiated Band Edge

Band :	GSM850	Temperature :	21~26.9°C
Test Mode :	GPRS 8 Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang		
Remark :	Channel 128 and 251		

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	Polarization (H/V)
128	824.0	-62.49	31.60	-33.04	H
251	849.0	-57.81	35.17	-24.79	H
128	824.0	-64.81	34.41	-32.55	V
251	849.0	-58.98	34.37	-26.76	V

Band :	GSM850	Temperature :	21~26.9°C
Test Mode :	EDGE 8 Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang		
Remark :	Channel 128 and 251		

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	Polarization (H/V)
824	824.0	-70.46	-37.67	-41.01	H
849	849.0	-64.50	-28.28	-31.48	H
824	824.0	-70.70	-35.10	-38.44	V
849	849.0	-65.04	-29.62	-32.82	V

Band :	GSM1900	Temperature :	21~26.9°C
Test Mode :	GPRS 8 Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang		
Remark :	Channel 512 and 810		

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	Polarization (H/V)
512	1850.0	-61.27	42.03	-19.24	H
810	1910.0	-64.83	41.19	-23.64	H
512	1850.0	-62.77	45.32	-17.45	V
810	1910.0	-64.72	44.45	-20.27	V

Band :	GSM1900	Temperature :	21~26.9°C
Test Mode :	EDGE 8 Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang		
Remark :	Channel 512 and 810		

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	Polarization (H/V)
512	1850.0	-68.56	42.03	-26.53	H
810	1910.0	-71.57	41.19	-30.38	H
512	1850.0	-65.07	45.32	-19.75	V
810	1910.0	-72.14	44.45	-27.69	V

Band :	WCDMA Band V	Temperature :	21~26.9°C
Test Mode :	HSDPA Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang		
Remark :	Channel 4132 and 4233		

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	Polarization (H/V)
4132	824.0	-62.00	31.60	-32.55	H
4233	849.0	-64.57	35.17	-31.55	H
4132	824.0	-61.72	34.41	-29.46	V
4233	849.0	-64.04	34.37	-31.82	V

Band :	WCDMA Band II	Temperature :	21~26.9°C
Test Mode :	RMC 12.2K Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang		
Remark :	Channel 9262 and 9538		

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	Polarization (H/V)
9262	1850.0	-65.45	42.03	-23.42	H
9538	1910.0	-64.30	41.19	-23.11	H
9262	1850.0	-64.33	45.32	-19.01	V
9538	1910.0	-64.39	44.45	-19.94	V

3.4.7 Conducted Emission Measurement

3.4.8 Description of Conducted Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.4.9 Measuring Instruments

See list of measuring instruments of this test report.

3.4.10 Test Procedures

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The middle channel for the highest RF power within the transmitting frequency was measured.
3. The conducted spurious emission for the whole frequency range was taken.


3.4.11 Test Setup

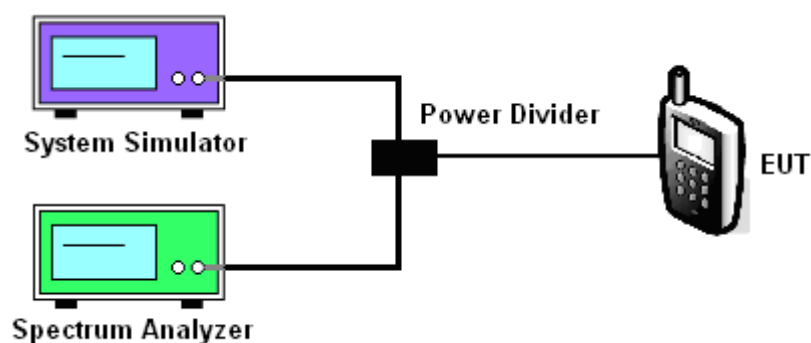

3.4.12 Test Result (Plots) of Conducted Emission


Band :	GSM850	Channel :	CH189
Test Mode :	GPRS 8 Link		

Conducted Emission Plot between 30MHz ~ 1GHz

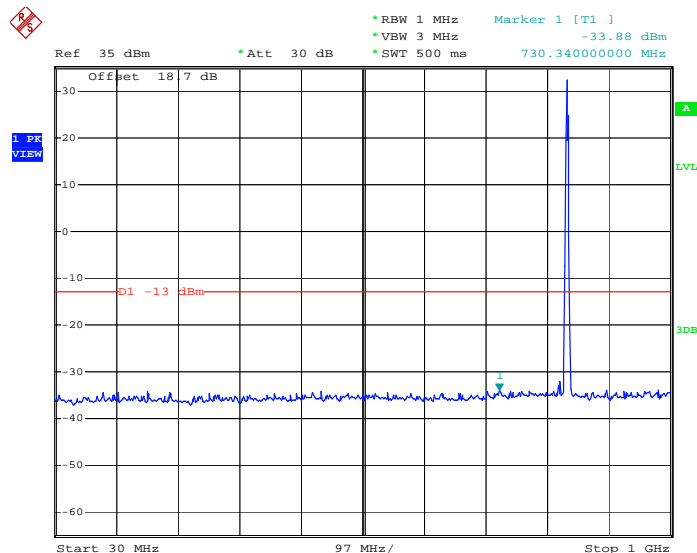

Date: 20.MAY.2009 16:45:08


Conducted Emission Plot between 1GHz ~ 3GHz

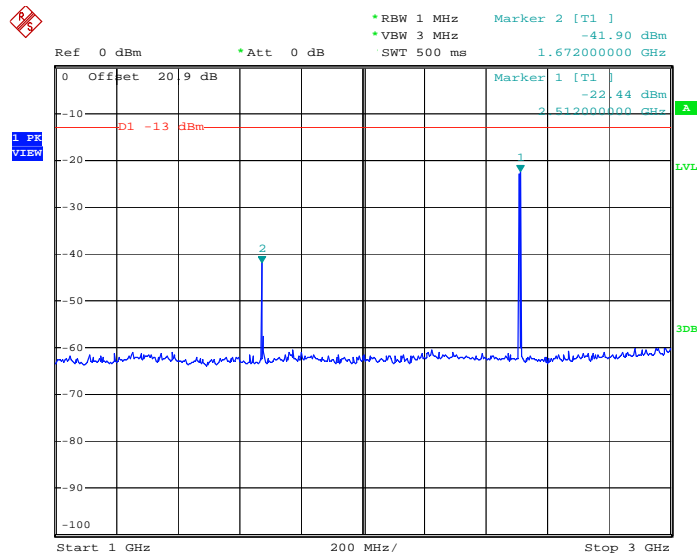

Date: 20.MAY.2009 16:54:02




Conducted Emission Plot between 3GHz ~ 7GHz

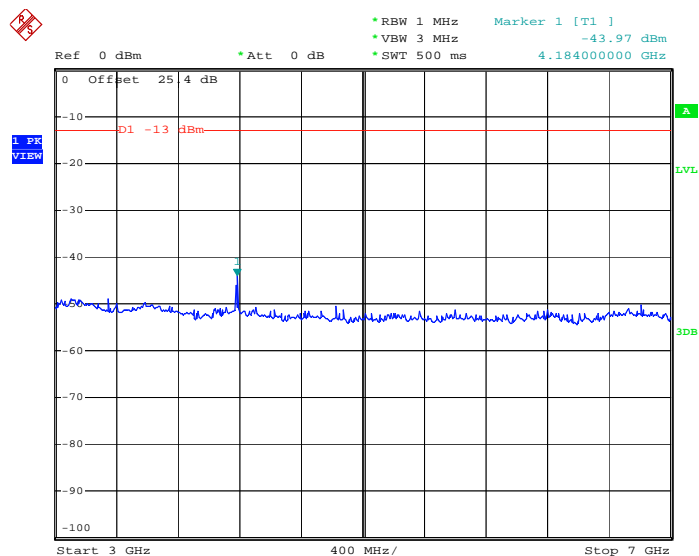


Date: 20.MAY.2009 16:54:43

Conducted Emission Plot between 7GHz ~ 9GHz

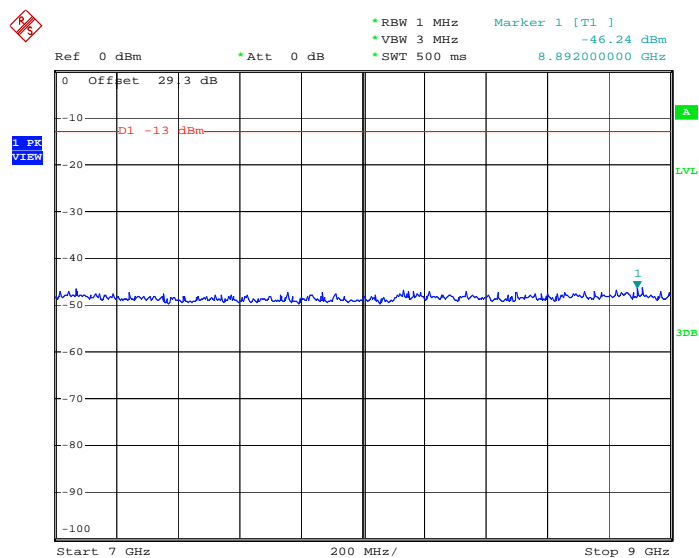


Date: 20.MAY.2009 16:55:26

Band :	GSM850	Channel :	CH189
Test Mode :	EDGE 8 Link		

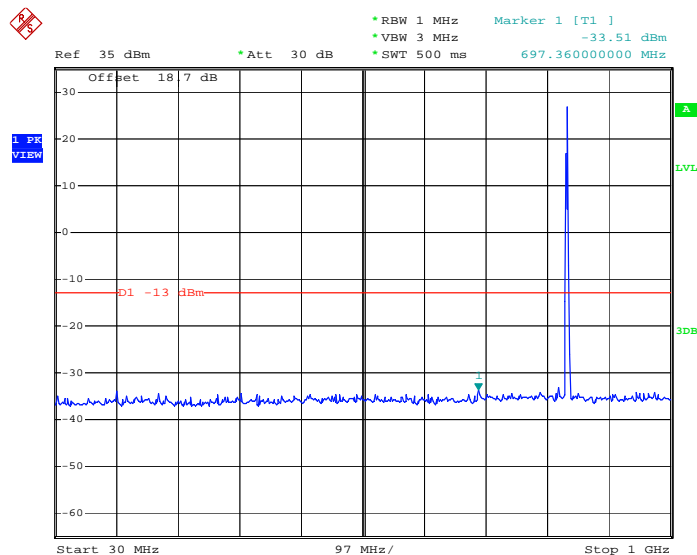Conducted Emission Plot between 30MHz ~ 1GHz


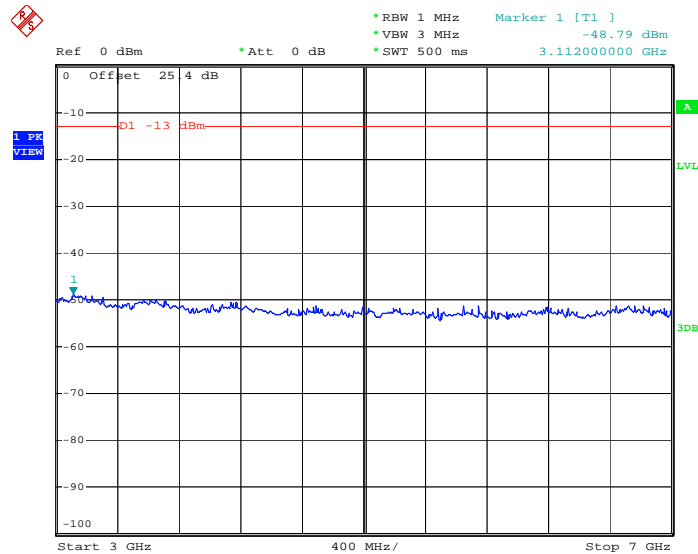
Date: 20.MAY.2009 19:41:11

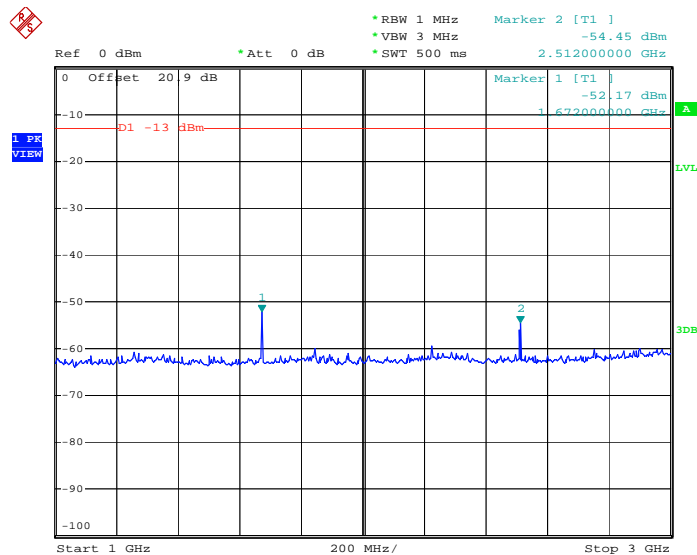Conducted Emission Plot between 1GHz ~ 3GHz


Date: 22.MAY.2009 11:39:42




Conducted Emission Plot between 3GHz ~ 7GHz




Date: 20.MAY.2009 18:00:53

Conducted Emission Plot between 7GHz ~ 9GHz

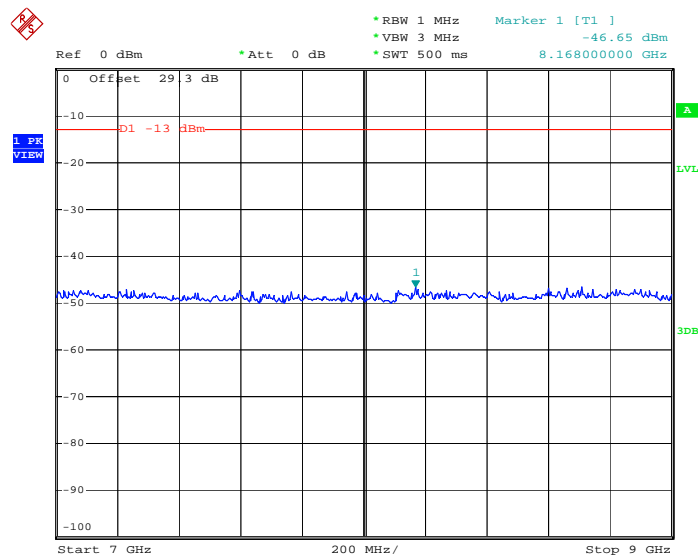


Date: 20.MAY.2009 18:01:27

Band :	GSM1900	Channel :	CH661
Test Mode :	GPRS 8 Link		

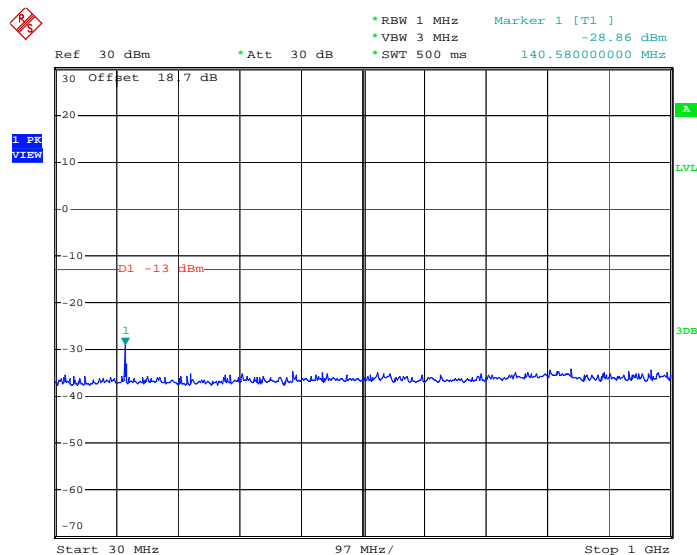Conducted Emission Plot between 30MHz ~ 1GHz


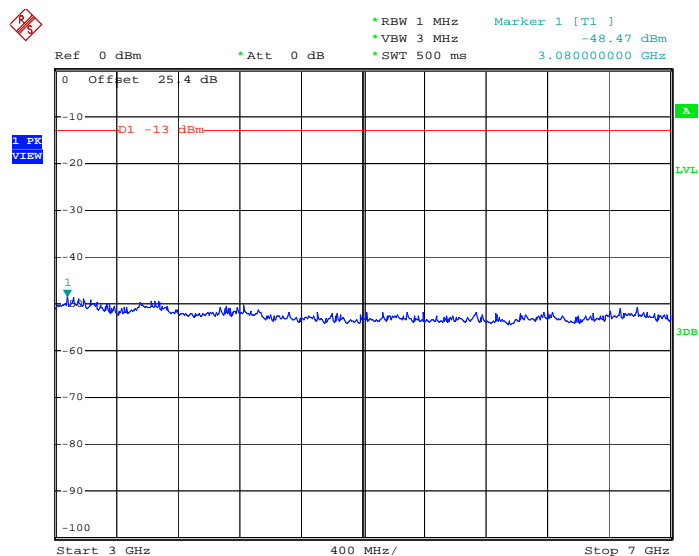
Date: 20.MAY.2009 19:29:15

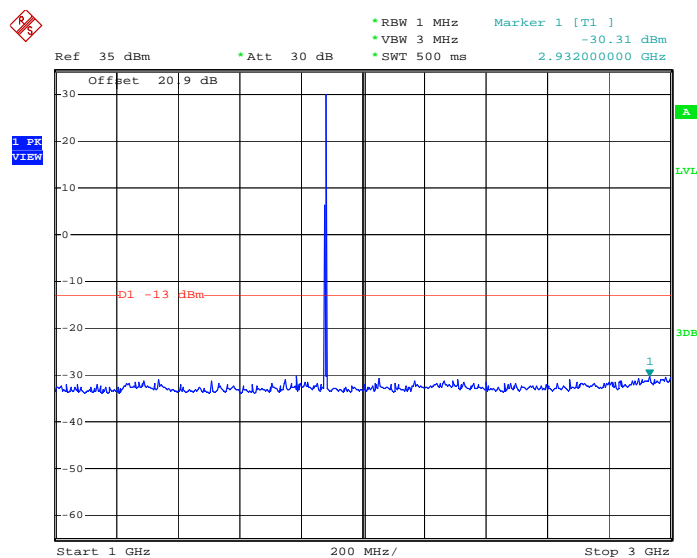Conducted Emission Plot between 1GHz ~ 3GHz


Date: 20.MAY.2009 19:28:29




Conducted Emission Plot between 3GHz ~ 7GHz




Date: 20.MAY.2009 19:27:50

Conducted Emission Plot between 7GHz ~ 13.6GHz

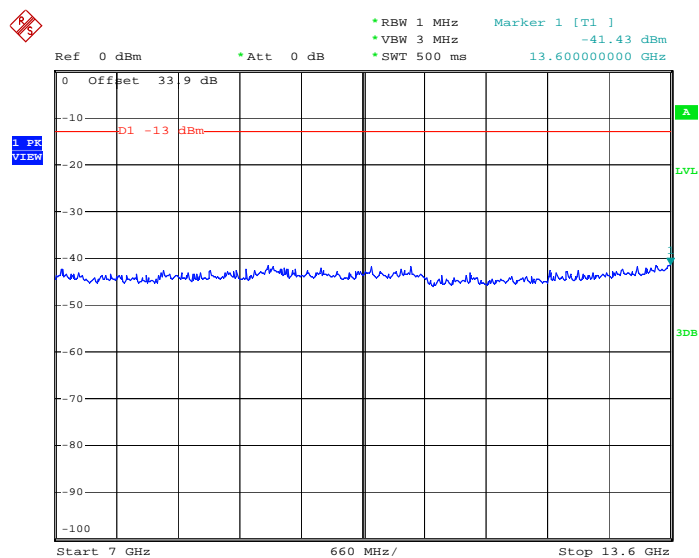


Date: 20.MAY.2009 19:27:19

Conducted Emission Plot between 13.6GHz ~ 19.1GHz

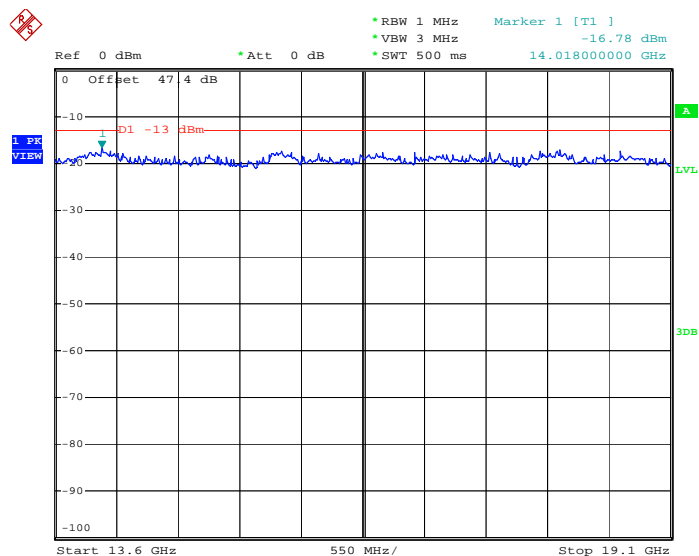


Date: 20.MAY.2009 19:26:44

Band :	GSM1900	Channel :	CH661
Test Mode :	EDGE 8 Link		

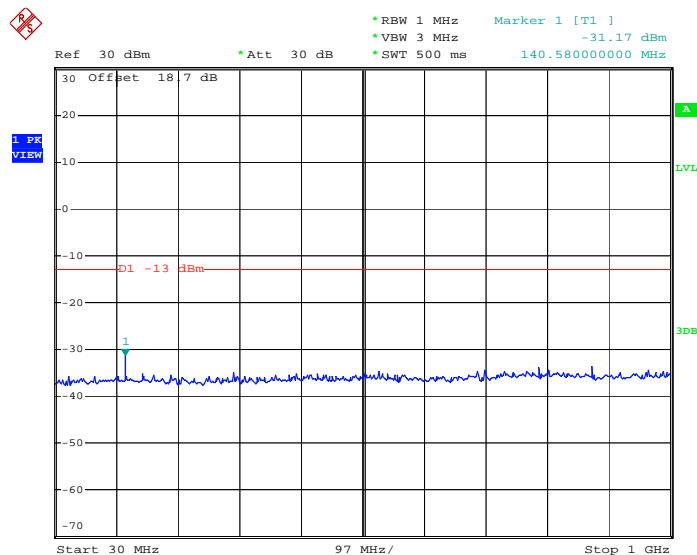Conducted Emission Plot between 30MHz ~ 1GHz


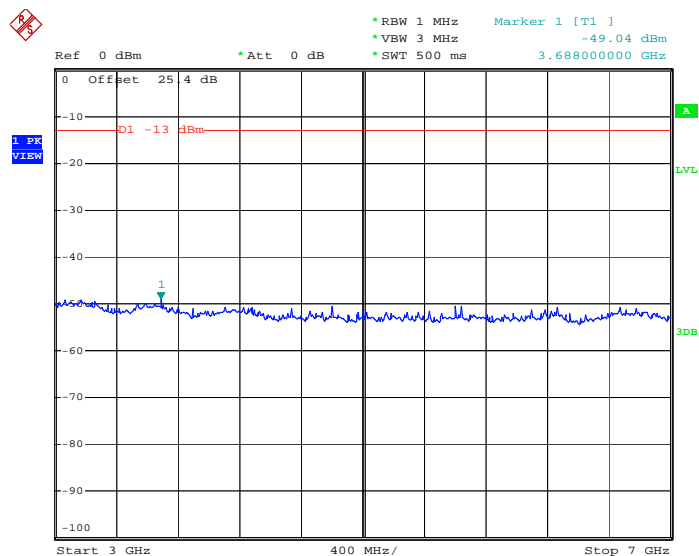
Date: 20.MAY.2009 19:31:01

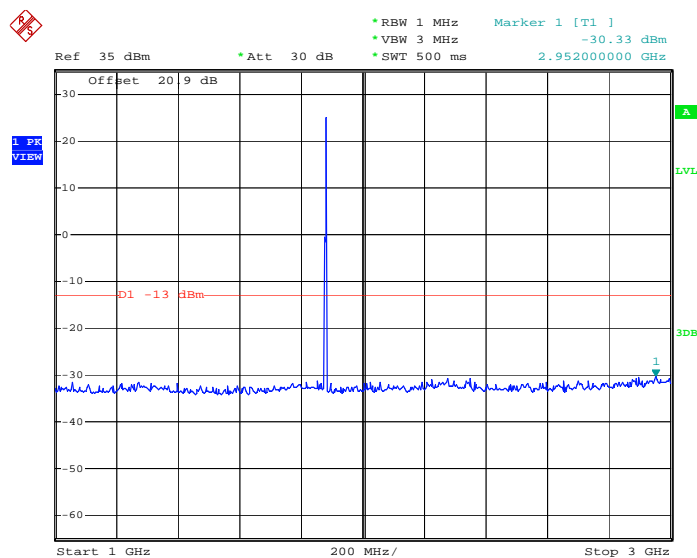Conducted Emission Plot between 1GHz ~ 3GHz


Date: 20.MAY.2009 19:32:10




Conducted Emission Plot between 3GHz ~ 7GHz



Date: 20.MAY.2009 19:32:50


Conducted Emission Plot between 7GHz ~ 13.6GHz

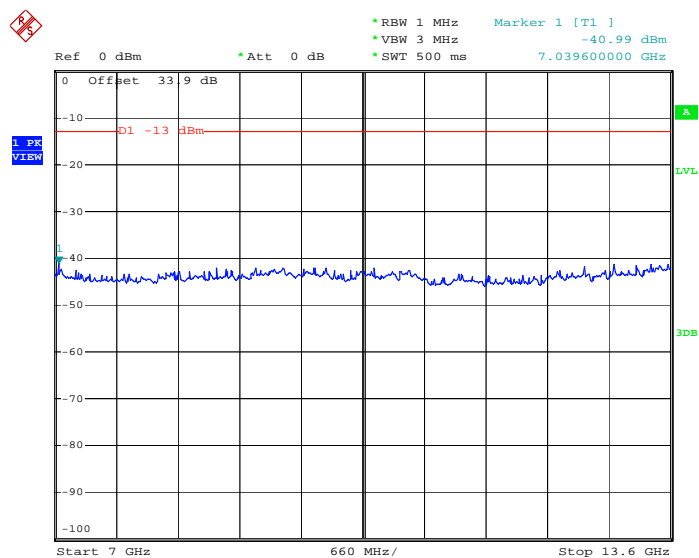

Date: 20.MAY.2009 19:33:25




Conducted Emission Plot between 13.6GHz ~ 19.1GHz

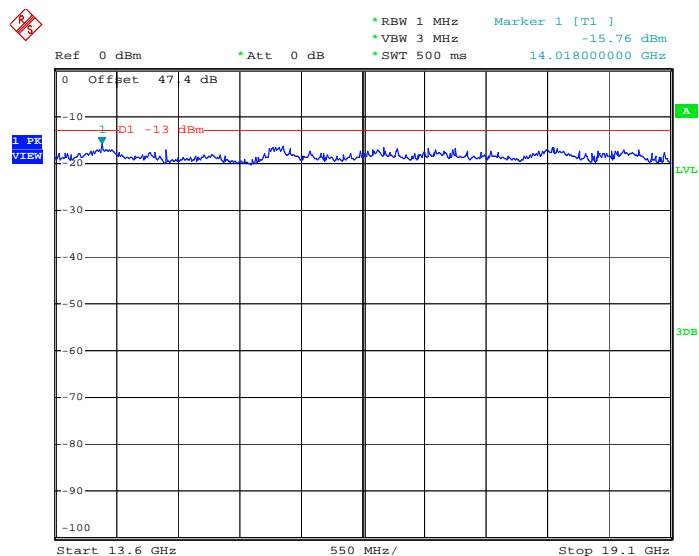


Date: 20.MAY.2009 19:34:32

Band :	WCDMA Band V	Channel :	CH4182
Test Mode :	HSDPA Link		

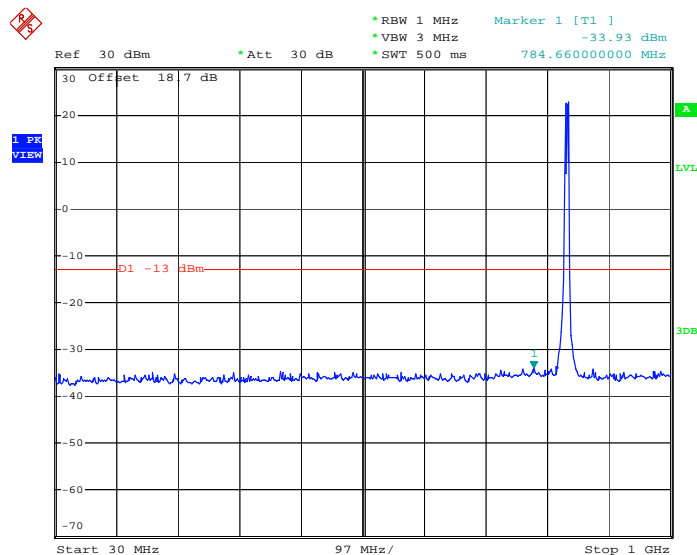Conducted Emission Plot between 30MHz ~ 1GHz


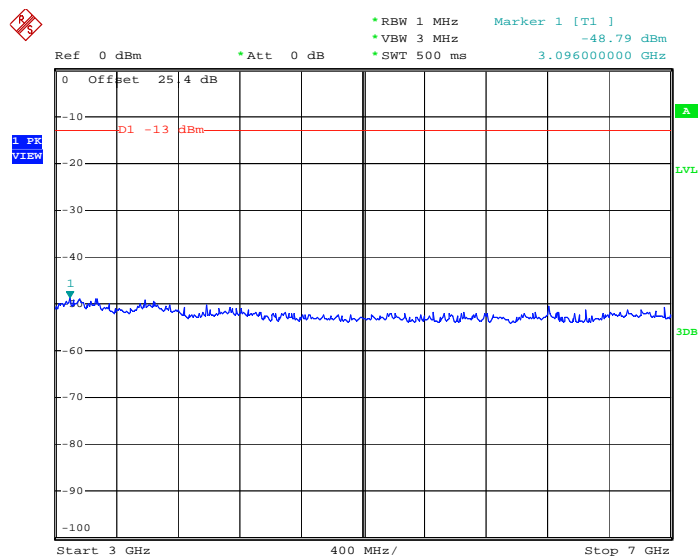
Date: 20.MAY.2009 20:45:00

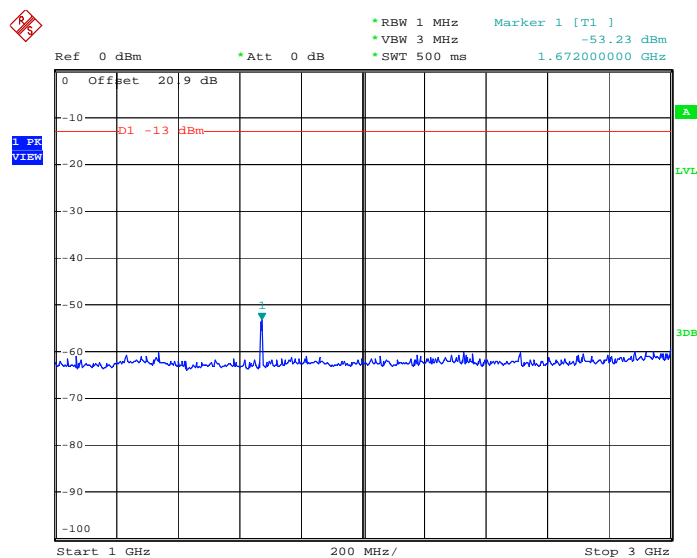Conducted Emission Plot between 1GHz ~ 3GHz


Date: 20.MAY.2009 20:46:03




Conducted Emission Plot between 3GHz ~ 7GHz




Date: 20.MAY.2009 20:46:36

Conducted Emission Plot between 7GHz ~ 9GHz

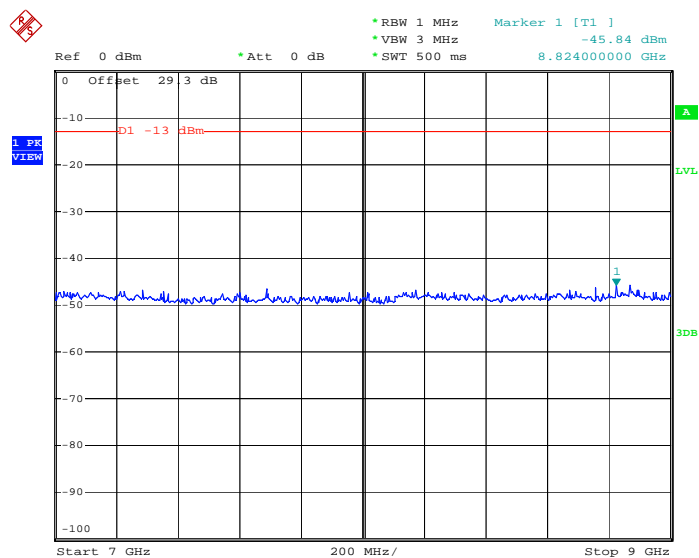


Date: 20.MAY.2009 20:47:24

Band :	WCDMA Band II	Channel :	CH9400
Test Mode :	RMC 12.2K Link		

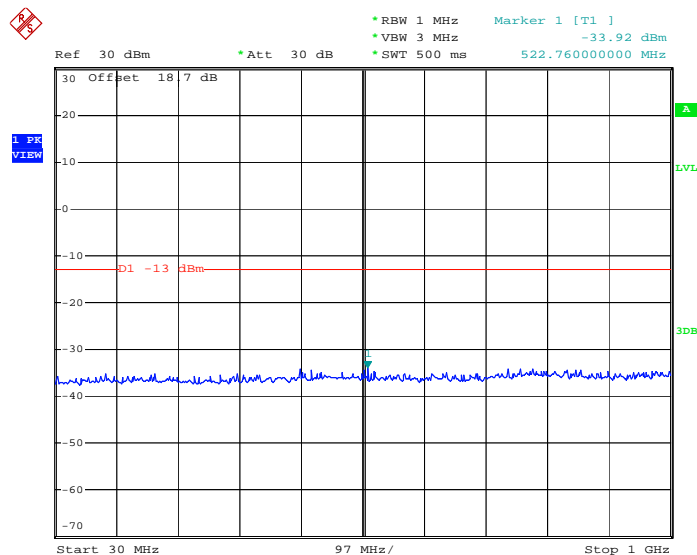Conducted Emission Plot between 30MHz ~ 1GHz


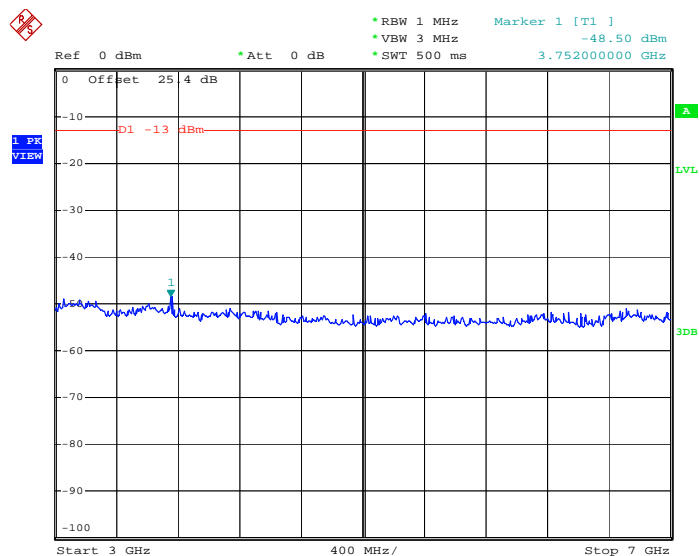
Date: 20.MAY.2009 20:35:45

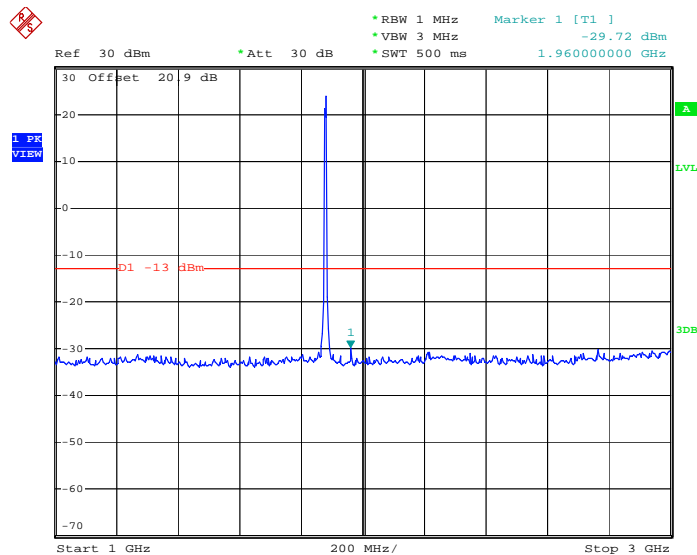Conducted Emission Plot between 1GHz ~ 3GHz


Date: 20.MAY.2009 20:36:59




Conducted Emission Plot between 3GHz ~ 7GHz




Date: 20.MAY.2009 20:38:04

Conducted Emission Plot between 7GHz ~ 13.6GHz

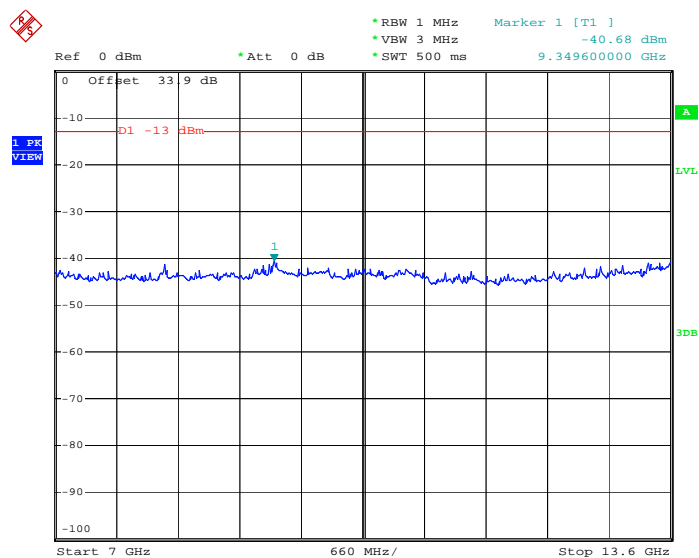

Date: 20.MAY.2009 20:38:38

Conducted Emission Plot between 13.6GHz ~ 19.1GHz

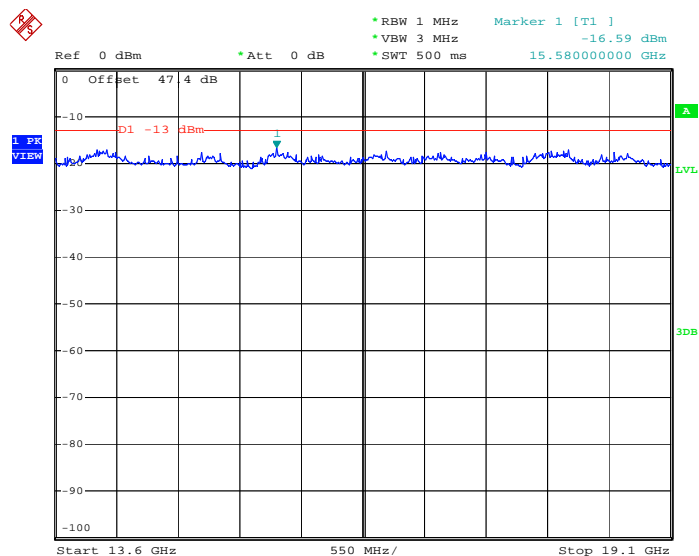

Date: 20.MAY.2009 20:39:12

3.5 Field Strength of Spurious Radiation Measurement

3.5.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures


4. The EUT was placed on a rotatable wooden table with 0.8 meter about ground.
5. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
6. The table was rotated 360 degrees to determine the position of the highest spurious emission.
7. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
8. Taking the record of maximum spurious emission.
9. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
10. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
11. Taking the record of output power at antenna port.
12. Repeat step 7 to step 8 for another polarization.
13. Emission level (dBm) = output power + substitution Gain.

3.5.4 Test Setup

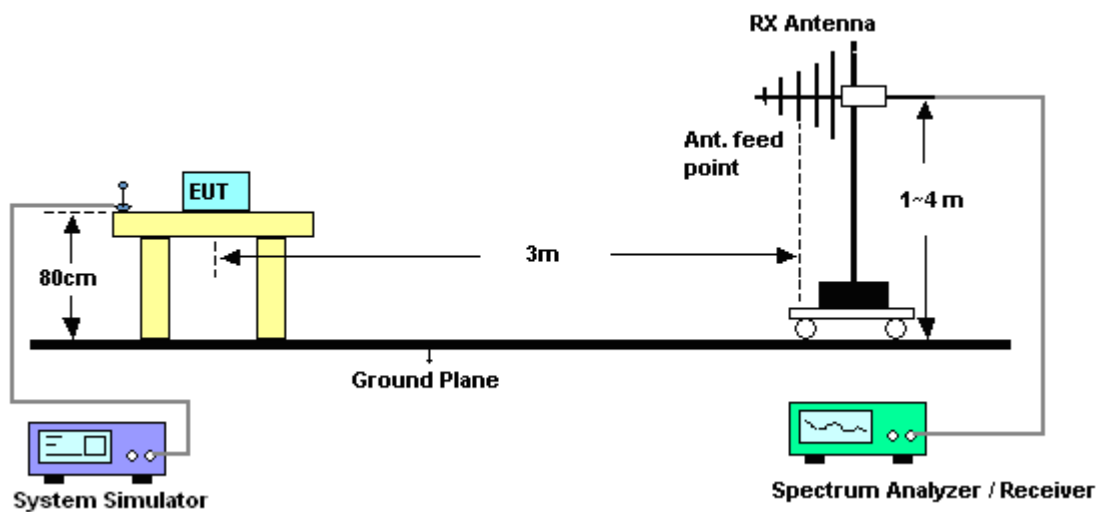


3.5.5 Test Result of Field Strength of Spurious Radiated

Band :	GSM850	Temperature :	21~26.9°C
Test Mode :	GPRS 8 Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Horizontal
Channel :	Low Channel_128		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

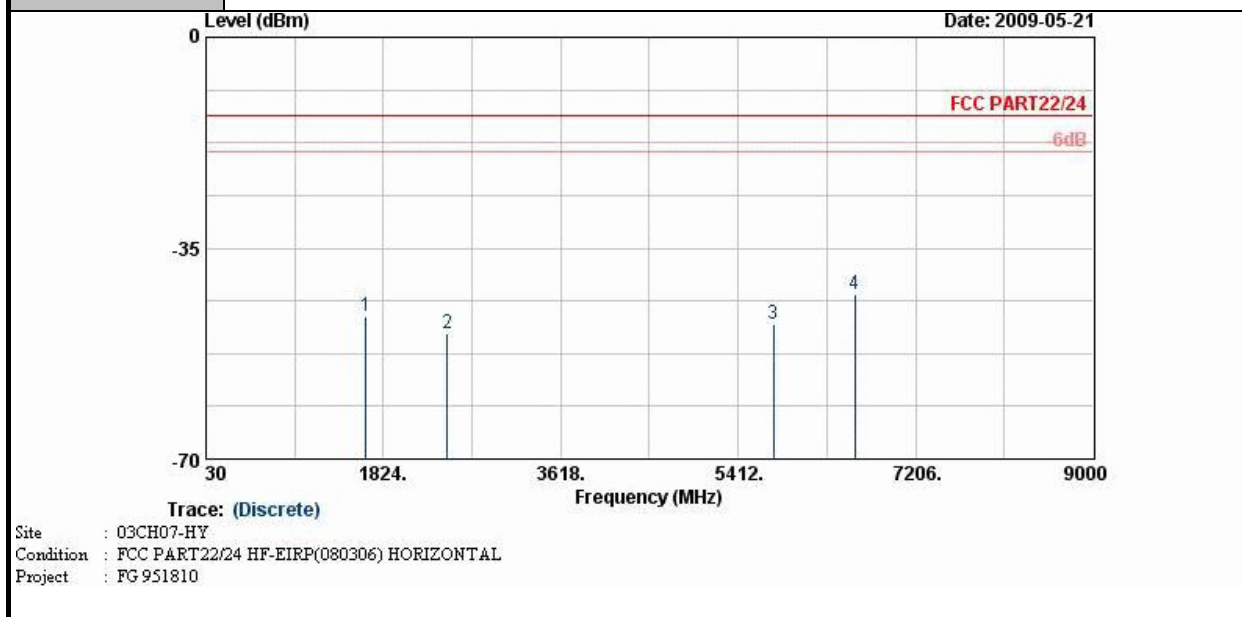


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1645	-46.33	-13	-33.33	-54.00	-46.51	3.10	5.43	H	Pass
2473	-49.14	-13	-36.14	-59.18	-49.13	3.89	6.03	H	Pass
5770	-47.68	-13	-34.68	-65.82	-50.39	5.54	10.40	H	Pass
6590	-42.66	-13	-29.66	-63.96	-45.71	5.88	11.08	H	Pass

Band :	GSM850	Temperature :	21~26.9°C
Test Mode :	GPRS 8 Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Vertical
Channel :	Low Channel_128		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

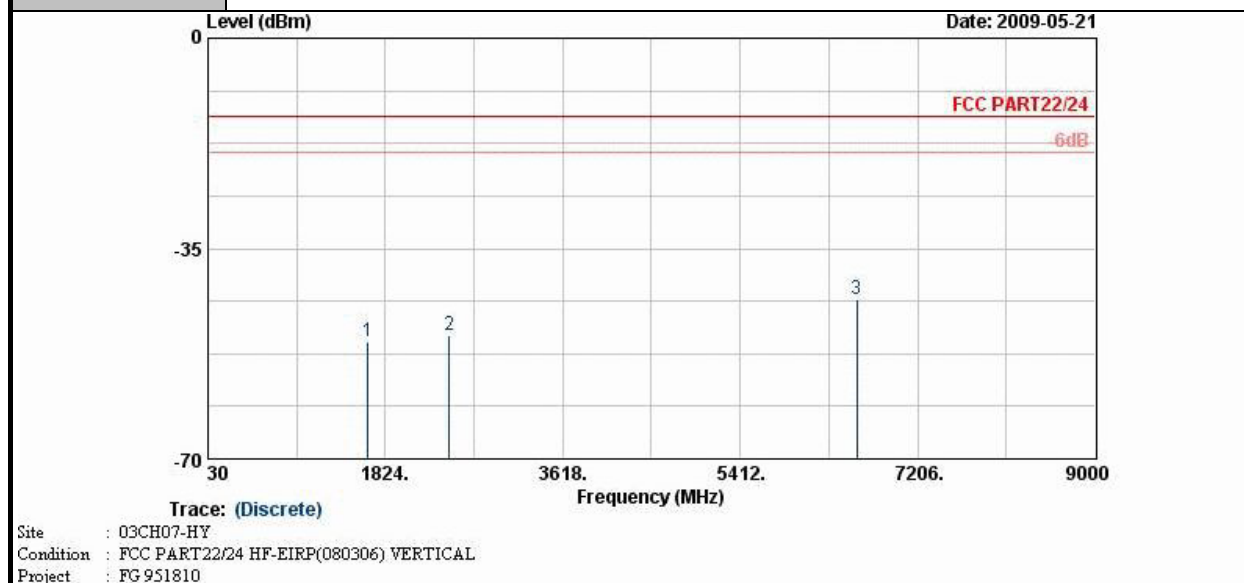


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1645	-50.51	-13	-37.51	-56.29	-50.69	3.10	5.43	V	Pass
2470	-49.47	-13	-36.47	-59.94	-49.46	3.89	6.03	V	Pass
6590	-43.36	-13	-30.36	-64.16	-46.41	5.88	11.08	V	Pass

Band :	GSM850	Temperature :	21~26.9°C
Test Mode :	GPRS 8 Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Horizontal
Channel :	Middle Channel_189		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

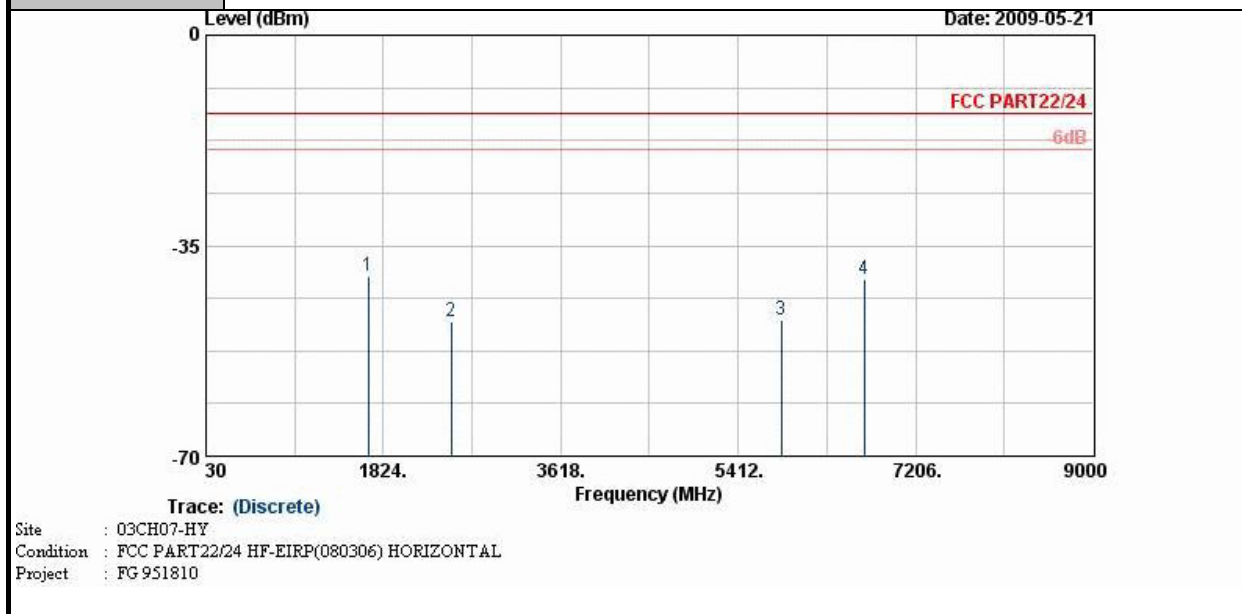


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-39.96	-13	-26.96	-52.14	-39.81	3.39	5.39	H	Pass
2509	-47.50	-13	-34.50	-54.78	-47.76	3.71	6.12	H	Pass
5850	-47.33	-13	-34.33	-63.96	-51.20	4.38	10.40	H	Pass
6690	-40.53	-13	-27.53	-59.44	-44.31	5.22	11.15	H	Pass

Band :	GSM850	Temperature :	21~26.9°C
Test Mode :	GPRS 8 Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Vertical
Channel :	Middle Channel_189		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

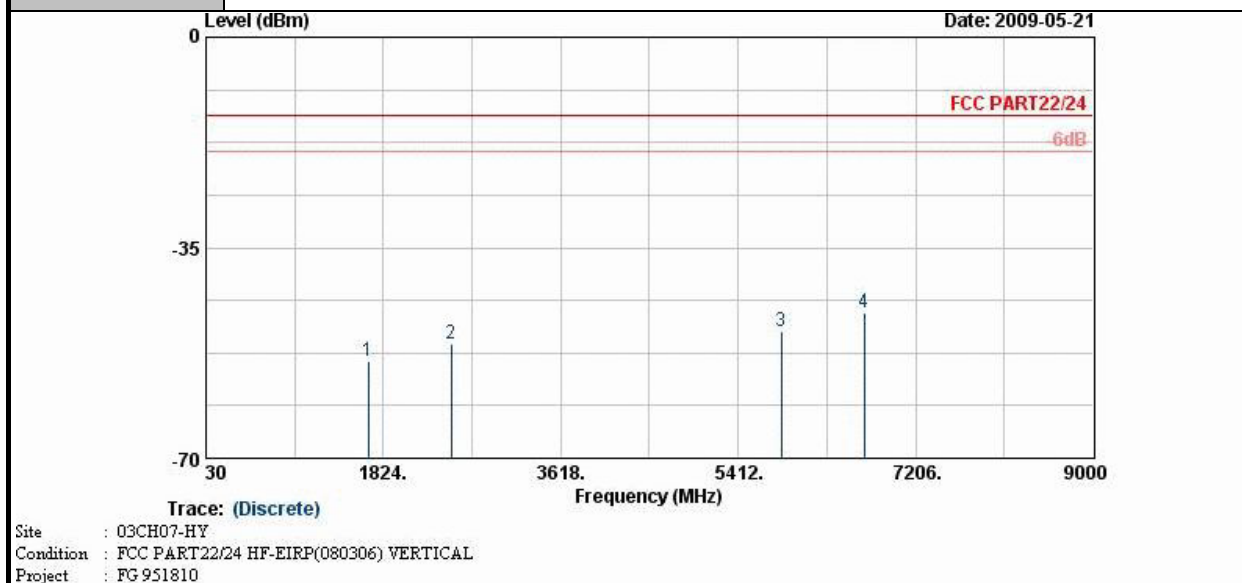


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-53.79	-13	-40.79	-58.04	-53.64	3.39	5.39	V	Pass
2506	-51.03	-13	-38.03	-60.27	-51.29	3.71	6.12	V	Pass
5850	-49.00	-13	-36.00	-63.52	-52.87	4.38	10.40	V	Pass
6690	-45.74	-13	-32.74	-62.71	-49.52	5.22	11.15	V	Pass

Band :	GSM850	Temperature :	21~26.9°C
Test Mode :	GPRS 8 Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Horizontal
Channel :	High Channel_251		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

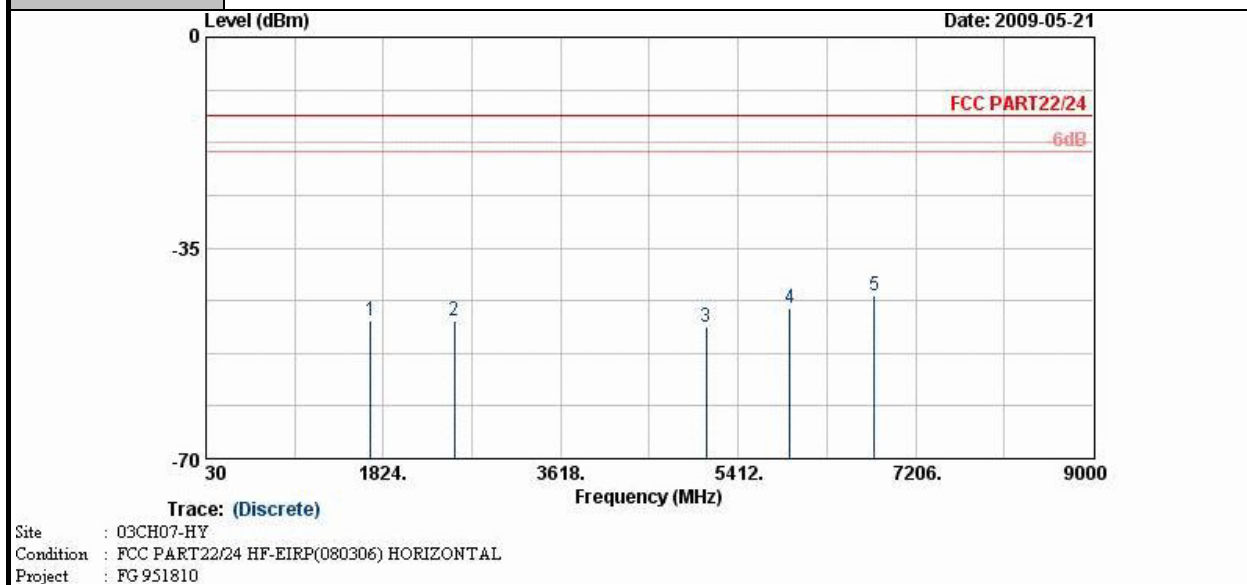


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1693	-47.23	-13	-34.23	-54.92	-47.41	3.02	5.35	H	Pass
2545	-47.19	-13	-34.19	-54.74	-47.50	3.73	6.19	H	Pass
5090	-48.26	-13	-35.26	-63.42	-50.57	5.36	9.82	H	Pass
5935	-44.90	-13	-31.90	-63.63	-47.32	5.83	10.40	H	Pass
6790	-42.81	-13	-29.81	-65.13	-45.93	5.96	11.23	H	Pass

Band :	GSM850	Temperature :	21~26.9°C
Test Mode :	GPRS 8 Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Vertical
Channel :	High Channel_251		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

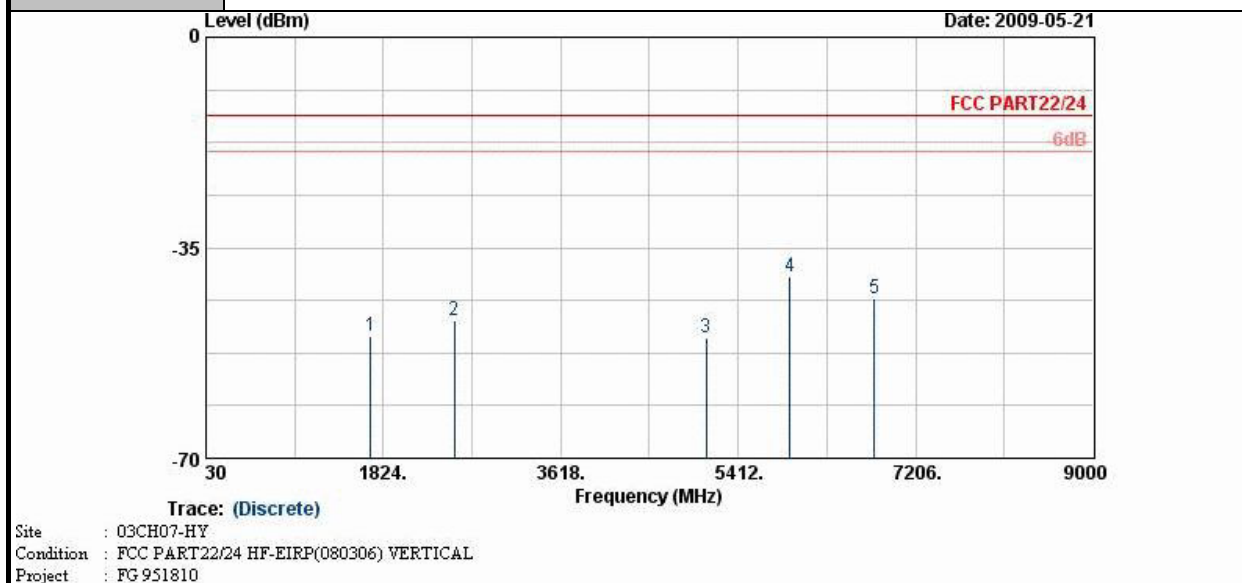


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1693	-49.71	-13	-36.71	-55.59	-49.89	3.02	5.35	V	Pass
2545	-47.05	-13	-34.05	-57.20	-47.36	3.73	6.19	V	Pass
5090	-49.95	-13	-36.95	-61.29	-52.26	5.36	9.82	V	Pass
5935	-39.70	-13	-26.70	-62.11	-42.12	5.83	10.40	V	Pass
6790	-43.37	-13	-30.37	-65.00	-46.49	5.96	11.23	V	Pass

Band :	GSM850	Temperature :	21~26.9°C
Test Mode :	EDGE 8 Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Horizontal
Channel :	Low Channel_128		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

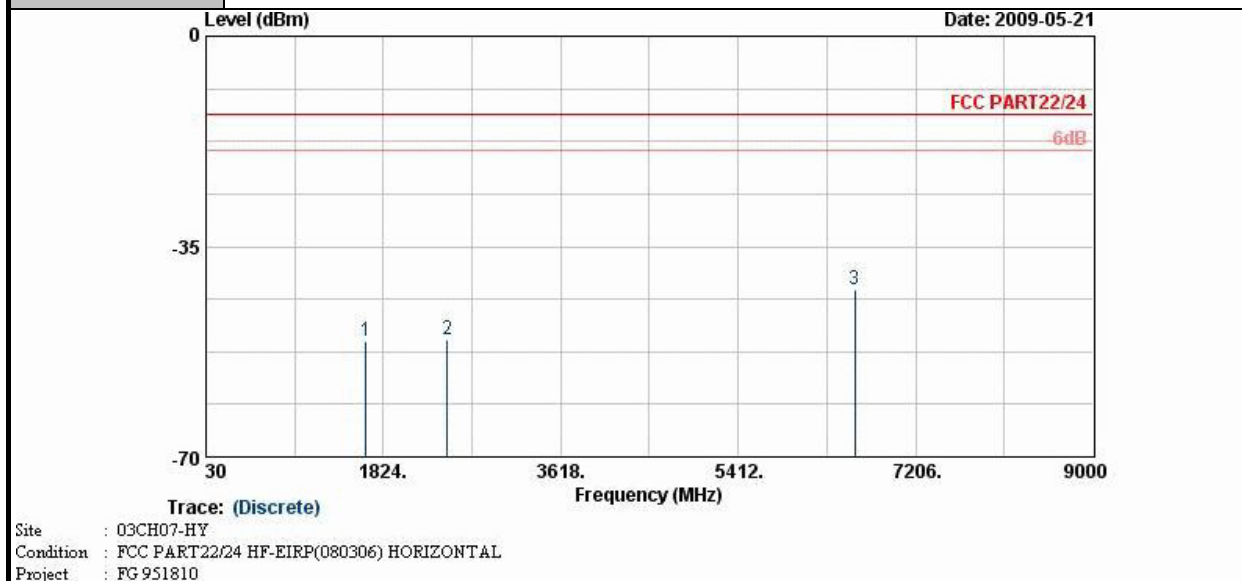


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1645	-50.84	-13	-37.84	-57.59	-51.02	3.10	5.43	H	Pass
2470	-50.46	-13	-37.46	-60.40	-50.45	3.89	6.03	H	Pass
6590	-42.06	-13	-29.06	-63.36	-45.11	5.88	11.08	H	Pass

Band :	GSM850	Temperature :	21~26.9°C
Test Mode :	EDGE 8 Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Vertical
Channel :	Low Channel_128		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

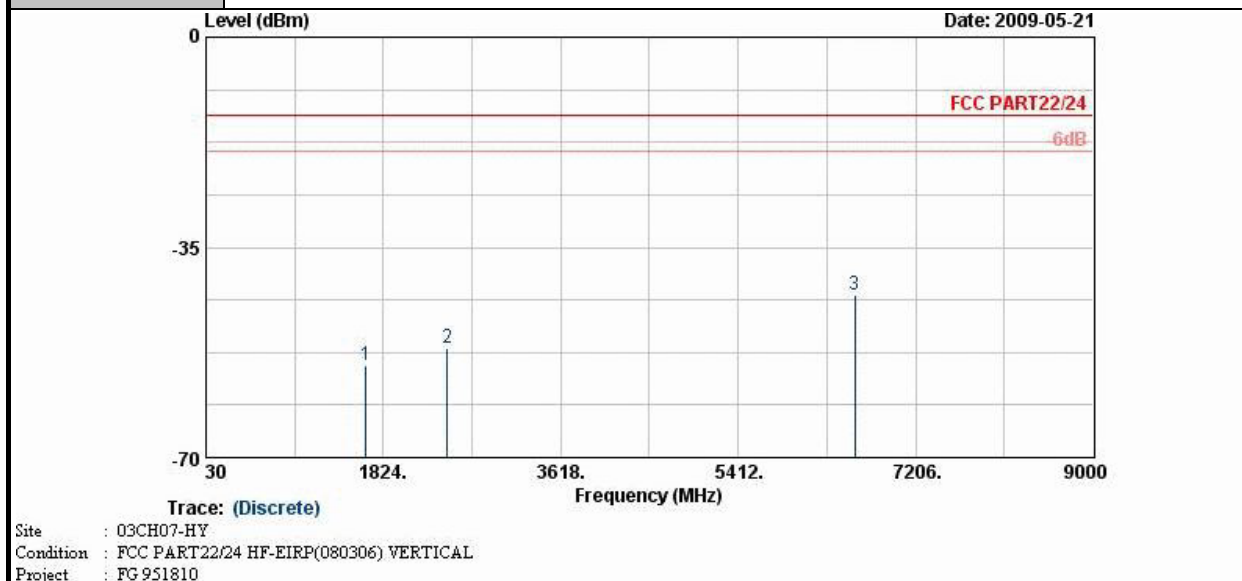


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1645	-54.62	-13	-41.62	-62.45	-54.80	3.10	5.43	V	Pass
2473	-51.84	-13	-38.84	-62.33	-51.83	3.89	6.03	V	Pass
6590	-43.04	-13	-30.04	-63.84	-46.09	5.88	11.08	V	Pass

Band :	GSM850	Temperature :	21~26.9°C
Test Mode :	EDGE 8 Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Horizontal
Channel :	Middle Channel_189		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

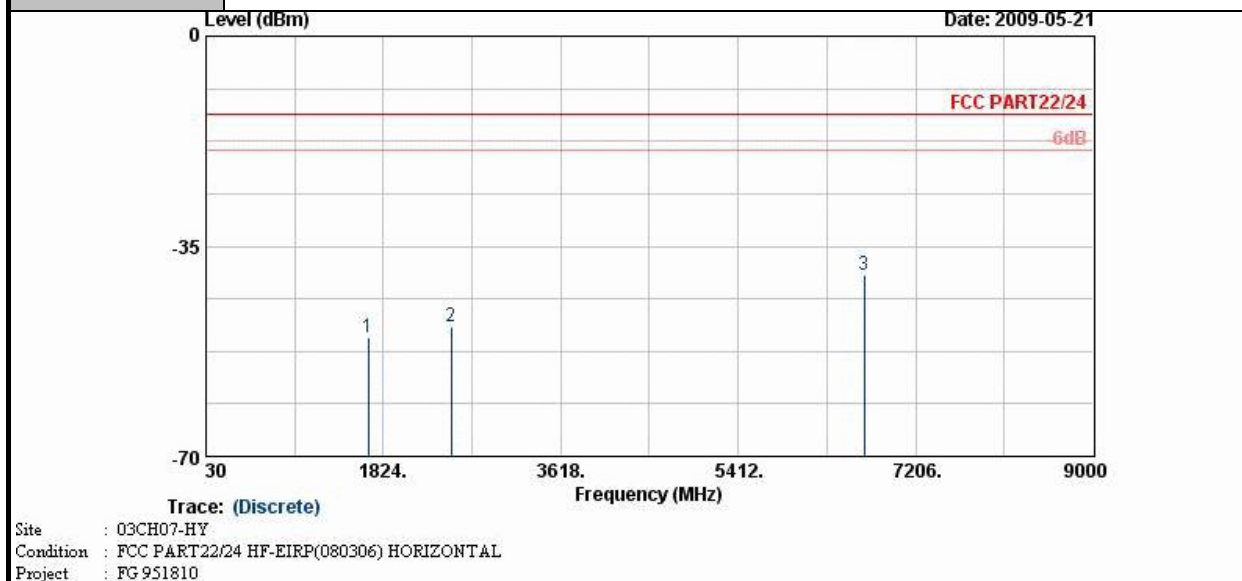


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-50.21	-13	-37.21	-57.30	-50.06	3.39	5.39	H	Pass
2509	-48.45	-13	-35.45	-58.59	-48.71	3.71	6.12	H	Pass
6690	-39.87	-13	-26.87	-61.68	-43.65	5.22	11.15	H	Pass

Band :	GSM850	Temperature :	21~26.9°C
Test Mode :	EDGE 8 Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Vertical
Channel :	Middle Channel_189		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

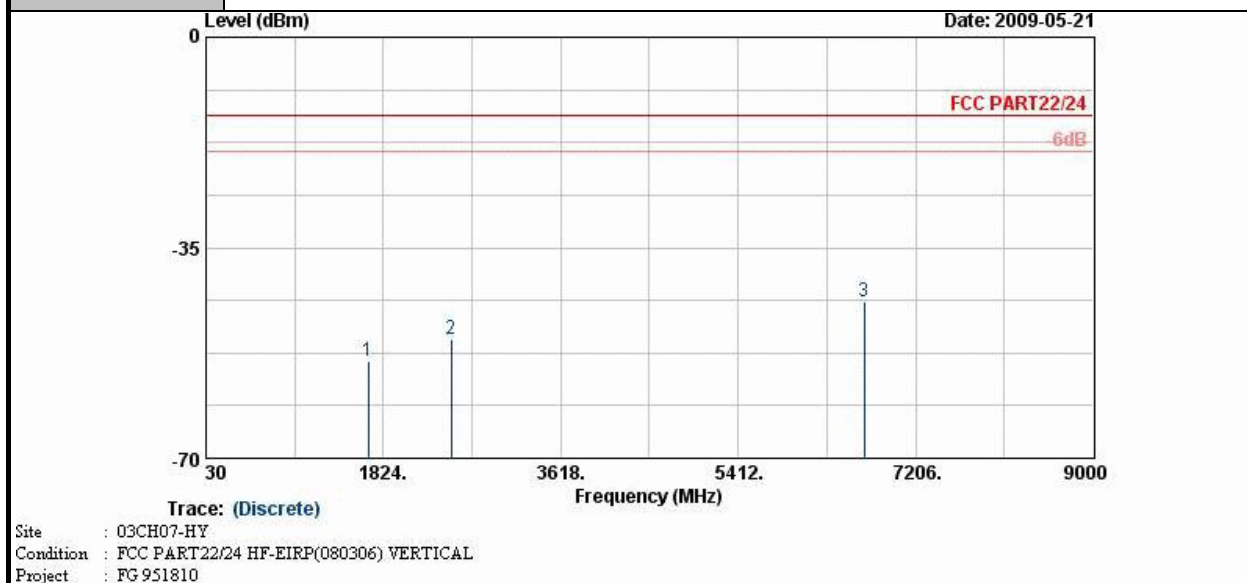


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-53.99	-13	-40.99	-61.91	-53.84	3.39	5.39	V	Pass
2509	-50.33	-13	-37.33	-60.92	-50.59	3.71	6.12	V	Pass
6690	-44.09	-13	-31.09	-65.31	-47.87	5.22	11.15	V	Pass

Band :	GSM850	Temperature :	21~26.9°C
Test Mode :	EDGE 8 Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Horizontal
Channel :	High Channel_251		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

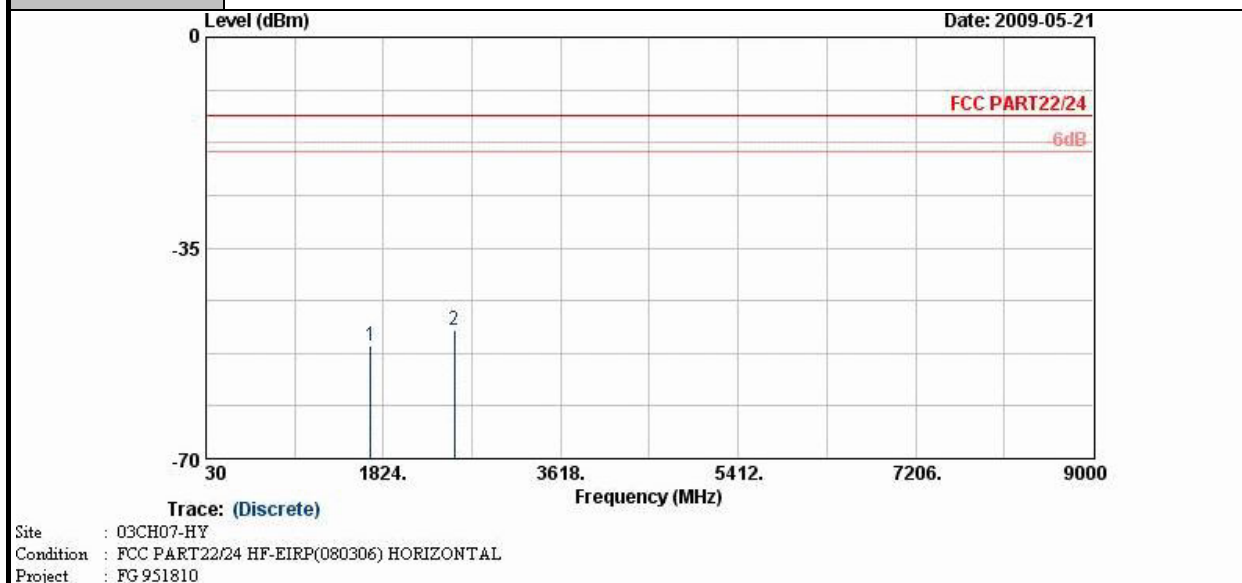


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1693	-51.14	-13	-38.14	-58.06	-51.32	3.02	5.35	H	Pass
2545	-48.71	-13	-35.71	-58.86	-49.02	3.73	6.19	H	Pass

Band :	GSM850	Temperature :	21~26.9°C
Test Mode :	EDGE 8 Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Vertical
Channel :	High Channel_251		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

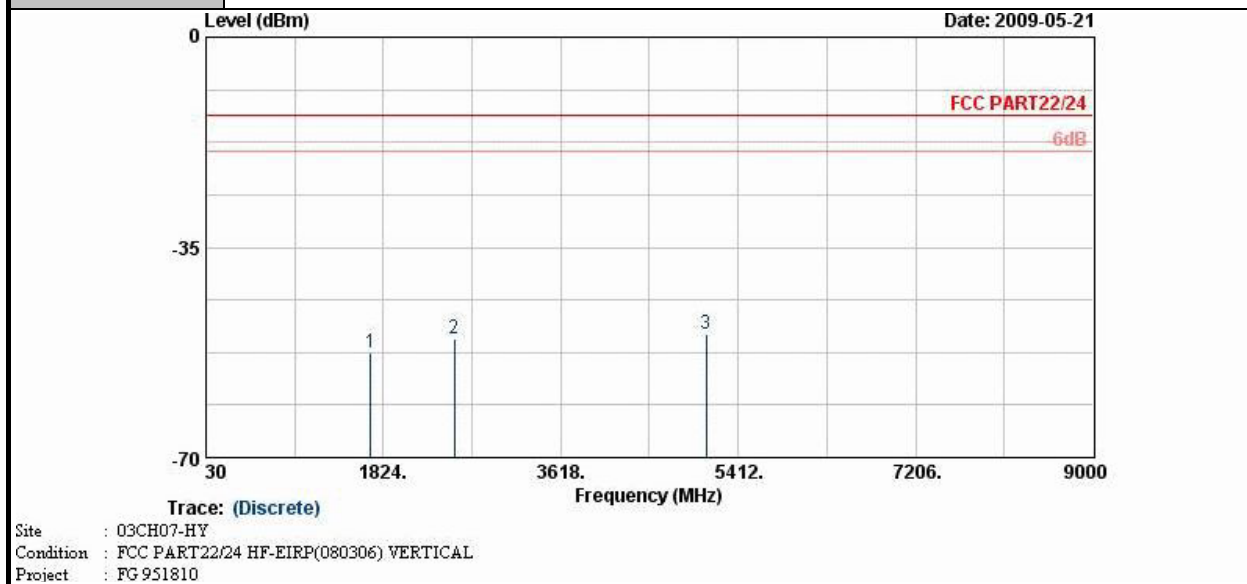


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1693	-52.66	-13	-39.66	-60.77	-52.84	3.02	5.35	V	Pass
2545	-50.25	-13	-37.25	-60.98	-50.56	3.73	6.19	V	Pass
5090	-49.47	-13	-36.47	-64.73	-51.78	5.36	9.82	V	Pass

Band :	GSM1900	Temperature :	21~26.9°C
Test Mode :	GPRS 8 Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Horizontal
Channel :	Low Channel_512		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

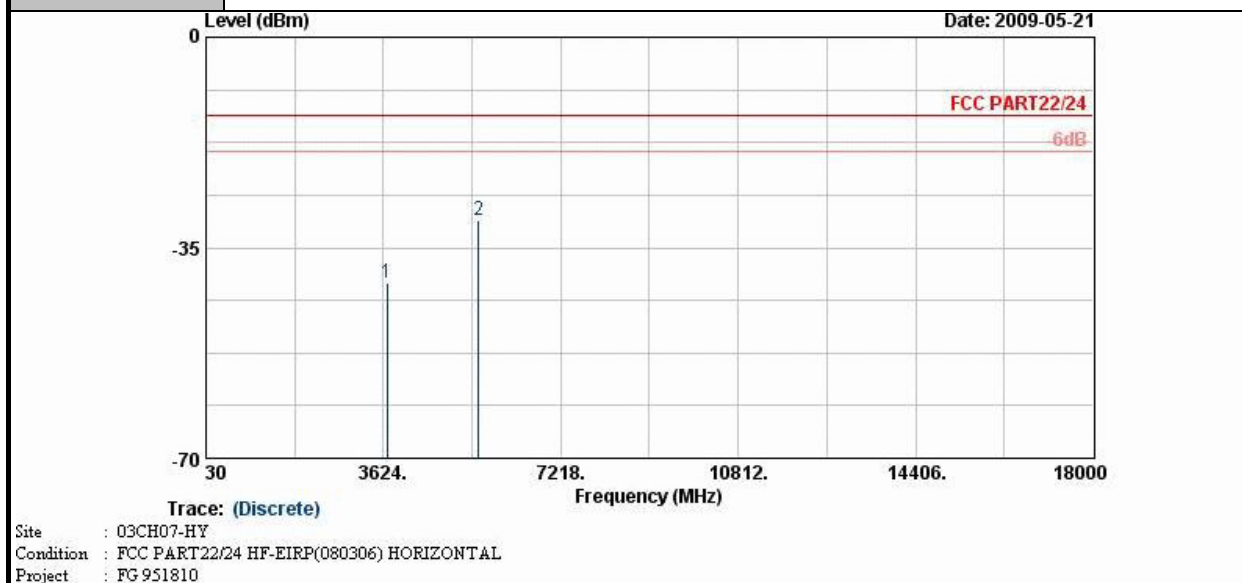


Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3696	-40.85	-13	-27.85	-56.29	-44.97	4.52	8.64	H	Pass
5552	-30.34	-13	-17.34	-52.88	-35.54	5.20	10.40	H	Pass

Band :	GSM1900	Temperature :	21~26.9°C
Test Mode :	GPRS 8 Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Vertical
Channel :	Low Channel_512		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

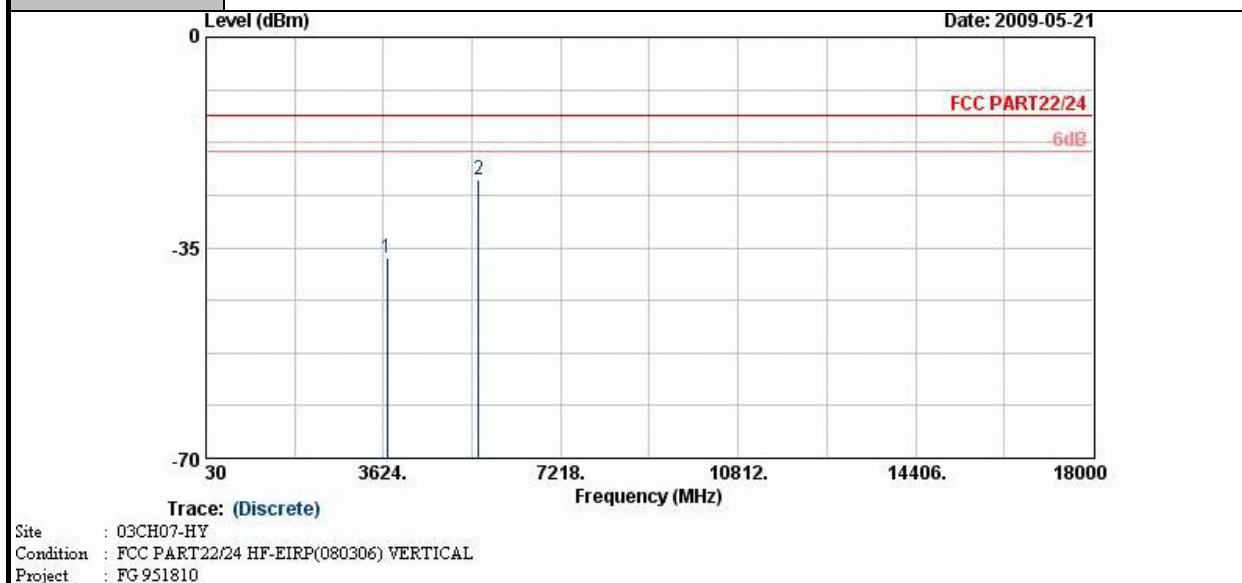


Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3696	-36.58	-13	-23.58	-54.70	-40.70	4.52	8.64	V	Pass
5552	-23.78	-13	-10.78	-46.68	-28.98	5.20	10.40	V	Pass

Band :	GSM1900	Temperature :	21~26.9°C
Test Mode :	GPRS 8 Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Horizontal
Channel :	Middle Channel_661		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

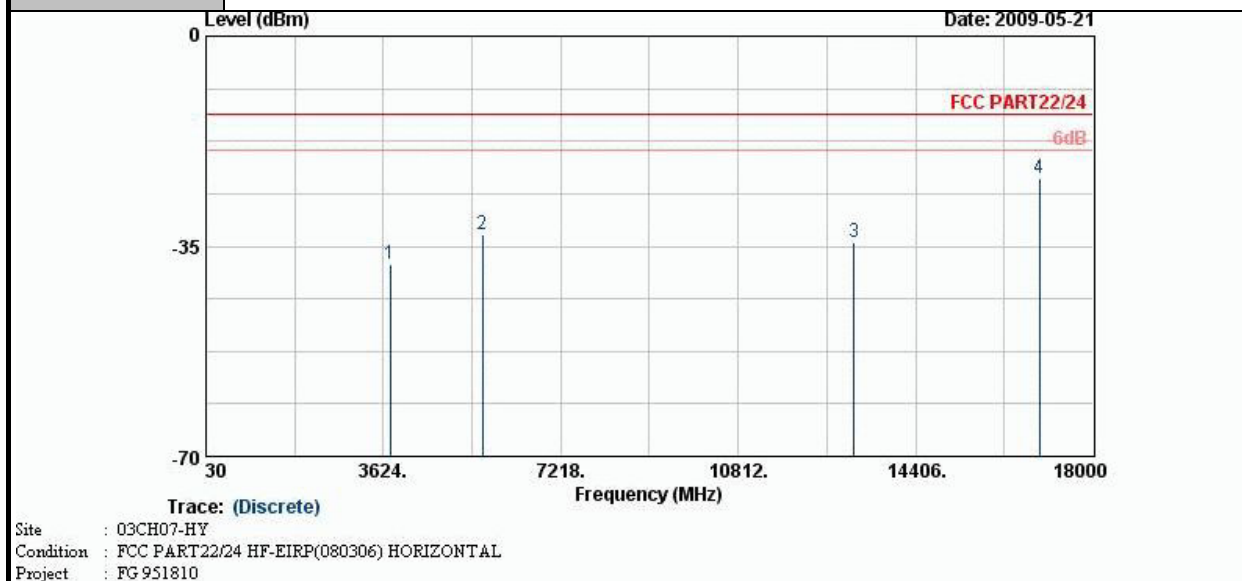


Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-37.95	-13	-24.95	-52.62	-40.47	4.88	7.40	H	Pass
5636	-33.13	-13	-20.13	-53.44	-36.39	5.55	8.81	H	Pass
13156	-34.32	-13	-21.32	-66.75	-36.55	8.80	11.03	H	Pass
16917	-23.63	-13	-10.63	-59.39	-22.91	11.22	10.50	H	Pass

Band :	GSM1900	Temperature :	21~26.9°C
Test Mode :	GPRS 8 Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Vertical
Channel :	Middle Channel_661		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

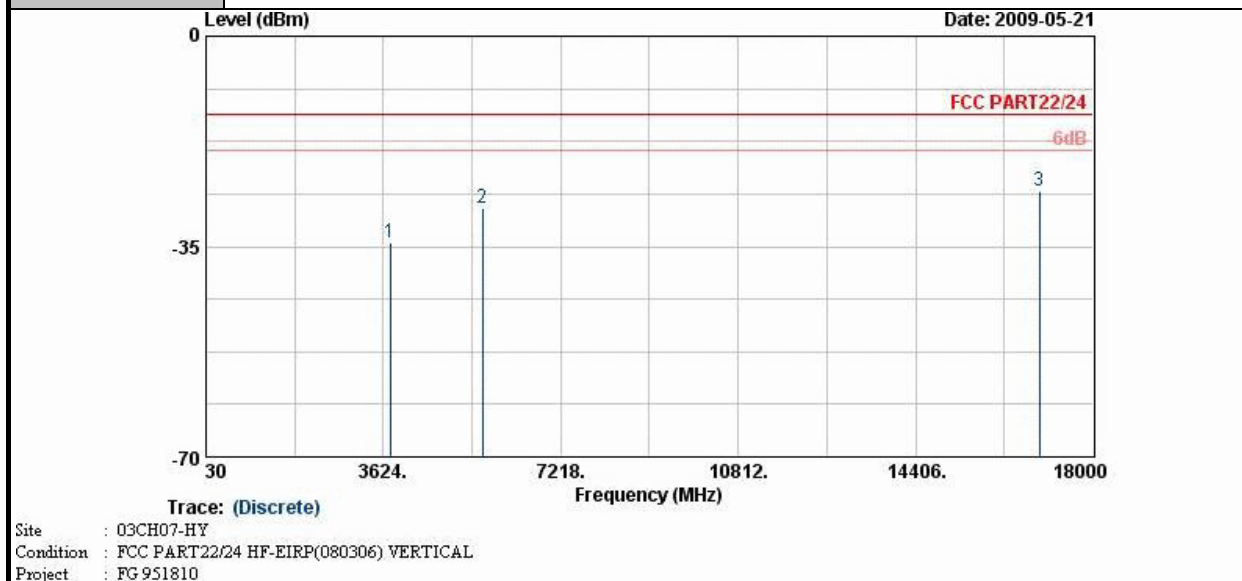


Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-34.25	-13	-21.25	-51.96	-37.28	4.88	7.91	V	Pass
5636	-28.58	-13	-15.58	-50.27	-32.80	5.55	9.77	V	Pass
16917	-25.77	-13	-12.77	-61.07	-25.15	11.22	10.60	V	Pass

Band :	GSM1900	Temperature :	21~26.9°C
Test Mode :	GPRS 8 Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Horizontal
Channel :	High Channel_810		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

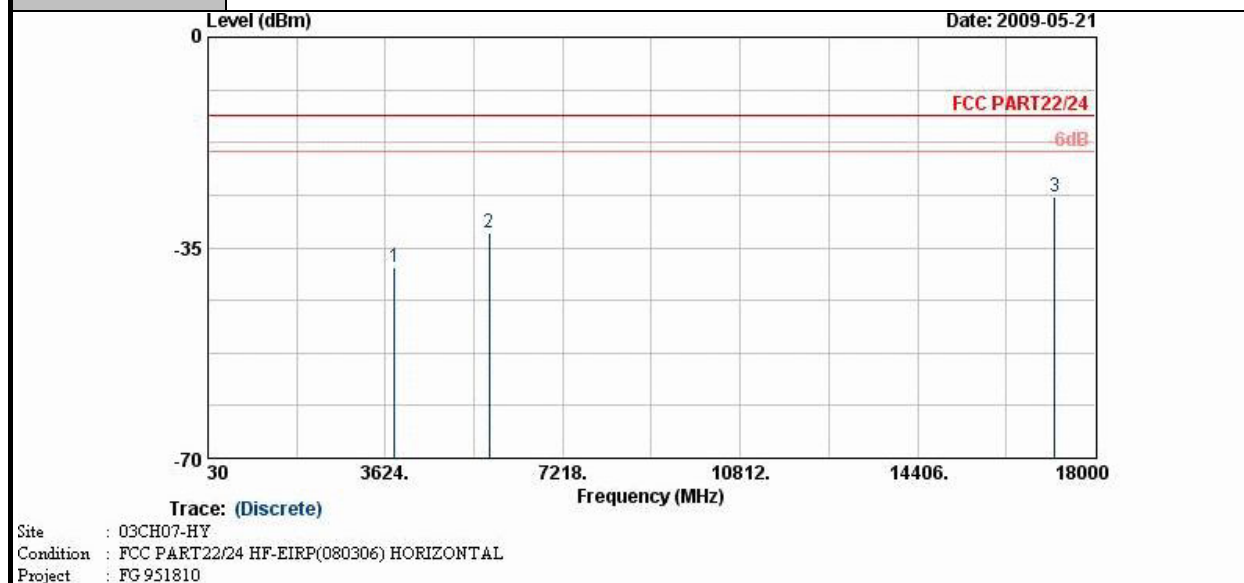


Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3812	-38.36	-13	-25.36	-54.27	-42.36	4.78	8.78	H	Pass
5728	-32.59	-13	-19.59	-54.29	-37.33	5.66	10.40	H	Pass
17190	-26.53	-13	-13.53	-62.34	-30.29	10.32	14.08	H	Pass

Band :	GSM1900	Temperature :	21~26.9°C
Test Mode :	GPRS 8 Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Vertical
Channel :	High Channel_810		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

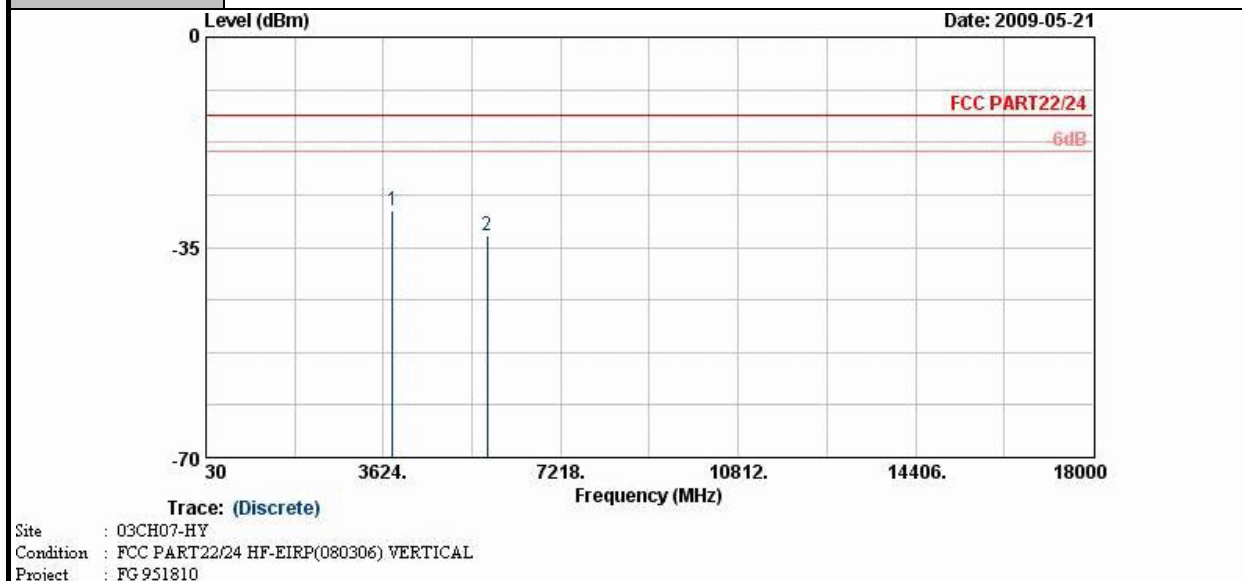


Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3812	-28.78	-13	-15.78	-47.54	-32.78	4.78	8.78	V	Pass
5728	-33.05	-13	-20.05	-54.89	-37.79	5.66	10.40	V	Pass

Band :	GSM1900	Temperature :	21~26.9°C
Test Mode :	EDGE 8 Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Horizontal
Channel :	Low Channel_512		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

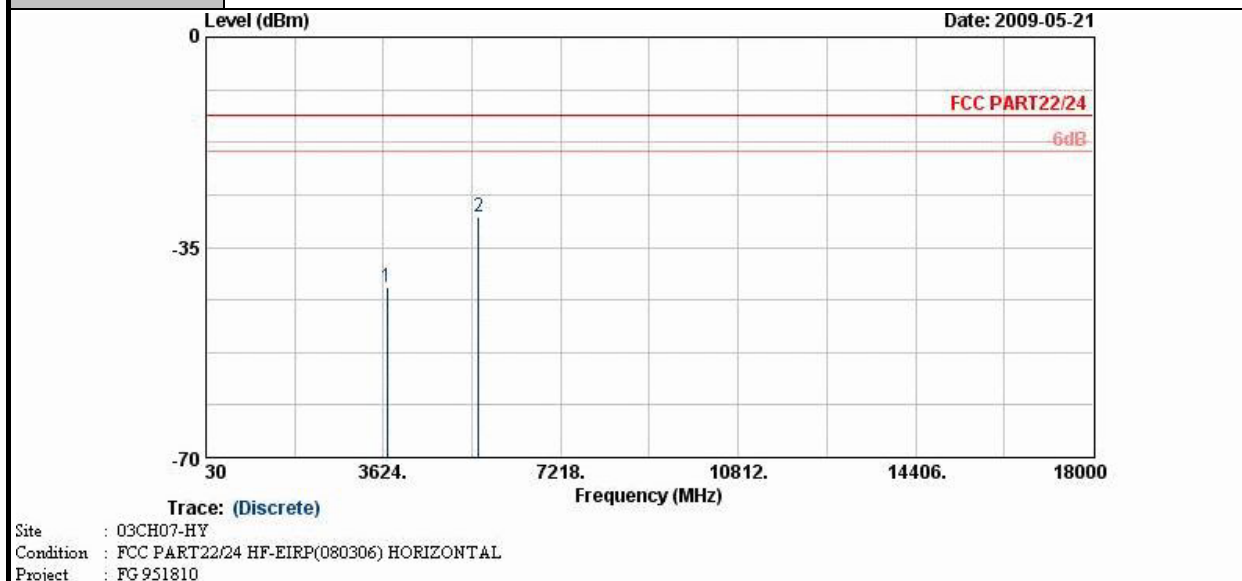


Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3696	-41.65	-13	-28.65	-57.18	-45.77	4.52	8.64	H	Pass
5552	-30.04	-13	-17.04	-52.58	-35.24	5.20	10.40	H	Pass

Band :	GSM1900	Temperature :	21~26.9°C
Test Mode :	EDGE 8 Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Vertical
Channel :	Low Channel_512		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

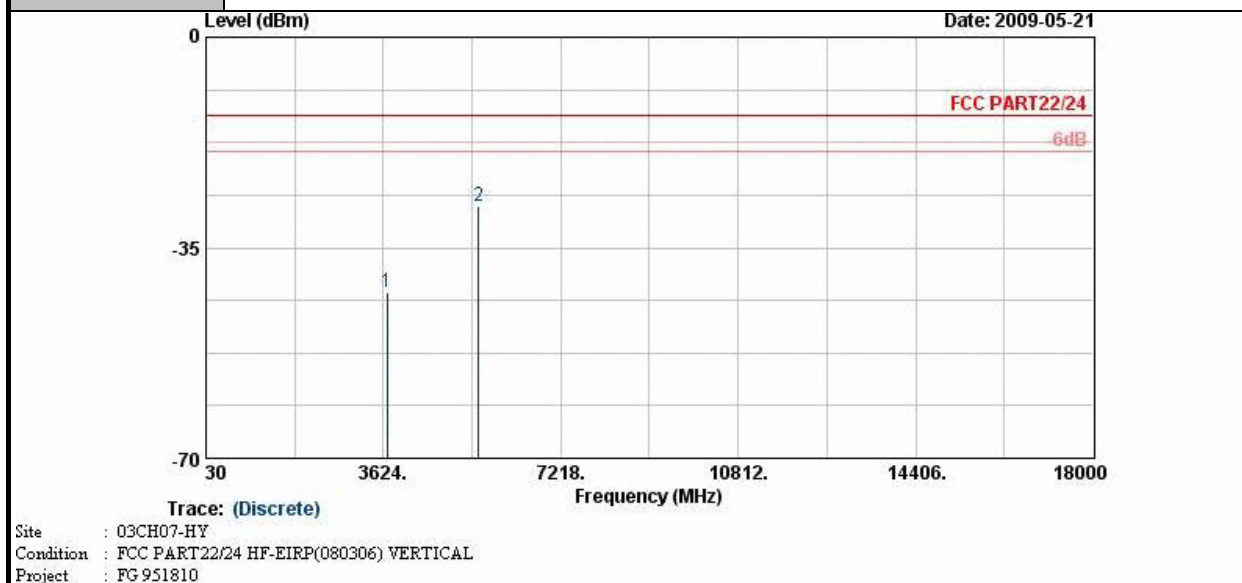


Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3696	-42.36	-13	-29.36	-59.26	-46.48	4.52	8.64	V	Pass
5552	-28.20	-13	-15.20	-50.87	-33.40	5.20	10.40	V	Pass

Band :	GSM1900	Temperature :	21~26.9°C
Test Mode :	EDGE 8 Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Horizontal
Channel :	Middle Channel_661		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

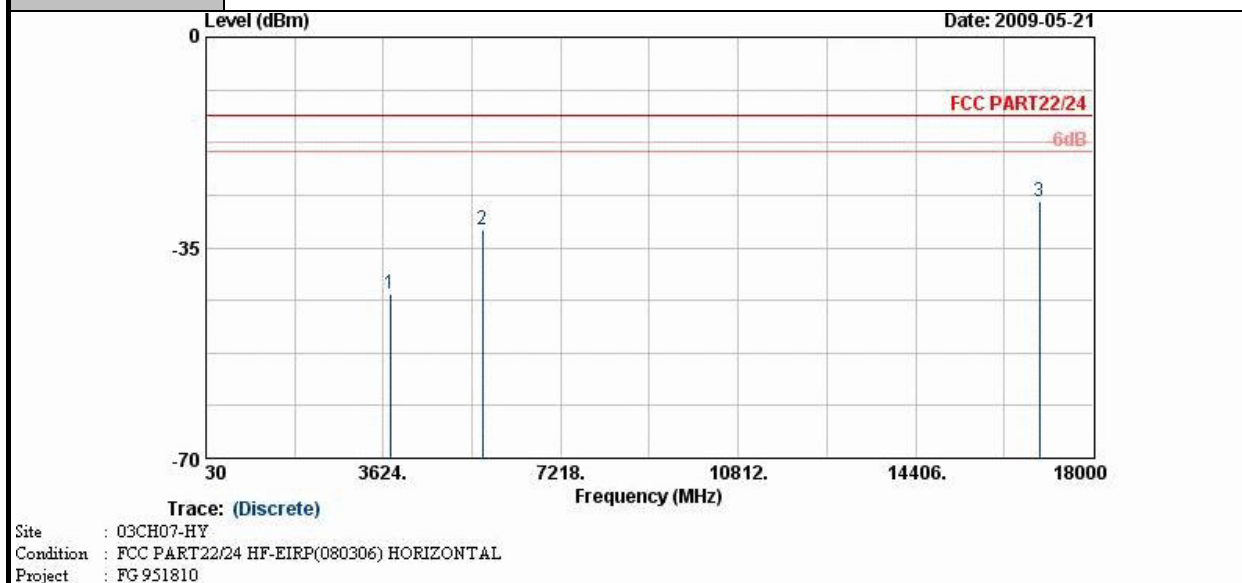


Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-42.73	-13	-29.73	-56.56	-45.25	4.88	7.40	H	Pass
5636	-32.12	-13	-19.12	-53.65	-35.38	5.55	8.81	H	Pass
16917	-27.21	-13	-14.21	-62.97	-26.49	11.22	10.50	H	Pass

Band :	GSM1900	Temperature :	21~26.9°C
Test Mode :	EDGE 8 Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Vertical
Channel :	Middle Channel_661		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

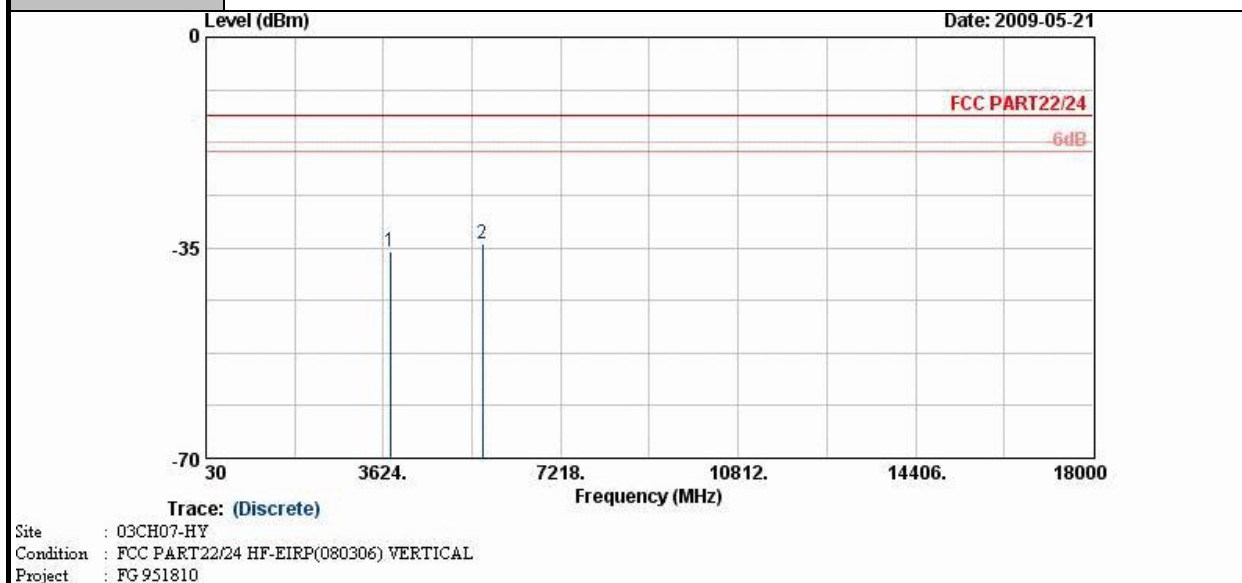


Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-35.74	-13	-22.74	-53.06	-38.77	4.88	7.91	V	Pass
5636	-34.44	-13	-21.44	-54.76	-38.66	5.55	9.77	V	Pass

Band :	GSM1900	Temperature :	21~26.9°C
Test Mode :	EDGE 8 Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Horizontal
Channel :	High Channel_810		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

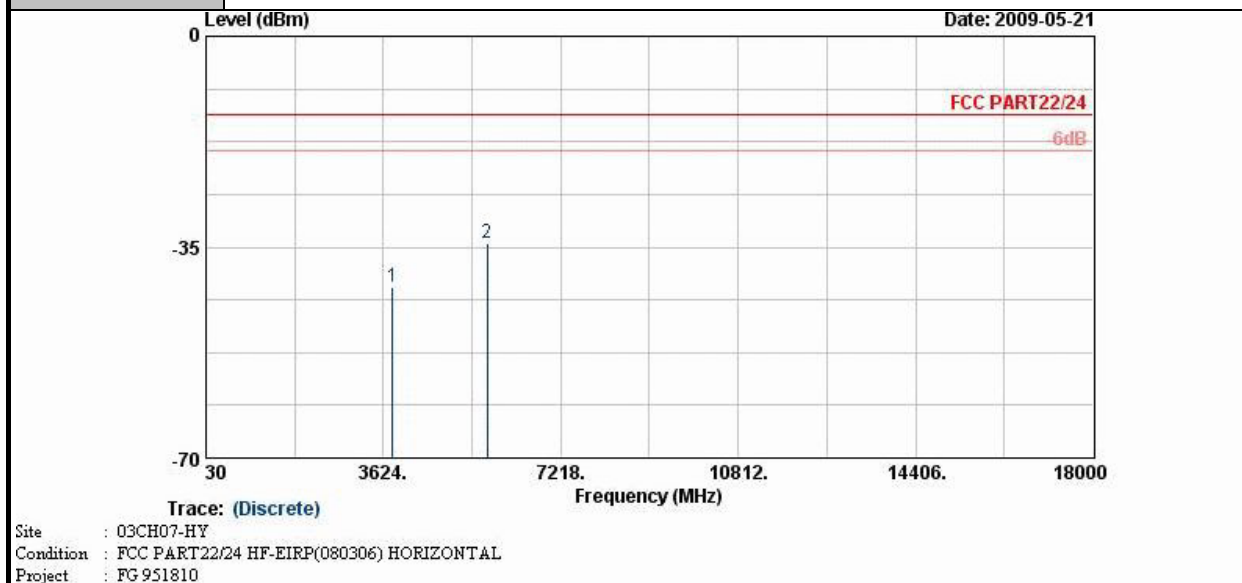


Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3812	-41.61	-13	-28.61	-56.91	-45.61	4.78	8.78	H	Pass
5728	-34.26	-13	-21.26	-55.87	-39.00	5.66	10.40	H	Pass

Band :	GSM1900	Temperature :	21~26.9°C
Test Mode :	EDGE 8 Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Vertical
Channel :	High Channel_810		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

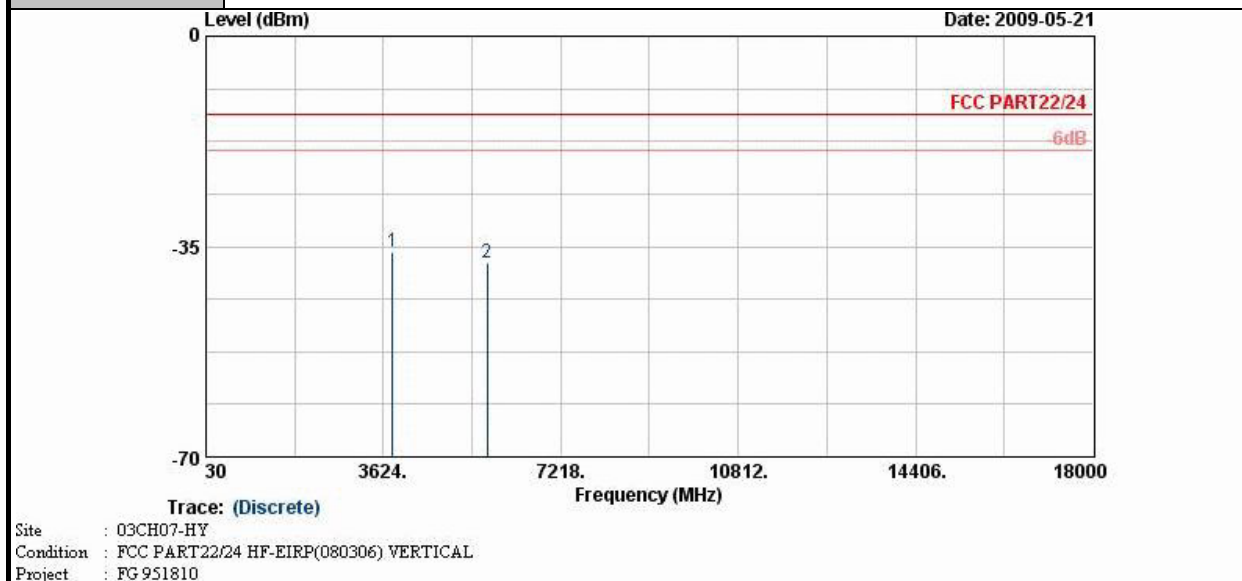


Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3812	-35.86	-13	-22.86	-53.99	-39.86	4.78	8.78	V	Pass
5728	-37.86	-13	-24.86	-58.81	-42.60	5.66	10.40	V	Pass

Band :	WCDMA Band V	Temperature :	21~26.9°C
Test Mode :	HSDPA Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Horizontal
Channel :	Low Channel_4132		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

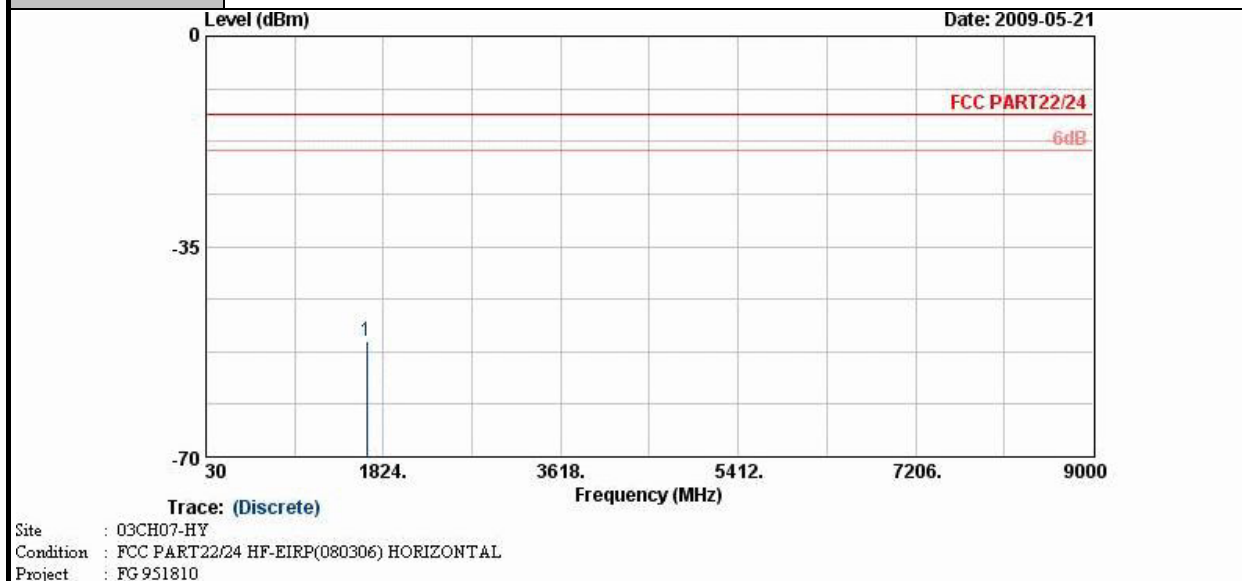


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1654	-50.67	-13	-37.67	-57.44	-50.85	3.10	5.43	H	Pass

Band :	WCDMA Band V	Temperature :	21~26.9°C
Test Mode :	HSDPA Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Vertical
Channel :	Low Channel_4132		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

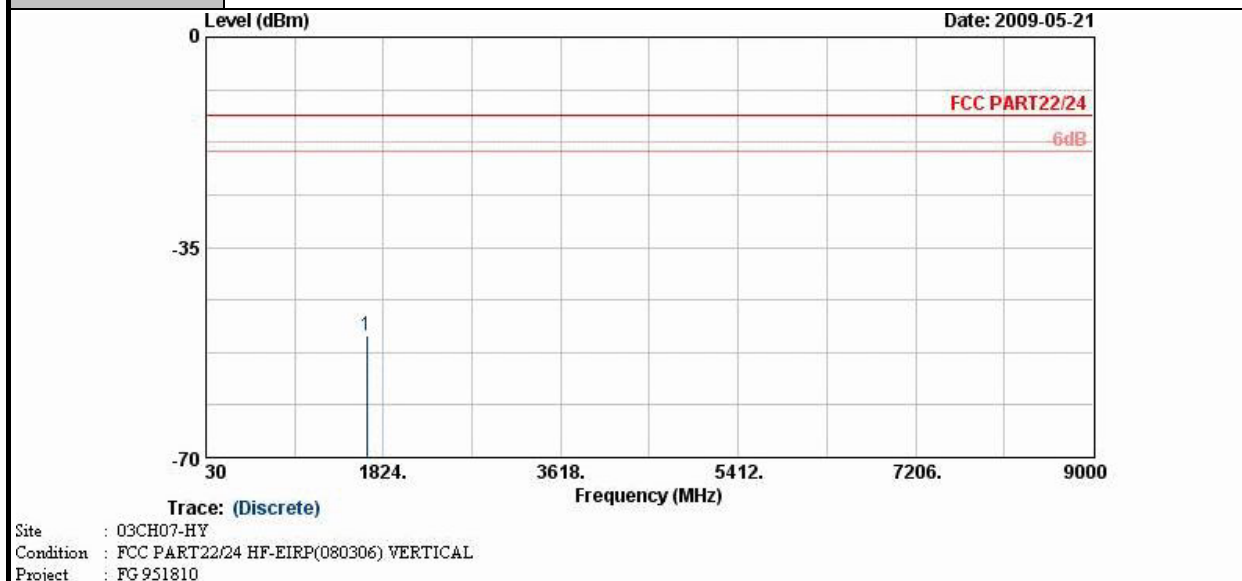


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1654	-49.74	-13	-36.74	-55.62	-49.92	3.10	5.43	V	Pass

Band :	WCDMA Band V	Temperature :	21~26.9°C
Test Mode :	HSDPA Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Horizontal
Channel :	Middle Channel_4182		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

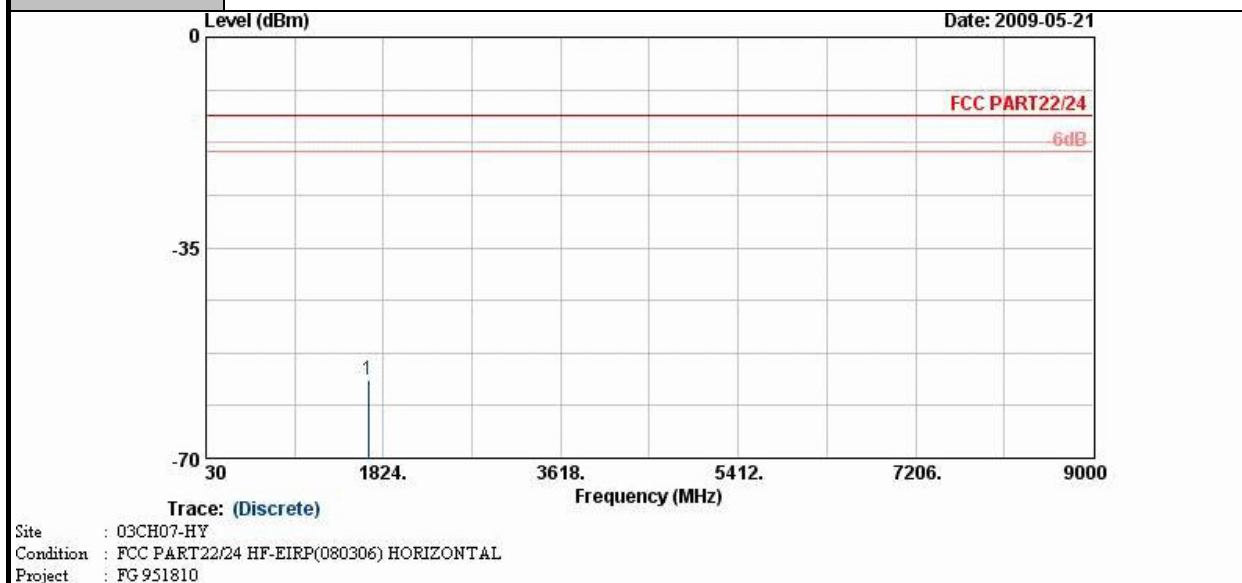


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-57.06	-13	-44.06	-61.44	-56.91	3.39	5.39	H	Pass

Band :	WCDMA Band V	Temperature :	21~26.9°C
Test Mode :	HSDPA Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Vertical
Channel :	Middle Channel_4182		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

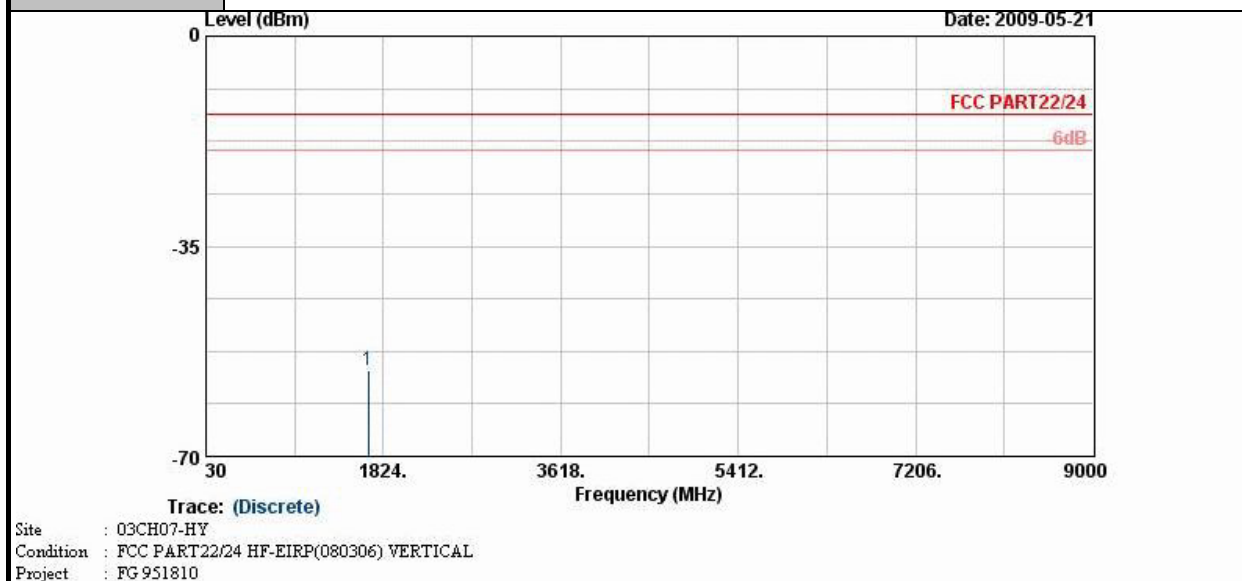


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-55.73	-13	-42.73	-59.52	-55.58	3.39	5.39	V	Pass

Band :	WCDMA Band V	Temperature :	21~26.9°C
Test Mode :	HSDPA Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Horizontal
Channel :	High Channel_4233		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

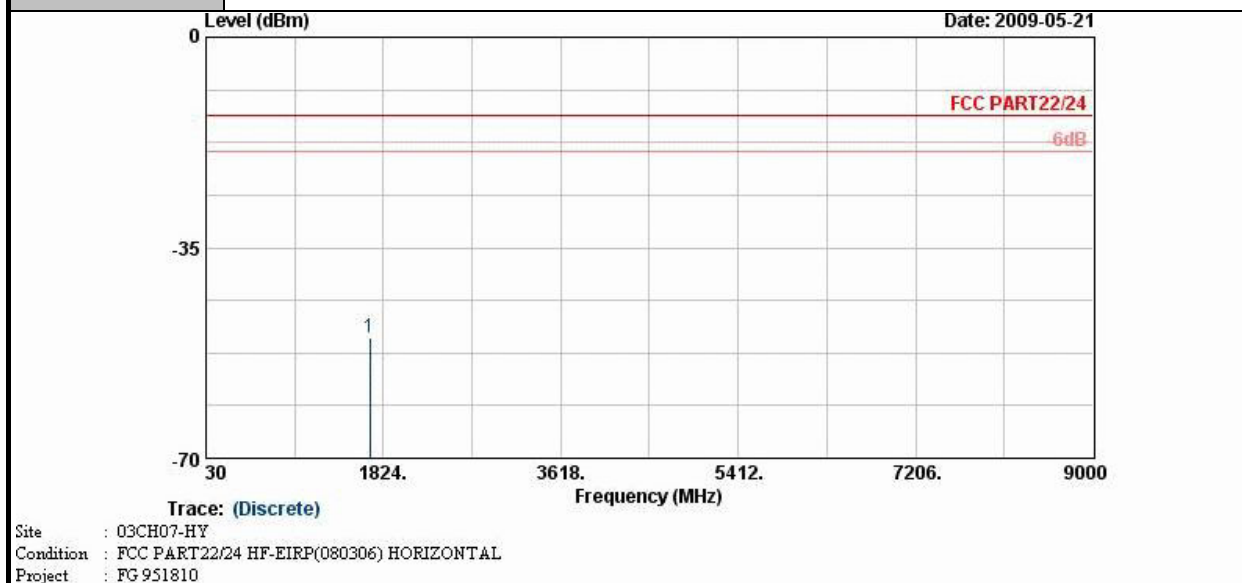


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1690	-50.03	-13	-37.03	-57.45	-50.21	3.02	5.35	H	Pass

Band :	WCDMA Band V	Temperature :	21~26.9°C
Test Mode :	HSDPA Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Vertical
Channel :	High Channel_4233		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

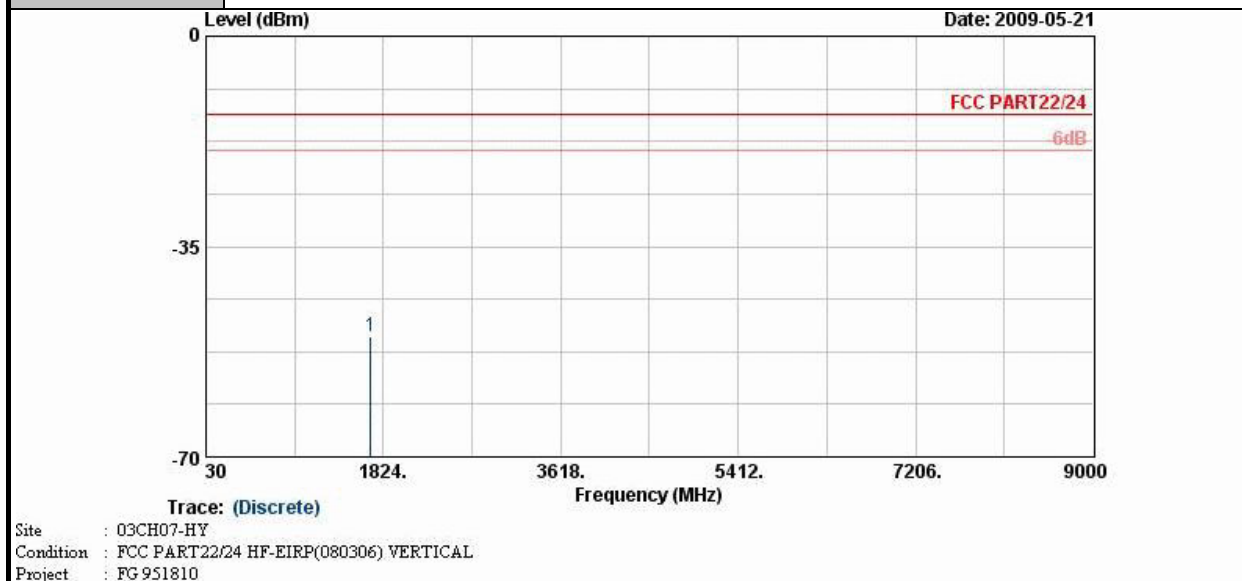


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1693	-49.94	-13	-36.94	-55.96	-50.12	3.02	5.35	V	Pass

Band :	WCDMA Band II	Temperature :	21~26.9°C
Test Mode :	RMC 12.2K Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Horizontal
Channel :	Low Channel_9262		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

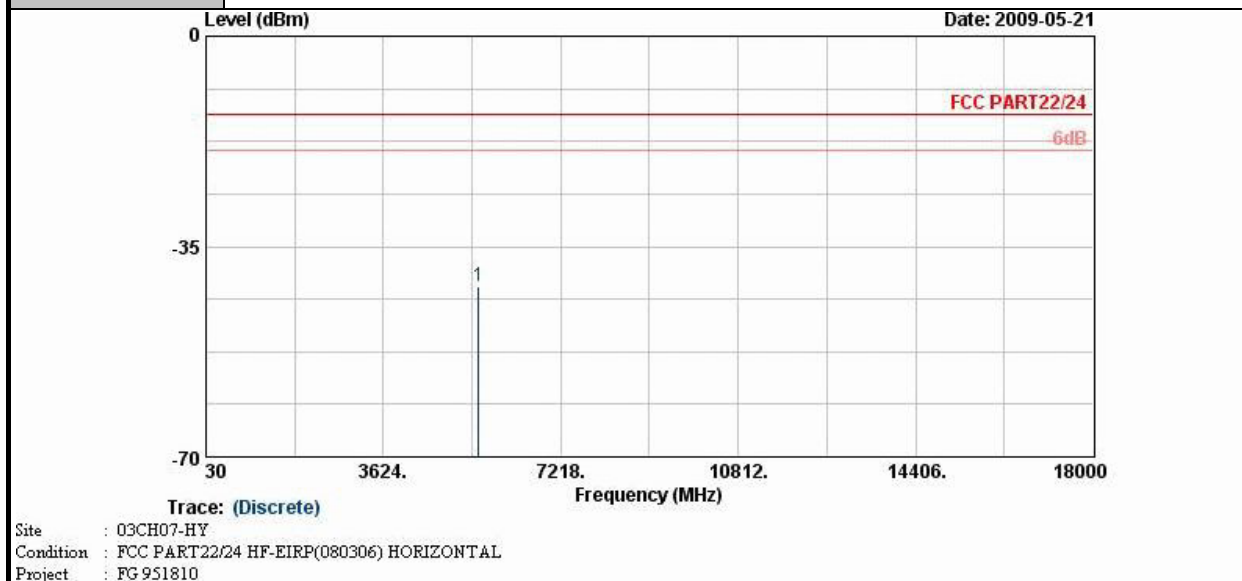


Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
5556	-41.71	-13	-28.71	-62.05	-46.91	5.20	10.40	H	Pass

Band :	WCDMA Band II	Temperature :	21~26.9°C
Test Mode :	RMC 12.2K Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Vertical
Channel :	Low Channel_9262		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

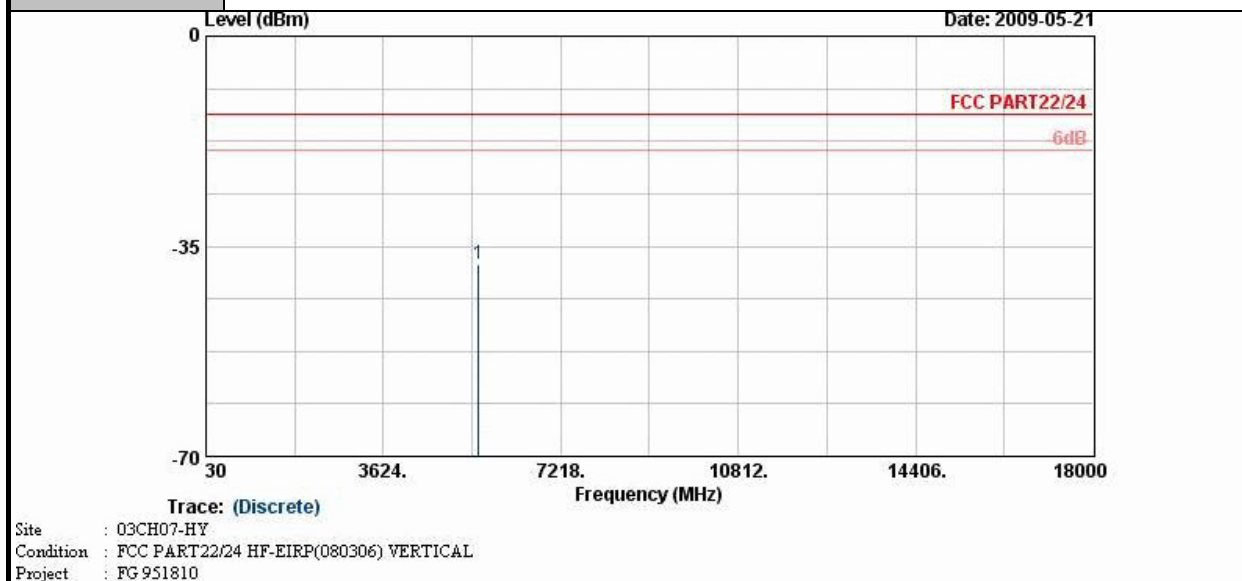


Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
5556	-37.89	-13	-24.89	-59.49	-43.09	5.20	10.40	V	Pass

Band :	WCDMA Band II	Temperature :	21~26.9°C
Test Mode :	RMC 12.2K Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Horizontal
Channel :	Middle Channel_9400		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

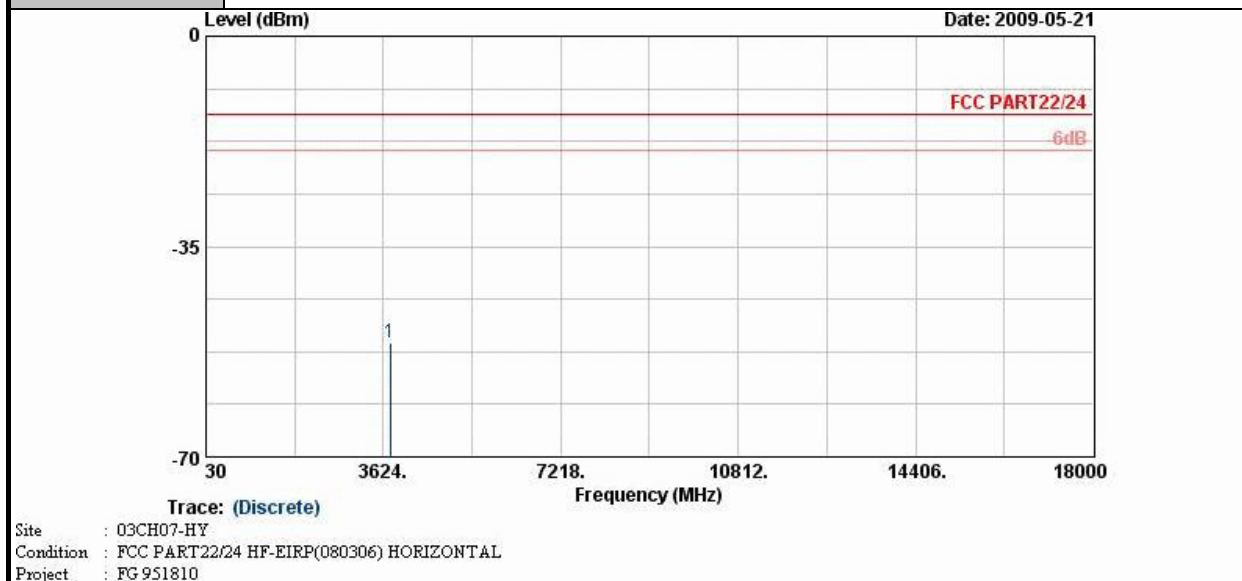


Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-50.88	-13	-37.88	-62.53	-53.40	4.88	7.40	H	Pass

Band :	WCDMA Band II	Temperature :	21~26.9°C
Test Mode :	RMC 12.2K Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Vertical
Channel :	Middle Channel_9400		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

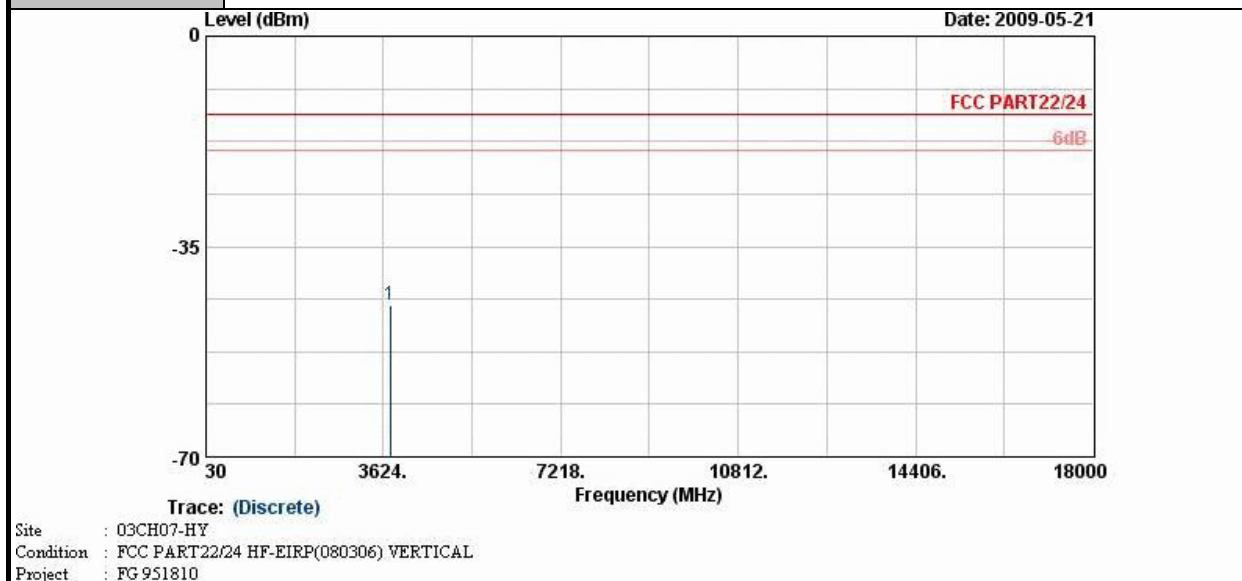


Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-44.88	-13	-31.88	-60.33	-47.91	4.88	7.91	V	Pass

Band :	WCDMA Band II	Temperature :	21~26.9°C
Test Mode :	RMC 12.2K Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Horizontal
Channel :	High Channel_9538		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

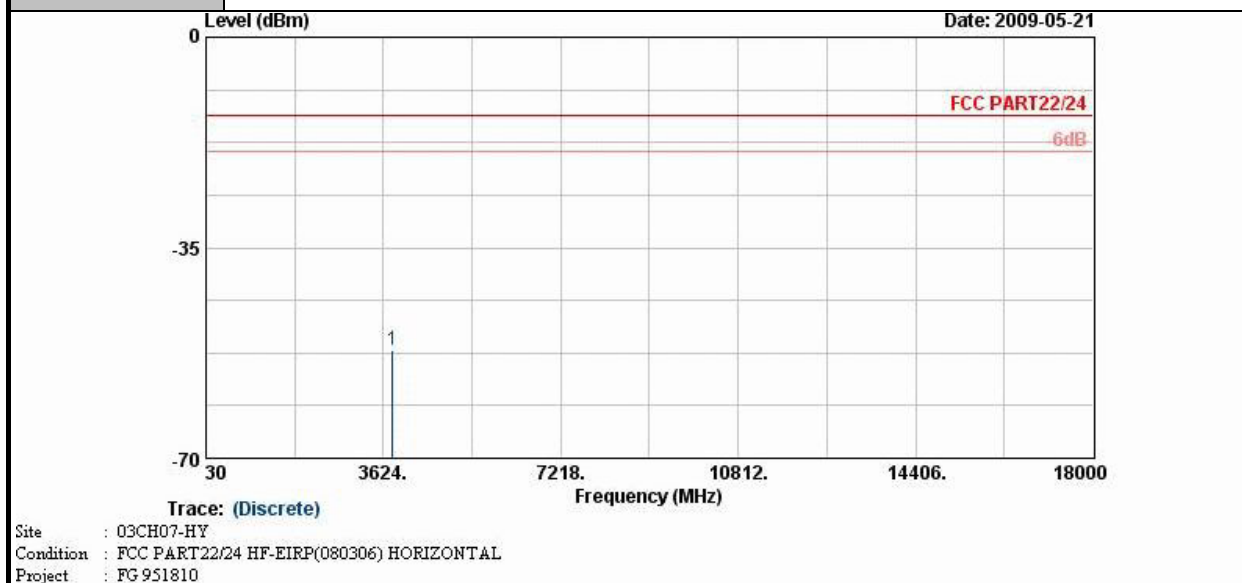

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3812	-51.96	-13	-38.96	-63.96	-55.96	4.78	8.78	H	Pass

Band :	WCDMA Band II	Temperature :	21~26.9°C
Test Mode :	RMC 12.2K Link	Relative Humidity :	34~41%
Test Engineer :	Nadir Wang	Polarization :	Vertical
Channel :	High Channel_9538		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

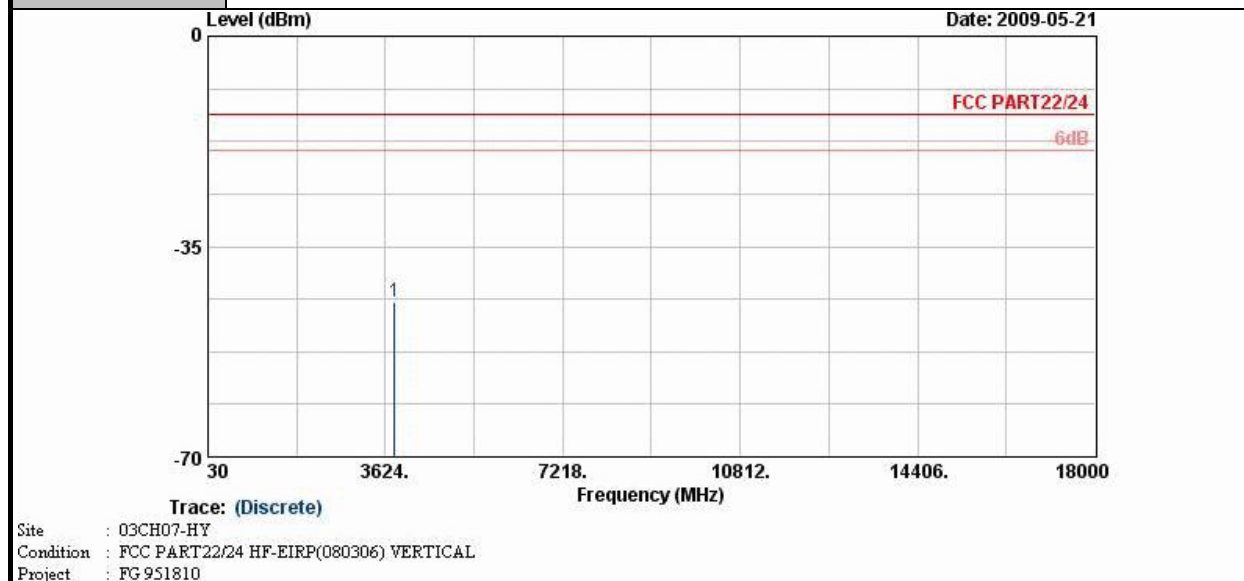

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3812	-44.28	-13	-31.28	-60.69	-48.28	4.78	8.78	V	Pass

3.6 Frequency Stability Measurement

3.6.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.6.2 Measuring Instruments

See list of measuring instruments of this test report.


3.6.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.
4. If the EUT can not be turned on at -30°C , the testing lowest temperature will be raised in 10°C step until the EUT can be turned on.

3.6.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the base station.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

3.6.5 Test Setup

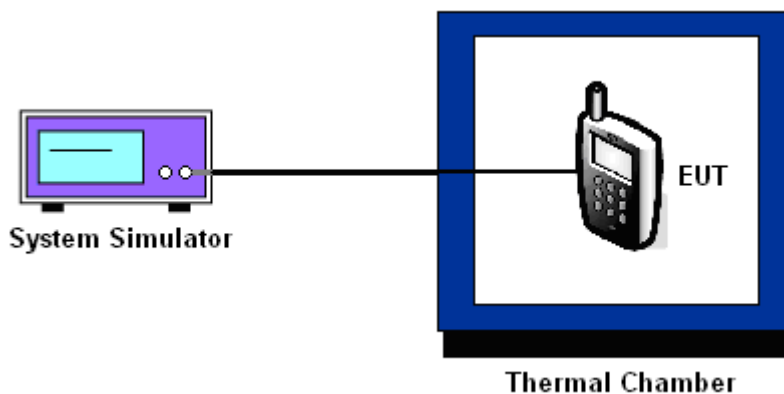

3.6.6 Test Result of Temperature Variation

Band :	GSM 850	Channel :	189
Limit (ppm) :	2.5		

Temperature (°C)	GPRS 8		EDGE 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	-21	-0.02	19	0.02	PASS
-20	-23	-0.03	37	0.04	
-10	-25	-0.03	26	0.03	
0	-27	-0.03	29	0.03	
10	-31	-0.04	23	0.03	
20	-23	-0.03	14	0.02	
30	-16	-0.02	19	0.02	
40	-27	-0.03	22	0.03	
50	-23	-0.03	26	0.03	

Band :	GSM 1900	Channel :	661
Limit (ppm) :	2.5		

Temperature (°C)	GPRS 8		EDGE 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	-57	-0.03	-49	-0.03	PASS
-20	-68	-0.04	-41	-0.02	
-10	-75	-0.04	-51	-0.03	
0	-45	-0.02	-60	-0.03	
10	-62	-0.03	-55	-0.03	
20	-31	-0.02	-28	-0.01	
30	-42	-0.02	32	0.02	
40	-44	-0.02	-73	-0.04	
50	-38	-0.02	-76	-0.04	

Band :	WCDMA Band V	Channel :	4182
Limit (ppm) :	2.5		

Temperature (°C)	HSDPA		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	17	0.02	PASS
-20	14	0.02	
-10	-16	-0.02	
0	-12	-0.01	
10	18	0.02	
20	15	0.02	
30	18	0.02	
40	17	0.02	
50	-14	-0.02	

Band :	WCDMA Band II	Channel :	9400
Limit (ppm) :	2.5		

Temperature (°C)	RMC 12.2K		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	-39	-0.02	PASS
-20	41	0.02	
-10	-25	-0.01	
0	27	0.01	
10	-29	-0.02	
20	-25	-0.01	
30	-30	-0.02	
40	36	0.02	
50	31	0.02	

3.6.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Freq. Dev. (Hz)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH189	GPRS 8	3.7	-15	-0.02	2.5	PASS
		BEP	-2	0.00		
		4.3	-16	-0.02		
	EDGE 8	3.7	-19	-0.02		
		BEP	38	0.04		
		4.3	23	0.03		
GSM 1900 CH661	GPRS 8	3.7	-33	-0.02		
		BEP	-25	-0.01		
		4.3	-37	-0.02		
	EDGE 8	3.7	-55	-0.03		
		BEP	-46	-0.02		
		4.3	-41	-0.02		
WCDMA Band V CH4182	HSDPA	3.7	16	0.02		
		BEP	19	0.02		
		4.3	24	0.03		
WCDMA Band II CH9400	RMC 12.2K	3.7	-28	-0.01		
		BEP	40	0.02		
		4.3	20	0.01		

Note:

1. Normal Voltage = 3.7V.
2. Battery End Point (BEP) = 3.2 V.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
System Simulator	R&S	CMU200	116456	N/A	Jun. 05, 2008	Jun. 04, 2010	Conducted (TH02-HY)
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 26, 2008	Jun. 25, 2009	Conducted (TH02-HY)
Thermal Chamber	TEN BILLION	TTH-D35P	TBN-930701	N/A	Aug. 01, 2008	Jul. 31, 2009	Conducted (TH02-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2726	30MHz~1GHz	Nov. 20, 2008	Nov. 19, 2009	Radiation (03CH07-HY)
Spectrum Analyzer	R&S	FSP	101067	9kHz~30GHz	Dec. 02, 2008	Dec. 01, 2009	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1G~18GHz	Aug. 18, 2008	Aug. 17, 2009	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A02362	1G~26.5GHz	Dec. 17, 2008	Dec. 16, 2009	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10~1000MHz. 32dB.GAIN	Mar. 27, 2009	Mar. 26, 2010	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00066584	1G~18GHz	Aug. 06, 2008	Aug. 05, 2009	Radiation (03CH07-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz~30 MHz	May 22, 2008	May 21, 2010	Radiation (03CH07-HY)

5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of x_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.41	Normal(k=2)	0.21
Antenna factor calibration	0.83	Normal(k=2)	0.42
Cable loss calibration	0.25	Normal(k=2)	0.13
Pre Amplifier Gain calibration	0.27	Normal(k=2)	0.14
RCV/SPA specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site imperfection	1.43	Rectangular	0.83
Mismatch	+0.39/-0.41	U-shaped	0.28
Combined standard uncertainty Uc(y)	1.27		
Measuring uncertainty for a level of confidence of 95% U=2Uc(y)	2.54		

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of x_i		$u(x_i)$	C_i	$C_i * u(x_i)$
	dB	Probability Distribution			
Receiver reading	±0.10	Normal(k=1)	0.10	1	0.10
Antenna factor calibration	±1.70	Normal(k=2)	0.85	1	0.85
Cable loss calibration	±0.50	Normal(k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20 \log(1 - \Gamma_1 * \Gamma_2)$	+0.34/-0.35	U-shaped	0.244	1	0.244
Combined standard uncertainty Uc(y)	2.36				
Measuring uncertainty for a level of confidence of 95% U=2Uc(y)	4.72				

6 Certification of TAF Accreditation



Certificate No. : L1190-090417

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2007 to January 09, 2010
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities



Jay-San Chen
President, Taiwan Accreditation Foundation
Date : April 17, 2009

P1, total 20 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix