







ISO/IEC17025 Accredited Lab.

Report No: FCC 0909147-01 File reference No: 2009-09-10

Applicant: Craftmade International, Inc

Product: Wireless Door Chime

Model No: BWL

Trademark: Craftmade

Test Standards: FCC Part 15 Subpart C, Paragraph 15.231

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4&FCC Part 15 Subpart C, Paragraph 15.231 regulations for the evaluation of

raragraph 13.231 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung Manager

Dated: Sep 10,2009

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District, Shenzhen.CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 0909147-01 Page 2 of 29

Date: 2009-09-10



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.:899988.

IC- Registration No.: IC5205A-01

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration No.: IC 5205A-01.

Page 3 of 29

Report No: 0909147-01

Date: 2009-09-10



Test Report Conclusion Content

| 1.0 | General Details | 4 |
|------------|-------------------------------------|----|
| 1.1 | Test Lab Details. | 4 |
| 1.2 | Applicant Details | 4 |
| 1.3 | Description of EUT | 4 |
| 1.4 | Submitted Sample | 4 |
| 1.5 | Test Duration | 5 |
| 1.6 | Test Uncertainty | 5 |
| 1.7 | Test By | 5 |
| 2.0 | List of Measurement Equipment | 5 |
| 3.0 | Technical Details | 7 |
| 3.1 | Summary of Test Results | 7 |
| 3.2 | Test Standards | 7 |
| 4.0 | EUT Modification. | 7 |
| 5.0 | Power Line Conducted Emission Test. | 8 |
| 5.1 | Schematics of the Test. | 8 |
| 5.2 | Test Method and Test Procedure. | 8 |
| 5.3 | Configuration of the EUT | 8 |
| 5.4 | EUT Operating Condition. | 9 |
| 5.5 | Conducted Emission Limit. | 9 |
| 5.6 | Test Result. | 9 |
| 6.0 | Radiated Emission test | 10 |
| 6.1 | Test Method and Test Procedure. | 10 |
| 6.2 | Configuration of the EUT | 10 |
| 6.3 | EUT Operation Condition. | 10 |
| 6.4 | Radiated Emission Limit. | 11 |
| 6.5 | Test Result. | 12 |
| 7.0 | 20dB Bandwidth Test | 17 |
| 8.0 | Deactivate Test | 19 |
| 9.0 | Duty Cycle | 21 |
| 10.0 | FCC ID Label | 26 |
| 11.0 | Photo of Testing. | 27 |

Report No: 0909147-01 Page 4 of 29

Date: 2009-09-10



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

Address: 5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-01

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: Craftmade International, Inc

Address: 650 s. Royal Lane Suit 100 P.O. Box 1037 Coppell, Texas, 75019, United States

Telephone: (972) 393-3800 Fax: (972) 304-3755

1.3 Description of EUT

Product: Wireless Door Chime

Brand Name: Craftmade
Model Number: MECH-WL

Additional Brand Name PRIME, Home Impressions

Rating: 12V DC input Powered by 1 pcs battery

Operation Frequency 300.5MHz

Antenna Designation PCB Antenna, designed as an indispensable part of the EUT.

1.4 Submitted Sample

1 Sample

Page 5 of 29

Report No: 0909147-01

Date: 2009-09-10



1.5 Test Duration 2009-07-24 to 2009-09-10

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB Radiated Emissions Uncertainty = 4.7dB

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

| 2.0 | Test Equipments | | | | | | | |
|-----------------------|-----------------|------------|------------|--------------|------------|--|--|--|
| Instrument Type | Manufacturer | Model | Serial No. | Date of Cal. | Due Date | | | |
| ESDV Test Receiver | ROHDE&SCHWARZ | ESDV | 100008 | 2009-04-22 | 2010-04-21 | | | |
| System Controller | CT | SC100 | - | 2009-02-18 | 2010-02-17 | | | |
| Bilog Antenna | Chase | CBL6111C | 2576 | 2009-02-18 | 2010-02-17 | | | |
| ESPI Test Receiver | ROHDE&SCHWARZ | ESI26 | 838786/013 | 2009-02-18 | 2010-02-17 | | | |
| 3m OATS | | | N/A | 2009-02-18 | 2010-02-17 | | | |
| Horn Antenna | SCHWARZBECK | BBHA 9120D | 9120D-631 | 2008-07-03 | 2009-07-02 | | | |

Page 6 of 29

Report No: 0909147-01

Date: 2009-09-10



3.0 **Technical Details**

3.1 Summary of test results

| Standard | Test Type | Result | Notes |
|---------------------------------------|---------------|--------|-----------|
| FCC Part 15, Paragraph 15.207 | Conducted | N/A | N/A |
| | Emission Test | | |
| FCC Part 15, Paragraph 15.209 | General | PASS | Compliant |
| ree 1 art 13, 1 aragraph 13.209 | Requirement | IASS | Compilant |
| | Radiated | | |
| FCC Part 15, Paragraph 15.231 (b) | Emission Test | PASS | Compliant |
| FCC Part 15, Paragraph 15.231 (c) | 20dB | PASS | Compliant |
| | Bandwidth | | |
| | Testing | | |
| FCC Part 15, Paragraph 15.231 (a) (1) | Deactivate | PASS | Compliant |
| | Testing | | |

3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.231

4.0 **EUT Modification**


No modification by Shenzhen Timeway Technology Consulting Co.,Ltd

Date: 2009-09-10



5. Power Line Conducted Emission Test

5.1 Schematics of the test

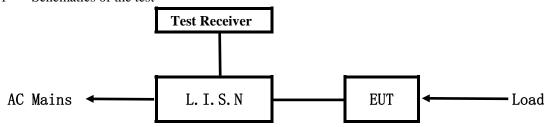


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003.

Block diagram of Test setup

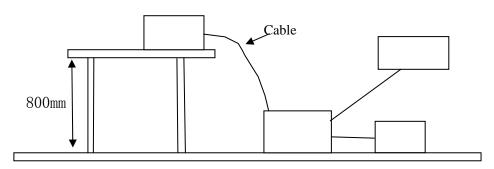

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

| Device | Manufacturer | Model | FCC ID |
|---------------|-----------------------------------|-------|-------------------|
| Wireless Door | National State Industries Limited | BWL | XEJ-CRFTMAD200906 |
| Chime | | | |

B. Internal Device

| Device | Manufacturer | Model | FCC ID/DOC |
|--------|--------------|-------|------------|
| N/A | | | |

C. Peripherals

| Device | Manufacturer | Model | FCC ID/DOC | Cable |
|--------|--------------|-------|------------|-------|
| N/A | | | | |
| | | | | |

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 0909147-01 Page 8 of 29

Date: 2009-09-10



5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2003.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

| | <u> </u> | | | | | |
|---|-------------------|-------------------------|---------------|-------------------------|---------------|--|
| | Frequency | Class A Limits (dB µ V) | | Class B Limits (dB µ V) | | |
| | (MHz) | Quasi-peak Level | Average Level | Quasi-peak Level | Average Level | |
| (| 0.15 ~ 0.50 | 79.0 | 66.0 | 66.0~56.0* | 56.0~46.0* | |
| (| $0.50 \sim 5.00$ | 73.0 | 60.0 | 56.0 | 46.0 | |
| 4 | $5.00 \sim 30.00$ | 73.0 | 60.0 | 60.0 | 50.0 | |

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Note: Owing to DC operation of EUT, this test item is not performed

Page 9 of 29

Report No: 0909147-01

Date: 2009-09-10



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
- (3) The frequency spectrum from 30 MHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "**QP**" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup Distance = 3m Computer Pre -Amplifier EUT Turn-table Receiver

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

Page 10 of 29

Report No: 0909147-01

Date: 2009-09-10



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

A FCC Part 15 Subpart C Paragraph 15.231 Limit

| Fundamental Frequency (MHz) | Field Strength of | | Field Strength of Spurious | |
|-----------------------------|-------------------|-------------|----------------------------|-------------|
| | Fundamental | | Emission | |
| | uV/m | dBuV/m | uV/m | dBuV/m |
| 40.66-40.70 | 2250 | 67.04 | 225 | 47.04 |
| 70-130 | 1250 | 61.94 | 125 | 41.94 |
| 130-174 | 1250-3370 | 61.94-70.55 | 125-375 | 41.94-51.48 |
| 174-260 | 3750 | 71.48 | 375 | 51.48 |
| 260-470 | 3750-12500 | 71.48-81.94 | 375-1250 | 51.48-61.94 |
| Above 470 | 12500 | 81.94 | 1250 | 61.94 |

Note:

- 1. RF Field Strength (dBuV) = 20 log RF Voltage (uV)
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.
- 4.Linear interpolations for frequency ranges 130-174MHz and 260-470MHz
- 5.the above field strength limits are specified at a distance of 3-meters and the tighter limits apply at the band edges

B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

| Frequency Range (MHz) | Distance (m) | Field strength (dB μ V/m) |
|-----------------------|--------------|-------------------------------|
| 30-88 | 3 | 40.0 |
| 88-216 | 3 | 43.5 |
| 216-960 | 3 | 46.0 |
| Above 960 | 3 | 54.0 |

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 5. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-3G, the final emission level got using PK detector. And Average = peak(dBuV/m) duty cycle(dB)
- 6. New batteries were installed in the equipment under test for radiated emission testing.

Page 11 of 29

Report No: 0909147-01 Date: 2009-09-10




6.5 Test result

A Fundamental and Harmonic Radiated Emission Data

| Product: | Wireless Door Chime | Test Mode: | Keeping Tx transmitting |
|---------------|--|--------------|-------------------------|
| Test Item: | Fundamental Radiated Emission and Spurious Emission Data | Temperature: | 25℃ |
| Test Voltage: | 12V | Humidity: | 56% |
| Test Result: | Pass | | |

| Frequency | Emission PK/AV | Horiz / | Limits PK/AV | Margin |
|-----------|----------------|------------|--------------|---------------|
| (MHz) | (dBuV/m) | Vert | (dBuV/m) | (dB) |
| 300.50 | 71.70/62.59 | Horizontal | 94.67/74.67 | -22.97/-12.08 |
| 300.50 | 68.20/59.09 | Vertical | 94.67/74.67 | -26.47/-15.58 |
| 601.062 | 56.35/47.24 | Horizontal | 74.67/54.67 | -18.32/-7.43 |
| 601.062 | 61.02/51.91 | Vertical | 74.67/54.67 | -13.65/-2.76 |
| 901.602 | 59.78/50.67 | Horizontal | 74.67/54.67 | -14.89/-4.00 |
| 901.602 | 61.51/52.40 | Vertical | 74.67/54.67 | -13.16/-2.27 |
| 1202 | | Horizontal | 74.67/54.67 | |
| 1202 | 46.93(PK) | Vertical | 74.67/54.67 | -7.74 |
| 1502.522 | | Horizontal | 74.67/54.67 | |
| 1502.522 | 43.71(PK) | Vertical | 74.67/54.67 | -10.96 |
| 1803.102 | | Horizontal | 74.67/54.67 | |
| 1803.102 | 49.49(PK) | Vertical | 74.67/54.67 | -5.18 |
| 2103.518 | | Horizontal | 74.67/54.67 | |
| 2103.518 | 46.99(PK) | Vertical | 74.67/54.67 | -7.68 |
| 2404.123 | | Horizontal | 74.67/54.67 | |
| 2404.123 | 44.97(PK) | Vertical | 74.67/54.67 | -9.70 |
| 2704.532 | | Horizontal | 74.67/54.67 | |
| 2704.532 | 38.80(PK) | Vertical | 74.67/54.67 | -15.87 |
| 3005 | | Horizontal | 74.67/54.67 | |
| 3005 | | Vertical | 74.67/54.67 | |

Note: Average = $peak(dBuV/m) - duty \ cycle(dB)$



Report No: 0909147-01 Date: 2009-09-10


General Radiated Emission Data and Harmonics Radiated Emission Data B.

Radiated Emission In Horizontal (30MHz----1000MHz)


EUT set Condition: Keep Tx Transmitting

Results: Pass

Please refer to following diagram for individual

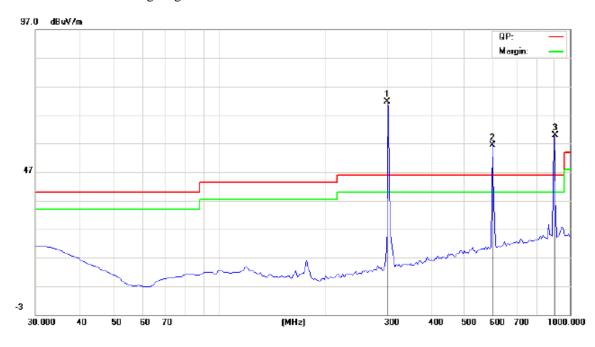

| Frequency (MHz) | Level@3m (dB \u03b4 V/m) | Antenna Polarity | Limit@3m (dB \(\mu \)V/m) |
|-----------------|--------------------------|------------------|----------------------------|
| | | Н | |
| | | Н | |



Date: 2009-09-10


B. General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx Transmitting

Results: Pass

Please refer to following diagram for individual

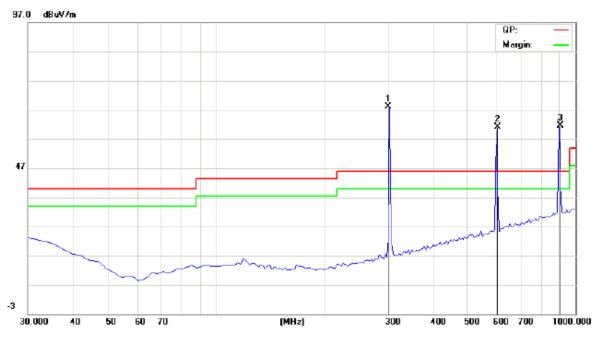

| Frequency (MHz) | Level@3m (dB \u03bc V/m) | Antenna Polarity | Limit@3m (dB \(\mu \)V/m) |
|-----------------|--------------------------|------------------|----------------------------|
| | | V | |

Page 14 of 29


Report No: 0909147-01


Date: 2009-09-10



Test Plot above 1G

Horizontal

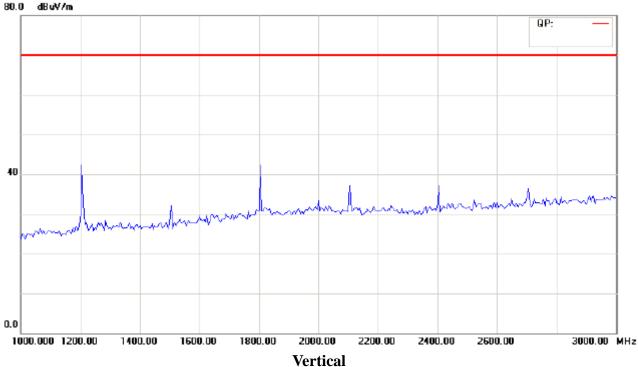

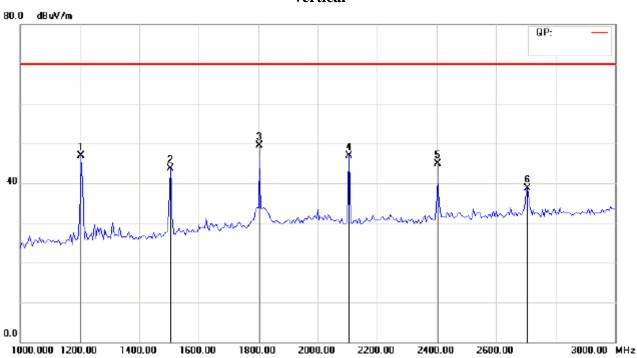

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 0909147-01 Page 15 of 29

Date: 2009-09-10



7.0 20dB Bandwidth Testing

7.1 Requirement

Per 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

7.2 Test Procedure

With the EUT's antenna attached, the EUT's 20dB Bandwidth power was received by the test antenna which was connected to the spectrum analyzer with the START and STOP frequencies set to the EUT's operation band.

7.3 Test Data

| Frequency (MHz) | 20dB Bandwidth Emission (kHz) | Limit (MHz) | Result |
|-----------------|-------------------------------|-------------|--------|
| 300.50 | 158.00 | 0.751 | Pass |

Limit=Frequency x 0.25%=300.50 x 0.25%=0.751MHz

Refer to attached plots:


Page 16 of 29

Report No: 0909147-01

Date: 2009-09-10





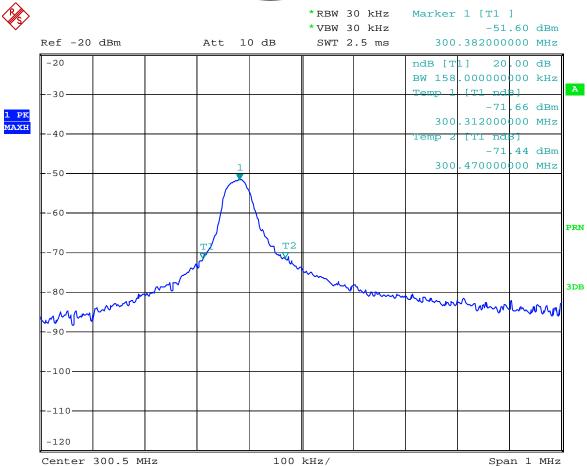

Date: 10.SEP.2009 10:48:12

Page 17 of 29

Report No: 0909147-01

Date: 2009-09-10




8.0 Deactivate Test

8.1 Requirement

Per 15.231(a) (1), a manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

8. 2 Radiated Test Setup

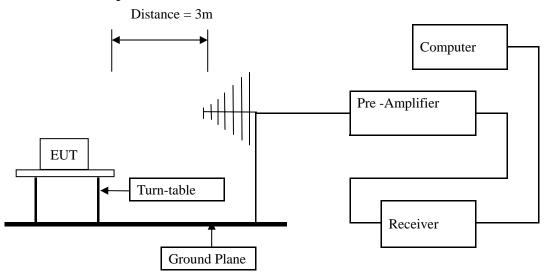

For the actual test configuration , please refer to the related items – Photos of Testing The deactivation test was performed in the 3 meters chamber B test site, using the setup accordance with the ANSI C63.4 - 2003. The specification used was the FCC 15.231(a) limits.

8.3 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

8.4 Test Data


Refer to attached plots:

Page 18 of 29

Report No: 0909147-01

Date: 2009-09-10



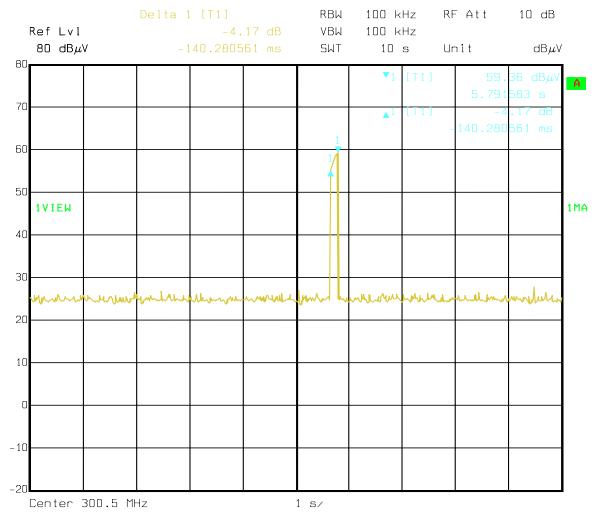

Date: 10.SEP.2009 17:30:38

Report No: 0909147-01 Page 19 of 29

Date: 2009-09-10



9.0 Duty Cycle

9.1 Limit

Nil (No dedicated limit specified in the Rules).

9.2 Test Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer=operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=30kHz, Span=0Hz, Adjust Sweep=100ms.
- 5. Repeat above procedures until all frequency measured were complete.

9.3 Test Data

Tp = 100 ms

 $Ton_1 = 0.389*(4*12+8+10) = 25.674$ (ms)

 $Ton_2 = 0.132*(4*13+8+11) = 9.372$ (ms)

 $Ton = Ton_1 + Ton_2 = 35.046$

Factor = $20 * \log (Ton / Tp) = 20 * \log (35.046/100) = -9.11dB$


Refer to attached plots for details:

Page 20 of 29


Report No: 0909147-01

Date: 2009-09-10



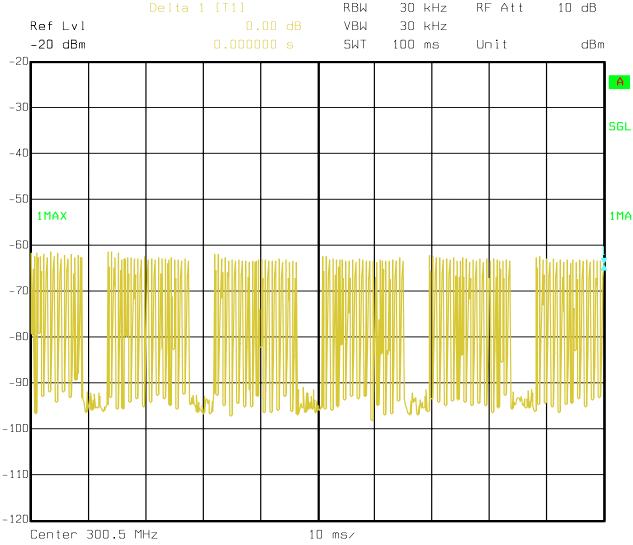


Date: 10.SEP.2009 17:01:59



Date: 2009-09-10




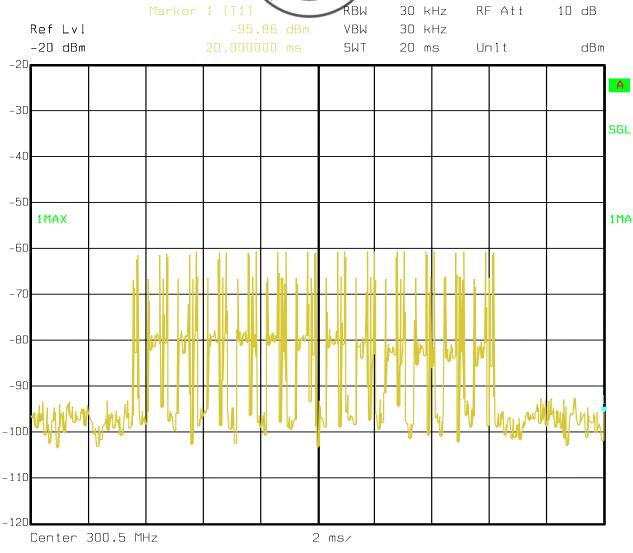

10.SEP.2009


16:56:29

Date:




Date: 2009-09-10



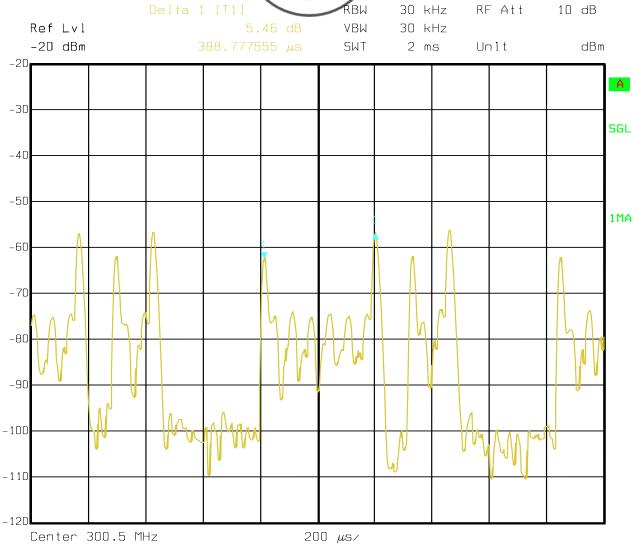


Date: 10.SEP.2009 16:58:28



Date: 2009-09-10



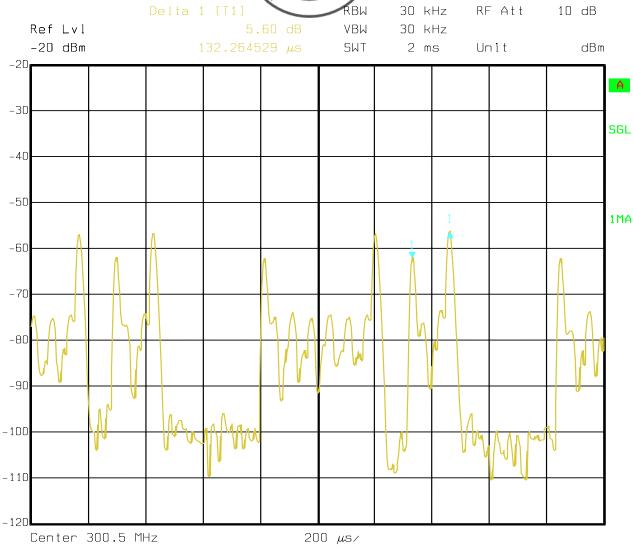

Date: 10.SEP.2009 16:59:06

Page 24 of 29

Report No: 0909147-01

Date: 2009-09-10




10.0 FCC ID Label

FCC ID: XEJ-CRFTMAD200906

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

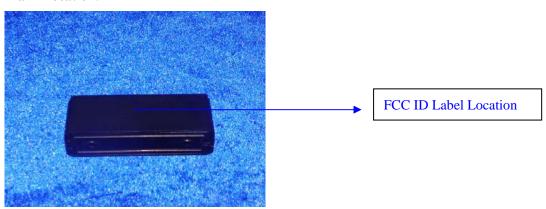

Page 25 of 29

Report No: 0909147-01


Date: 2009-09-10



11.0. Photo of testing

11.1 Conducted test View—N/A

11.2 Radiated emission test view

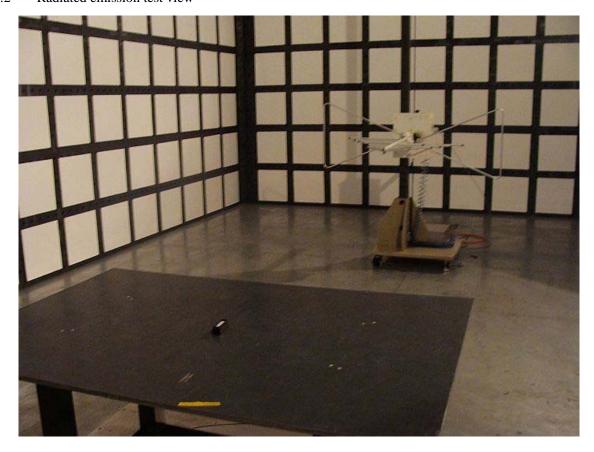

Page 26 of 29


Report No: 0909147-01


Date: 2009-09-10



11.3 Photo for the EUT




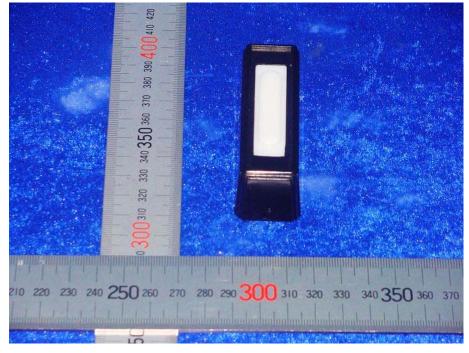

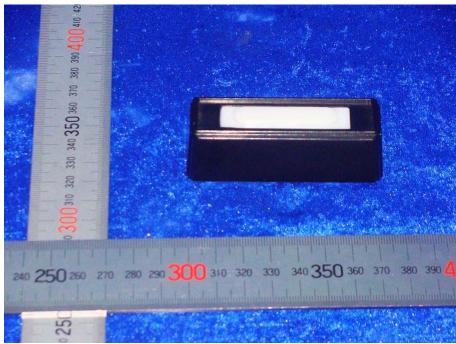


Date: 2009-09-10



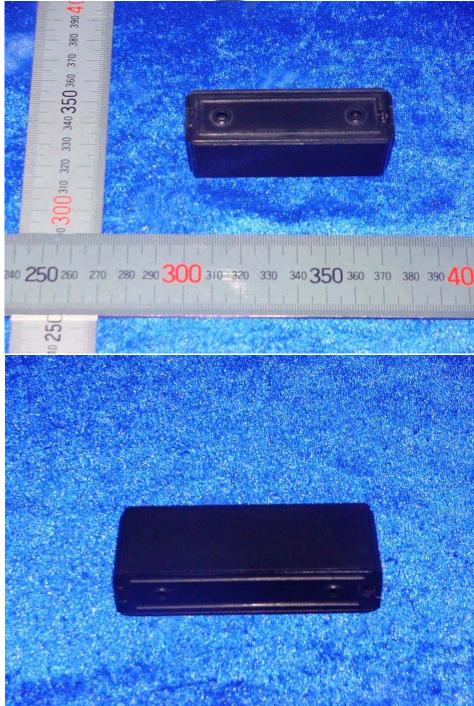

Date: 2009-09-10



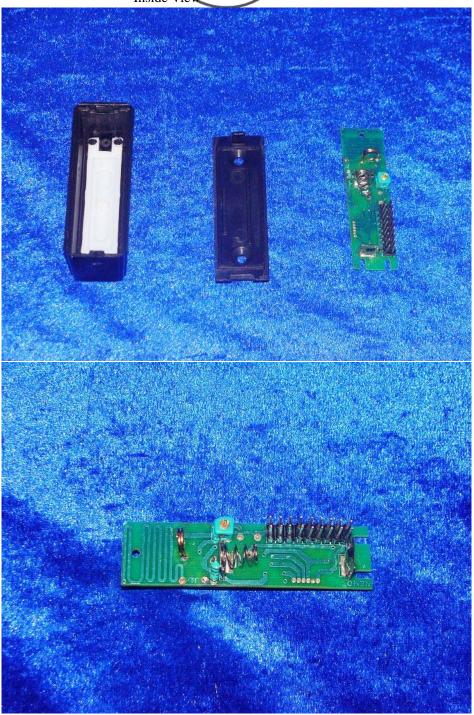


Page 29 of 29

Report No: 0909147-01

Date: 2009-09-10



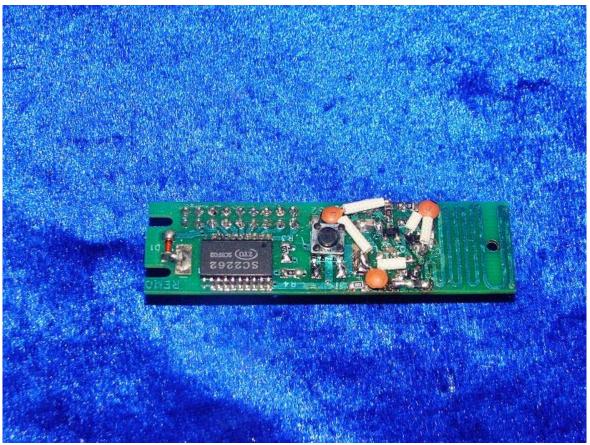

End of the report