



A D T

# FCC TEST REPORT

**REPORT NO.:** RF990420C12B  
**MODEL NO.:** NBHS-3  
**FCC ID:** XWTNBHS-3  
**RECEIVED:** Apr. 15, 2010  
**TESTED:** Apr. 15 ~ Sep. 22, 2010  
**ISSUED:** Sep. 27, 2010

**APPLICANT:** Novero Canada Inc.

**ADDRESS:** 19 Allstate Parkway, Suite 300, Markham,  
Ontario L3R 5A4, Canada

**ISSUED BY:** Bureau Veritas Consumer Products Services  
(H.K.) Ltd., Taoyuan Branch

**LAB ADDRESS:** No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou  
Hsiang, Taipei Hsien 244, Taiwan, R.O.C.

**TEST LOCATION:** No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen,  
Kwei Shan Hsiang, Taoyuan Hsien 333,  
Taiwan, R.O.C.

This test report consists of 55 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval or endorsement by TAF or any government agency. The test results in the report only apply to the tested sample.





A D T

## Table of Contents

1.	CERTIFICATION.....	4
2.	SUMMARY OF TEST RESULTS .....	5
2.1	MEASUREMENT UNCERTAINTY .....	5
3.	GENERAL INFORMATION .....	6
3.1	GENERAL DESCRIPTION OF EUT .....	6
3.2	DESCRIPTION OF TEST MODES .....	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST .....	7
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL .....	8
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS .....	9
3.4	DESCRIPTION OF SUPPORT UNITS .....	9
4.	TEST TYPES AND RESULTS .....	10
4.1	RADIATED EMISSION MEASUREMENT .....	10
4.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT .....	10
4.1.2	TEST INSTRUMENTS.....	11
4.1.3	TEST PROCEDURES .....	13
4.1.4	DEVIATION FROM TEST STANDARD.....	13
4.1.5	TEST SETUP.....	14
4.1.6	EUT OPERATING CONDITIONS .....	14
4.1.7	TEST RESULTS .....	15
4.2	NUMBER OF HOPPING FREQUENCY USED .....	24
4.2.1	LIMIT OF HOPPING FREQUENCY USED.....	24
4.2.2	TEST INSTRUMENTS.....	24
4.2.3	TEST PROCEDURES .....	24
4.2.4	DEVIATION FROM TEST STANDARD.....	25
4.2.5	TEST SETUP.....	25
4.2.6	TEST RESULTS .....	25
4.3	DWELL TIME ON EACH CHANNEL .....	28
4.3.1	LIMIT OF DWELL TIME USED.....	28
4.3.2	TEST INSTRUMENTS.....	28
4.3.3	TEST PROCEDURES .....	28
4.3.4	DEVIATION FROM TEST STANDARD.....	28
4.3.5	TEST SETUP.....	29
4.3.6	TEST RESULTS .....	29
4.4	CHANNEL BANDWIDTH.....	37
4.4.1	LIMITS OF CHANNEL BANDWIDTH .....	37
4.4.2	TEST INSTRUMENTS.....	37



A D T

4.4.3	TEST PROCEDURE.....	37
4.4.4	DEVIATION FROM TEST STANDARD.....	37
4.4.5	TEST SETUP.....	37
4.4.6	EUT OPERATING CONDITION.....	38
4.4.7	TEST RESULTS .....	38
4.5	HOPPING CHANNEL SEPARATION.....	40
4.5.1	LIMIT OF HOPPING CHANNEL SEPARATION .....	40
4.5.2	TEST INSTRUMENTS.....	40
4.5.3	TEST PROCEDURES .....	40
4.5.4	DEVIATION FROM TEST STANDARD.....	40
4.5.5	TEST SETUP.....	40
4.5.6	TEST RESULTS .....	41
4.6	MAXIMUM OUTPUT POWER.....	43
4.6.1	LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT.....	43
4.6.2	TEST INSTRUMENTS.....	43
4.6.3	TEST PROCEDURES .....	43
4.6.4	DEVIATION FROM TEST STANDARD.....	43
4.6.5	TEST SETUP.....	43
4.6.6	EUT OPERATING CONDITION.....	44
4.6.7	TEST RESULTS .....	44
4.7	BAND EDGES MEASUREMENT .....	46
4.7.1	LIMITS OF BAND EDGES MEASUREMENT.....	46
4.7.2	TEST INSTRUMENTS.....	46
4.7.3	TEST PROCEDURE.....	46
4.7.4	DEVIATION FROM TEST STANDARD.....	46
4.7.5	EUT OPERATING CONDITION.....	46
4.7.6	TEST RESULTS .....	47
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	53
6.	INFORMATION ON THE TESTING LABORATORIES .....	54
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	55



A D T

## 1. CERTIFICATION

**PRODUCT:** Lexington

(H/W version: R6, S/W version Headset: D01.14,  
S/W version Charging Dock: D01.14)

**BRAND:** novero

**MODEL:** NBHS-3

**APPLICANT:** Novero Canada Inc.

**TESTED:** Apr. 15 ~ Sep. 22, 2010

**TEST SAMPLE:** ENGINEERING SAMPLE

**STANDARDS:** FCC Part 15, Subpart C (Section 15.247),  
ANSI C63.4-2003

The above equipment (Model: NBHS-3) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY** : Pettie Chen , **DATE** : Sep. 27, 2010  
Pettie Chen / Specialist

**TECHNICAL**  
**ACCEPTANCE** : Long Chen , **DATE** : Sep. 27, 2010  
Responsible for RF Long Chen / Senior Engineer

**APPROVED BY** : Gary Chang , **DATE** : Sep. 27, 2010  
Gary Chang / Assistant Manager

## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	NA	Power supply is 3.7Vdc from battery.
15.247(a)(1)(iii)	Number of Hopping Frequency Used Spec.: At least 15 channels	PASS	Meet the requirement of limit.
15.247(a)(1)(iii)	Dwell Time on Each Channel Spec.: Max. 0.4 second within 31.6 second	PASS	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation Spec. : Min. 25 kHz or $\frac{2}{3}$ *20 dB bandwidth, whichever is greater 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Meet the requirement of limit.
15.247(b)	Maximum Output Power Spec.: max. 21dBm	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Spec.: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -12.6dB at 1654.00MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

**NOTE:** If The Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted Emission	150kHz ~ 30MHz	2.44dB
Radiated emissions	30MHz ~ 200MHz	3.34dB
	200MHz ~1000MHz	3.35dB
	1GHz ~ 18GHz	2.26dB
	18GHz ~ 40GHz	1.94dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

EUT	Lexington
MODEL NO.	NBHS-3
FCC ID	XWTNBHS-3
POWER SUPPLY	3.7Vdc (rechargeable battery) 5.0Vdc (car charger or adapter)
MODULATION TYPE	GFSK, $\pi/4$ -DQPSK, 8DPSK
MODULATION TECHNOLOGY	FHSS
TRANSFER RATE	1/2/3Mbps
FREQUENCY RANGE	2402 ~ 2480MHz
NUMBER OF CHANNEL	79
CHANNEL SPACING	1MHz
OUTPUT POWER	1.5mW
ANTENNA TYPE	Chip antenna with -5dBi gain
DATA CABLE	1.25m non-shielded USB cable without core
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	Adapter, car charger, Performance Dock (Brand: novero, Model: NCDO-2)

#### NOTE:

- The EUT was powered by the following batteries, car charger and adapter:

Lithium ion Polymer Rechargeable Battery (For Headset)	
BRAND	B&K
MODEL	401230
RATING	3.7Vdc, 100mAh

Lithium ion Polymer Rechargeable Battery (For Dock)	
BRAND	B&K
MODEL	72234
RATING	3.7Vdc, 700mAh

Car charger	
BRAND	novero
MODEL	NDCH-1
INPUT POWER	10-30Vdc
OUTPUT POWER	5Vdc, 1A

Adapter	
BRAND	novero
MODEL	NACM-1
INPUT POWER	100-240Vac, 0.3A, 50-60Hz, 12-15VA
OUTPUT POWER	5Vdc, 1A


- The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

## 3.2 DESCRIPTION OF TEST MODES

79 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

### 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

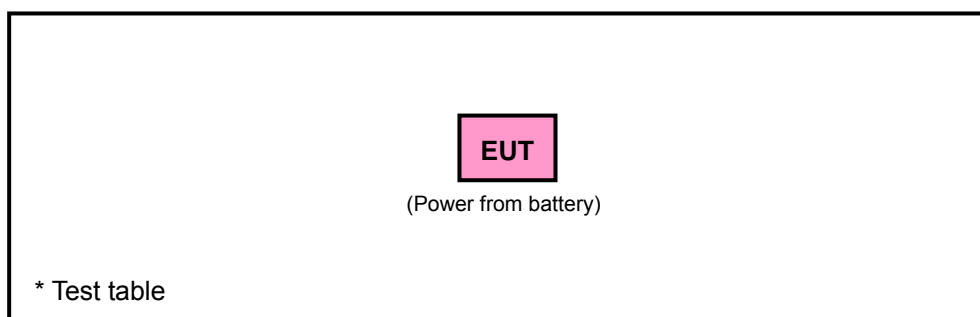

### 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
-	√	√	NOTE	√	-

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz

**RE<1G**: Radiated Emission below 1GHz

**PLC**: Power Line Conducted Emission

**APCM**: Antenna Port Conducted Measurement

**NOTE**: No need to concern of Conducted Emission due to the EUT is powered by battery.

#### RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE	AXIS
-	0 to 78	0, 39, 78	FHSS	GFSK	DH5	Z
-	0 to 78	0, 39, 78	FHSS	8DPSK	DH5	Z

#### RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE	AXIS
-	0 to 78	0	FHSS	GFSK	DH5	Z



#### **ANTENNA PORT CONDUCTED MEASUREMENT:**

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
-	0 to 78	0, 39, 78	FHSS	GFSK	DH5
-	0 to 78	0, 39, 78	FHSS	8DPSK	DH5

#### **TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY	DATE
RE $\geq$ 1G	25deg. C, 65%RH, 1018 hPa	3.7Vdc	Sun Lin	Apr. 15, 2010
RE<1G	22deg. C, 66%RH, 1016 hPa	3.7Vdc	Sun Lin	Sep. 22, 2010
APCM	26deg. C, 67%RH, 1009 hPa	3.7Vdc	Brad Wu	May 04, 2010

### **3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C. (15.247)**

**ANSI C63.4-2003**

All test items have been performed and recorded as per the above standards.

### **3.4 DESCRIPTION OF SUPPORT UNITS**

The EUT has been tested as an independent unit.

## 4. TEST TYPES AND RESULTS

### 4.1 RADIATED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 TEST INSTRUMENTS

##### For Frequency above 1GHz

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESI7	100033	Jul. 06, 2009	Jul. 05, 2010
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100076	May 26, 2009	May 25, 2010
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Apr. 27, 2010	Apr. 26, 2011
HORN Antenna SCHWARZBECK	9120D	9120D-209	Jul. 01, 2009	Jun. 30, 2010
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Dec. 25, 2009	Dec. 24, 2010
Preamplifier Agilent	8447D	2944A10633	Nov. 10, 2009	Nov. 09, 2010
Preamplifier Agilent	8449B	3008A01964	Nov. 09, 2009	Nov. 08, 2010
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	238141/4	May 13, 2009	May 12, 2010
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	12738/6	May 13, 2009	May 12, 2010
Software ADT.	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA	NA
Turn Table ADT.	TT100.	TT93021703	NA	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Chamber 3.
  3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  4. The FCC Site Registration No. is 988962.
  5. The IC Site Registration No. is IC 7450F-3.



A D T

### For Frequency below 1GHz

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100188	Dec. 21, 2009	Dec. 20, 2010
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Dec. 31, 2009	Dec. 30, 2010
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Apr. 27, 2010	Apr. 26, 2011
HORN Antenna SCHWARZBECK	9120D	9120D-405	Feb. 03, 2010	Feb. 02, 2011
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Dec. 25, 2009	Dec. 24, 2010
Preamplifier Agilent	8447D	2944A10633	Nov. 10, 2009	Nov. 09, 2010
Preamplifier Agilent	8449B	3008A01964	Nov. 09, 2009	Nov. 08, 2010
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	238141/4	May 14, 2010	May 13, 2011
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	12738/6	May 14, 2010	May 13, 2011
Software ADT.	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA	NA
Turn Table ADT.	TT100.	TT93021703	NA	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Chamber 3.
  3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  4. The FCC Site Registration No. is 988962.
  5. The IC Site Registration No. is IC 7450F-3.

#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.1.5 TEST SETUP

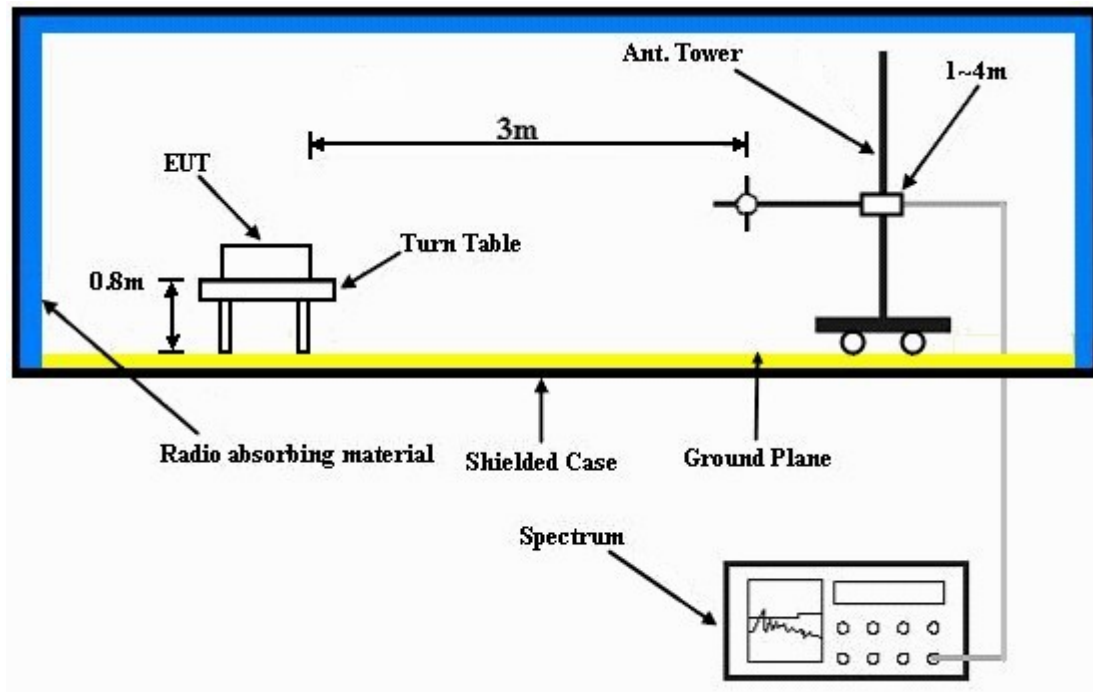

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT OPERATING CONDITIONS

- Placed the EUT on a testing table.
- Set the EUT under transmission condition continuously at specific channel frequency.

#### 4.1.7 TEST RESULTS

##### RADIATED WORST CASE DATA: ABOVE 1GHz: GFSK

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	3.7Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1602.00	41.6 PK	74.0	-32.4	1.11 H	118	13.20	28.40
2	1602.00	35.4 AV	54.0	-18.6	1.11 H	118	7.00	28.40
3	2390.00	36.5 PK	74.0	-37.5	1.01 H	118	6.00	30.50
4	2390.00	25.8 AV	54.0	-28.2	1.01 H	118	-4.70	30.50
5	2398.00	42.4 PK	74.0	-31.6	1.01 H	118	11.90	30.50
6	2398.00	32.1 AV	54.0	-21.9	1.01 H	118	1.60	30.50
7	2400.00	52.7 PK	74.0	-21.3	1.01 H	118	22.20	30.50
8	2400.00	22.6 AV	54.0	-31.4	1.01 H	118	-7.90	30.50
9	*2402.00	88.1 PK			1.01 H	118	57.60	30.50
10	*2402.00	58.0 AV			1.01 H	118	27.50	30.50
11	4804.00	60.2 PK	74.0	-13.8	1.13 H	115	24.10	36.10
12	4804.00	30.1 AV	54.0	-23.9	1.13 H	115	-6.00	36.10

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  7. Average value = peak reading +  $20\log(\text{duty cycle})$ .



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	3.7Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1602.00	44.4 PK	74.0	-29.6	1.04 V	348	16.00	28.40
2	1602.00	39.8 AV	54.0	-14.2	1.04 V	348	11.40	28.40
3	2390.00	40.9 PK	74.0	-33.1	1.35 V	153	10.40	30.50
4	2390.00	30.1 AV	54.0	-23.9	1.35 V	153	-0.40	30.50
5	2398.00	46.6 PK	74.0	-27.4	1.35 V	153	16.10	30.50
6	2398.00	36.4 AV	54.0	-17.6	1.35 V	153	5.90	30.50
7	2400.00	57.9 PK	74.0	-16.1	1.35 V	153	27.40	30.50
8	2400.00	27.8 AV	54.0	-26.2	1.35 V	153	-2.70	30.50
9	*2402.00	93.3 PK			1.35 V	153	62.80	30.50
10	*2402.00	63.2 AV			1.35 V	153	32.70	30.50
11	4804.00	54.2 PK	74.0	-19.8	1.01 V	192	18.10	36.10
12	4804.00	24.1 AV	54.0	-29.9	1.01 V	192	-12.00	36.10

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on  $0.625 * 5$  per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  7. Average value = peak reading +  $20\log(\text{duty cycle})$ .





A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	3.7Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1628.00	41.9 PK	74.0	-32.1	1.09 H	122	13.50	28.40
2	1628.00	35.8 AV	54.0	-18.2	1.09 H	122	7.40	28.40
3	*2441.00	88.7 PK			1.02 H	121	58.00	30.70
4	*2441.00	58.6 AV			1.02 H	121	27.90	30.70
5	4882.00	60.6 PK	74.0	-13.4	1.11 H	125	24.40	36.20
6	4882.00	30.5 AV	54.0	-23.5	1.11 H	125	-5.70	36.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1628.00	44.8 PK	74.0	-29.2	1.03 V	346	16.40	28.40
2	1628.00	40.6 AV	54.0	-13.4	1.03 V	346	12.20	28.40
3	*2441.00	94.0 PK			1.10 V	161	63.30	30.70
4	*2441.00	63.9 AV			1.10 V	161	33.20	30.70
5	4882.00	54.5 PK	74.0	-19.5	1.05 V	91	18.30	36.20
6	4882.00	24.4 AV	54.0	-29.6	1.05 V	91	-11.80	36.20

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  7. Average value = peak reading +  $20\log(\text{duty cycle})$ .



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	3.7Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1654.00	41.9 PK	74.0	-32.1	1.26 H	51	13.40	28.50
2	1654.00	35.7 AV	54.0	-18.3	1.26 H	51	7.20	28.50
3	*2480.00	87.8 PK			1.00 H	122	57.00	30.80
4	*2480.00	57.7 AV			1.00 H	122	26.90	30.80
5	2483.50	33.5 PK	74.0	-40.5	1.00 H	122	2.70	30.80
6	2483.50	3.4 AV	54.0	-50.6	1.00 H	122	-27.40	30.80
7	2485.50	39.6 PK	74.0	-34.4	1.00 H	122	8.80	30.80
8	2485.50	27.2 AV	54.0	-26.8	1.00 H	122	-3.60	30.80
9	4960.00	60.6 PK	74.0	-13.4	4.00 H	129	24.20	36.40
10	4960.00	30.5 AV	54.0	-23.5	4.00 H	129	-5.90	36.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1654.00	45.2 PK	74.0	-28.8	1.05 V	352	16.70	28.50
2	1654.00	41.0 AV	54.0	-13.0	1.05 V	352	12.50	28.50
3	*2480.00	93.1 PK			1.12 V	156	62.30	30.80
4	*2480.00	63.0 AV			1.12 V	156	32.20	30.80
5	2483.50	38.8 PK	74.0	-35.2	1.12 V	156	8.00	30.80
6	2483.50	8.7 AV	54.0	-45.3	1.12 V	156	-22.10	30.80
7	2485.50	44.0 PK	74.0	-30.0	1.12 V	156	13.20	30.80
8	2485.50	31.4 AV	54.0	-22.6	1.12 V	156	0.60	30.80
9	4960.00	55.1 PK	74.0	-18.9	1.04 V	222	18.70	36.40
10	4960.00	25.0 AV	54.0	-29.0	1.04 V	222	-11.40	36.40

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* ”: Fundamental frequency.
  6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  7. Average value = peak reading +  $20\log(\text{duty cycle})$ .

## 8DPSK

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	3.7Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1602.00	41.0 PK	74.0	-33.0	1.14 H	24	12.60	28.40
2	1602.00	34.7 AV	54.0	-19.3	1.14 H	24	6.30	28.40
3	2390.00	35.8 PK	74.0	-38.2	1.03 H	131	5.30	30.50
4	2390.00	24.2 AV	54.0	-29.8	1.03 H	131	-6.30	30.50
5	2398.00	40.2 PK	74.0	-33.8	1.03 H	131	9.70	30.50
6	2398.00	30.1 AV	54.0	-23.9	1.03 H	131	-0.40	30.50
7	2400.00	47.3 PK	74.0	-26.7	1.03 H	131	16.80	30.50
8	2400.00	17.2 AV	54.0	-36.8	1.03 H	131	-13.30	30.50
9	*2402.00	85.9 PK			1.03 H	131	55.40	30.50
10	*2402.00	55.8 AV			1.03 H	131	25.30	30.50
11	4804.00	58.8 PK	74.0	-15.2	1.14 H	162	22.70	36.10
12	4804.00	28.7 AV	54.0	-25.3	1.14 H	162	-7.40	36.10

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  7. Average value = peak reading +  $20\log(\text{duty cycle})$ .



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	3.7Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1602.00	44.5 PK	74.0	-29.5	1.02 V	351	16.10	28.40
2	1602.00	39.1 AV	54.0	-14.9	1.02 V	351	10.70	28.40
3	2390.00	39.2 PK	74.0	-34.8	1.14 V	152	8.70	30.50
4	2390.00	27.4 AV	54.0	-26.6	1.14 V	152	-3.10	30.50
5	2398.00	44.4 PK	74.0	-29.6	1.14 V	152	13.90	30.50
6	2398.00	34.4 AV	54.0	-19.6	1.14 V	152	3.90	30.50
7	2400.00	52.6 PK	74.0	-21.4	1.14 V	152	22.10	30.50
8	2400.00	22.5 AV	54.0	-31.5	1.14 V	152	-8.00	30.50
9	*2402.00	91.2 PK			1.14 V	152	60.70	30.50
10	*2402.00	61.1 AV			1.14 V	152	30.60	30.50
11	4804.00	50.9 PK	74.0	-23.1	1.05 V	191	14.80	36.10
12	4804.00	20.8 AV	54.0	-33.2	1.05 V	191	-15.30	36.10

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on  $0.625 * 5$  per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  7. Average value = peak reading +  $20\log(\text{duty cycle})$ .

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	3.7Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1628.00	40.6 PK	74.0	-33.4	1.12 H	39	12.20	28.40
2	1628.00	34.4 AV	54.0	-19.6	1.12 H	39	6.00	28.40
3	*2441.00	86.8 PK			1.04 H	139	56.10	30.70
4	*2441.00	56.7 AV			1.04 H	139	26.00	30.70
5	4882.00	60.4 PK	74.0	-13.6	1.15 H	96	24.20	36.20
6	4882.00	30.3 AV	54.0	-23.7	1.15 H	96	-5.90	36.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1628.00	44.5 PK	74.0	-29.5	1.03 V	338	16.10	28.40
2	1628.00	40.2 AV	54.0	-13.8	1.03 V	338	11.80	28.40
3	*2441.00	92.2 PK			1.11 V	143	61.50	30.70
4	*2441.00	62.1 AV			1.11 V	143	31.40	30.70
5	4882.00	53.5 PK	74.0	-20.5	1.06 V	252	17.30	36.20
6	4882.00	23.4 AV	54.0	-30.6	1.06 V	252	-12.80	36.20

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* ”: Fundamental frequency.
  6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  7. Average value = peak reading +  $20\log(\text{duty cycle})$ .



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	3.7Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1654.00	40.6 PK	74.0	-33.4	1.13 H	29	12.10	28.50
2	1654.00	34.4 AV	54.0	-19.6	1.13 H	29	5.90	28.50
3	*2480.00	85.6 PK			1.05 H	134	54.80	30.80
4	*2480.00	55.5 AV			1.05 H	134	24.70	30.80
5	2483.50	39.4 PK	74.0	-34.6	1.05 H	134	8.60	30.80
6	2483.50	9.3 AV	54.0	-44.7	1.05 H	134	-21.50	30.80
7	2485.50	44.3 PK	74.0	-29.7	1.05 H	134	13.50	30.80
8	2485.50	31.2 AV	54.0	-22.8	1.05 H	134	0.40	30.80
9	4960.00	58.4 PK	74.0	-15.6	1.13 H	92	22.00	36.40
10	4960.00	28.3 AV	54.0	-25.7	1.13 H	92	-8.10	36.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1654.00	54.1 PK	74.0	-19.9	1.12 V	351	25.60	28.50
2	1654.00	41.4 AV	54.0	-12.6	1.12 V	351	12.90	28.50
3	*2480.00	91.1 PK			1.11 V	142	60.30	30.80
4	*2480.00	61.0 AV			1.11 V	142	30.20	30.80
5	2483.50	44.9 PK	74.0	-29.1	1.11 V	142	14.10	30.80
6	2483.50	14.8 AV	54.0	-39.2	1.11 V	142	-16.00	30.80
7	2485.50	49.2 PK	74.0	-24.8	1.11 V	142	18.40	30.80
8	2485.50	35.6 AV	54.0	-18.4	1.11 V	142	4.80	30.80
9	4960.00	53.4 PK	74.0	-20.6	1.05 V	61	17.00	36.40
10	4960.00	23.3 AV	54.0	-30.7	1.05 V	61	-13.10	36.40

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  7. Average value = peak reading +  $20\log(\text{duty cycle})$ .

# BELOW 1GHz WORST-CASE DATA : GFSK

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	3.7Vdc	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	22deg. C, 66%RH 1016 hPa	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	22.3 QP	40.0	-17.7	2.00 H	109	9.80	12.50
2	68.79	16.3 QP	40.0	-23.7	2.00 H	91	3.00	13.30
3	158.22	20.1 QP	43.5	-23.4	2.00 H	10	5.80	14.30
4	230.16	15.7 QP	46.0	-30.3	1.25 H	82	3.20	12.50
5	473.20	21.3 QP	46.0	-24.7	1.50 H	289	1.40	19.90
6	632.63	21.9 QP	46.0	-24.1	1.00 H	10	-1.50	23.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	25.5 QP	40.0	-14.5	1.25 V	16	13.00	12.50
2	68.79	19.1 QP	40.0	-20.9	1.00 V	244	5.80	13.30
3	138.78	17.6 QP	43.5	-25.9	1.25 V	25	4.70	12.90
4	228.22	29.1 QP	46.0	-16.9	2.00 V	277	16.70	12.40
5	467.36	20.5 QP	46.0	-25.5	1.00 V	304	0.80	19.70
6	632.63	22.8 QP	46.0	-23.2	2.00 V	130	-0.60	23.40

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.

## 4.2 NUMBER OF HOPPING FREQUENCY USED

### 4.2.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channels frequencies, and should be equally spaced.

### 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
SPECTRUM ANALYZER R&S	FSP40	100040	Jul. 07, 2009	Jul. 06, 2010

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.2.3 TEST PROCEDURES


- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- Set the SA on View mode and then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.



#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.2.5 TEST SETUP

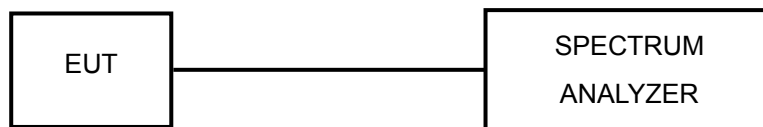



#### 4.2.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.



A D T



## GFSK

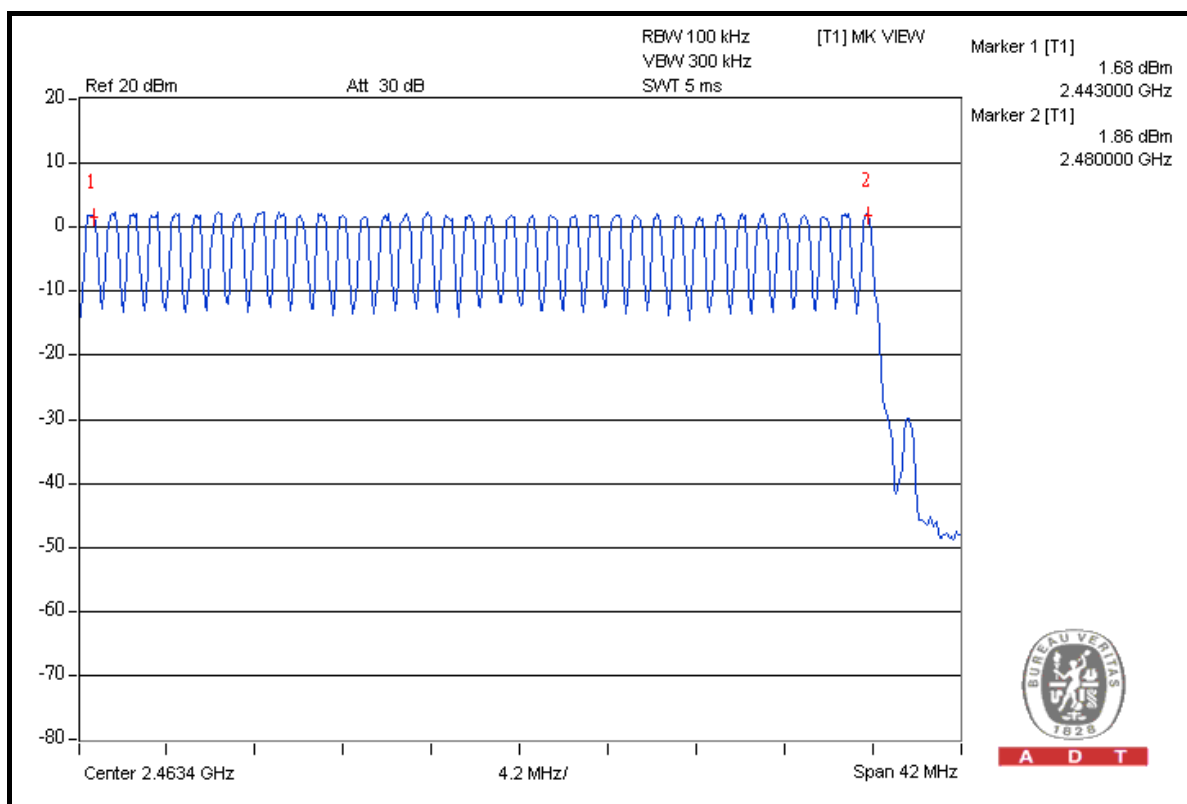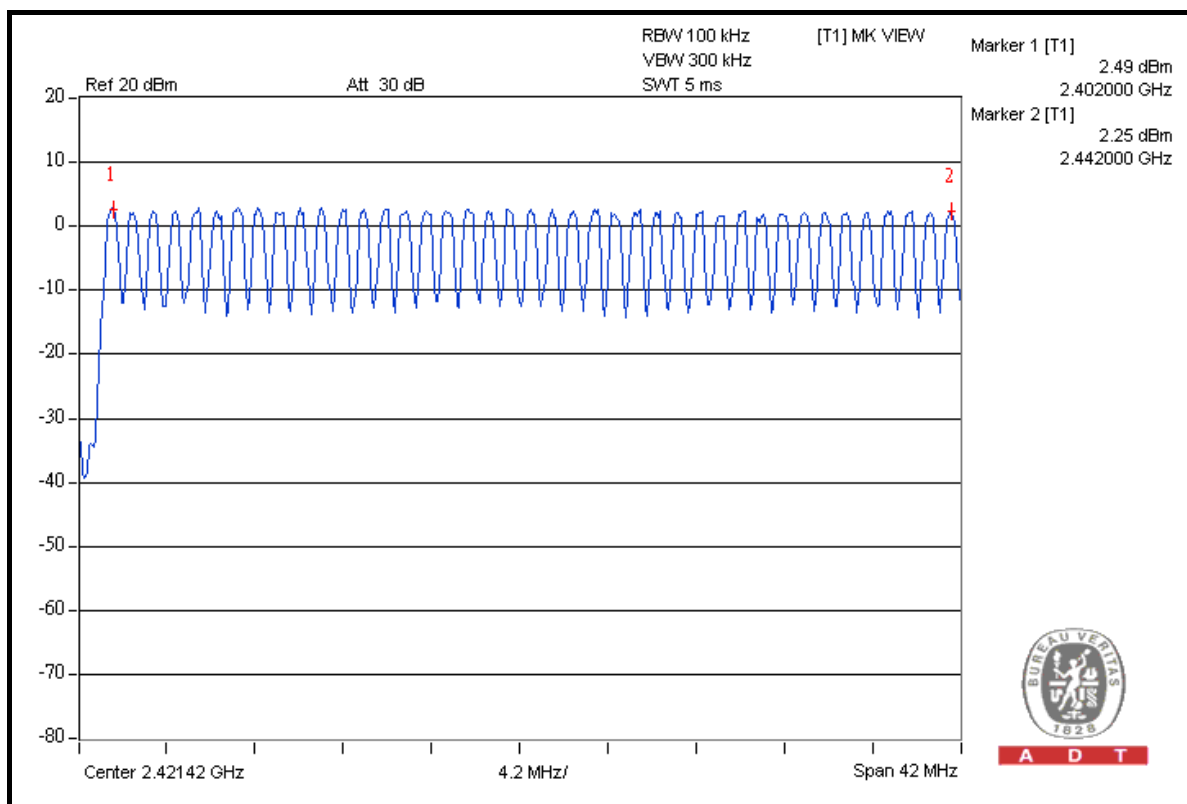



A D T

## 8DPSK

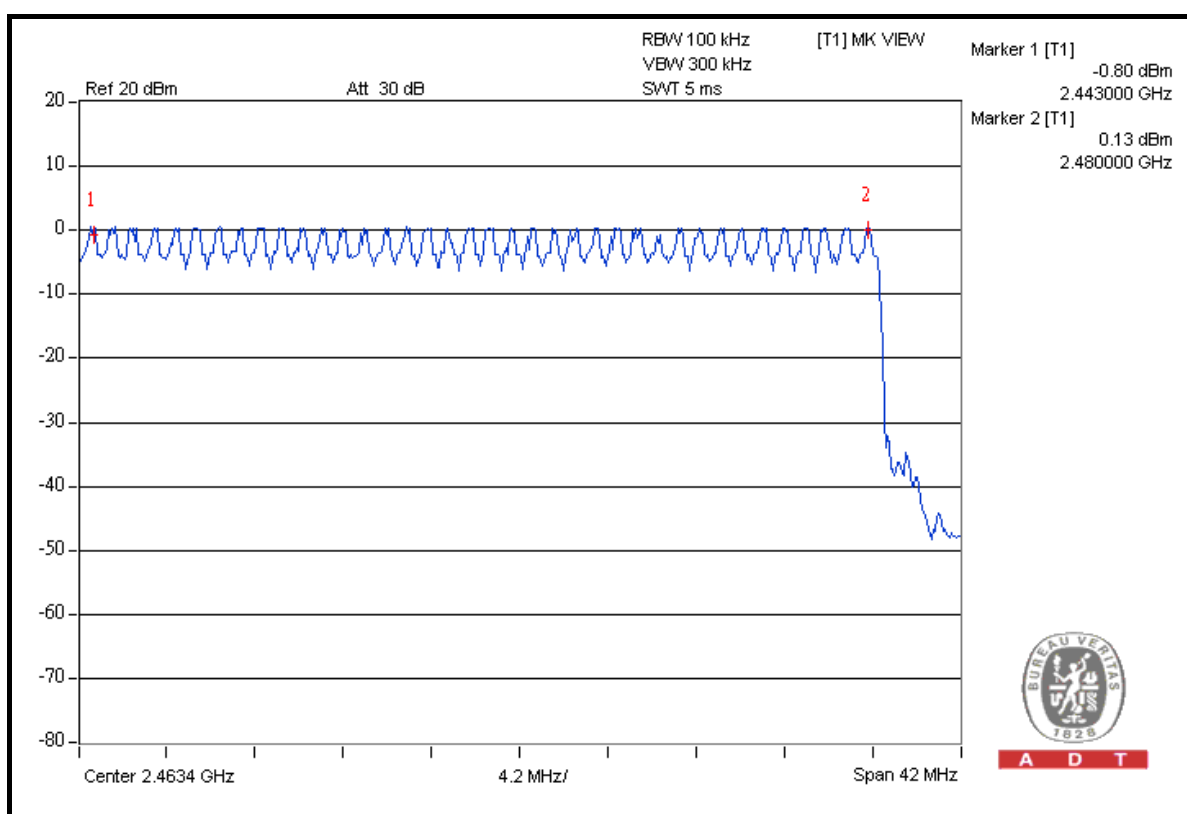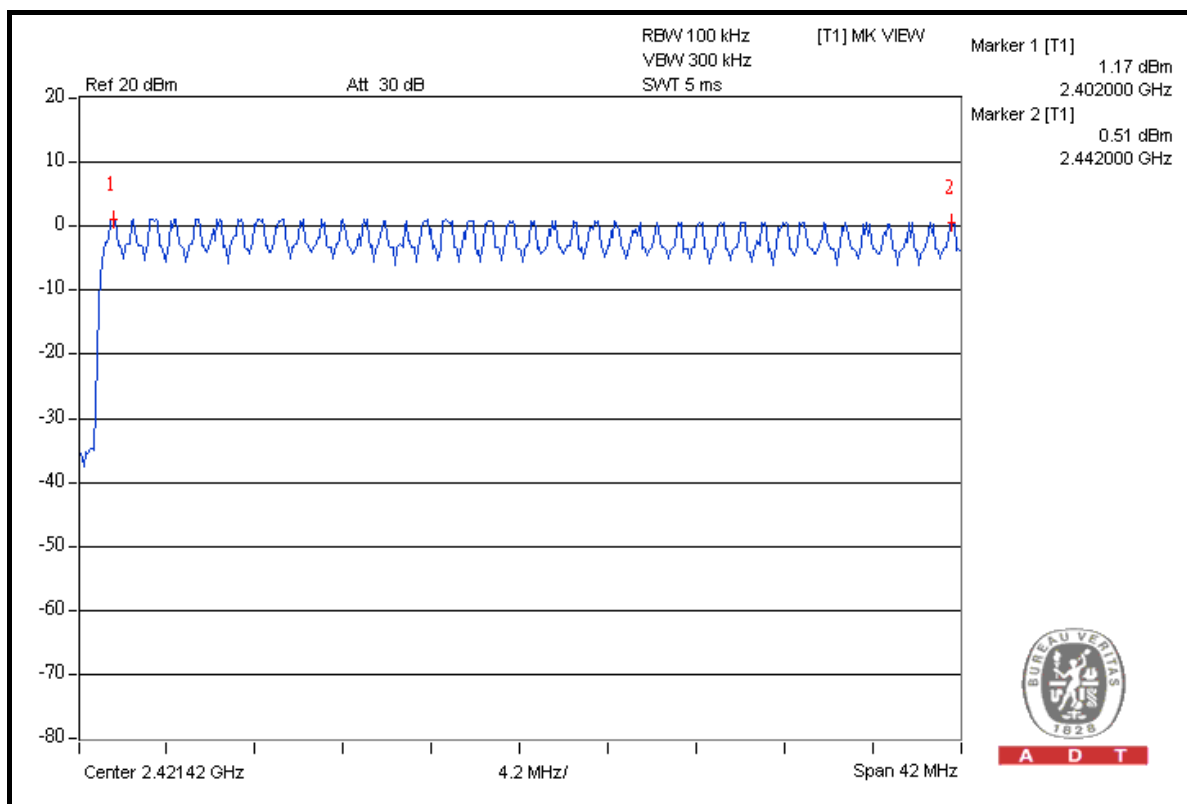

### 4.3 DWELL TIME ON EACH CHANNEL

#### 4.3.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### 4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
SPECTRUM ANALYZER R&S	FSP40	100040	Jul. 07, 2009	Jul. 06, 2010

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.3.3 TEST PROCEDURES

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.3.5 TEST SETUP

Same as 4.3.5.

#### 4.3.6 TEST RESULTS

##### GFSK



Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	51 (times / 5 sec) * 6.32 = 322.32 times	0.468	150.846	400
DH3	26 (times / 5 sec) * 6.32 = 164.32 times	1.728	283.945	400
DH5	16 (times / 5 sec) * 6.32 = 101.12times	3.000	303.360	400

**NOTE:** Test plots of the transmitting time slot are shown on next 3 pages.



A D T



DH1

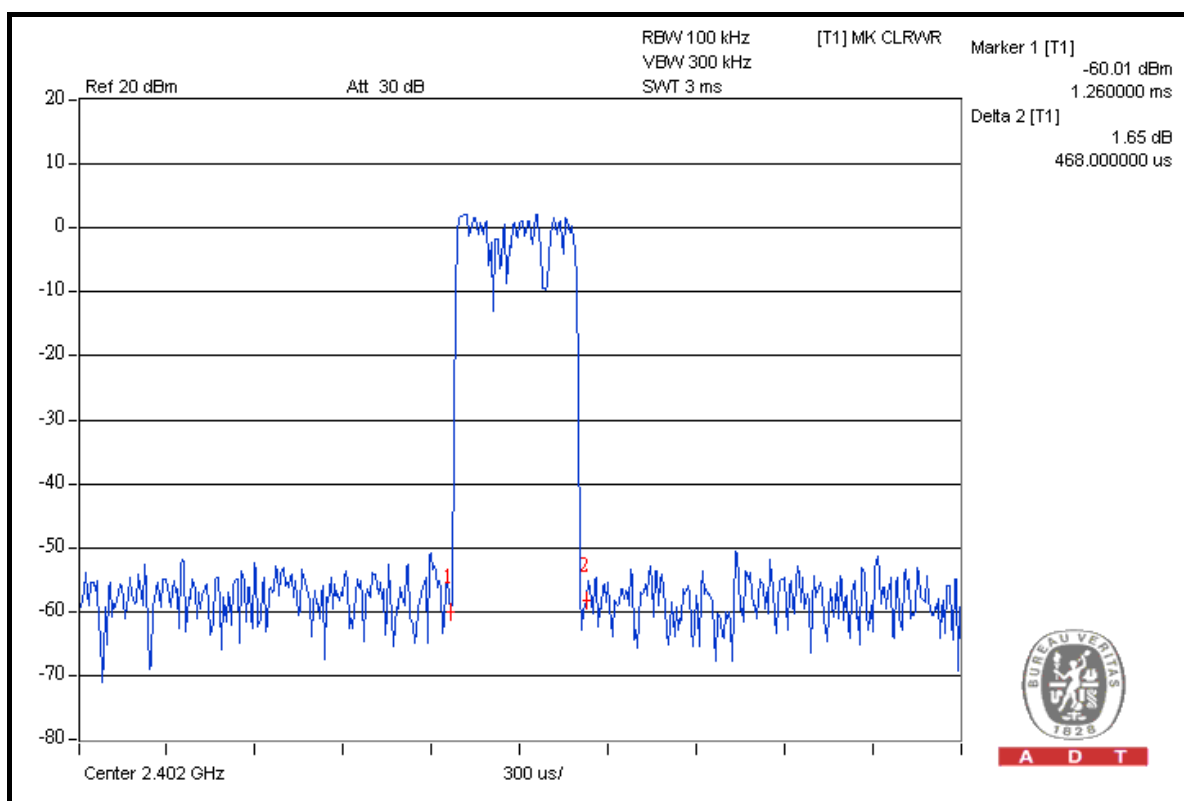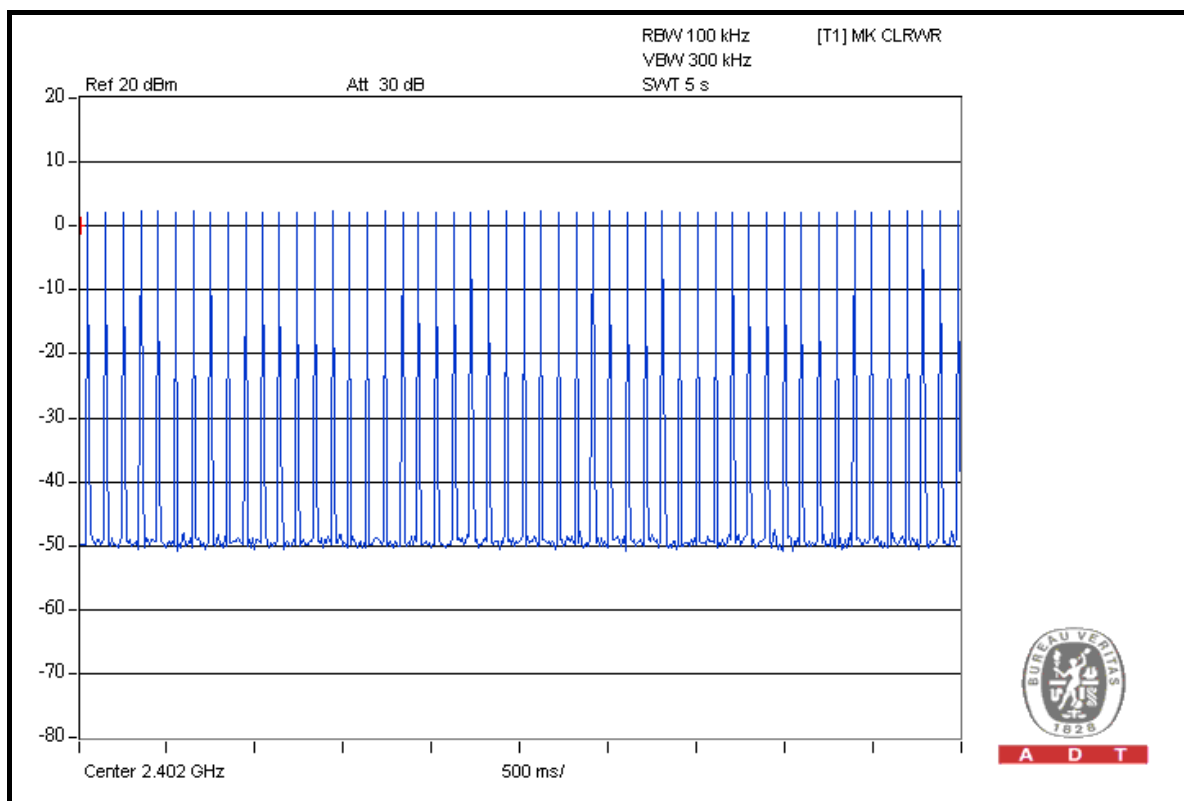



A D T



DH3

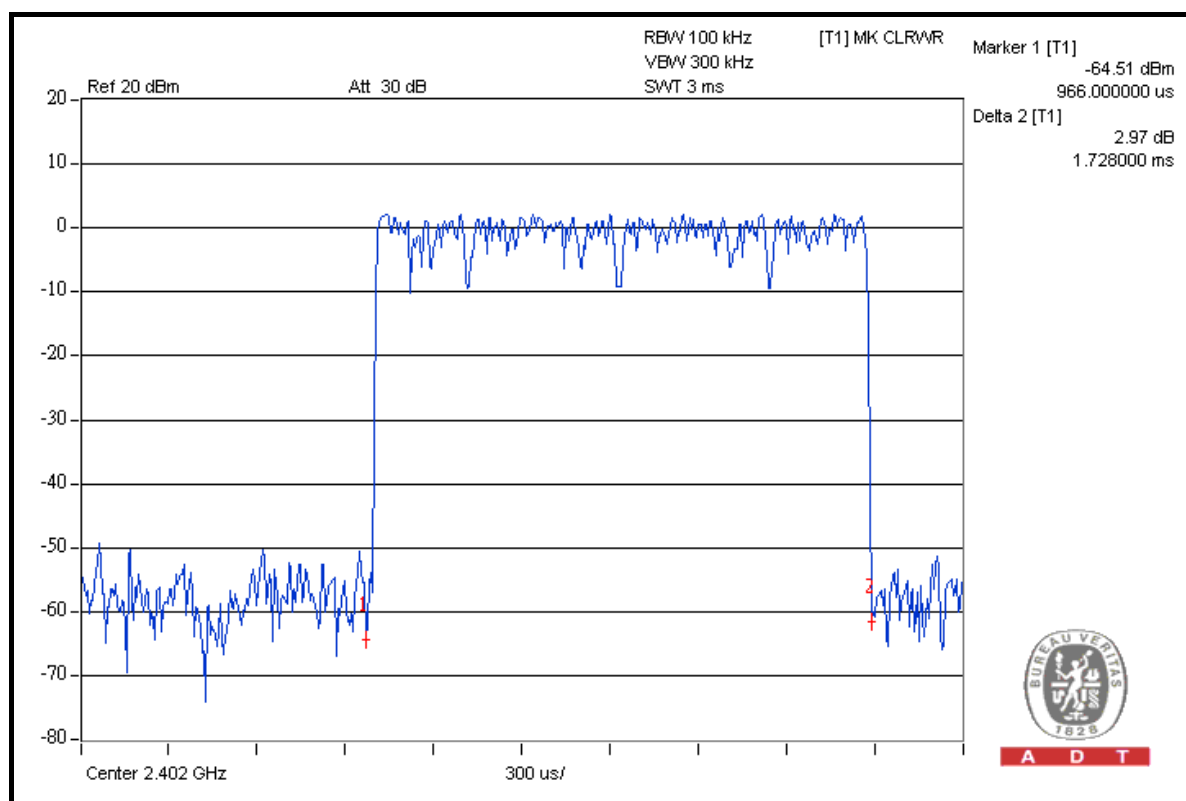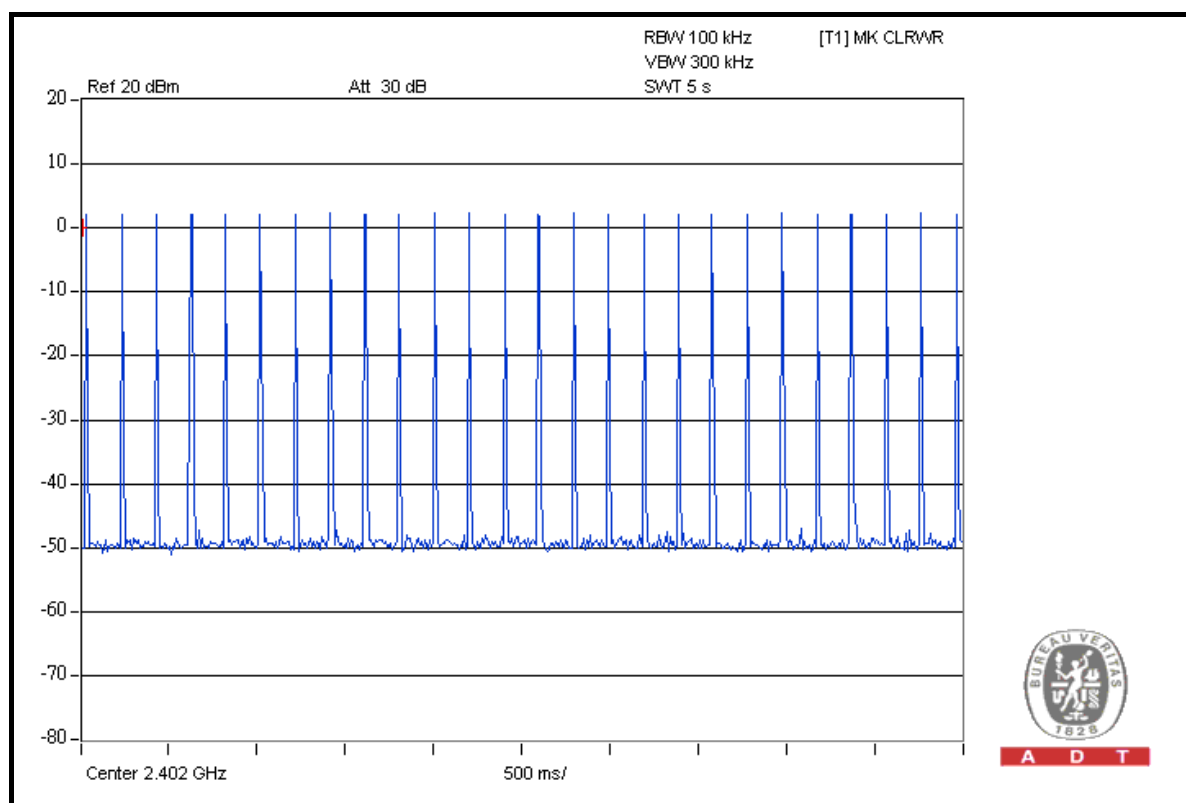



A D T

DH5

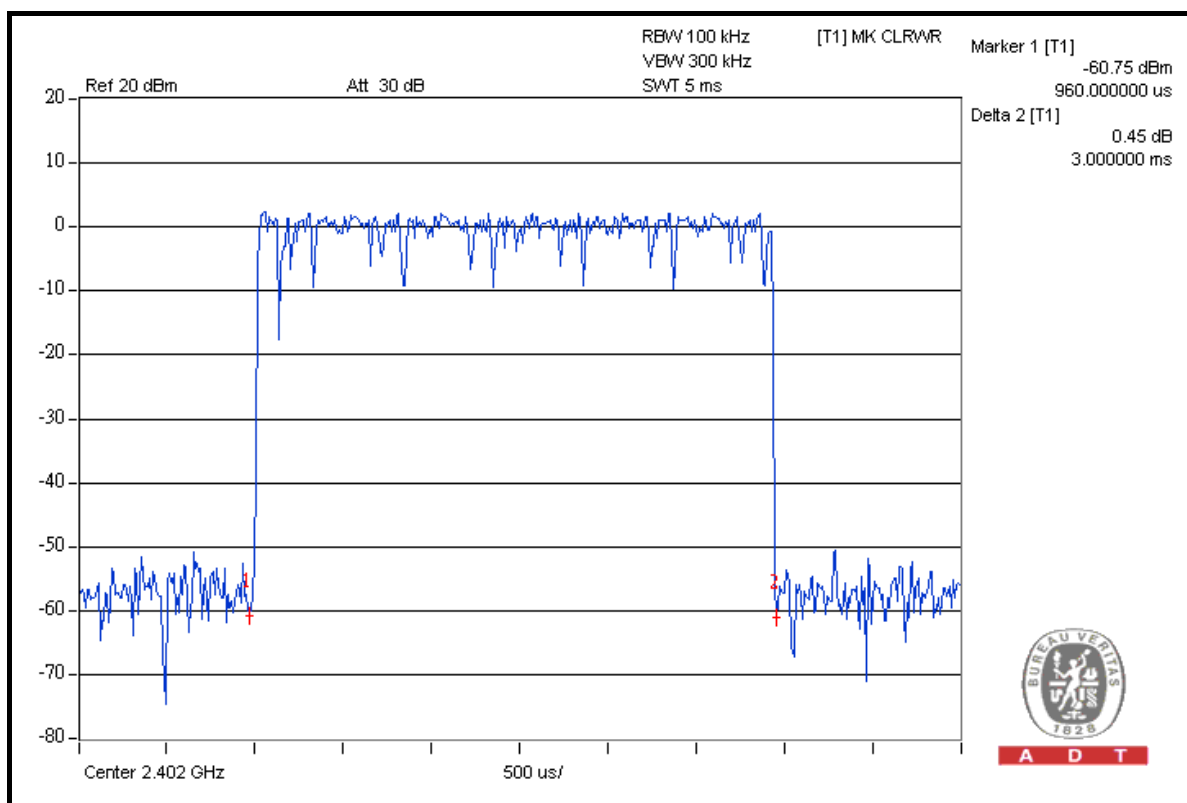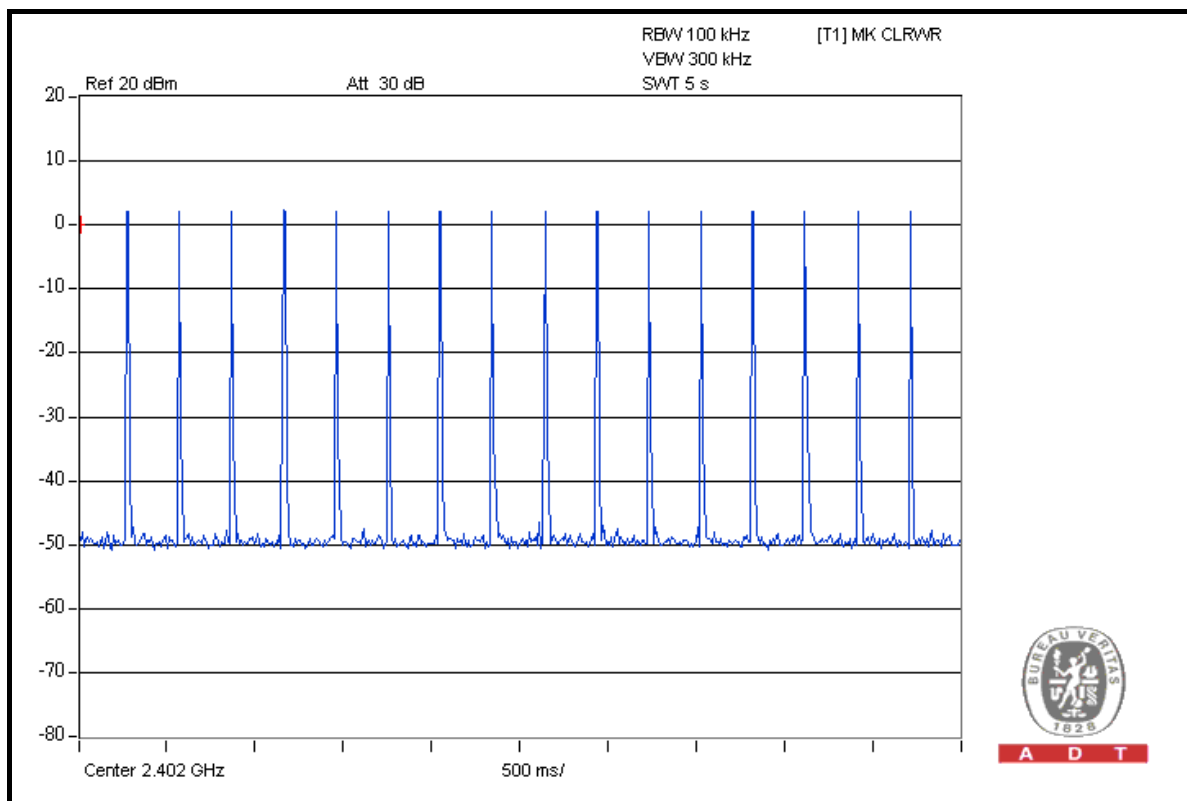



## 8DPSK



Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	50 (times / 5 sec) * 6.32 = 316.00 times	0.480	151.680	400
DH3	26 (times / 5 sec) * 6.32 = 164.32 times	1.710	280.987	400
DH5	17 (times / 5 sec) * 6.32 = 107.44 times	3.010	323.394	400

**NOTE:** Test plots of the transmitting time slot are shown on next 3 pages.



A D T



DH1

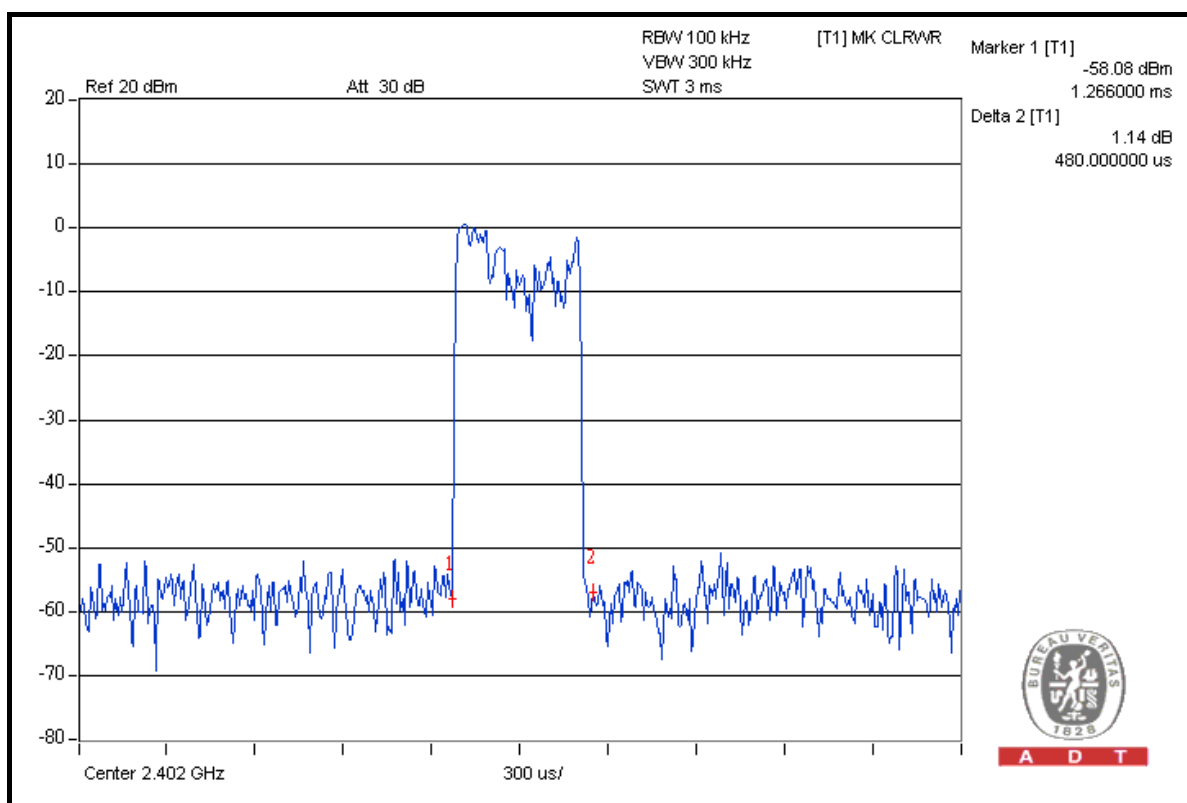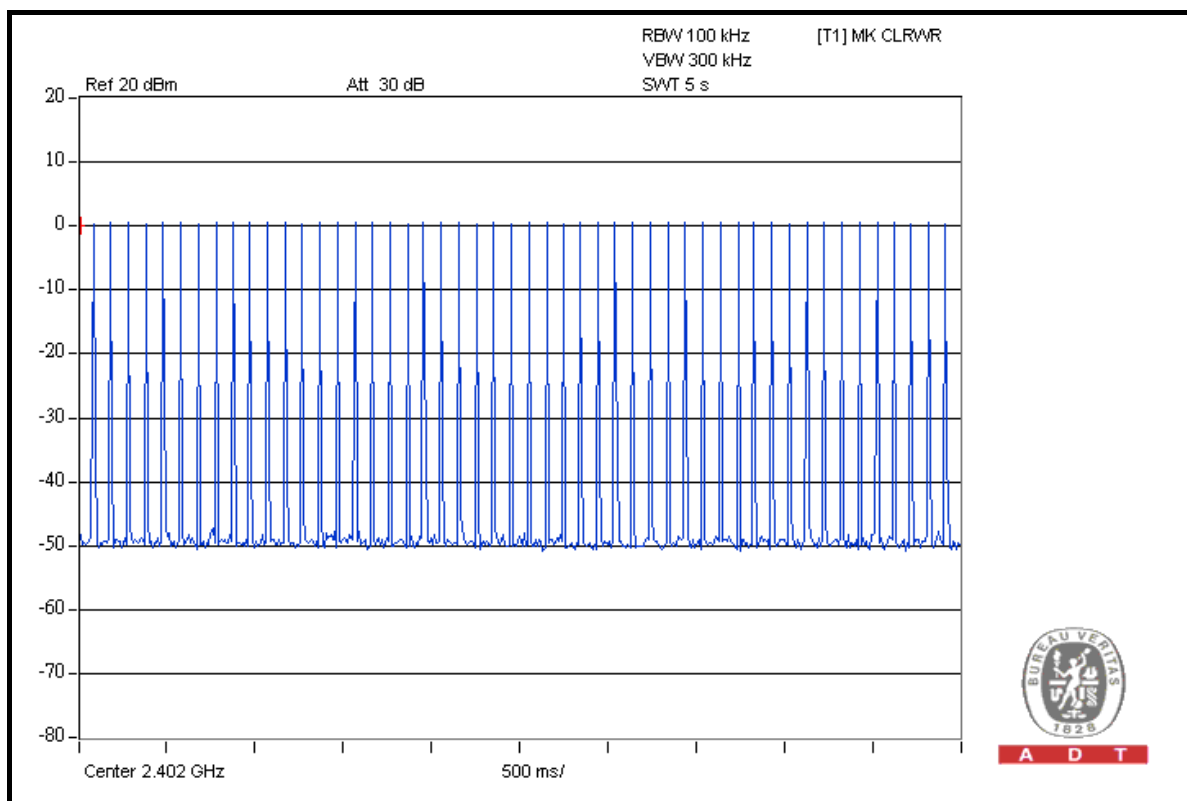



A D T



### DH3

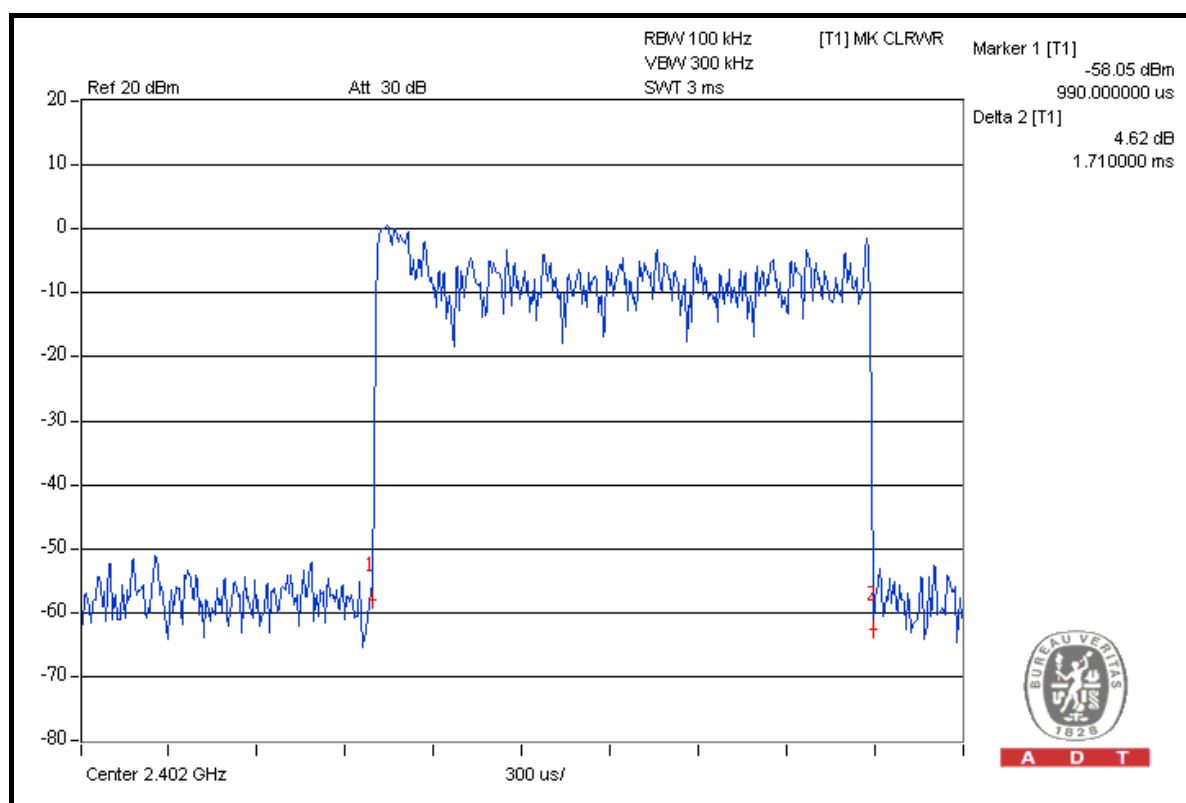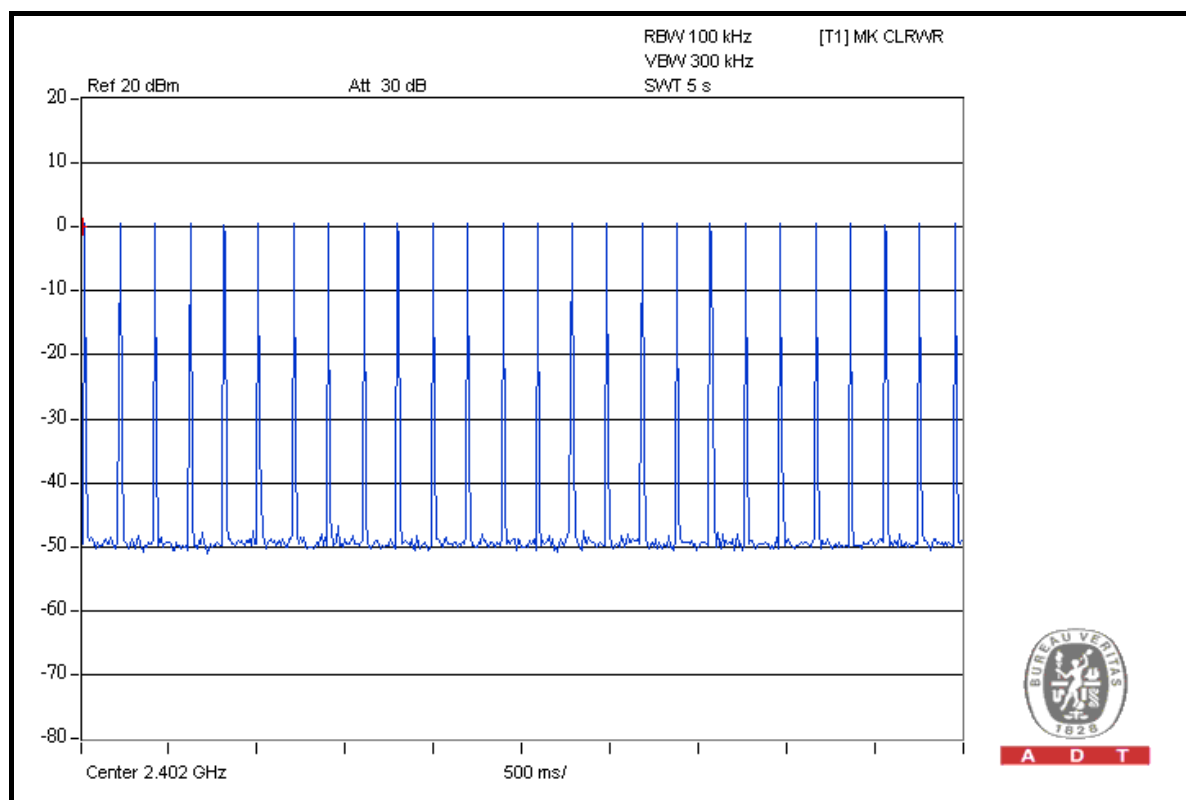



A D T

DH5

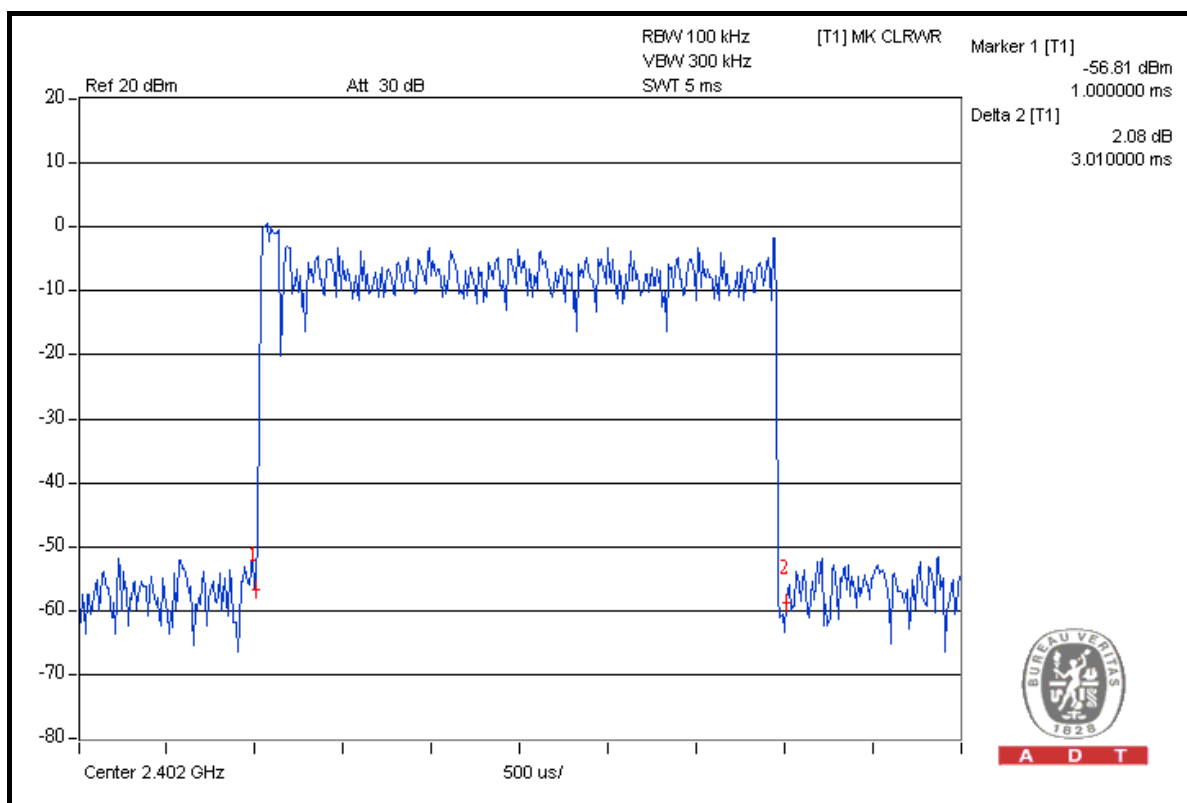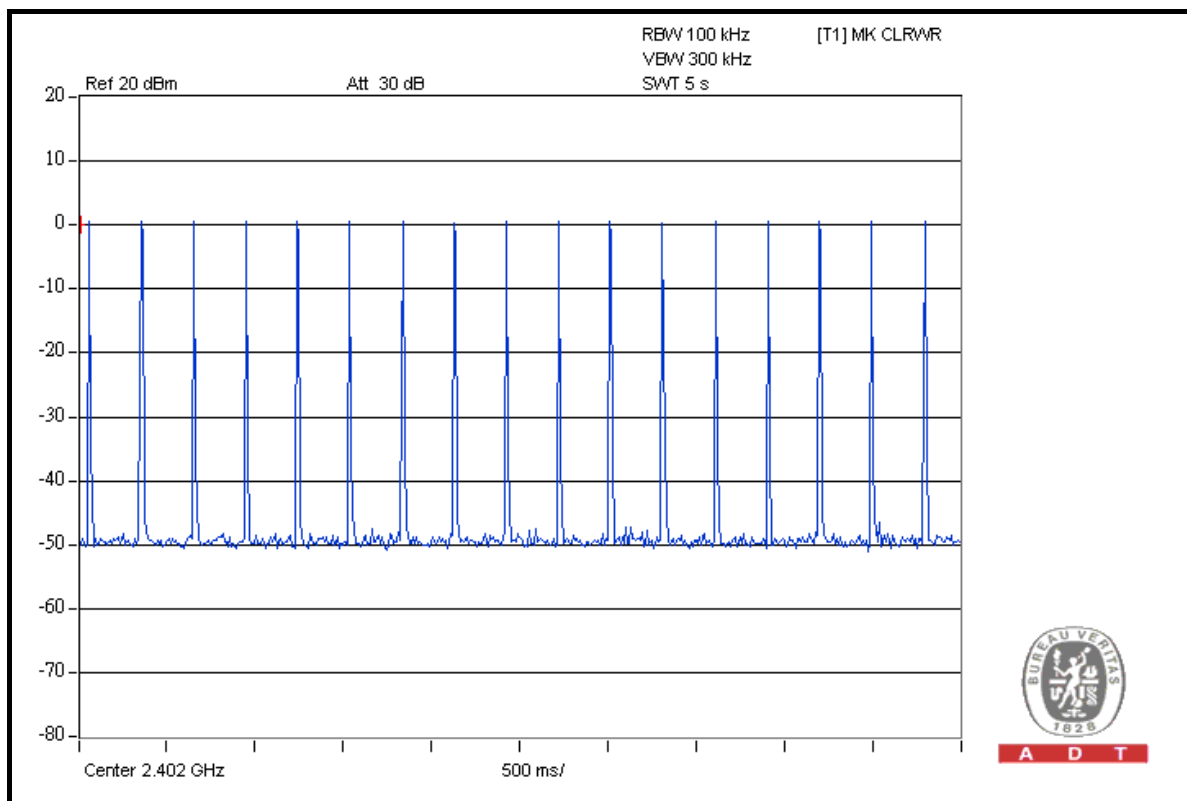

## 4.4 CHANNEL BANDWIDTH

### 4.4.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

### 4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
SPECTRUM ANALYZER R&S	FSP40	100040	Jul. 07, 2009	Jul. 06, 2010

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.4.3 TEST PROCEDURE

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

### 4.4.5 TEST SETUP

Same as 4.3.5.

#### 4.4.6 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

#### 4.4.7 TEST RESULTS

##### GFSK

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2402	0.932
39	2441	0.929
78	2480	0.933


##### CH 78

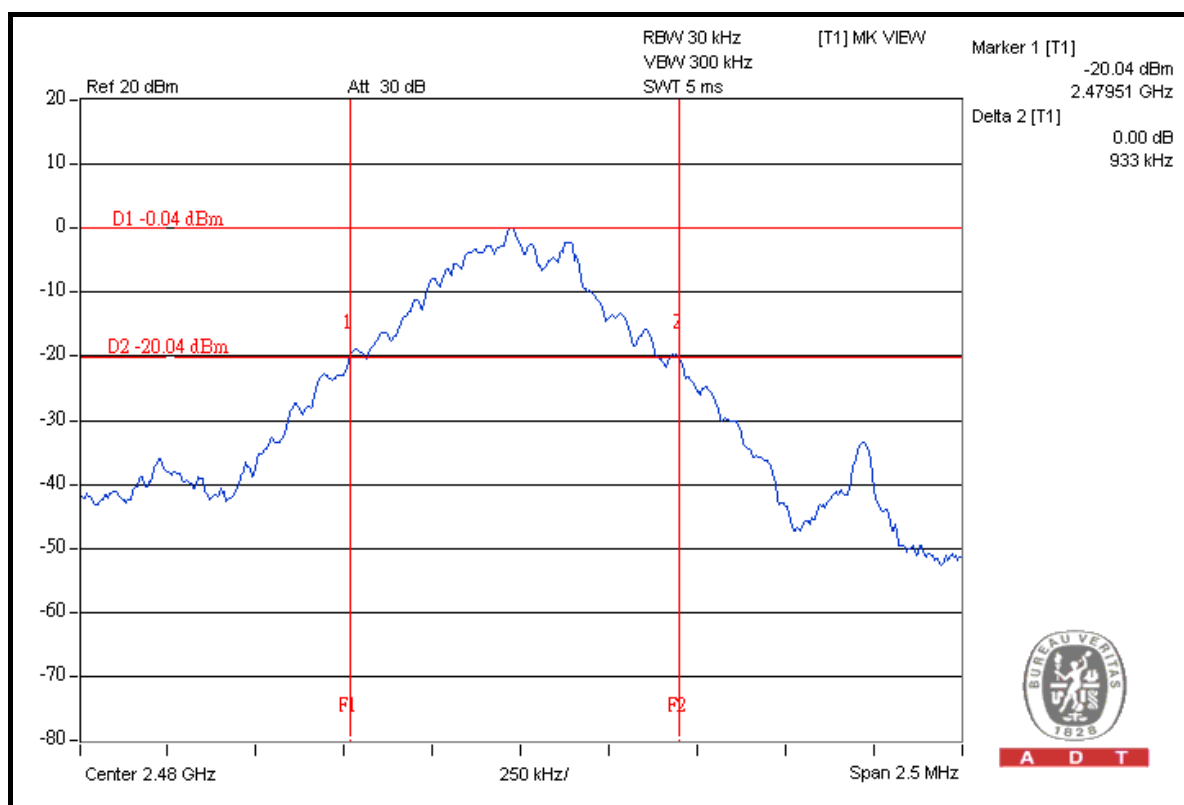

## 8DPSK

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2402	1.270
39	2441	1.300
78	2480	1.280

## CH 39

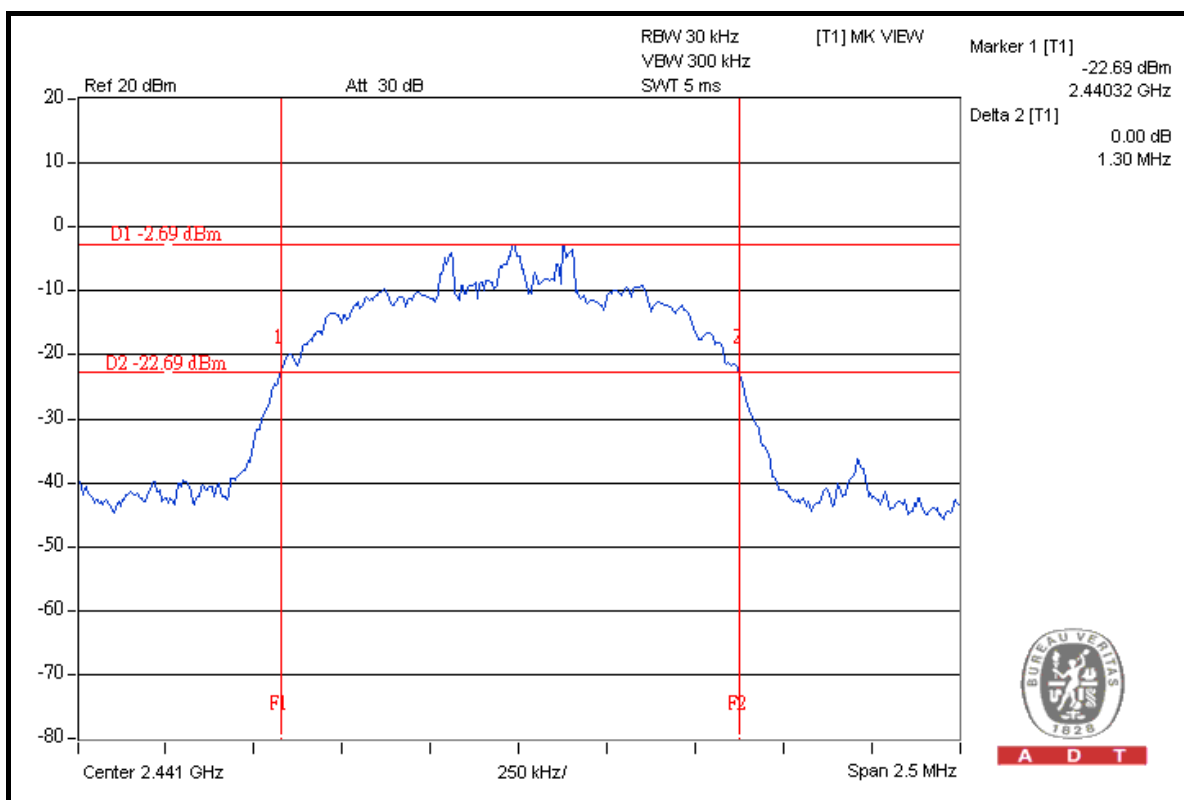

## 4.5 HOPPING CHANNEL SEPARATION

### 4.5.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

### 4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
SPECTRUM ANALYZER R&S	FSP40	100040	Jul. 07, 2009	Jul. 06, 2010

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.5.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

### 4.5.5 TEST SETUP

Same as 4.3.5.




## 4.5.6 TEST RESULTS

### GFSK

CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)	20dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.000	0.932	0.621	PASS
39	2441	1.000	0.929	0.619	PASS
78	2480	1.000	0.933	0.622	PASS

**NOTE:** The minimum limit is two-third 20dB bandwidth. Test results please refer to next two pages.

### CH 0

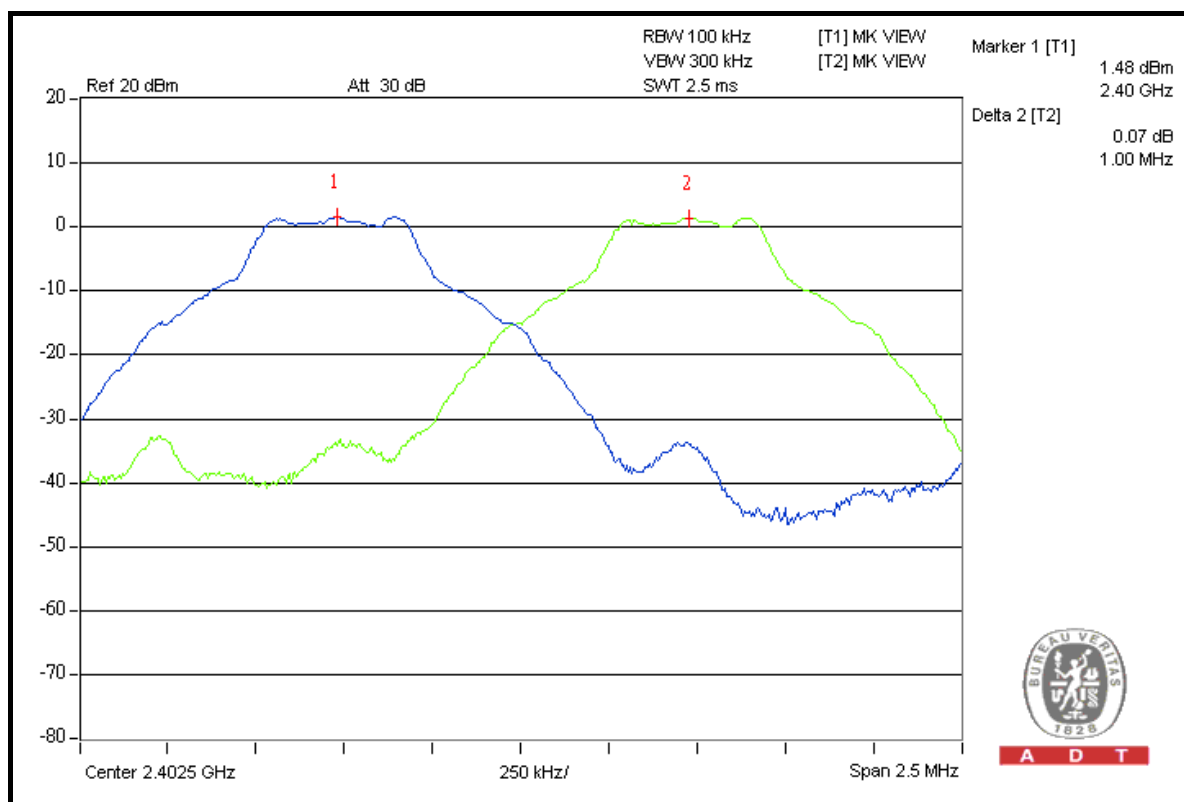


# 8DPSK

CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)	20dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.000	1.270	0.847	PASS
39	2441	1.000	1.300	0.867	PASS
78	2480	1.000	1.280	0.853	PASS

**NOTE:** The minimum limit is two-third 20dB bandwidth. Test results please refer to next two pages.

# CH 0

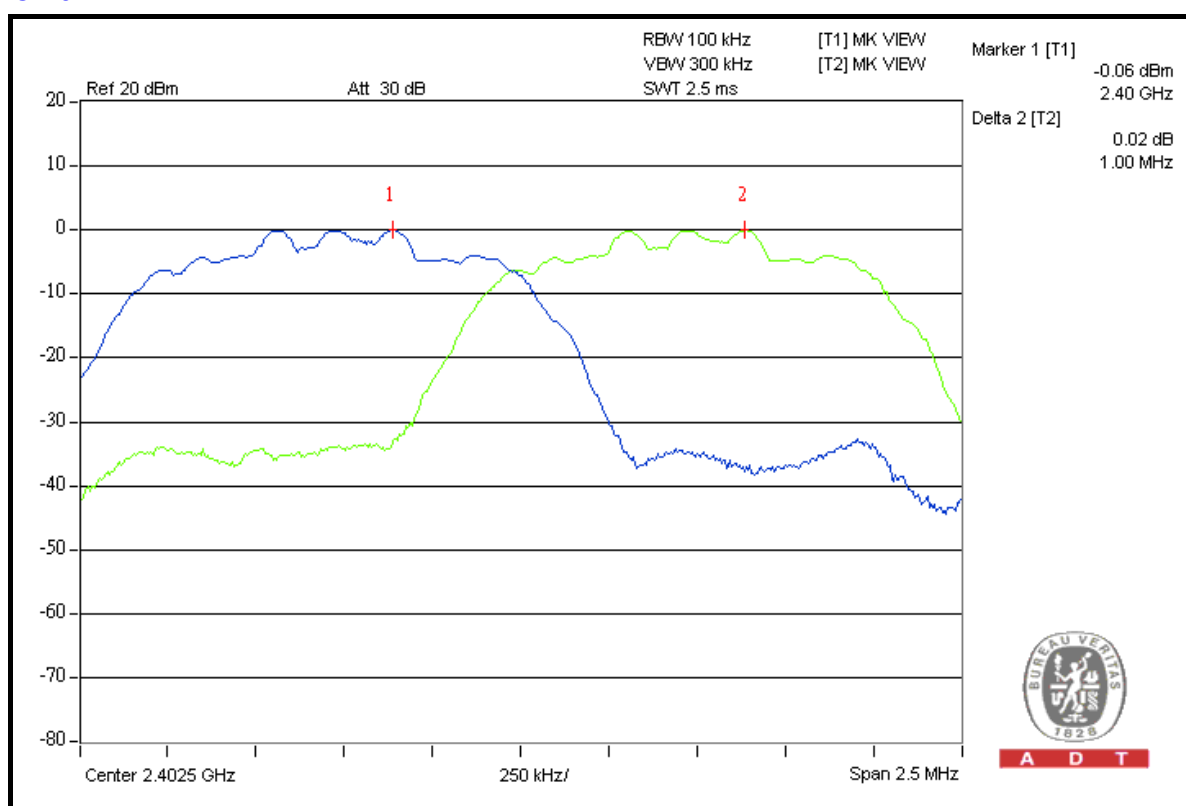

## 4.6 MAXIMUM OUTPUT POWER

### 4.6.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 125mW.

### 4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
SPECTRUM ANALYZER R&S	FSP40	100040	Jul. 07, 2009	Jul. 06, 2010

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.6.3 TEST PROCEDURES

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3MHz RBW and 10 MHz VBW.
- Measure the captured power within the band and recording the plot.
- Repeat above procedures until all frequencies required were complete.

### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

### 4.6.5 TEST SETUP

Same as 4.3.5.

#### 4.6.6 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

#### 4.6.7 TEST RESULTS

##### GFSK

CHANNEL	CHANNEL FREQUENCY (MHz)	POWER OUTPUT (mW)	POWER OUTPUT (dBm)	POWER LIMIT (mW)	PASS/FAIL
0	2402	1.5	1.8	125	PASS
39	2441	1.2	1.0	125	PASS
78	2480	1.1	0.6	125	PASS


##### CH 0

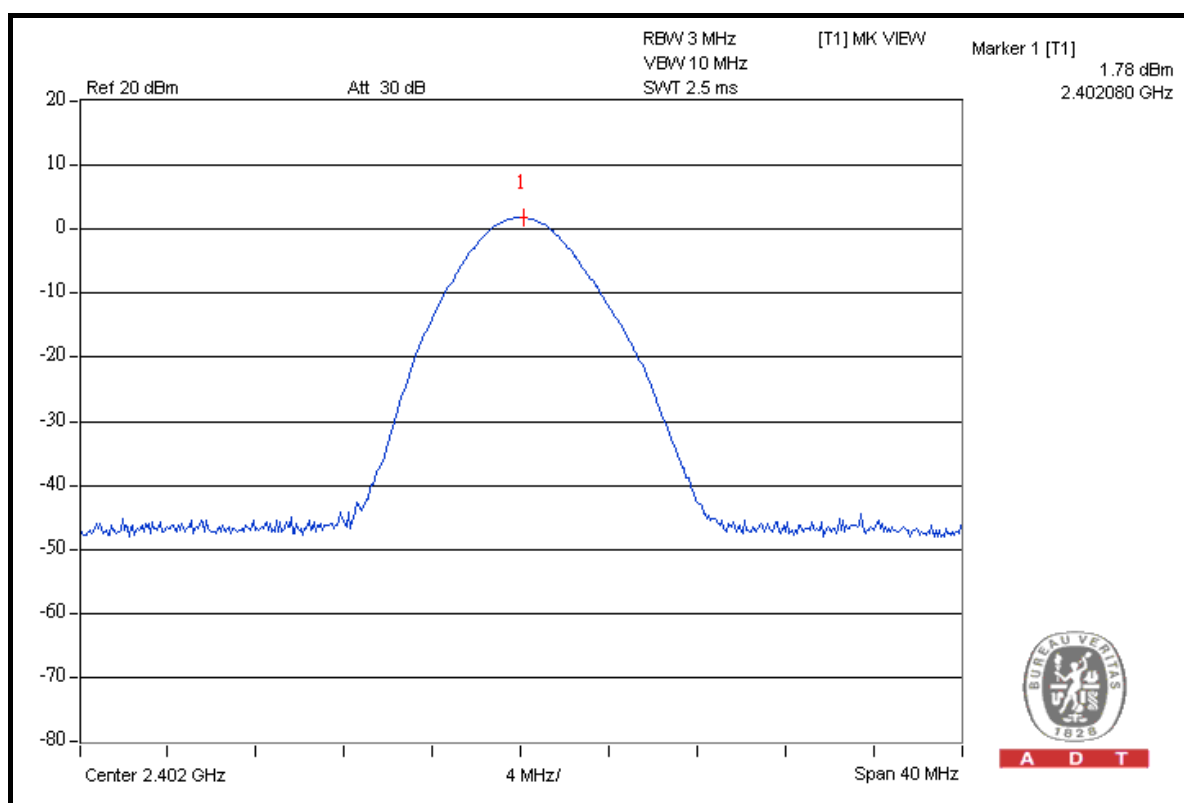

## 8DPSK

CHANNEL	CHANNEL FREQUENCY (MHz)	POWER OUTPUT (mW)	POWER OUTPUT (dBm)	POWER LIMIT (mW)	PASS/FAIL
0	2402	1.2	0.9	125	PASS
39	2441	1.0	0.1	125	PASS
78	2480	1.0	-0.2	125	PASS

## CH 0

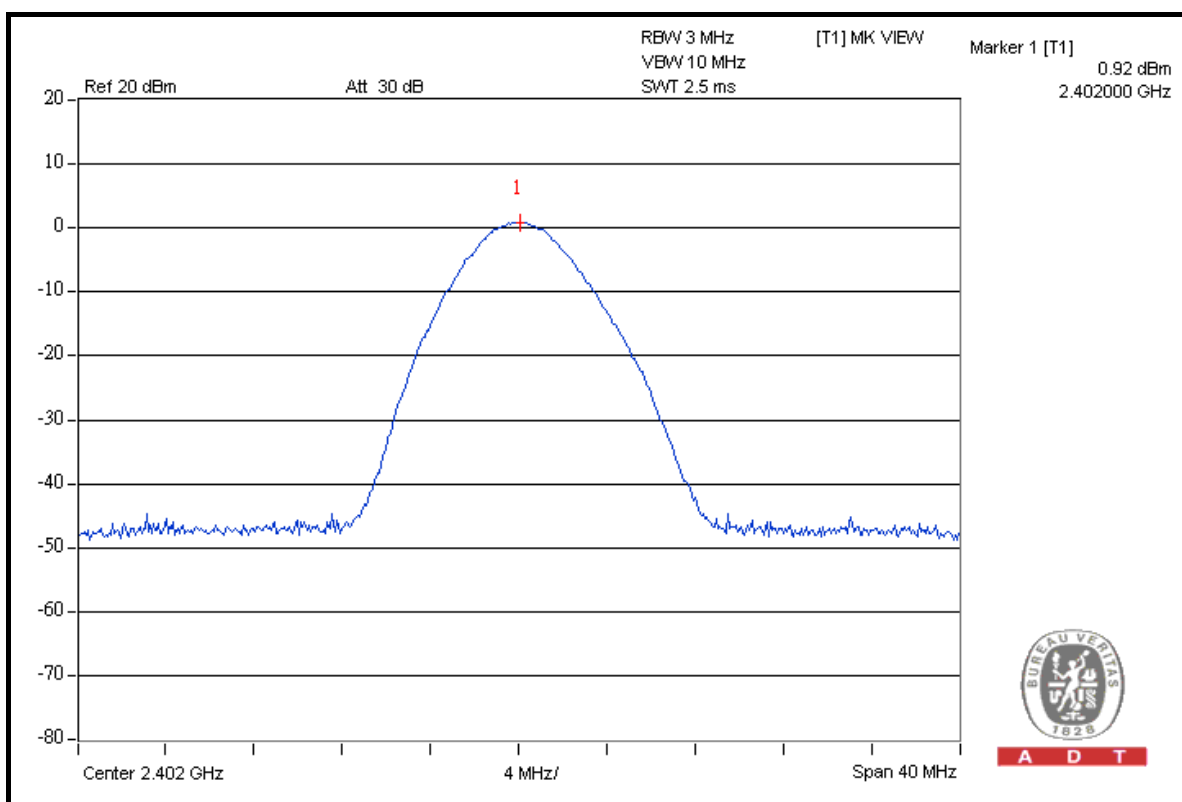

## 4.7 BAND EDGES MEASUREMENT

### 4.7.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RBW).

### 4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
SPECTRUM ANALYZER R&S	FSP40	100040	Jul. 07, 2009	Jul. 06, 2010

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.7.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

### 4.7.4 DEVIATION FROM TEST STANDARD

No deviation.

### 4.7.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest and highest channel frequencies individually.

#### 4.7.6 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

#### GFSK

##### RESTRICT BAND (2310 ~ 2390 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2402.00 (PK)	93.30	49.30	44.00	74.00
2402.00 (AV)	-	-	13.90	54.00

##### RESTRICT BAND (2483.5 ~ 2500 MHz)


FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2480.00 (PK)	93.10	47.85	45.25	74.00
2480.00 (AV)	-	-	15.15	54.00

#### NOTE:


- Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission. Please check following 2 pages.
- Maximum field strength in restrict band (PK value) = Fundamental emission (PK value) – Delta.
- Average value = Peak value + 20 Log (duty cycle) = Peak value – 30.1dB.
- The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon Bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correction factor be equal to:  $20\log(3.125/100) = -30.1$  dB.



A D T

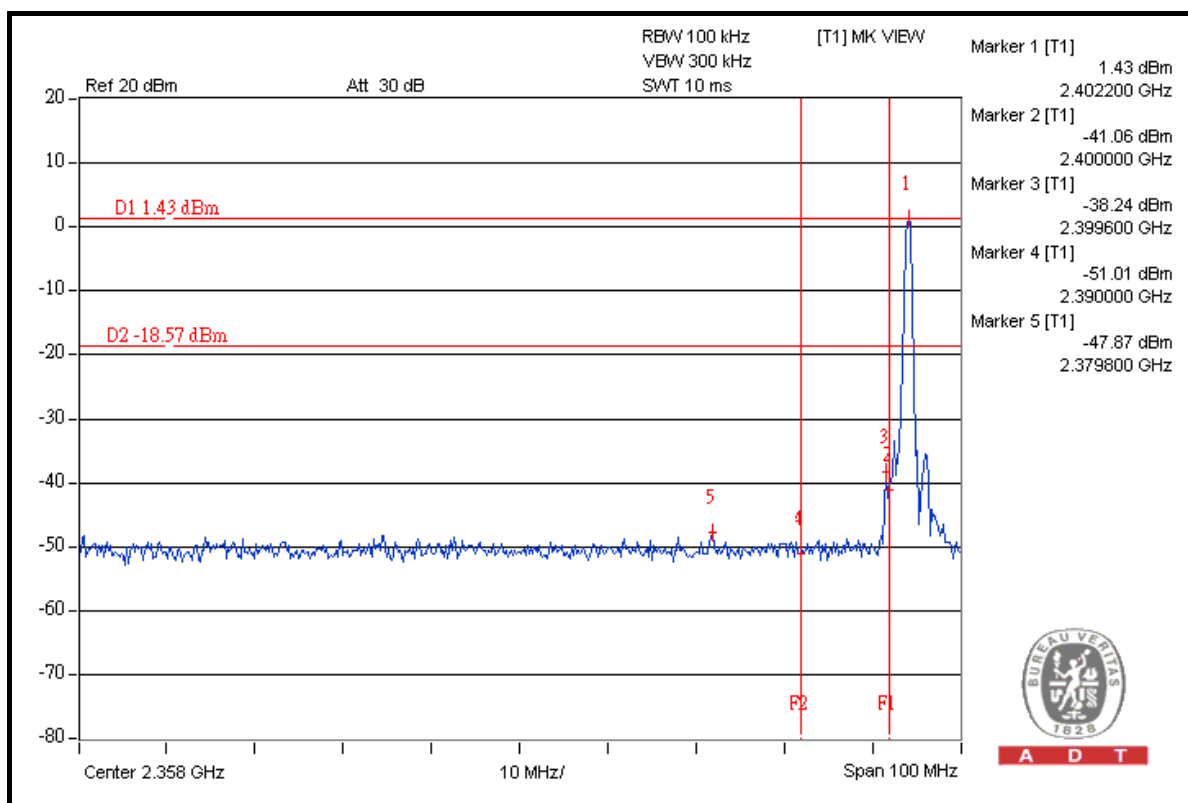

A D T


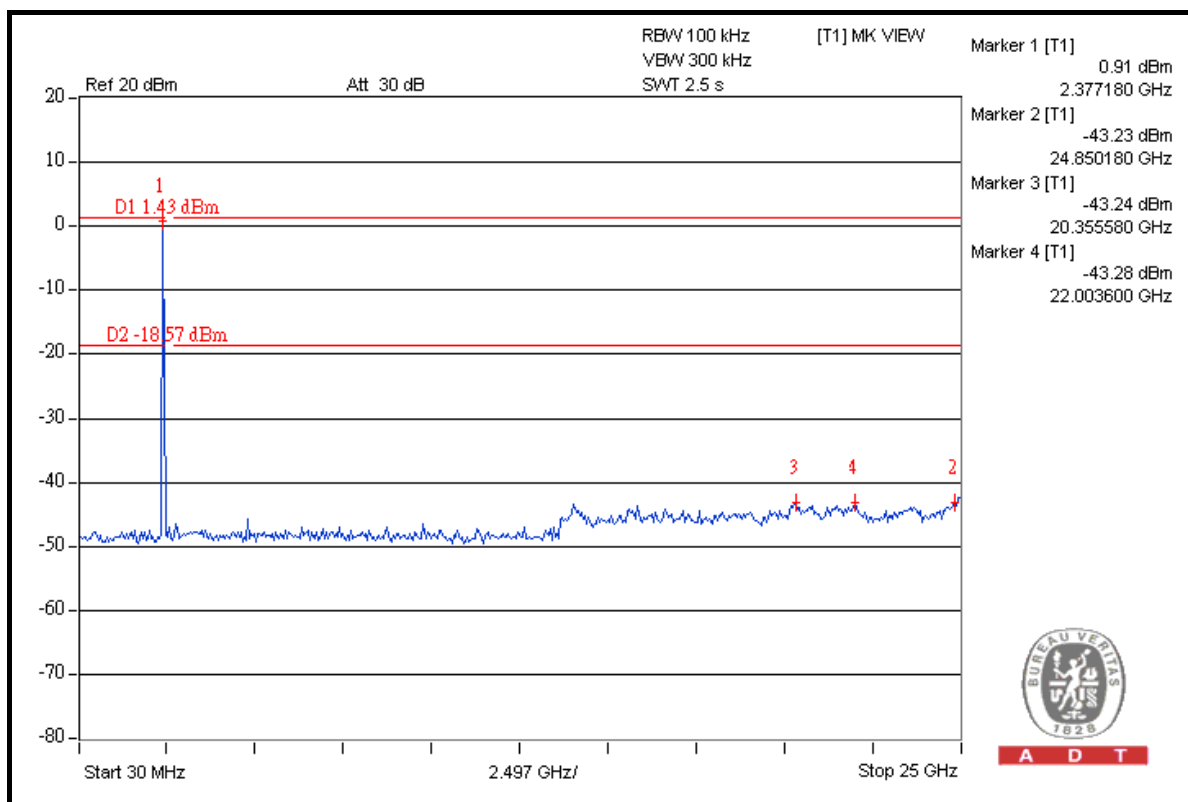


A D T





A D T

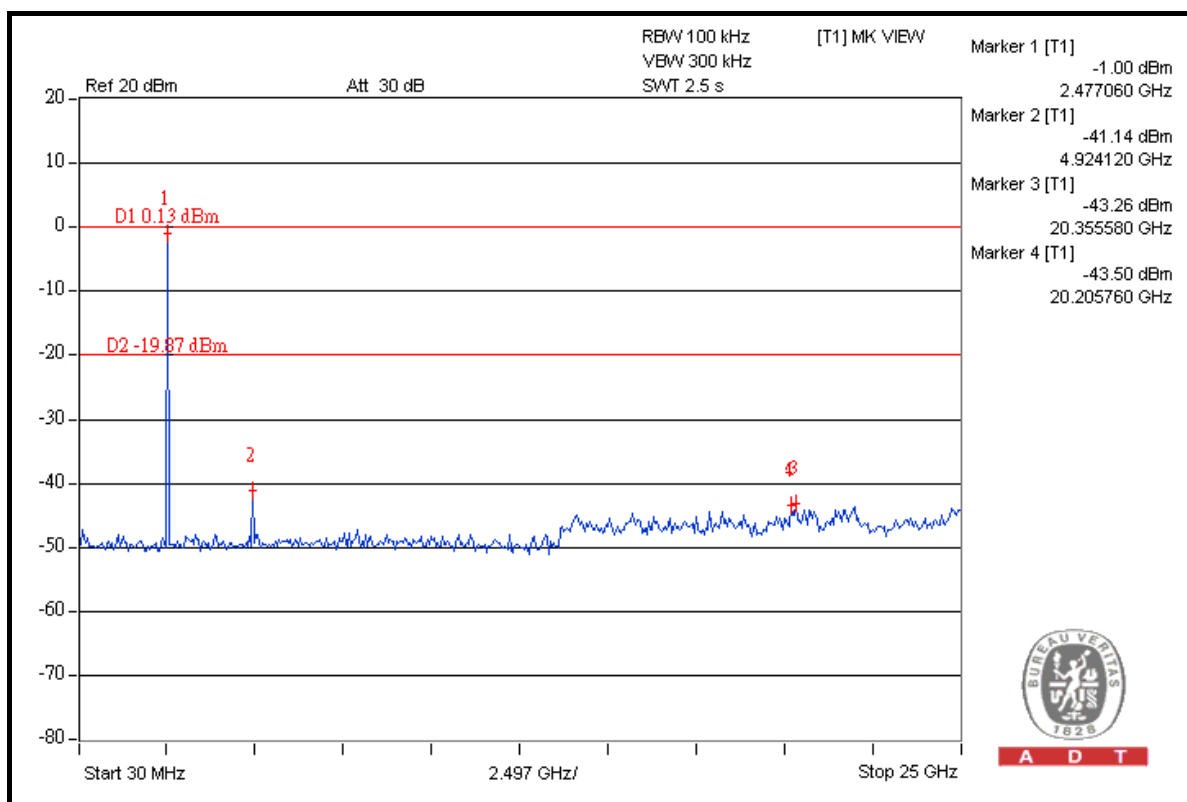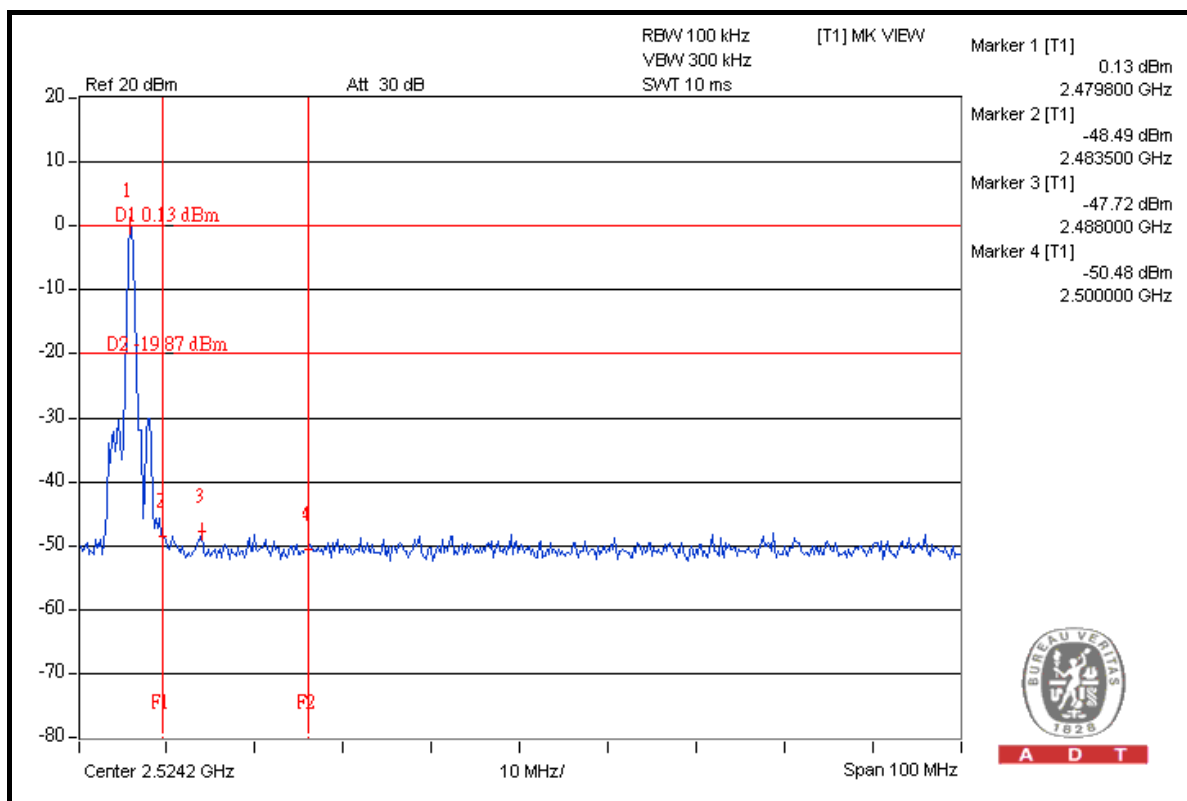

## 8DPSK

### RESTRICT BAND (2310 ~ 2390 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2402.00 (PK)	91.20	48.16	43.04	74.00
2402.00 (AV)	-	-	12.94	54.00

### RESTRICT BAND (2483.5 ~ 2500 MHz)


FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2480.00 (PK)	91.10	44.77	46.33	74.00
2480.00 (AV)	-	-	16.23	54.00

#### NOTE:


1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission. Please check following 2 pages.
2. Maximum field strength in restrict band (PK value) = Fundamental emission (PK value) – Delta.
3. Average value = Peak value + 20 Log (duty cycle) = Peak value – 30.1dB.
4. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon Bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correction factor be equal to:  $20\log(3.125/100) = -30.1 \text{ dB}$ .



A D T

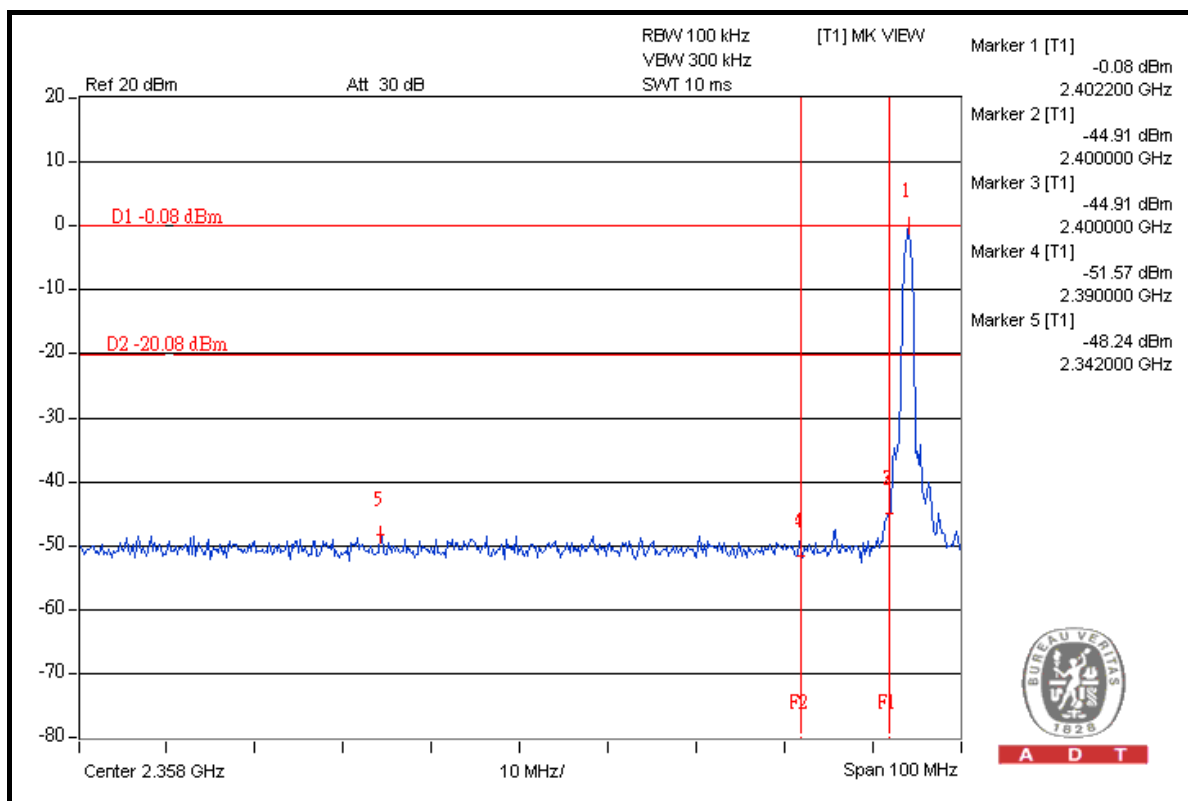


A D T

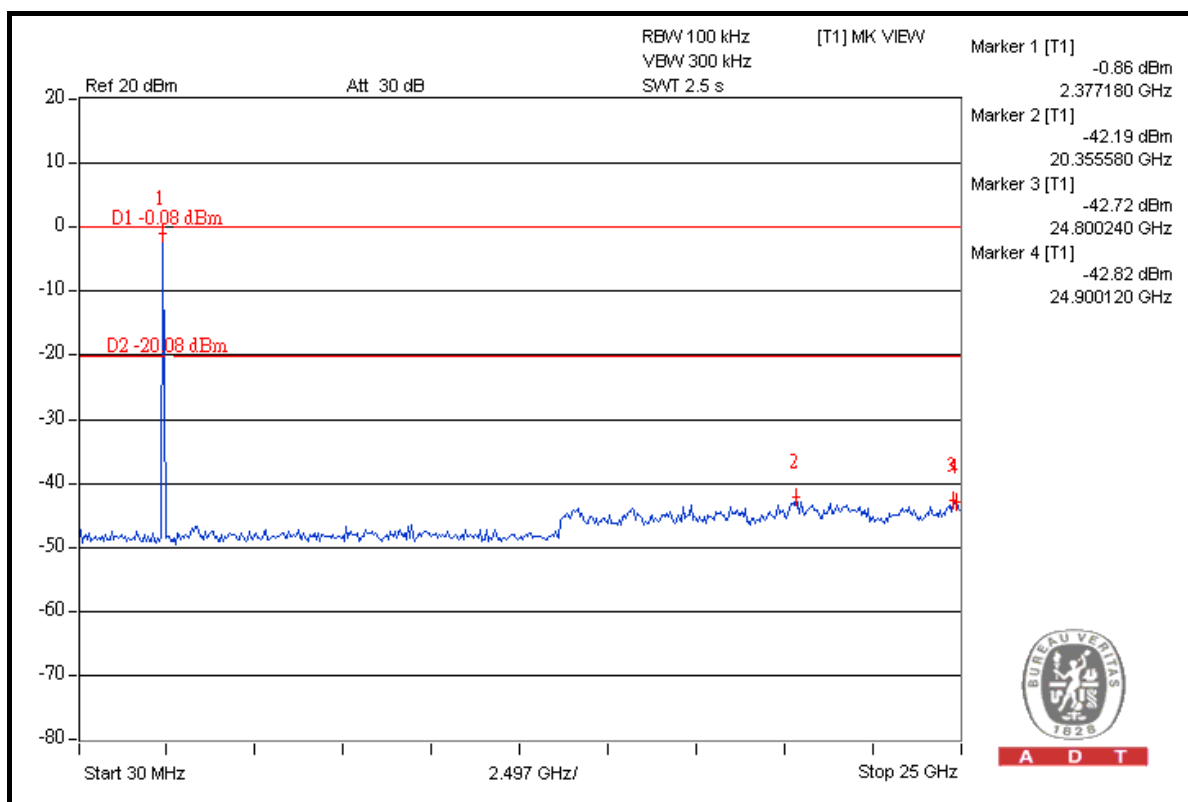


A D T



A D T

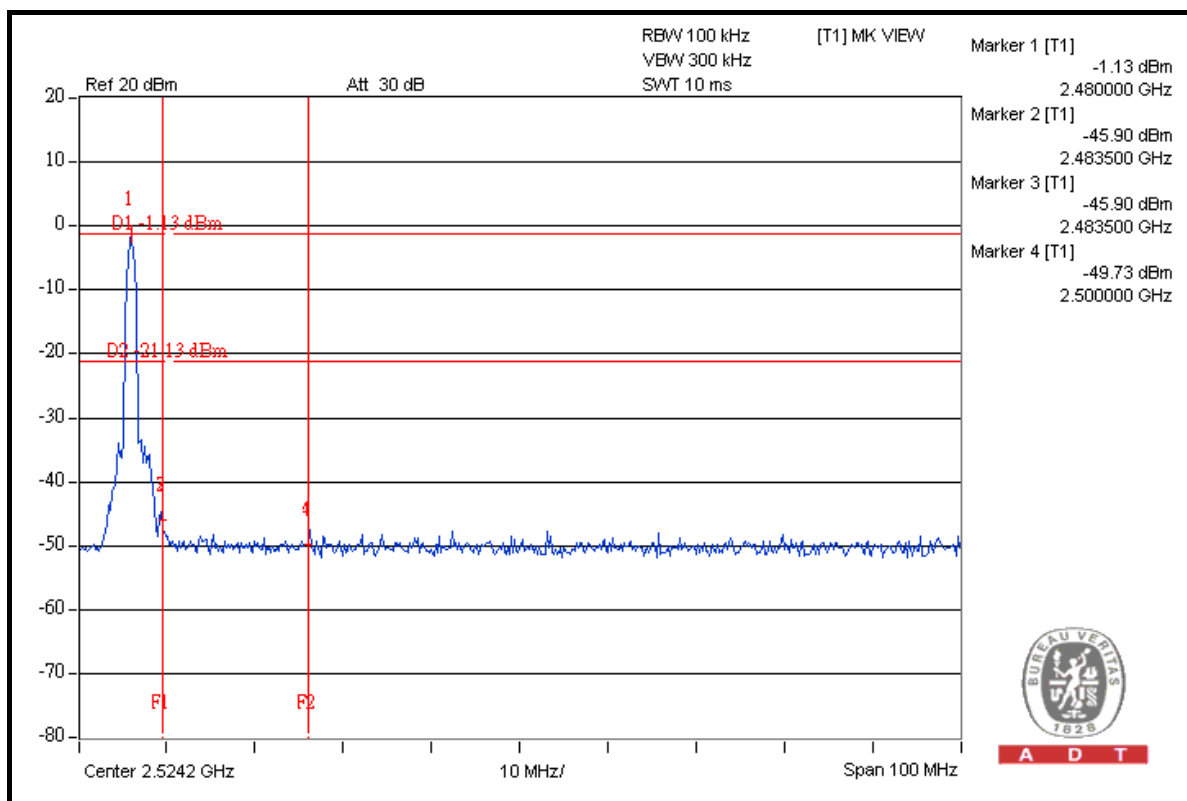

A D T

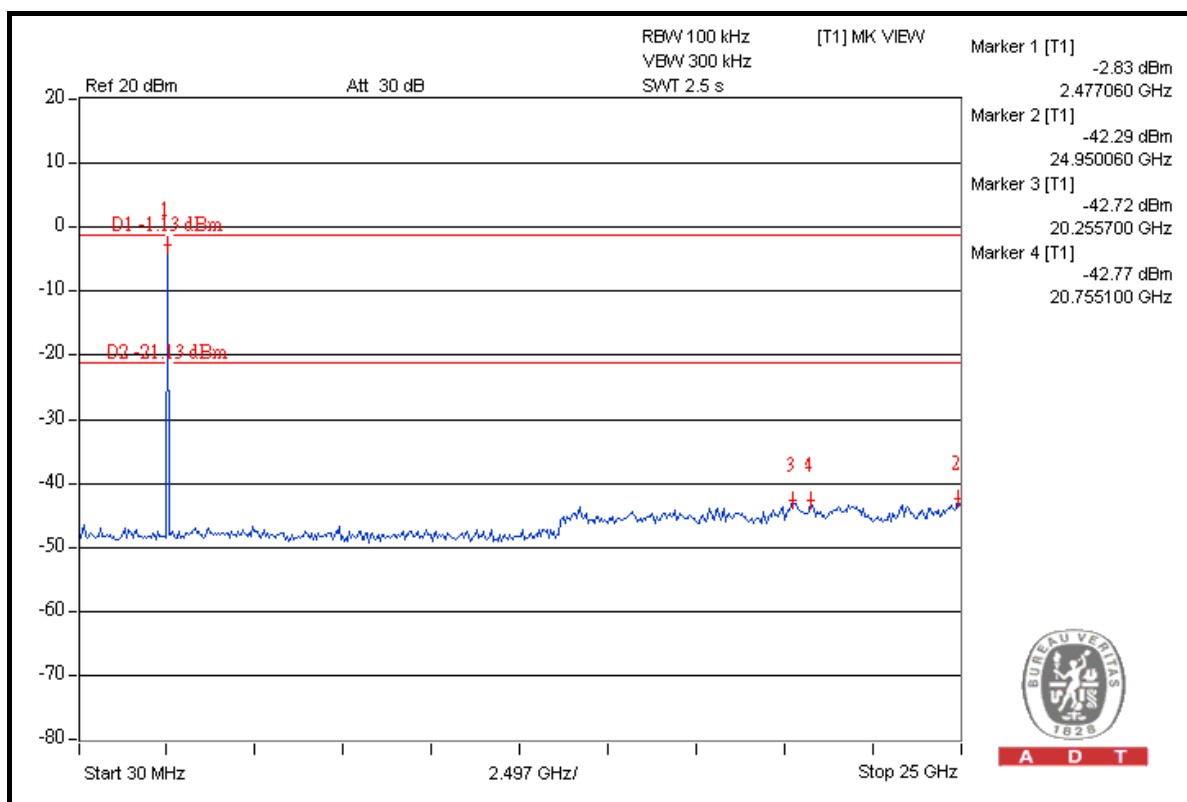

A D T



A D T

## 5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

## 6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

[www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml). If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety Telecom Lab:**

Tel: 886-3-3183232

Fax: 886-3-3185050

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.

## **7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.

--- END ---