
Product Overview

Product Layout

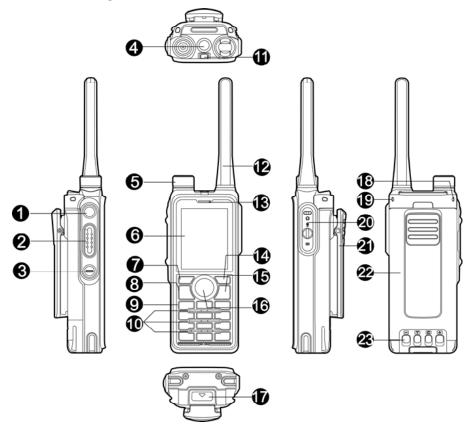

| No. | Part Name | No. | Part Name |
|-----|------------------------|-----|---------------------|
| 1 | Side Key 1 (SK1) | 13 | Microphone |
| 2 | Push-to-Talk (PTT) Key | 14 | Back/Subgroup Key |
| 3 | Side Key 2 (SK2) | 15 | On-Off/P2/End Key |
| 4 | Top Key (TK) | 16 | Navigation Keys |
| 5 | Smart Knob | 17 | Battery Latch |
| 6 | LCD Display | 18 | Strap Hole 1 |
| 7 | OK/Menu Key | 19 | Strap Hole 2 |
| 8 | P1/Answer Key | 20 | Accessory Connector |
| 9 | Numeric Keypad | 21 | Belt Clip |
| 10 | Speaker | 22 | Battery |
| 11 | LED Indicator | 23 | Charging Piece |
| 12 | Antenna | / | / |

Programmable Keys

For enhanced convenience, you can request your dealer to program the following keys as shortcuts to radio features: **TK**, **SK1**, **SK2**, **P1/Answer** key, **P2/End** key, **Up** key, and **Down** key. Consult your dealer for assignable radio features.

Basic Operations

Charging the Battery



- Read the Safety Information Booklet before charging.
- Use the approved charger to charge the battery.
- The remaining lithium-ion battery power is limited to 30% pursuant to the new lithium battery shipment regulation approved by International Air Transport Association (IATA).


Before initial use, charge the battery. You can charge either the standalone battery or the radio with battery attached. It is recommended that the radio remain powered off during charging.

The LED indicator on the charger shows the charging status. For details, see the following table.

| LED Indicator | Charging Status |
|---------------|-------------------------------|
| Glows red | The battery is being charged. |
| Glows orange | The battery is charged to 90% |

| LED Indicator | Charging Status |
|---------------------|--------------------------------------|
| | or above. |
| Glows green | The battery is fully charged. |
| Flashes red slowly | No battery is placed on the charger. |
| Flashes red rapidly | The battery fails to be charged. |

Turning the Radio On or Off





Adjusting the Volume

To increase or decrease the volume, rotate the **Smart** knob clockwise or counter-clockwise.

Selecting the Contact or Channel

To select the contact or channel, press the **Smart** knob, and then rotate the knob.



If you do not rotate the knob within 5s or if you press it again within 5s, you can rotate it to adjust the volume.

Locking or Unlocking the Keypad

When the keypad is not in use, it is recommended that you lock it to avoid unintended operations.

To allow the keypad to be locked automatically, do as follows:

- 1. Go to Menu > Settings > Basic Settings > Keypad Lock.
- 2. Enable **AutoLock**, and then go to **Timed** to set the auto lock time.

If you do not operate the radio or if the radio receives no call or message within the auto lock time, the keypad is locked automatically.

To manually lock or unlock the keypad, do one of the following:

- Press the preprogrammed **Keypad Lock** key.
- On the home screen, press the **OK/Menu** key, and then press (*-

ONOTE

- If the Keypad Lock Backup feature is enabled by your dealer, the radio automatically saves the last settings of keypad lock upon power-off.
- You can go to Menu > Settings > Basic
 Settings > Keypad Lock > Optional Key to
 set whether the corresponding keys and
 knobs still work when the keypad is locked.

Using the Keypad

You can use the keypad to enter contact aliases and IDs, or edit messages.

- To switch the input method between alphabetic mode and numeric mode, press # •.
- To enter special characters, press 11< in alphabetic mode.
- To enter a space, press * in alphabetic mode.

Switching the Operation Mode

The radio can operate in conventional mode, or trunking mode if enabled by your dealer.

To switch the operation mode, do one of the following:

- Press the preprogrammed Operation Mode Switch key.
- Go to **Menu** > **Mode**, and then select the mode.

⊘NOTE

If the Zone/Subgroup Switch Mode feature is enabled, you can switch the operation mode by switching the contact through the menu or the **Smart** knob.

To allow the radio to automatically switch to a mode based on signal strength, do one of the following:

- Press the preprogrammed Mode Auto Switch key.
- Go to Menu > Mode, and then enable Auto Switch.

Conventional Mode

In conventional mode, a zone is a group of channels within the same operational area. The radio receives and transmits data and voice on the selected channel.

Selecting a Zone

To select a zone, do one of the following:

 Go to Menu > Zone, select the zone, and then select Set Default. Press the preprogrammed Zone Up or Zone Down key.

Selecting a Channel

Before selecting a channel, make sure that the current zone contains the channel.

To select a channel, do one of the following:

- Press and rotate the **Smart** knob.
- Go to **Menu** > **Zone**, select the zone, and then select the channel.
- Press the preprogrammed Channel Up or Channel Down key.
- Press the preprogrammed **Preset Channel** key.



If the Voice Notify feature is enabled, the radio automatically announces the current channel upon power-on and channel change.

Trunking Mode

In trunking mode, the radio hunts for available base stations (BS) automatically. After registration, the radio can receive and transmit data and voice.

Selecting a Group or Private Contact

To select a group contact or a private contact, do one of the following:

- Press and rotate the **Smart** knob.
- On the home screen, press the Back/Subgroup key or go to Menu > Subgroup, select the subgroup, and then select the group or private contact.
- Press the preprogrammed Group/Private Up or Group/Private Down key.

Selecting a Subgroup

A subgroup consists of multiple groups or private contacts.

To select a subgroup, do one of the following:

- On the home screen, press the Back/Subgroup key or go to Menu > Subgroup, select the subgroup, and then select Set Default.
- Press the preprogrammed Subgroup Up or Subgroup Down key.

Status Indications

LCD Icons

| Icon | Radio Status | | |
|------|---|--|--|
| | The fuller the battery bar is, the stronger the | | |
| | battery power remains. | | |

| Icon | Radio Status | |
|---|--|--|
| | The battery power is low. | |
| | The battery power runs out. Recharge or replace the battery. | |
| Ψx | The radio detects no signal. | |
| The number of bars indicates the signal strength. | | |
| L | The radio operates in Low Power mode. | |
| Н | The radio operates in High Power mode. | |
| a | The keypad is locked. | |
| ₹ ○ | An accessory is connected. | |
| Φ. | The Mode Auto Switch feature is enabled. | |
| Ö | The radio is scanning or hunting. | |
| \otimes | The VOX feature is enabled. | |
| ₿. | The radio is mute. | |
| ₹⁄ | The radio operates in Meeting mode. | |
| ₹ | The radio operates in Outdoor mode. | |
| Δ | The radio is in Emergency mode. | |

| Icon | Radio Status | |
|-----------|---------------------------------------|--|
| Ç. | There is/are missed call(s). | |
| \bowtie | There is/are unread short message(s). | |
| × | The Inbox is full. | |

For details on other LCD icons, refer to the *User Manual*.

LED Indications

| LED Indicator | Radio Status |
|-----------------------|---|
| Flashes green | The radio is being turned on. |
| Flashes green slowly | The radio is standby in trunking mode. |
| Glows green | The radio is receiving. |
| Glows red | The radio is transmitting. |
| Flashes red | The radio is establishing a call in trunking mode. (This indication is applicable only to the calling radio.) |
| Flashes orange slowly | The radio is scanning, hunting, or roaming. |
| Flashes orange | Conventional mode: The |

| LED Indicator | Radio Status |
|----------------------|--------------------------------|
| | radio is working in |
| | emergency mode. |
| rapidly | • Trunking mode: The called |
| | radio is establishing a Full |
| | Off Air Call Set-Up |
| | (FOACSU) call. |
| | Call hang time: No voice is |
| | being transmitted or received |
| Glows orange | on the channel during a call. |
| Glows orange | Within such a period, you can |
| | press and hold the PTT key |
| | and speak. |
| Flashes blue every 3 | The BT feature is enabled, but |
| seconds | no BT device is connected. |
| Flashes blue every | A BT device is connected. |
| 1.5 seconds | A D1 device is connected. |
| Flashes blue every | The BT feature is being |
| 0.1 second | disabled. |

Call Services

When you are speaking during a call, keep the microphone about 2.5 cm to 5 cm away from your

mouth. This ensures optimal voice quality on the receiving radio.



In trunking mode, if the radio is not registered or attached, or an empty group is selected, you cannot initiate a call.

Call on Digital Channel

You can initiate or receive the following types of calls on a digital channel:

- Group call: a call from an individual user in a group to all the other members in the group.
- Private call: a call from an individual user to another individual user.

Initiating a Group Call Through Preset Contact

Press and rotate the **Smart** knob to select the channel or group contact, and then press and hold the **PTT** key.

Through Contact List

Conventional mode: Go to Menu > Contact >
 Favorite/Contact, select the group contact, and then press and hold the PTT key.

 Trunking mode: Go to Menu > Subgroup, select the subgroup and group contact, and then press or the PTT key.

Through Manual Dial

- Conventional mode: With the dial authority for group call enabled, on the home screen, use the numeric keypad to enter the group ID, and then press and hold the PTT key.
- Trunking mode: On the home screen, use the numeric keypad to enter the group ID, and then press or the **PTT** key.



To input an ID that complies with the dialing rules, consult your dealer for details.

Receiving a Group Call

You can receive a group call without any operation.

Ending a Group Call

Conventional Mode

A group call ends when the call hang time expires.

Trunking Mode

A group call ends in one of the following scenarios:

- The call hang time expires.
- The calling party ends the call.
- The call duration exceeds the preset time.
- The BS signal is lost.
- A preemptive or emergency call interrupts the call.
- The calling party changes the contact with the Clear Down Via Group Switch feature enabled.

Initiating a Private Call

Through Preset Contact

Press and rotate the **Smart** knob to select the channel or private contact, and then press and hold the **PTT** key.

Through Contact List

Go to Menu > Contact > Favorite / Contact, select the private contact, and then press and hold the **PTT** key.

Through Manual Dial

- Conventional mode: With the dial authority for private call enabled, use the numeric keypad to enter the private ID, and then press and hold the PTT key.
- Trunking mode: On the home screen, use the numeric keypad to enter the private ID, and then press or the PTT key.



To input an ID that complies with the dialing rules, consult your dealer for details.

Receiving a Private Call

Conventional Mode

You can receive a private call without any operation.

Trunking Mode

FOACSU

When receiving a FOACSU private call, the radio vibrates and rings. Press or the **PTT** key within the preset time to answer the call.

OACSU

When receiving an Off Air Call Set- Up (OACSU) private call, you can answer it without any operation. The call is established automatically.

Ending a Private Call

Conventional Mode

A private call ends when the call hang time expires.

Trunking Mode

A private call ends in one of the following scenarios:

- The call hang time expires.
- The calling or called party ends the call.
- The call duration exceeds the preset time.

- The BS signal is lost.
- A preemptive or emergency call interrupts the call.
- The calling or called party changes the contact with the Clear Down Via Private Switch feature enabled.

Call on Analog Channel (Conventional Only)

Call without Signaling

On an analog channel without signaling, you can initiate a call to all the other users on the channel. Do as follows:

- 1. Rotate the **Smart** knob to select the channel.
- 2. Press and hold the **PTT** key.

Call with Signaling

On an analog channel with signaling, you can initiate a call to a specific contact on the channel. Do as follows:

- Press the preprogrammed Contact List key, or go to Menu > Contact > Favorite/Contact.
- 2. Select the contact.
- Press and hold the PTT key or the preprogrammed One Touch Call key.

Emergency Call

In case of an emergency, you can initiate an emergency call to seek help from your companion or the control centre. With the highest priority, the emergency call can be initiated even when the radio is transmitting or receiving.

This feature is configured and enabled by your dealer. For details, refer to the *User Manual*.

Message Services

The radio can send and receive short messages.

- Text message: a message containing text or number.
- Quick text message: a frequently used text message that can be created, edited, and deleted.
- Status message (trunking only): a predefined code that transfers the message content.

Sending a Message

To send a message, do as follows:

- 1. Go to Menu > Message > Msg New.
- 2 In the recipient field, enter the contact ID, and then press # to switch the contact type.

- Alternatively, press the **OK/Menu** key to enter the contact list, and then select the contact.
- In the message content field, enter the message content.
 Alternatively, select **Insert**, and then insert a quick text message or status message.
- 4. Select **Send**.

Replying to a Message

To reply to a message, do as follows:

- 1. Go to **Menu** > **Message** > **Msg**, and then select the message.
- 2. Select **Reply**, and then enter the text content or insert a quick text message or status message.
- 3. Select Send.

Managing a Message

Go to **Menu** > **Message** > **Msg**, select a message, press the **Up** key, and then manage the message as follows:

- To forward the message, select Forward, and then add the contact.
- To resend the message, select **Resend**.
- To delete the message, select **Delete**.
- To delete all messages, select **Delete All**.

Icon Conventions



indicates functions that are available on digital channel only.



: Indicates functions that are available on analog channel only.

Functions marked with no icon are available on both analog and digital channels.

Disclaimer

Hytera Communications Corporation Limited (the Company) endeavors to achieve the accuracy and completeness of this manual, but no warranty of accuracy or reliability is given. All the specifications and designs are subject to change without notice due to continuous technology development. No part of this manual may be copied, modified, translated, or distributed in any manner without the express written permission of us.

We do not guarantee, for any particular purpose, the accuracy, validity, timeliness, legitimacy or completeness of the Third Party products and contents involved in this manual.

If you have any suggestions or would like to learn more details, please visit our website at: http://www.hytera. com

RF Radiation Information

This product must be restricted to operations in an occupational/controlled RF exposure environment. Users must be fully aware of the hazards of the exposure and able to exercise control over their RF exposure to qualify for the higher exposure limits.

RF Radiation Profile

Radio Frequency (RF) is a frequency of electromagnetic radiation in the range at which radio signals are transmitted. RF technology is widely used in communication, medicine, food processing and other fields. It may generate radiation during use.

RF Radiation Safety

In order to ensure user health, experts from relevant industries including science, engineering, medicine and health work with international organizations to develop standards for safe exposure to RF radiation. These standards consist of:

- United States Federal Communications Commission, Code of Federal Regulations; 47CFR part 2 sub-part J;
- American National Standards Institute (ANSI)/ Institute of Electrical and Electronic Engineers (IEEE) C95, 1-1992;
- Institute of Electrical and Electronic Engineers (IEEE) C95.1-1999:
- International Commission on Non-Ionizing Radiation Protection (ICNIRP) 1998;

FCC Regulations

Federal Communication Commission (FCC) requires that all radio communication products should meet the requirements set forth in the above standards before they can be marketed in the U.S, and the manufacturer shall post a RF label on the product to inform users of operational instructions, so as to enhance their occupational health against exposure to RF energy.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential

installation. This equipment generates and can radiate radio frequency energy. If not installed and used in accordance with the instructions, it may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. Verification of harmful interference by this equipment to radio or television reception can be determined by turning it off and then on. The user is encouraged to try to correct the interference by one or more of the following measures:

- · Reorient or relocate the receiving antenna. Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a different circuit to that of the receiver's outlet.
- · Consult the dealer or an experienced radio/TV technician for help.

Operation is subject to the following two conditions:

- This device may not cause harmful interference.
- This device must accept any interference received, including interference that may cause undesired operation.

Note: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

RF Exposure Compliance and Control Guidelines and Operating Instructions

To control your exposure and ensure compliance with the occupational/controlled environmental exposure limits, always adhere to the following procedures.

Guidelines:

- Do not remove the RF Exposure Label from the device.
- User awareness instructions should accompany device when transferred to other users.
- Do not use this device if the operational requirements described herein are not met.

Operating Instructions:

- Transmit no more than the rated duty factor of 50% of the time. To transmit (talk), push the Push-To-Talk (PTT) key. To receive calls, release the PTT key. Transmitting 50% of the time, or less, is important because the radio generates measurable RF energy only when transmitting (in terms of measuring for standards compliance).
- Keep the radio unit at least 2.5 cm away from the face.
 Keeping the radio at the proper distance is important as
 RF exposure decreases with distance from the antenna.
 The antenna should be kept away from the face and eyes.
- When worn on the body, always place the radio in a
 Hytera-approved holder, holster, case, or body harness or
 by use of the correct clip for this product. Use of
 non-approved accessories may result in exposure levels
 which exceed the FCC's occupational/controlled
 environmental RF exposure limits.

- Use of non-approved antennas, batteries, and accessories causes the radio to exceed the FCC RF exposure guidelines.
- Contact your local dealer for the optional accessories of the product.

L'exposition aux champs rf de conformité et de contrôle d'orientations et instructions

Pour contrôler l'exposition et s'assurer de la conformité avec les limites d'exposition professionnelle / environnement contrôlé, toujours respecter les procédures suivantes.

Lignes directrices:

Ne pas enlever l'étiquette de l'appareil d'exposition aux radiofréquences.

Sensibilisation des utilisateurs instructions devraient accompagner dispositif lorsque transférés à d'autres utilisateurs.

Ne pas utiliser cet appareil si les exigences opérationnelles décrites ci - après ne sont pas remplies.

Les instructions de fonctionnement:

Transmettre non plus que le facteur d'utilisation nominal de 50% du temps.à transmettre (parler), pousse le pousse à parler (ptt). Pour recevoir des appels, les ptt.50% du temps de transmission, ou moins, est important parce que la radio génère de l'énergie rf seulement lors de la transmission des (en termes de mesure de la conformité aux normes).

Ie groupe de la radio continue d'au moins 2,5 cm de la surface.garde la radio à la bonne distance est important, car l'exposition aux champs rf diminue avec la distance de l'antenne.l'antenne doit se tenir loin du visage et des yeux.

Quand portés sur le corps, toujours place de la radio dans un étui, hytera approuvé titulaire, ou un harnais ou par l'utilisation de la vidéo pour ce produit.utilisation des accessoires non approuvés peuvent entraîner des fac qui dépassent les niveaux d'exposition professionnelle et environnementale contrôlée des limites d'exposition aux rf.

Les opérations doivent satisfaire aux deux conditions suivantes: Ce dispositif peut ne pas causer d'interférences nuisibles. Ce dispositif doit accepter toute interférence reçue,

Y compris les interférences qui peuvent provoquer des accidents. Operation

Non approuvé des antennes, les piles et les accessoires causes la radio à dépasser les lignes directrices sur l'exposition aux radiofréquences de fac.

Communiquez avec votre distributeur local pour les accessoires facultatifs du produit.

ISEDC Statement

The device has been tested and complies with SAR limits, users can obtain Canadian information on RF exposure and compliance

Après examen de ce matériel aux conformité aux limites DAS, et/ou aux limites d'intensité de champ RF, les utilisateurs peuvent sur l'exposition aux radiofréquences et la conformité and compliance d'acquérir les informations correspondantes

EU Regulatory Conformance

As certified by the qualified laboratory, the product is in compliance with the essential requirements and other relevant provisions of the following directives: 2014/53/EU, 2006/66/EC, 2011/65/EU, and 2012/19/EU.

Please note that the above information is applicable to EU countries only.