

EverGuard-Care Control Panel



ES6502HC

Personalized Home Care Solution

EverGuard-Care is a Personalized Home Care Solution designed for the growing population, disabled and people that suffer from dementia and that wishes to "age peacefully at home".

- Long-Range Deployments over 2000 feet RF reach
- Remote Monitoring of System Status temperature report embedded in every peripheral
- Communication Modules- PSTN
- ☐ Reduced Shipment Costs compact, light-weight design
- ☐ Less Maintenance Long battery life



A discreet and passive monitoring of the individual's activities of daily living (ADL) assuring his/her wellbeing.

The system automatically learns the individual behavior and notifies upon nay abnormality.

With millions of systems and peripherals installed internationally, Essence Security is a technological and market leader in the field of advanced machine to machine solutions for homes, offices and full-service central monitoring stations

ES6502HC Control Panel Specifications

Wireless communication with the peripherals:

- Up to 1000 meters RF range (open air)
- End-to-end bidirectional ESI protocol
- · Advanced radio supervision algorithm
- Modulation: BFSK
- Frequencies: 868.3 MHz or 916.5 MHz
- Encoding: 32-bit ID, over 4 billion combinations

High quality, long range voice verification:

- Two-way Audio
- Enhanced echo canceling DSP-based algorithm
- Speaker programmable gain
- Ultra sensitive microphone

Safety Functionality:

- Various Detectors (Water, Smoke, Gas, etc.)
- Extreme Temperature Detection
- Various panic (SOS) devices

Video (external camera):

 High Resolution & Quality Color motion JPEG Video* or JPEG Stills

Remote Control:

- Automatic Software Upgrade
- Remote Programming and Configuration

Electrical Power Supply:

- Input: 100-240 VAC, 50/60Hz external AC adaptor
- Li-Polymer rechargeable backup battery for up to 36 hours - 3.7V, 1.4Ah



Communication Module:

PSTN phone line interface

Communication Modules:

 Interfacing protocols: SIA or Essence Proprietary Protocol (ESI)

Physical:

- Dimensions: 127x 127 x 72 mm (L x W x D)
- Weight: 560 grams (incl. battery)
- Color: White & Grey
- Mounting: Desktop, Wall, with Bracket

Environmental:

• Operating Temperatures: 0°~ 49° Celsius

General Features:


- Personal Security
- Multi language vocal reminders
- Onboard SOS and call CMS buttons
- · LED indications for system status

Certifications and approvals:







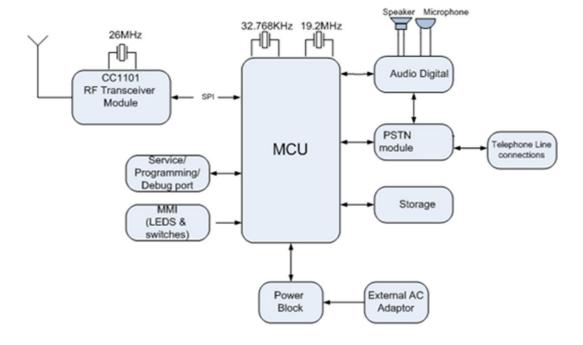

Block Diagram Description

Control panel consists of:

- 1. Microcontroller
- 2. PSTN module communicating with central operation station using telephone network respectively.
- 3. RF transceiver (915MHz) for communication with the peripherals
- 4. Speaker/microphone connected to CODEC
- 5. LEDs indicating system statuses
- 6. Power block providing all necessary voltages
- 7. Backup battery

