

TEST REPORT

Reference No. : WTS15S0730902E
FCC ID..... : ZGT-K42U
Applicant : Zhejiang Tianle Digital Electric Co., Ltd
Address : No.8,Tianle Rd, Economic Developing Zone, Shengzhou, Zhejiang,
China
Manufacturer : The same as above
Address : The same as above
Product Name : LED monitor
Model No. : K42U
Standards..... : FCC CFR47 Part 15 C Section 15.247:2014
Date of Receipt sample..... : Jul. 29, 2015
Date of Test..... : Jul. 30 – Aug. 18, 2015
Date of Issue : Aug. 21, 2015
Test Result : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen,
Guangdong, China

Tel :+86-755-83551033


Fax:+86-755-83552400

Compiled by:



Zero Zhou / Project Engineer

Approved by:



Philo Zhong / Manager

2 Test Summary

Test Items	Test Requirement	Result
Radiated Emissions	15.247 15.205(a) 15.209(a)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3),(4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

3 Contents

	Page
1 COVER PAGE.....	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 GENERAL INFORMATION.....	5
4.1 GENERAL DESCRIPTION OF E.U.T.	5
4.2 DETAILS OF E.U.T.	5
4.3 CHANNEL LIST	5
4.4 TEST MODE	6
4.5 TEST FACILITY	6
5 EQUIPMENT USED DURING TEST	7
5.1 EQUIPMENTS LIST	7
5.2 MEASUREMENT UNCERTAINTY	8
5.3 TEST EQUIPMENT CALIBRATION	8
6 CONDUCTED EMISSION	9
6.1 E.U.T. OPERATION	9
6.2 EUT SETUP	9
6.3 MEASUREMENT DESCRIPTION	9
6.4 CONDUCTED EMISSION TEST RESULT	10
7 RADIATED EMISSIONS.....	12
7.1 EUT OPERATION.....	12
7.2 TEST SETUP	13
7.3 SPECTRUM ANALYZER SETUP	14
7.4 TEST PROCEDURE	15
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	15
7.6 SUMMARY OF TEST RESULTS	16
8 BAND EDGE MEASUREMENT	25
8.1 TEST PRODUCE	25
8.2 TEST RESULT	26
9 6 DB BANDWIDTH MEASUREMENT	29
9.1 TEST PROCEDURE:	29
9.2 TEST RESULT:	29
10 MAXIMUM PEAK OUTPUT POWER	34
10.1 TEST PROCEDURE:	34
10.2 TEST RESULT:	34
11 POWER SPECTRAL DENSITY	40
11.1 TEST PROCEDURE:	40
11.2 TEST RESULT:	40
12 ANTENNA REQUIREMENT	46
13 RF EXPOSURE.....	47
13.1 REQUIREMENTS.....	47
13.2 THE PROCEDURES / LIMIT	47
13.3 MPE CALCULATION METHOD	48
14 PHOTOGRAPHS – MODEL K42U TEST SETUP.....	49
14.1 CONDUCTED EMISSION AT TEST SITE 2#	49
14.2 RADIATED EMISSION	49

15 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS51

15.1 MODEL K42U–EXTERNAL PHOTOS51

15.2 MODEL K42U– INTERNAL PHOTOS54

4 General Information

4.1 General Description of E.U.T.

Product Name:	LED monitor
Model No.:	K42U
Model Difference:	N/A
Operation Frequency:	2412MHz ~ 2462MHz
The Lowest Oscillator:	16 MHz
Antenna Gain:	3.0 dBi
Type of modulation:	IEEE 802.11b (CCK/QPSK/BPSK,11Mbps max.) IEEE 802.11g (BPSK/QPSK/16QAM/64QAM,54Mbps max.) IEEE 802.11n (BPSK/QPSK/16QAM/64QAM,HT20:72Mbps max.)

4.2 Details of E.U.T.

Technical Data:	AC 100-240V, 50/60Hz 1.1A
-----------------	---------------------------

4.3 Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

4.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
Power Spectral Density	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
Frequency Range	802.11b	11 Mbps	1/11	TX
	802.11g	54 Mbps	1/11	TX
	802.11n HT20	108 Mbps	1/11	TX
Transmitter Spurious Emissions	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX

Note :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .

Table 2 Tests Carried Out Under FCC part 15.207 & FCC part 15.209

Test Item	Test Mode
Conduction Emission	Communication
Radiated Emissions	Communication

4.5 Test Facility

The test facility has a test site registered with the following organizations:

- IC – Registration No.: 7760A-1**
 Waltek Services(Shenzhen) Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A-1, July 12, 2012.
- FCC Test Site 1#– Registration No.: 880581**
 Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.
- FCC Test Site 2#– Registration No.: 328995**
 Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	Sep.15,2014	Sep.14,2015
2.	LISN	R&S	ENV216	101215	Sep.15,2014	Sep.14,2015
3.	Cable	Top	TYPE16(3.5M)	-	Sep.15,2014	Sep.14,2015
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.15,2014	Sep.14,2015
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.15,2014	Sep.14,2015
3.	Limiter	York	MTS-IMP-136	261115-001-0024	Sep.15,2014	Sep.14,2015
4.	Cable	LARGE	RF300	-	Sep.15,2014	Sep.14,2015
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.15,2014	Sep.14,2015
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.15,2014	Sep.14,2015
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.19,2015	Apr.18,2016
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.15,2014	Sep.14,2015
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.19,2015	Apr.18,2016
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Apr.19,2015	Apr.18,2016
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Mar.17,2015	Mar.16,2016
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	Apr.10,2015	Apr.09,2016
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	Sep.15,2014	Sep.14,2015
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	Sep.15,2014	Sep.14,2015
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	Sep.15,2014	Sep.14,2015
4	Cable	HUBER+SUHNER	CBL2	525178	Sep.15,2014	Sep.14,2015
RF Conducted Testing						

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.15,2014	Sep.14,2015
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Sep.15,2014	Sep.14,2015
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	Sep.15,2014	Sep.14,2015

5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.4:2003
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

6.1 E.U.T. Operation

Operating Environment :


Temperature:	21.5 °C
Humidity:	51.9 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

Refer to section 4.4

6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003.

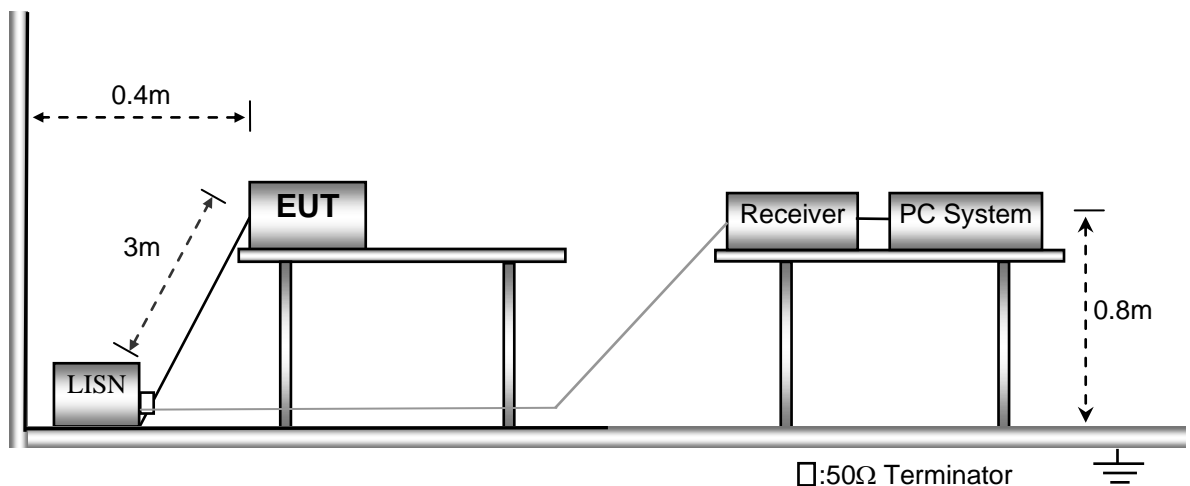


6.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.4 Conducted Emission Test Result


An initial pre-scan was performed on the live and neutral lines.

Live line:

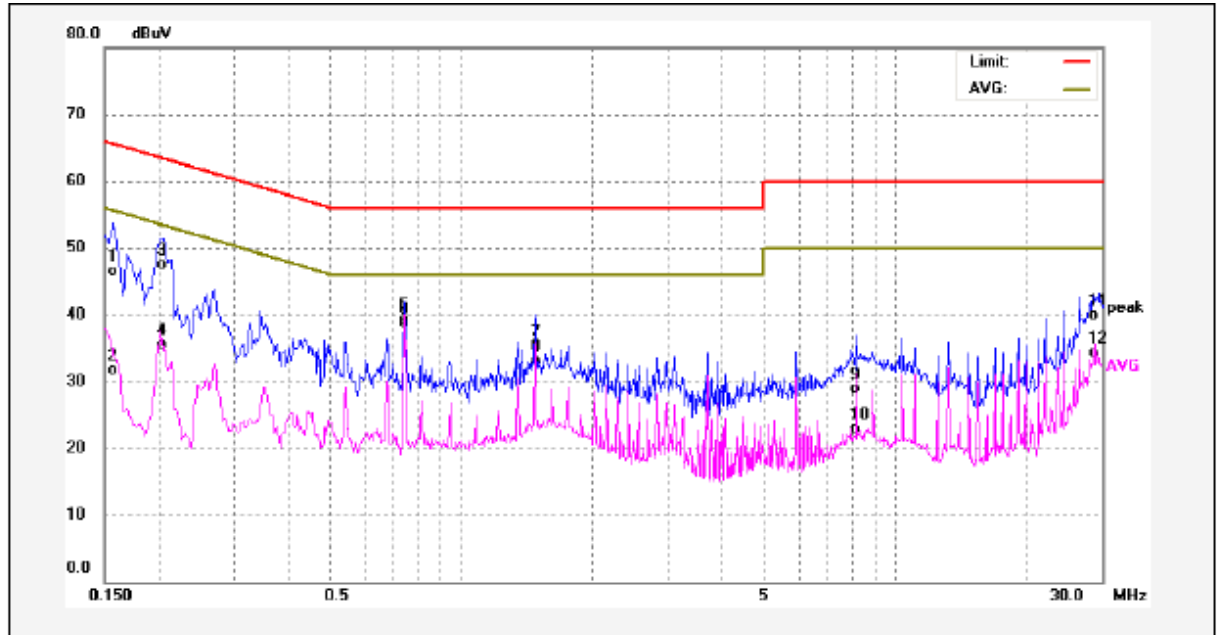

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1580	36.36	10.10	46.46	65.56	-19.10	QP	
2	0.1580	21.56	10.10	31.66	55.56	-23.90	AVG	
3	0.2060	37.46	10.10	47.56	63.36	-15.80	QP	
4	0.2060	25.49	10.10	35.59	53.36	-17.77	AVG	
5	0.7420	29.21	10.18	39.39	56.00	-16.61	QP	
6	0.7420	28.62	10.18	38.80	46.00	-7.20	AVG	
7	1.4819	25.01	10.20	35.21	56.00	-20.79	QP	
8	1.4819	22.81	10.20	33.01	46.00	-12.99	AVG	
9	8.1380	18.56	10.31	28.87	60.00	-31.13	QP	
10	8.1380	12.67	10.31	22.98	50.00	-27.02	AVG	
11	28.6860	29.10	10.86	39.96	60.00	-20.04	QP	
12	28.6860	23.38	10.86	34.24	50.00	-15.76	AVG	

Neutral line:

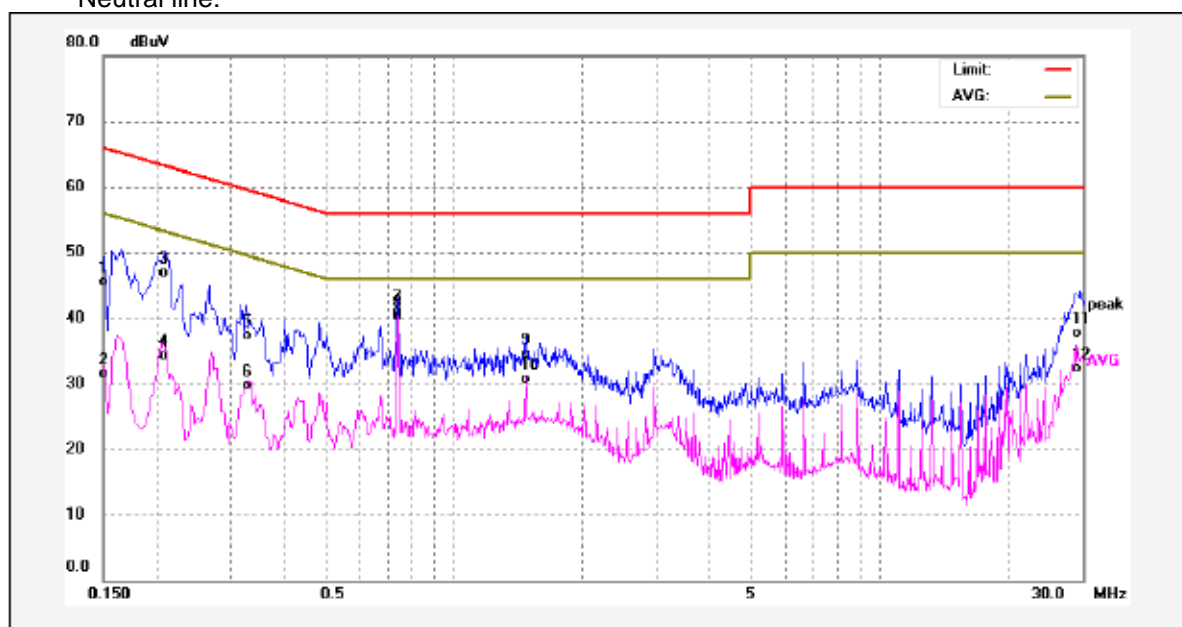

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	35.48	10.10	45.58	65.99	-20.41	QP	
2	0.1500	21.34	10.10	31.44	55.99	-24.55	AVG	
3	0.2100	36.84	10.10	46.94	63.20	-16.26	QP	
4	0.2100	24.19	10.10	34.29	53.20	-18.91	AVG	
5	0.3260	27.24	10.11	37.35	59.55	-22.20	QP	
6	0.3260	19.60	10.11	29.71	49.55	-19.84	AVG	
7	0.7380	30.94	10.18	41.12	56.00	-14.88	QP	
8	0.7380	30.22	10.18	40.40	46.00	-5.60	AVG	
9	1.4780	24.36	10.20	34.56	56.00	-21.44	QP	
10	1.4780	20.43	10.20	30.63	46.00	-15.37	AVG	
11	29.6740	26.78	10.91	37.69	60.00	-22.31	QP	
12	29.6740	21.33	10.91	32.24	50.00	-17.76	AVG	

7 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.4:2003

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

Refer to section 4.4


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2003.


The test setup for emission measurement below 30MHz.

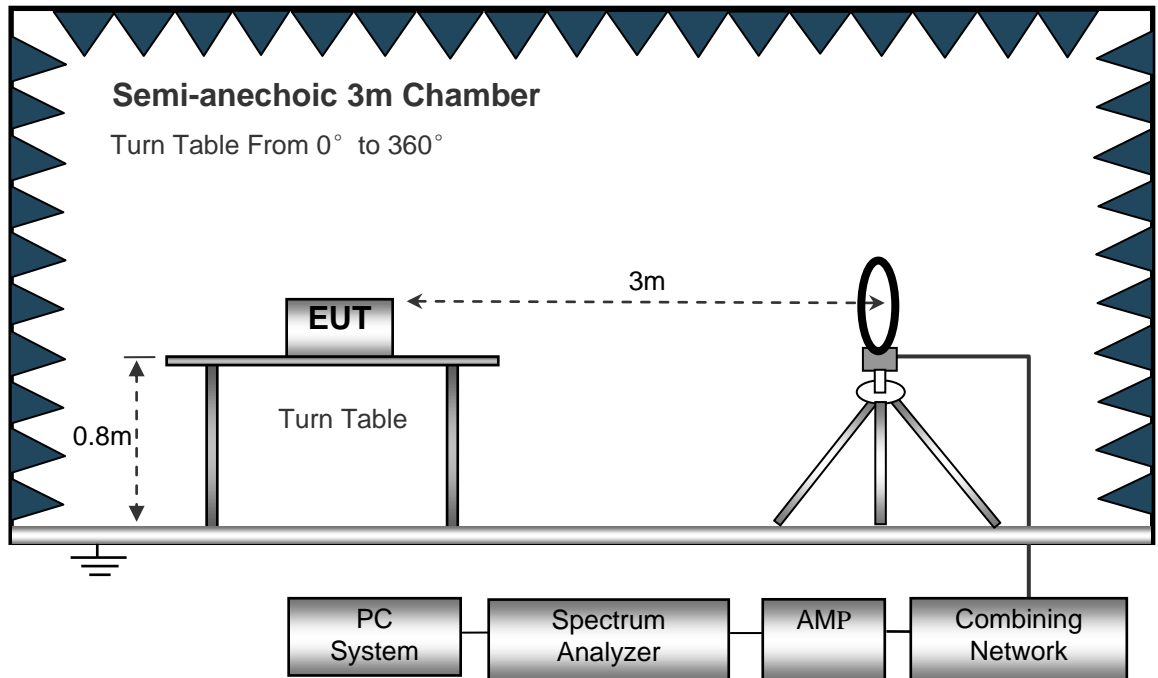

The test setup for emission measurement from 30 MHz to 1 GHz.

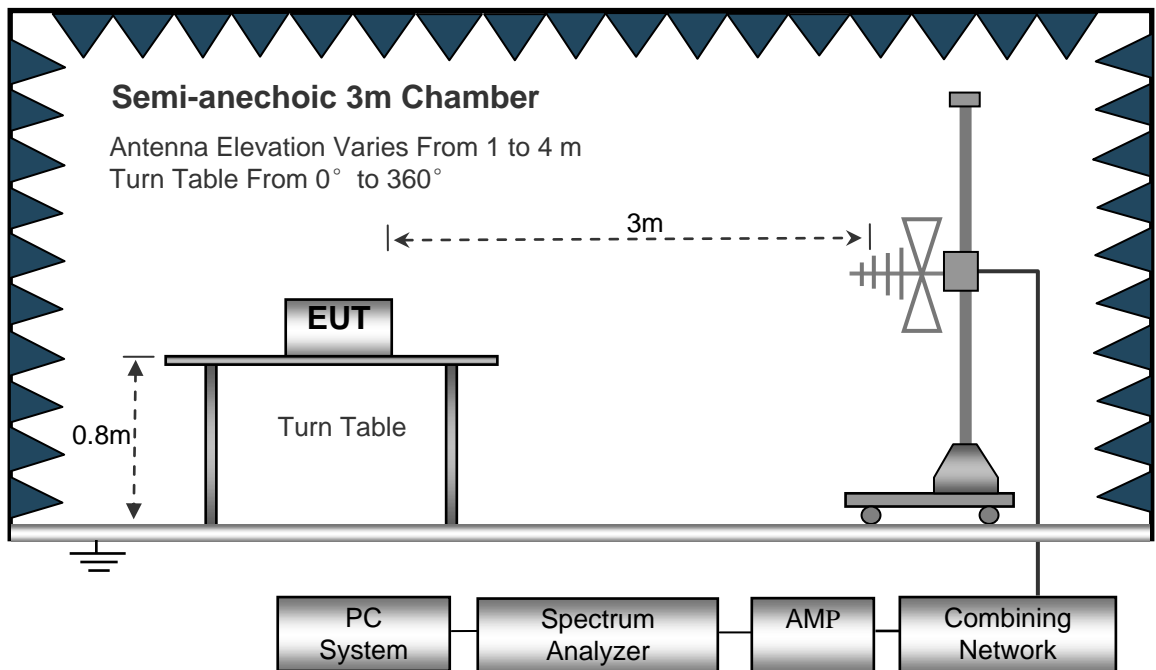

The test setup for emission measurement above 1 GHz.

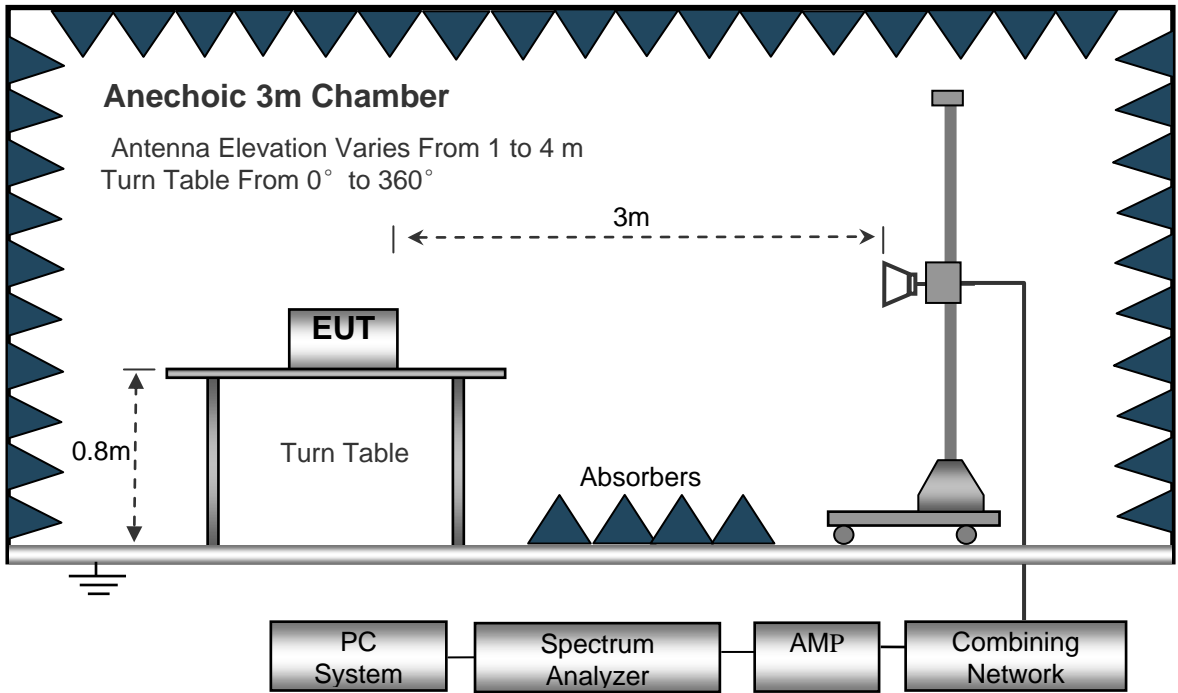

7.3 Spectrum Analyzer Setup

Below 30MHz

- Sweep Speed Auto
- IF Bandwidth.....10kHz
- Video Bandwidth.....10kHz
- Resolution Bandwidth.....10kHz

30MHz ~ 1GHz

- Sweep Speed Auto
- DetectorPK
- Resolution Bandwidth.....100kHz
- Video Bandwidth.....300kHz

Above 1GHz

- Sweep Speed Auto
- DetectorPK
- Resolution Bandwidth.....1MHz
- Video Bandwidth.....3MHz
- DetectorAve.
- Resolution Bandwidth.....1MHz
- Video Bandwidth.....10Hz

7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
8. A 2.4GHz high -pass filter is used during radiated emissions above 1GHz measurement.

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.6 Summary of Test Results

Test Frequency : Below 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: Low Channel 2412MHz									
223.59	41.69	QP	359	1.8	H	-11.62	30.07	46.00	-15.93
223.59	35.25	QP	238	1.9	V	-11.62	23.63	46.00	-22.37
4824.00	51.67	PK	46	1.2	V	-1.06	50.61	74.00	-23.39
4824.00	47.76	Ave	46	1.2	V	-1.06	46.70	54.00	-7.30
7236.00	43.11	PK	111	1.2	H	1.33	44.44	74.00	-29.56
7236.00	42.43	Ave	111	1.2	H	1.33	43.76	54.00	-10.24
2314.59	45.92	PK	21	1.2	V	-13.19	32.73	74.00	-41.27
2314.59	38.40	Ave	21	1.2	V	-13.19	25.21	54.00	-28.79
2378.28	43.81	PK	188	1.9	H	-13.14	30.67	74.00	-43.33
2378.28	38.05	Ave	188	1.9	H	-13.14	24.91	54.00	-29.09
2490.82	42.23	PK	225	1.3	V	-13.08	29.15	74.00	-44.85
2490.82	38.05	Ave	225	1.3	V	-13.08	24.97	54.00	-29.03

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: Middle Channel 2437MHz									
223.59	40.45	QP	270	1.0	H	-11.62	28.83	46.00	-17.17
223.59	35.55	QP	173	2.0	V	-11.62	23.93	46.00	-22.07
4874.00	51.28	PK	11	1.9	V	-0.62	50.66	74.00	-23.34
4874.00	48.29	Ave	11	1.9	V	-0.62	47.67	54.00	-6.33
7311.00	42.00	PK	90	1.9	H	2.21	44.21	74.00	-29.79
7311.00	41.19	Ave	90	1.9	H	2.21	43.40	54.00	-10.60
2324.20	45.42	PK	25	1.8	V	-13.19	32.23	74.00	-41.77
2324.20	37.45	Ave	25	1.8	V	-13.19	24.26	54.00	-29.74
2373.55	42.45	PK	13	1.8	H	-13.14	29.31	74.00	-44.69
2373.55	38.47	Ave	13	1.8	H	-13.14	25.33	54.00	-28.67
2496.93	43.01	PK	163	1.1	V	-13.08	29.93	74.00	-44.07
2496.93	37.91	Ave	163	1.1	V	-13.08	24.83	54.00	-29.17

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: High Channel 2462MHz									
223.59	39.24	QP	296	1.1	H	-11.62	27.62	46.00	-18.38
223.59	34.31	QP	85	1.8	V	-11.62	22.69	46.00	-23.31
4924.00	52.01	PK	287	1.8	V	-0.24	51.77	74.00	-22.23
4924.00	47.06	Ave	287	1.8	V	-0.24	46.82	54.00	-7.18
7386.00	42.77	PK	37	1.2	H	2.84	45.61	74.00	-28.39
7386.00	41.29	Ave	37	1.2	H	2.84	44.13	54.00	-9.87
2312.26	46.93	PK	125	1.7	V	-13.19	33.74	74.00	-40.26
2312.26	39.63	Ave	125	1.7	V	-13.19	26.44	54.00	-27.56
2388.73	43.37	PK	55	1.8	H	-13.14	30.23	74.00	-43.77
2388.73	38.50	Ave	55	1.8	H	-13.14	25.36	54.00	-28.64
2490.67	42.51	PK	135	1.0	V	-13.08	29.43	74.00	-44.57
2490.67	38.31	Ave	135	1.0	V	-13.08	25.23	54.00	-28.77

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: Low Channel 2412MHz									
223.59	40.57	QP	281	1.8	H	-11.62	28.95	46.00	-17.05
223.59	34.22	QP	47	1.1	V	-11.62	22.60	46.00	-23.40
4824.00	52.43	PK	16	1.2	V	-1.06	51.37	74.00	-22.63
4824.00	46.27	Ave	16	1.2	V	-1.06	45.21	54.00	-8.79
7236.00	41.65	PK	7	1.1	H	1.33	42.98	74.00	-31.02
7236.00	41.69	Ave	7	1.1	H	1.33	43.02	54.00	-10.98
2348.38	46.58	PK	354	1.4	V	-13.19	33.39	74.00	-40.61
2348.38	37.78	Ave	354	1.4	V	-13.19	24.59	54.00	-29.41
2388.10	42.98	PK	317	1.3	H	-13.14	29.84	74.00	-44.16
2388.10	38.06	Ave	317	1.3	H	-13.14	24.92	54.00	-29.08
2486.74	43.86	PK	169	1.6	V	-13.08	30.78	74.00	-43.22
2486.74	38.58	Ave	169	1.6	V	-13.08	25.50	54.00	-28.50

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: Middle Channel 2437MHz									
223.59	40.26	QP	212	1.5	H	-11.62	28.64	46.00	-17.36
223.59	33.50	QP	299	1.2	V	-11.62	21.88	46.00	-24.12
4874.00	52.14	PK	287	1.7	V	-0.62	51.52	74.00	-22.48
4874.00	47.43	Ave	287	1.7	V	-0.62	46.81	54.00	-7.19
7311.00	40.91	PK	330	2.0	H	2.21	43.12	74.00	-30.88
7311.00	41.27	Ave	330	2.0	H	2.21	43.48	54.00	-10.52
2319.02	46.60	PK	62	1.4	V	-13.19	33.41	74.00	-40.59
2319.02	39.74	Ave	62	1.4	V	-13.19	26.55	54.00	-27.45
2373.99	43.82	PK	78	1.1	H	-13.14	30.68	74.00	-43.32
2373.99	38.62	Ave	78	1.1	H	-13.14	25.48	54.00	-28.52
2496.14	44.26	PK	190	2.0	V	-13.08	31.18	74.00	-42.82
2496.14	38.83	Ave	190	2.0	V	-13.08	25.75	54.00	-28.25

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: High Channel 2462MHz									
223.59	41.26	QP	334	1.7	H	-11.62	29.64	46.00	-16.36
223.59	32.51	QP	29	1.6	V	-11.62	20.89	46.00	-25.11
4924.00	52.44	PK	1	1.1	V	-0.24	52.20	74.00	-21.80
4924.00	47.49	Ave	1	1.1	V	-0.24	47.25	54.00	-6.75
7386.00	39.80	PK	75	1.1	H	2.84	42.64	74.00	-31.36
7386.00	39.82	Ave	75	1.1	H	2.84	42.66	54.00	-11.34
2320.15	45.52	PK	196	1.1	V	-13.19	32.33	74.00	-41.67
2320.15	38.96	Ave	196	1.1	V	-13.19	25.77	54.00	-28.23
2363.44	42.22	PK	265	1.2	H	-13.14	29.08	74.00	-44.92
2363.44	36.30	Ave	265	1.2	H	-13.14	23.16	54.00	-30.84
2487.36	44.30	PK	136	1.8	V	-13.08	31.22	74.00	-42.78
2487.36	36.73	Ave	136	1.8	V	-13.08	23.65	54.00	-30.35

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: Low Channel 2412MHz									
223.59	40.06	QP	293	2.0	H	-11.62	28.44	46.00	-17.56
223.59	33.13	QP	227	1.7	V	-11.62	21.51	46.00	-24.49
4824.00	53.26	PK	281	1.7	V	-1.06	52.20	74.00	-21.80
4824.00	48.38	Ave	281	1.7	V	-1.06	47.32	54.00	-6.68
7236.00	40.99	PK	78	1.4	H	1.33	42.32	74.00	-31.68
7236.00	39.85	Ave	78	1.4	H	1.33	41.18	54.00	-12.82
2338.82	45.88	PK	124	1.1	V	-13.19	32.69	74.00	-41.31
2338.82	39.06	Ave	124	1.1	V	-13.19	25.87	54.00	-28.13
2378.61	44.21	PK	297	1.9	H	-13.14	31.07	74.00	-42.93
2378.61	37.23	Ave	297	1.9	H	-13.14	24.09	54.00	-29.91
2488.14	43.89	PK	279	1.6	V	-13.08	30.81	74.00	-43.19
2488.14	38.84	Ave	279	1.6	V	-13.08	25.76	54.00	-28.24

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: Middle Channel 2437MHz									
223.59	41.46	QP	27	1.3	H	-11.62	29.84	46.00	-16.16
223.59	32.59	QP	114	2.0	V	-11.62	20.97	46.00	-25.03
4874.00	53.35	PK	314	1.7	V	-0.62	52.73	74.00	-21.27
4874.00	48.43	Ave	314	1.7	V	-0.62	47.81	54.00	-6.19
7311.00	40.71	PK	1	1.8	H	2.21	42.92	74.00	-31.08
7311.00	39.13	Ave	1	1.8	H	2.21	41.34	54.00	-12.66
2315.18	46.74	PK	357	1.1	V	-13.19	33.55	74.00	-40.45
2315.18	39.08	Ave	357	1.1	V	-13.19	25.89	54.00	-28.11
2389.41	43.39	PK	269	1.9	H	-13.14	30.25	74.00	-43.75
2389.41	37.70	Ave	269	1.9	H	-13.14	24.56	54.00	-29.44
2499.41	42.72	PK	305	1.4	V	-13.08	29.64	74.00	-44.36
2499.41	36.50	Ave	305	1.4	V	-13.08	23.42	54.00	-30.58

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: High Channel 2462MHz									
223.59	41.39	QP	45	1.0	H	-11.62	29.77	46.00	-16.23
223.59	32.30	QP	68	1.1	V	-11.62	20.68	46.00	-25.32
4924.00	54.07	PK	62	1.1	V	-0.24	53.83	74.00	-20.17
4924.00	49.32	Ave	62	1.1	V	-0.24	49.08	54.00	-4.92
7386.00	39.60	PK	1	1.2	H	2.84	42.44	74.00	-31.56
7386.00	39.96	Ave	1	1.2	H	2.84	42.80	54.00	-11.20
2345.33	46.36	PK	11	1.3	V	-13.19	33.17	74.00	-40.83
2345.33	38.11	Ave	11	1.3	V	-13.19	24.92	54.00	-29.08
2380.03	42.30	PK	98	1.2	H	-13.14	29.16	74.00	-44.84
2380.03	38.94	Ave	98	1.2	H	-13.14	25.80	54.00	-28.20
2485.59	42.36	PK	187	1.8	V	-13.08	29.28	74.00	-44.72
2485.59	37.52	Ave	187	1.8	V	-13.08	24.44	54.00	-29.56

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

8 Band Edge Measurement



Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	558074 D01 DTS Meas Guidance v03r03 June 9, 2015
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting



8.1 Test Produce



1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

8.2 Test Result

Test result plots shown as follows:

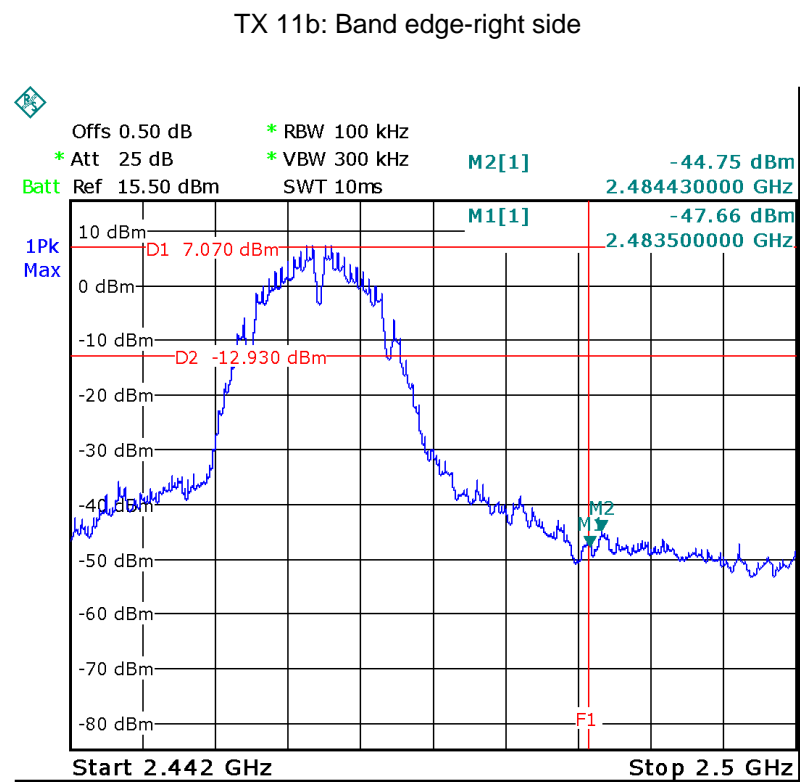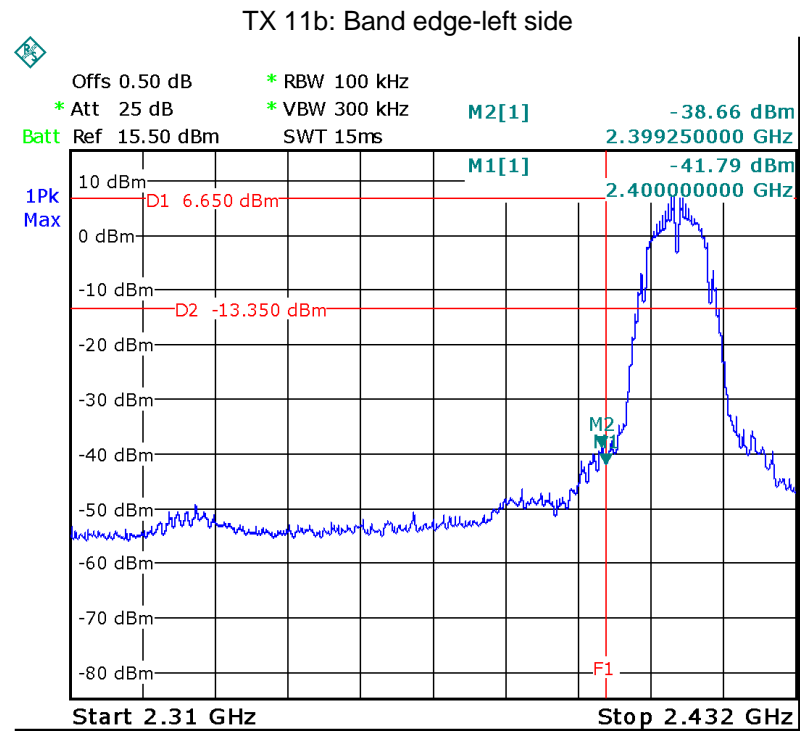

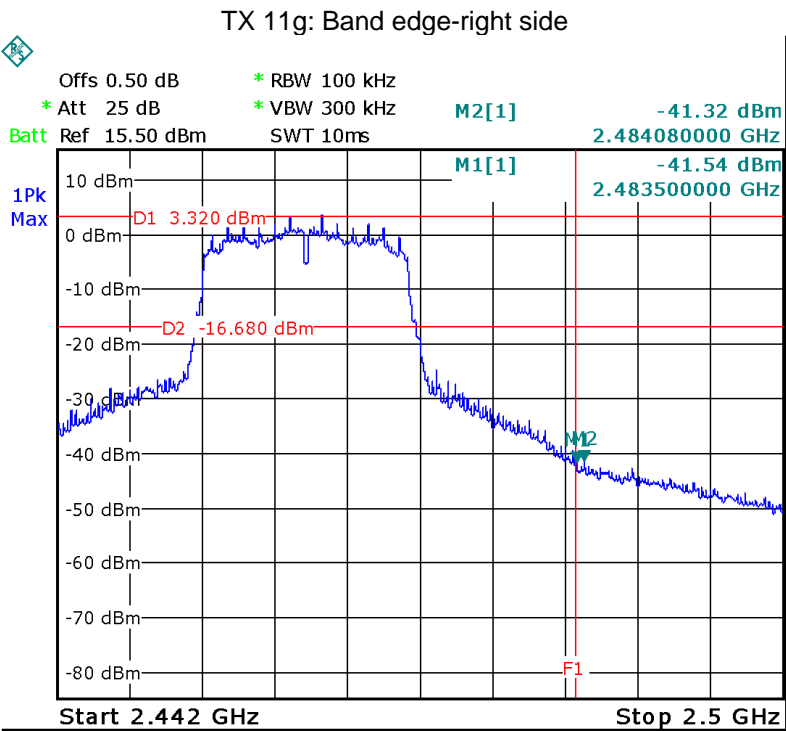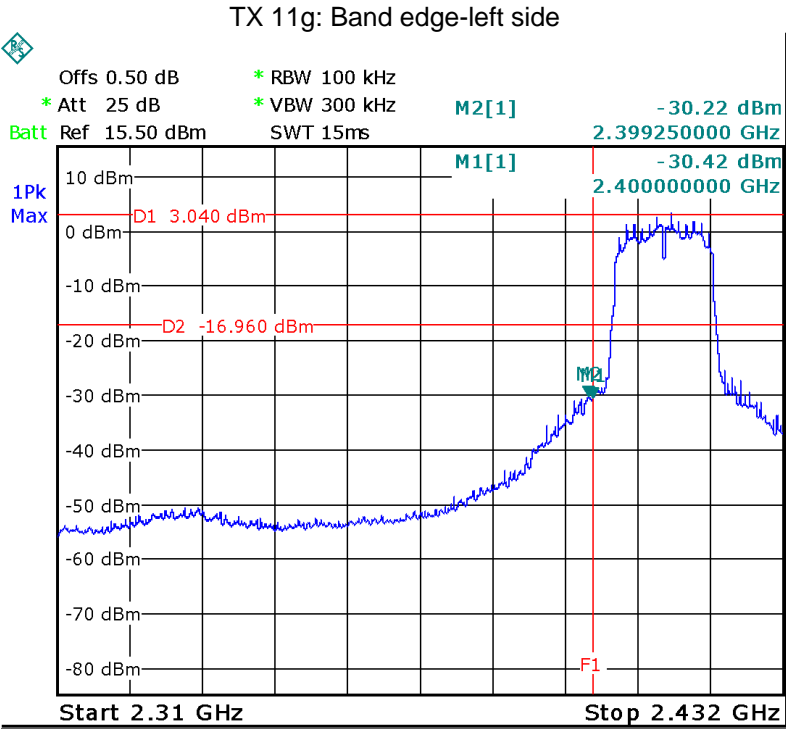

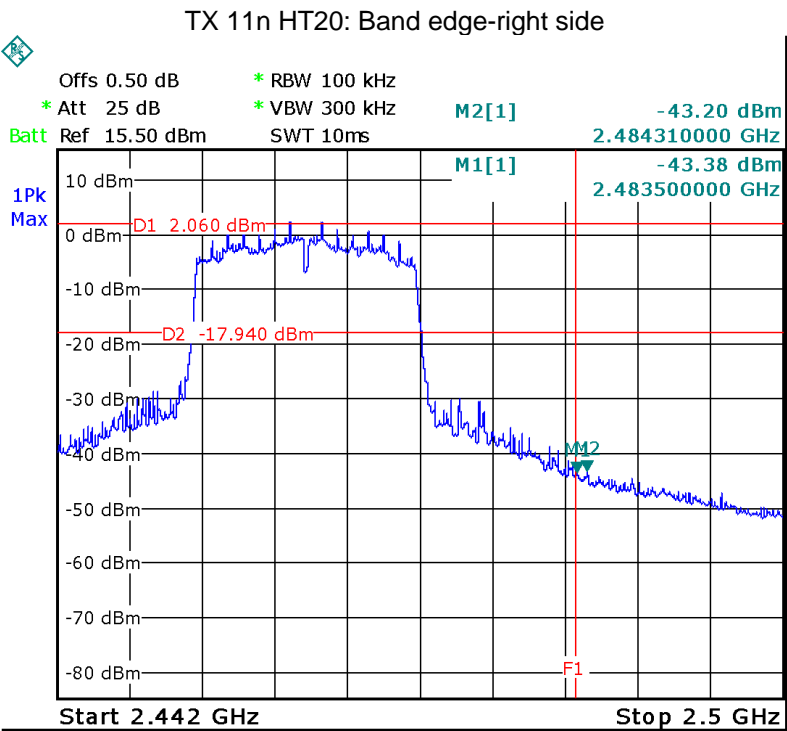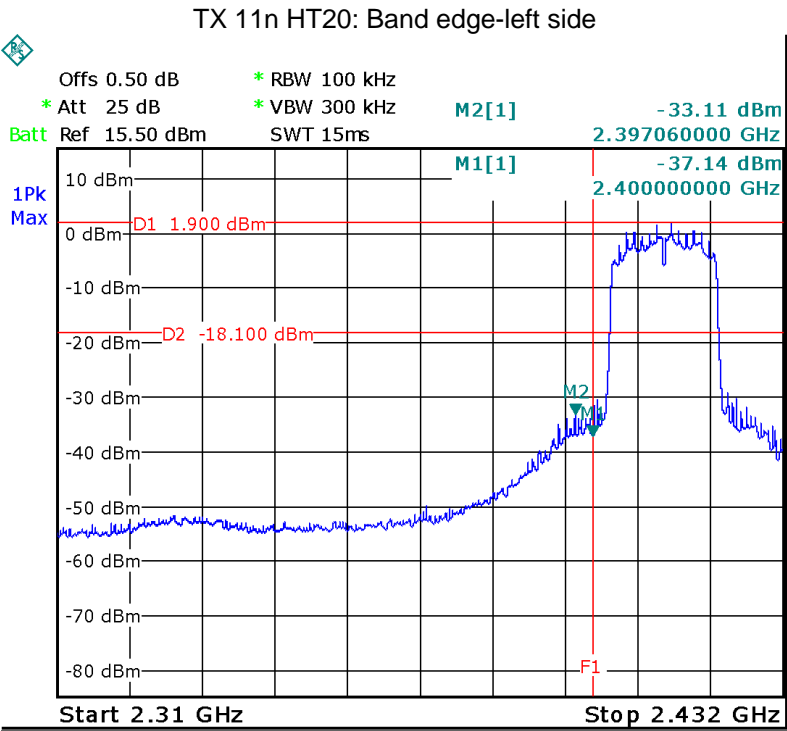

9 6 dB Bandwidth Measurement

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

558074 D01 DTS Meas Guidance v03r03 June 9, 2015


9.1 Test Procedure:



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz



9.2 Test Result:



Operation mode	Bandwidth (MHz)		
TX 11b	Channel 1	Channel 6	Channel 11
	8.024	8.024	8.024
TX 11g	Channel 1	Channel 6	Channel 11
	15.425	15.425	15.425
TX 11n HT20	Channel 1	Channel 6	Channel 11
	16.916	16.916	16.916



Test result plot as follows:

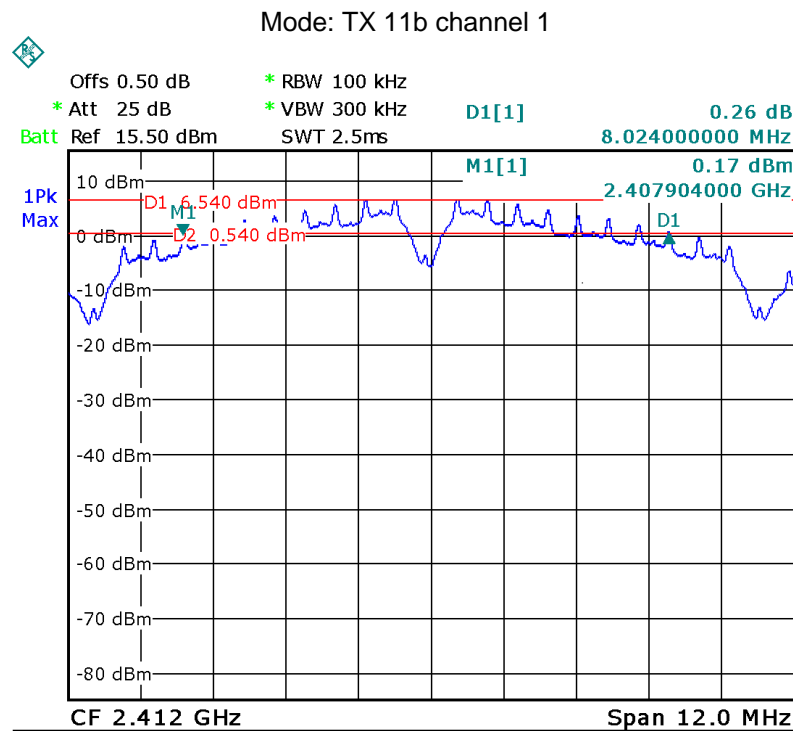

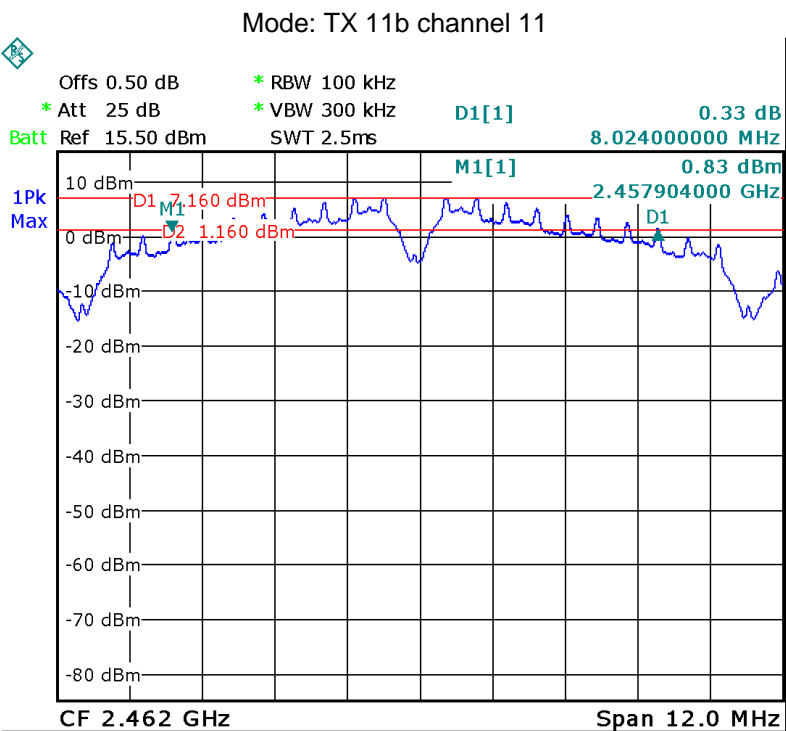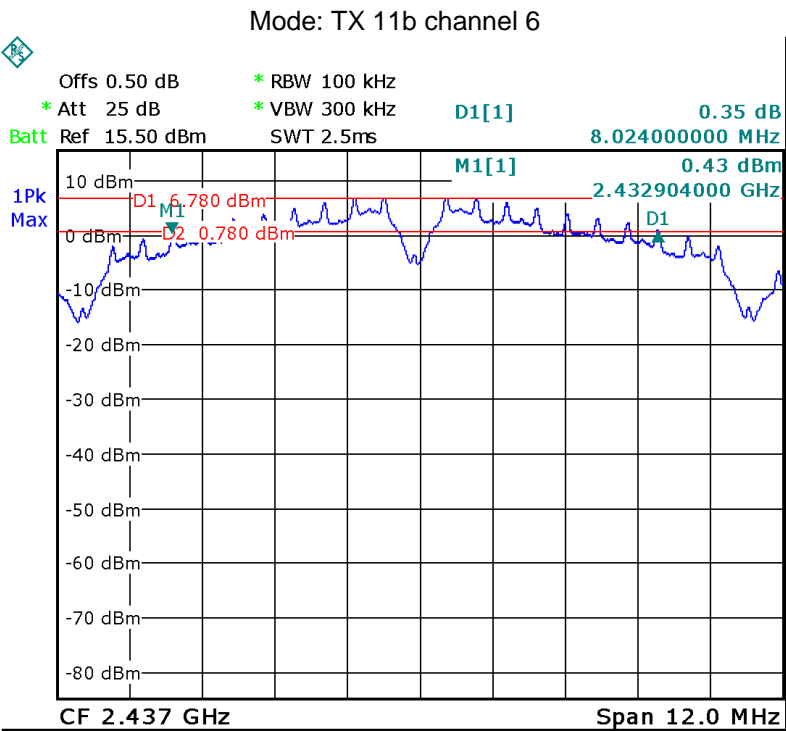

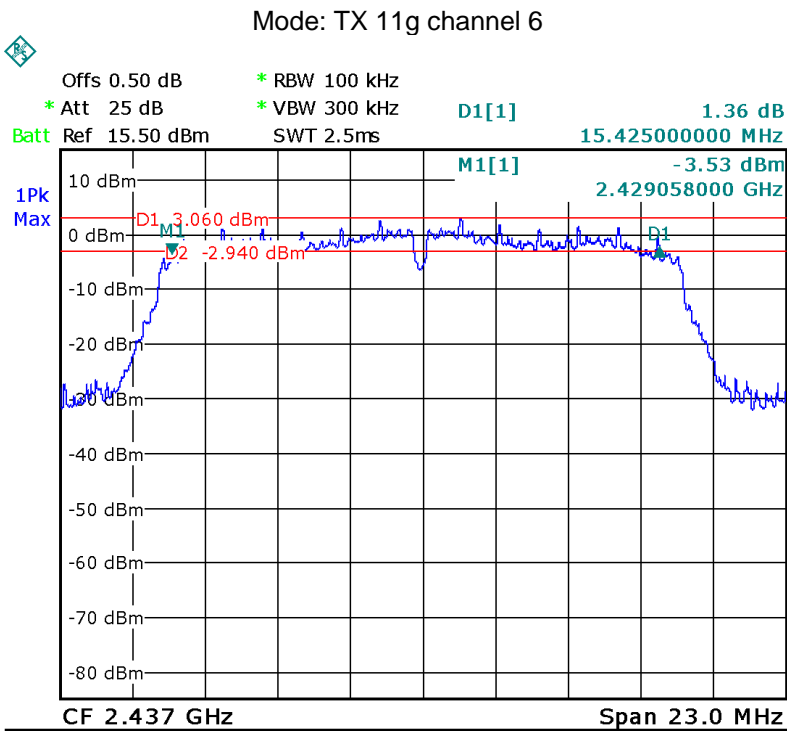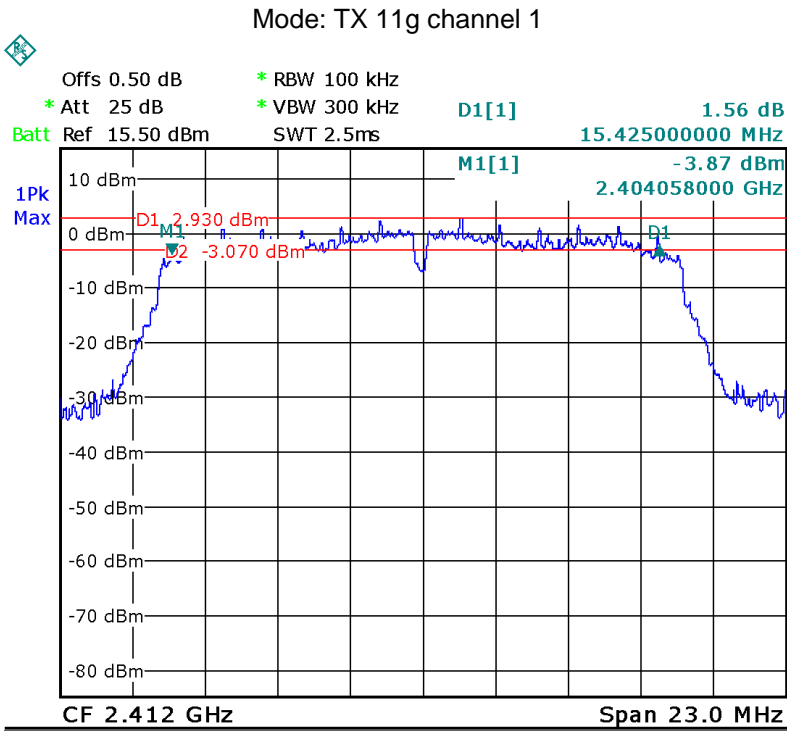

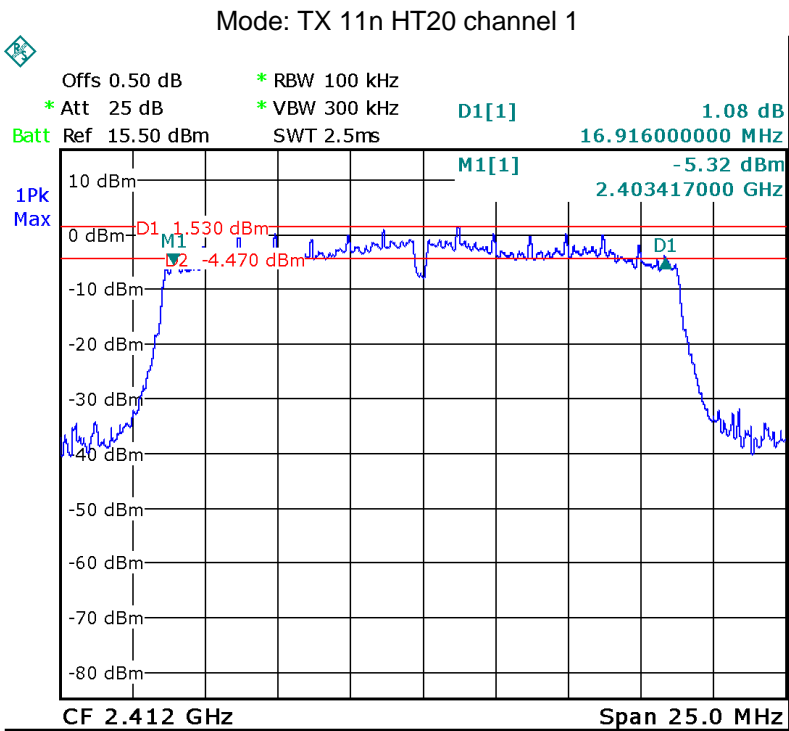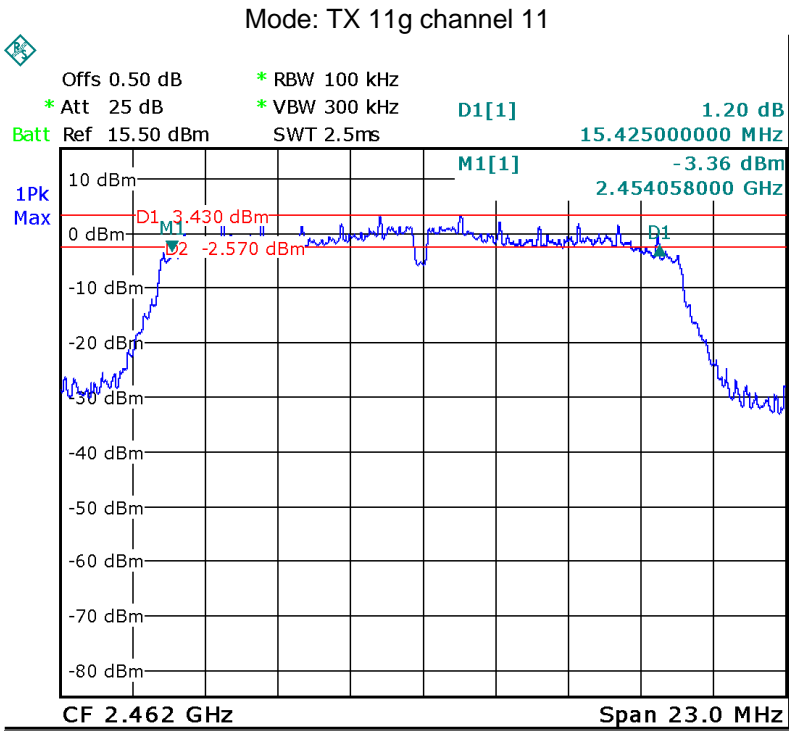

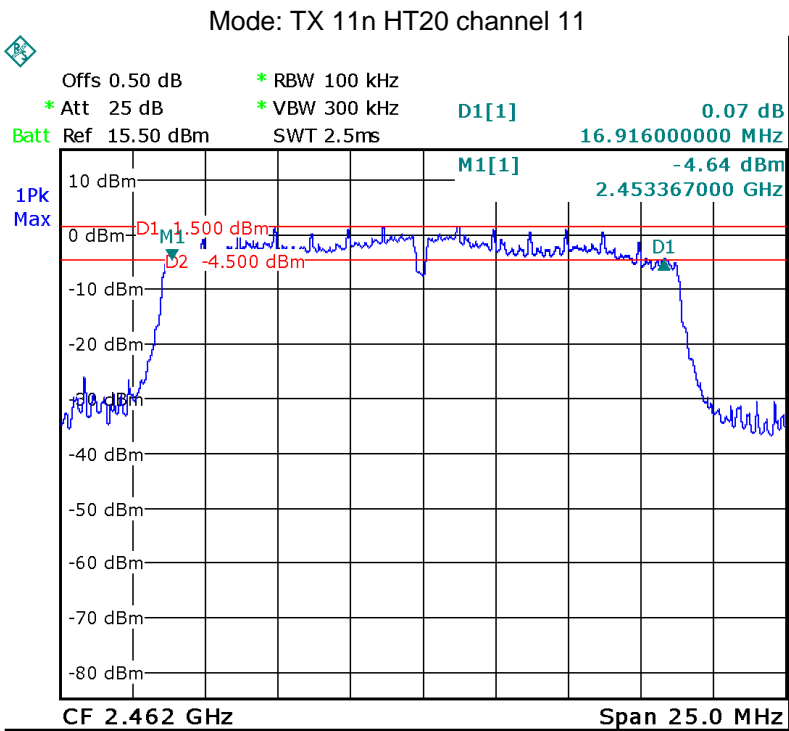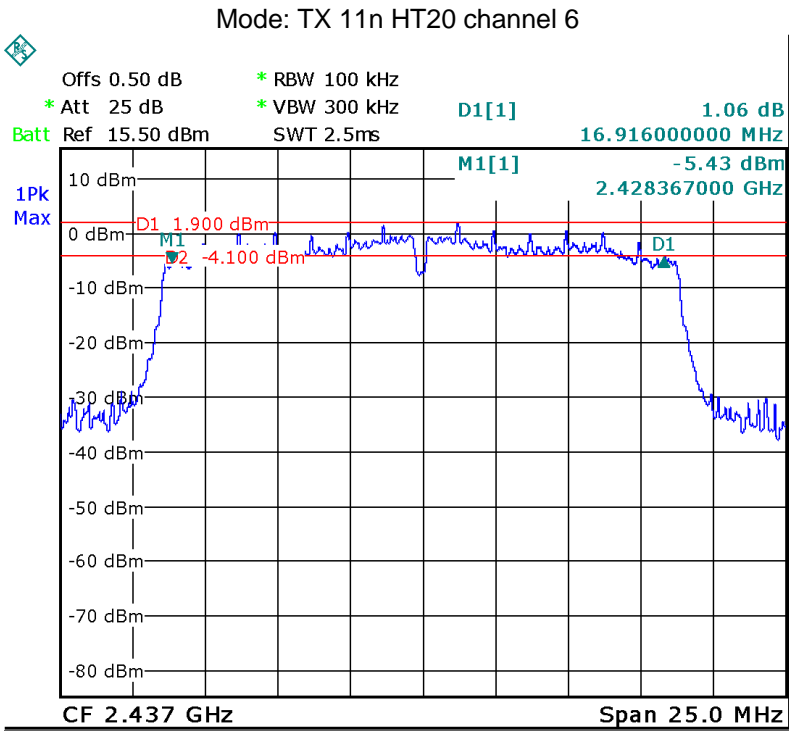

10 Maximum Peak Output Power

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

558074 D01 DTS Meas Guidance v03r03 June 9, 2015

10.1 Test Procedure:



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak, Set the span to fully encompass the DTS bandwidth.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


10.2 Test Result:

Test mode :TX 11b		
10 Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
16.49	16.70	17.10
1W/30dBm		


Test mode :TX 11g		
10 Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
21.25	21.95	21.77
1W/30dBm		



Test mode :TX 11n HT20		
10 Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
19.88	20.33	20.69
1W/30dBm		

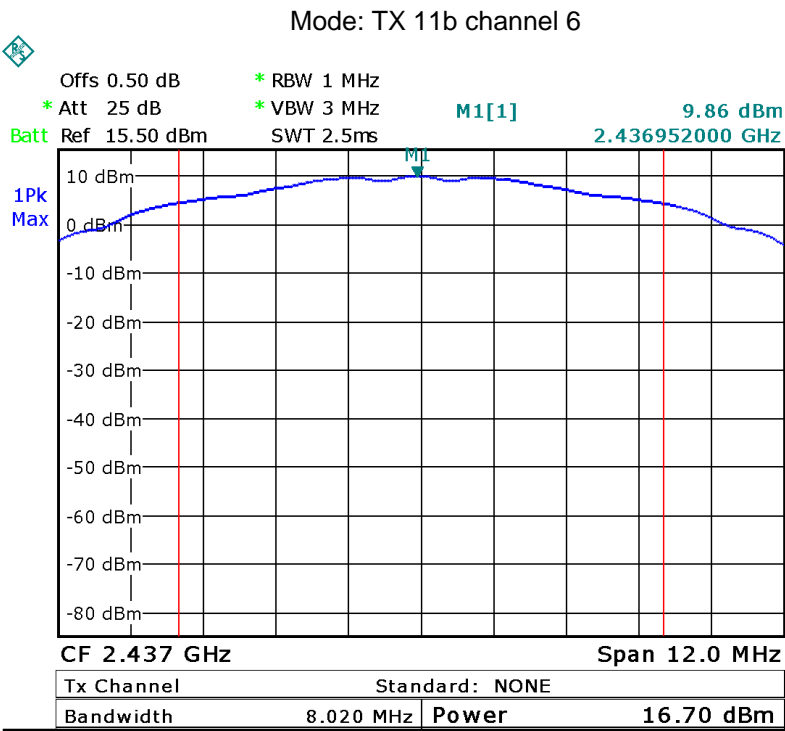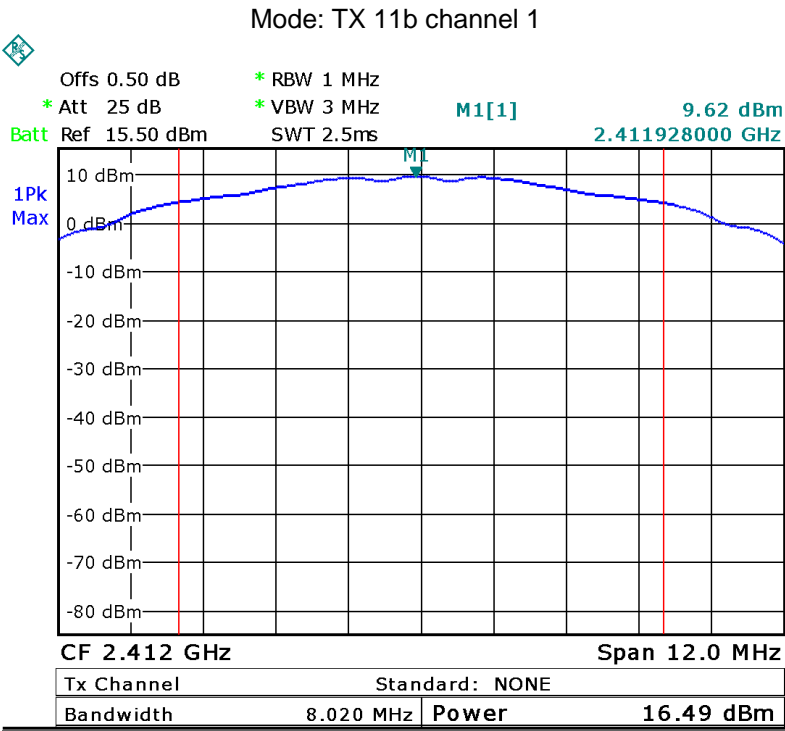

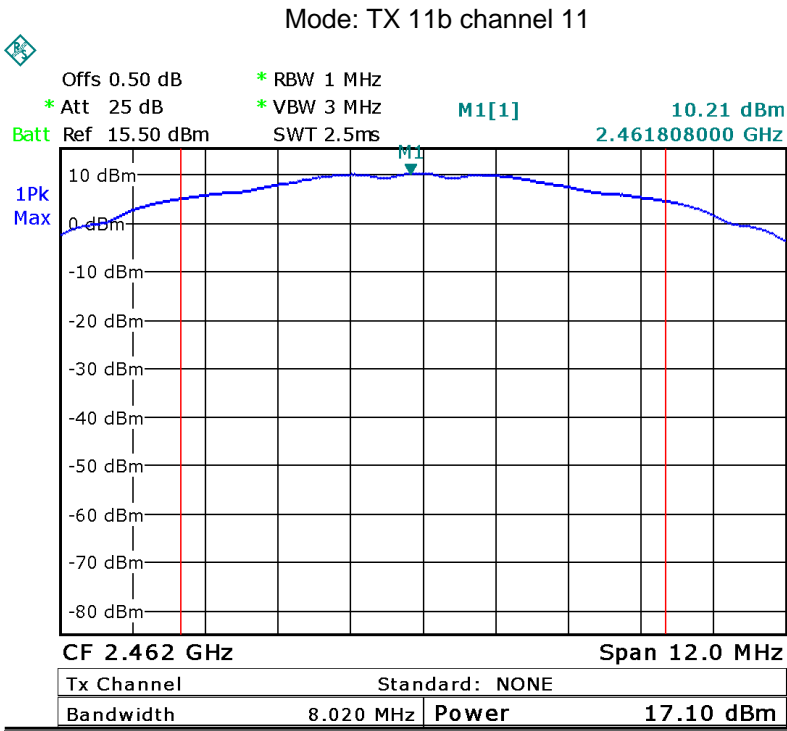


Mode :TX 11g channel 1

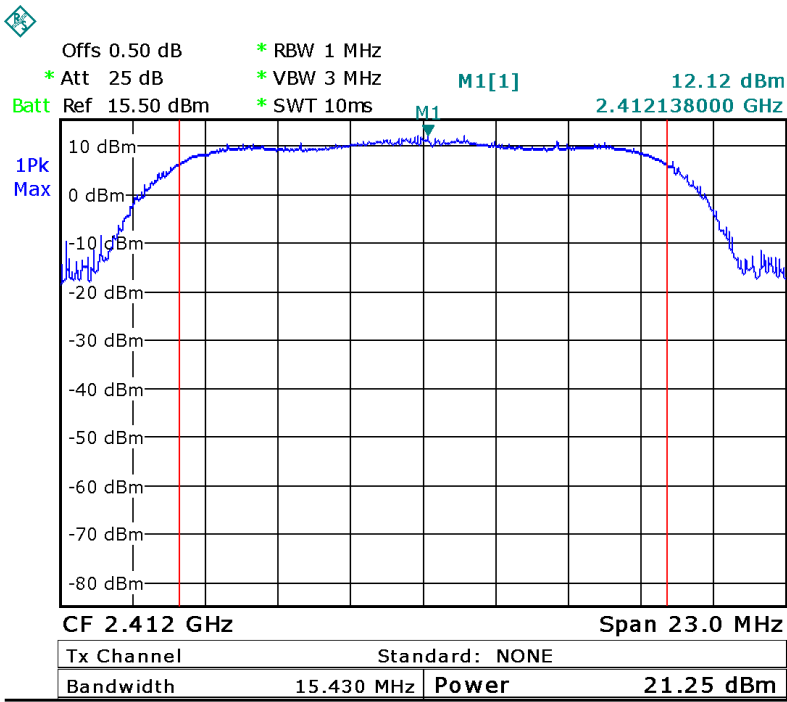


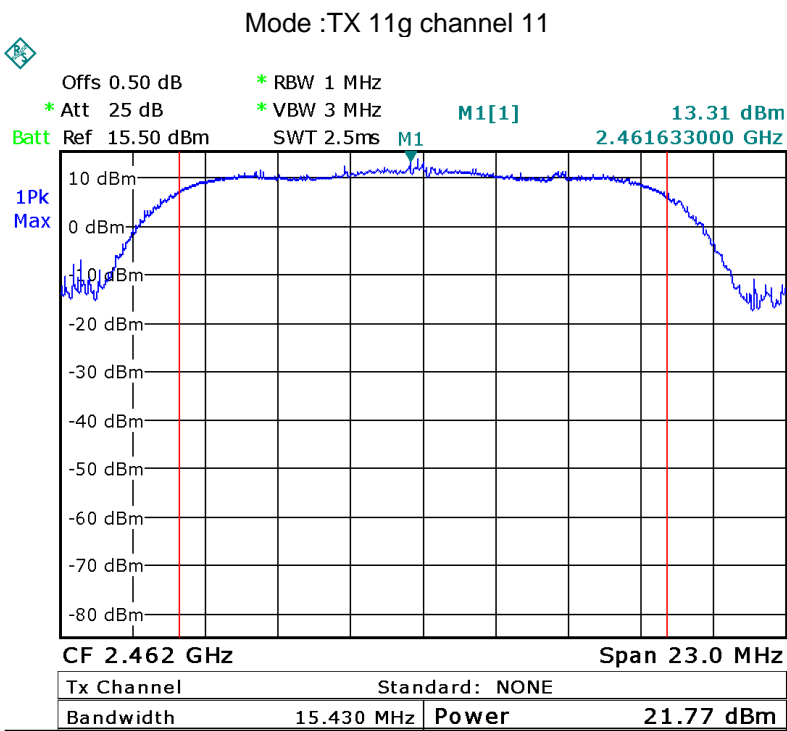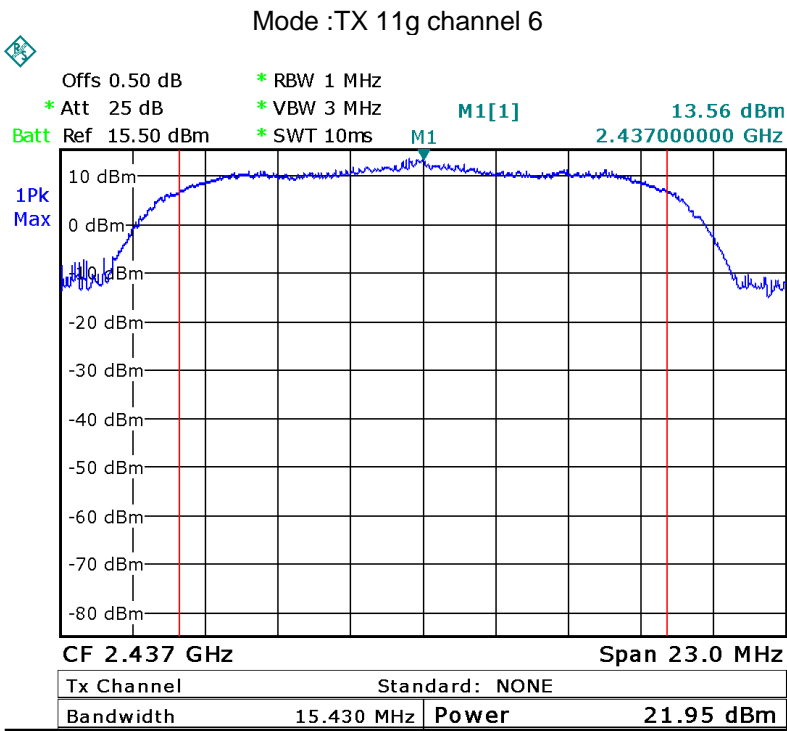


Mode: TX 11n HT20 channel 1

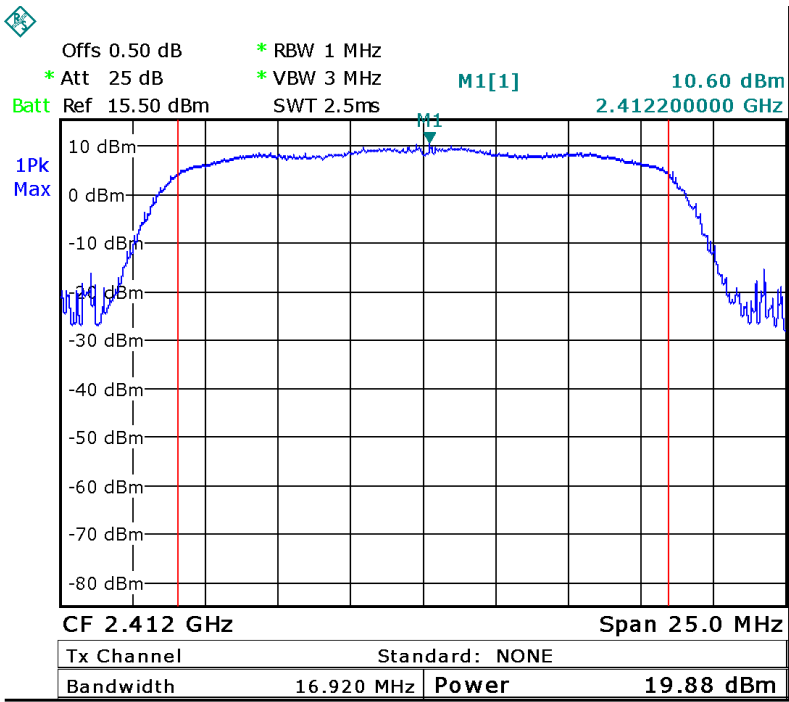

Mode: TX 11n HT20 channel 6

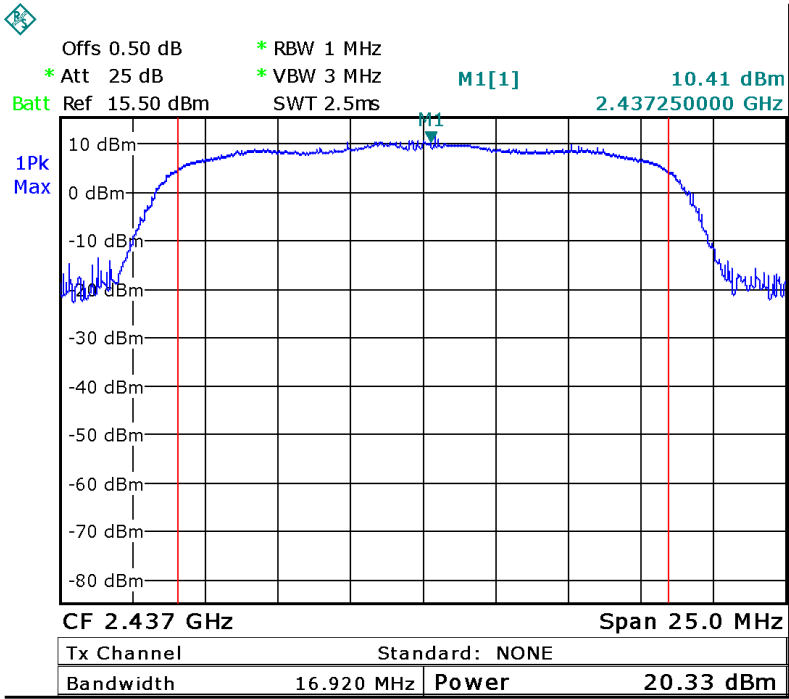

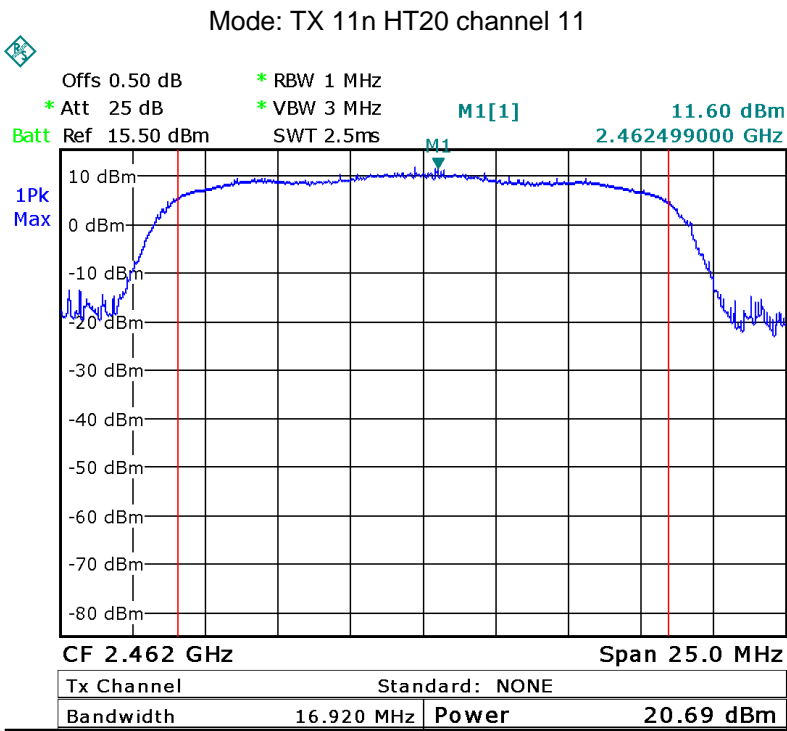

11 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: 558074 D01 DTS Meas Guidance v03r03 June 9, 2015

11.1 Test Procedure:



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.



11.2 Test Result:



Test mode :TX 11b		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-6.90	-7.27	-6.85
8dBm per 3kHz		



Test mode :TX 11g		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-11.15	-11.64	-10.61
8dBm per 3kHz		


Test mode :TX 11n HT20		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-11.96	-12.88	-12.48
8dBm per 3kHz		

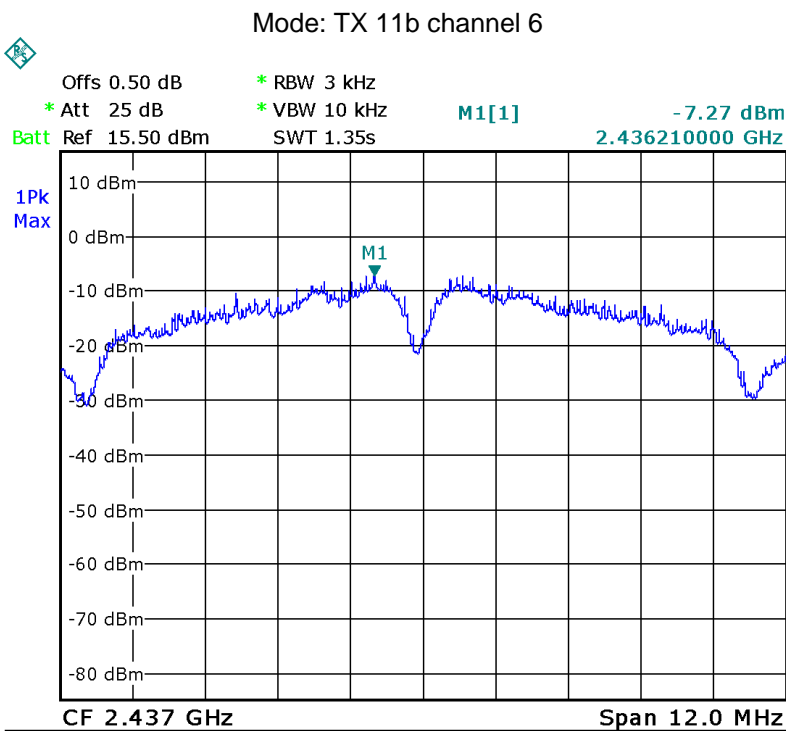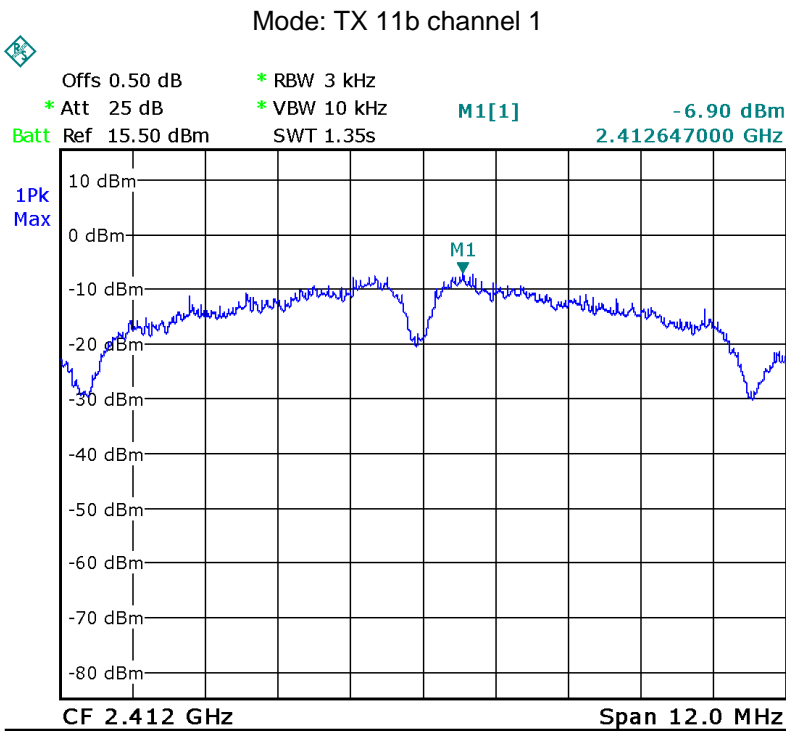

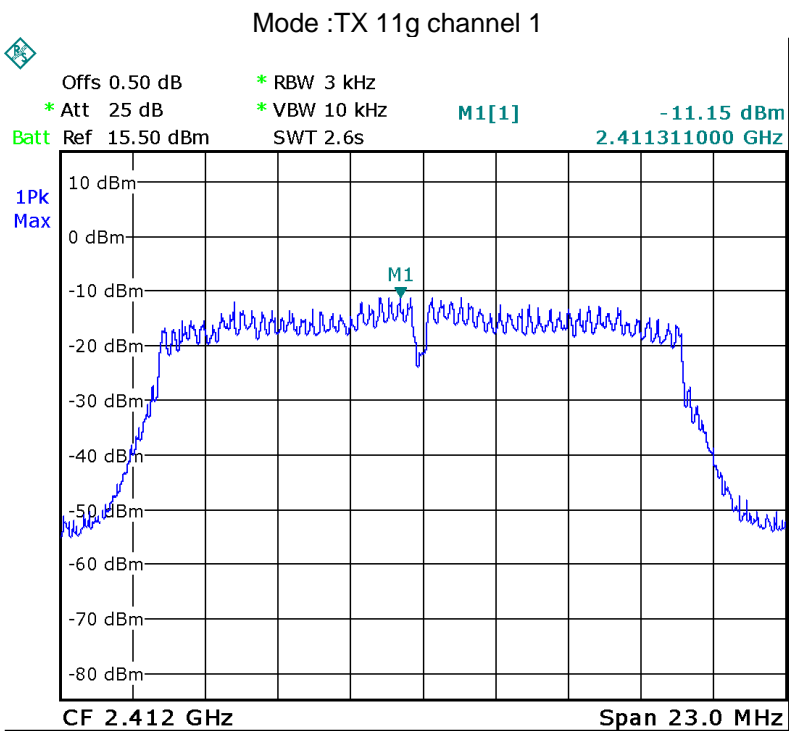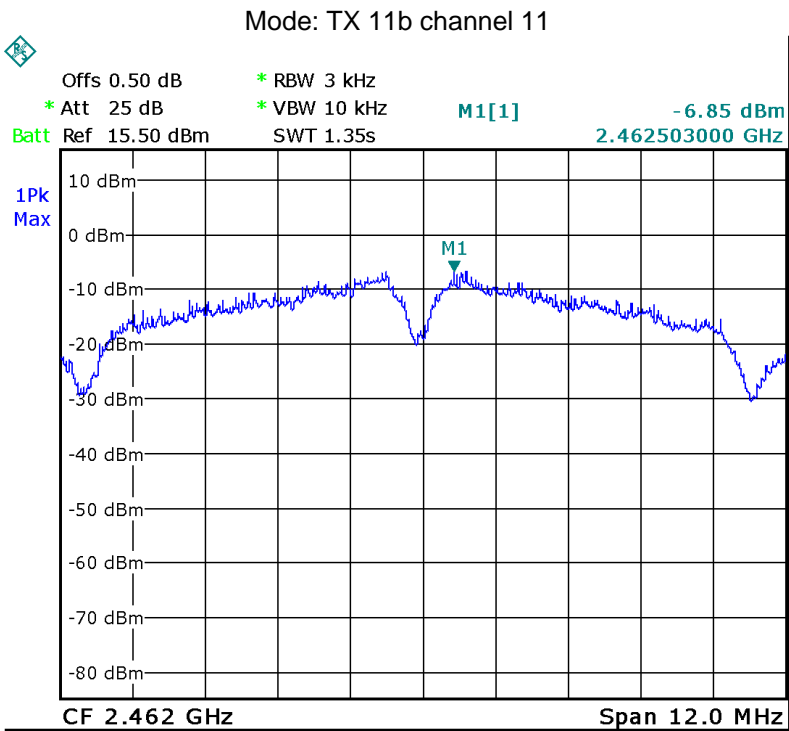

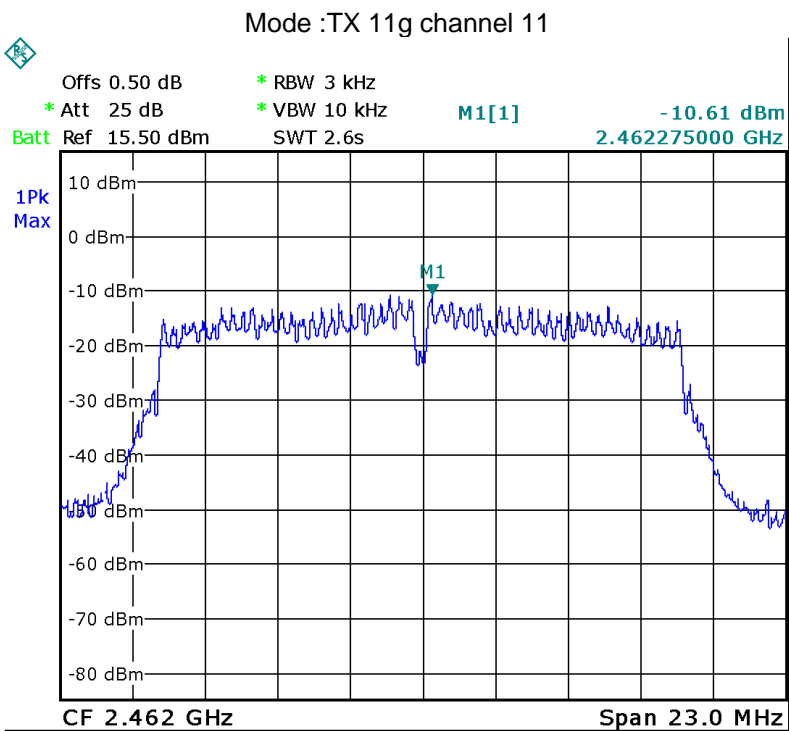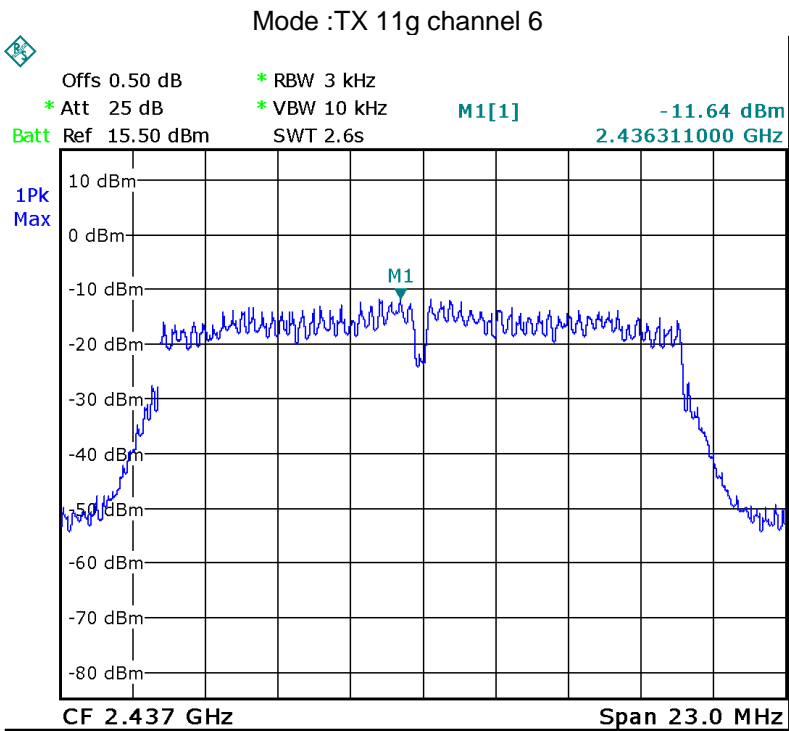

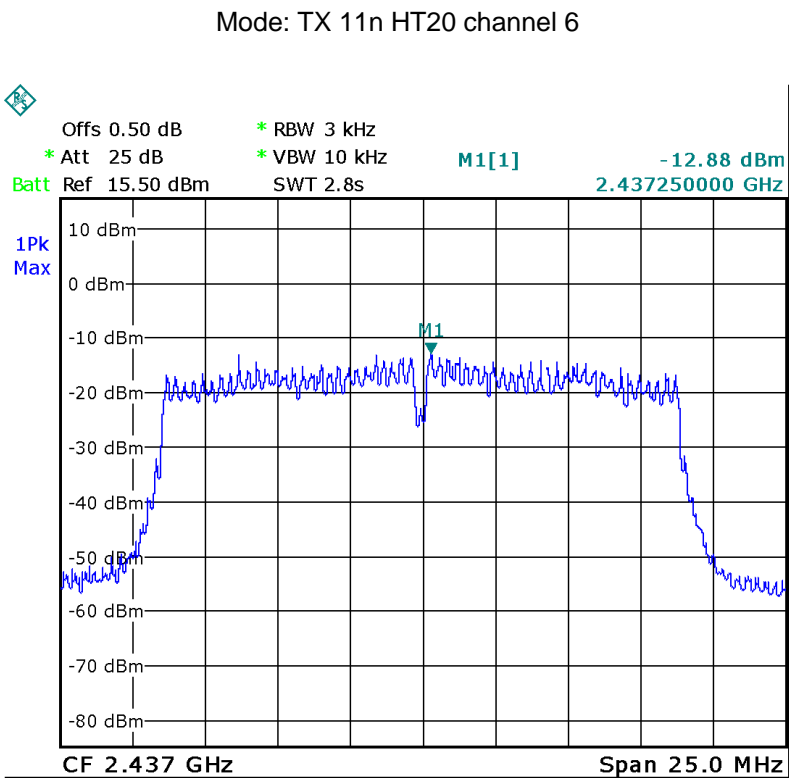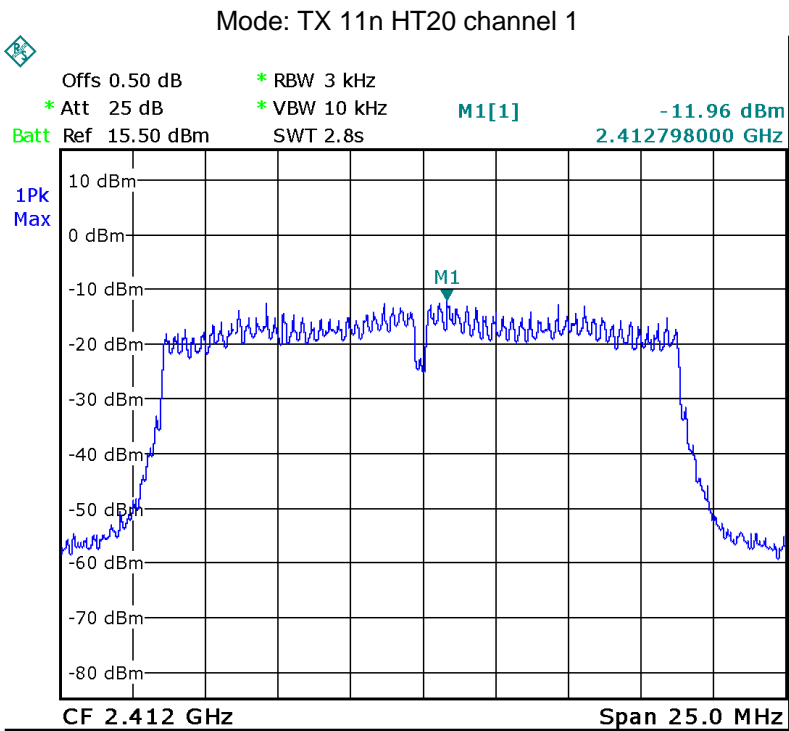

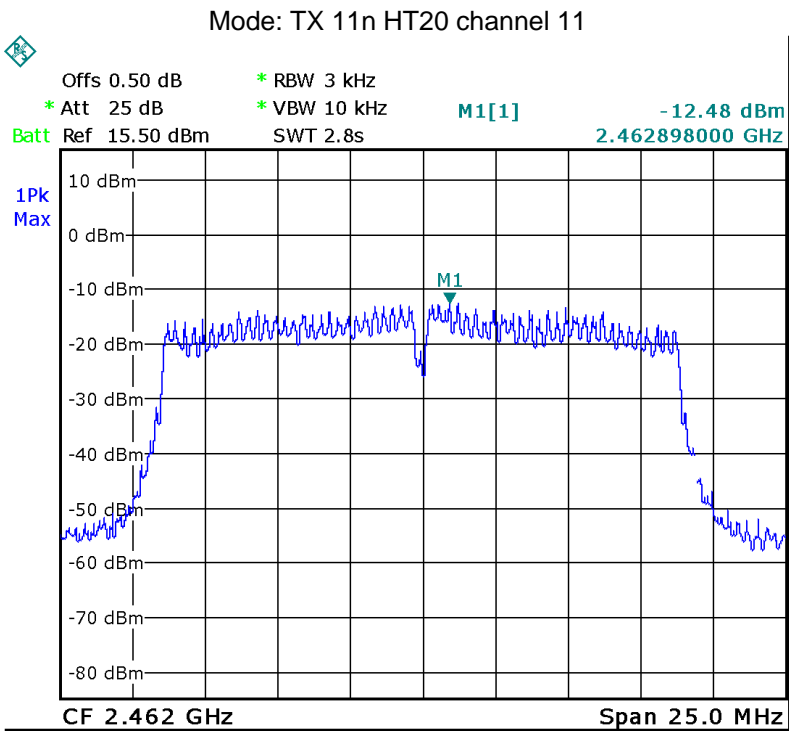

12 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a dipole antenna fulfill the requirement of this section.

13 RF Exposure

Test Requirement: FCC Part 1.1307

Evaluation Method: FCC Part 2.1091

13.1 Requirements

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

13.2 The procedures / limit

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

13.3 MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d}$$

$$\text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained

Antenna Gain (numeric)	Max. Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (mW/cm ²)	Limit of Power Density (mW/cm ²)
1.995	21.95	156.675	0.0622	1

Remark: The Max. Peak Output Power is 802.11g mode.


14 Photographs – Model K42U Test Setup

14.1 Conducted Emission at Test Site 2#




14.2 Radiated Emission

Test frequency below 30MHz at Test Site 2#

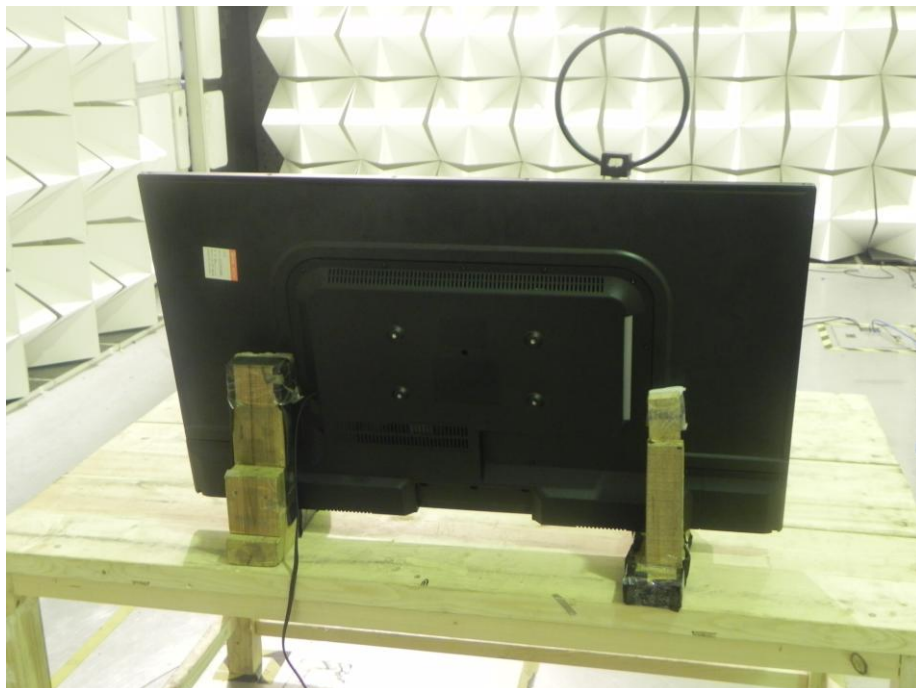

Test frequency from 30MHz to 1GHz at Test Site 2#


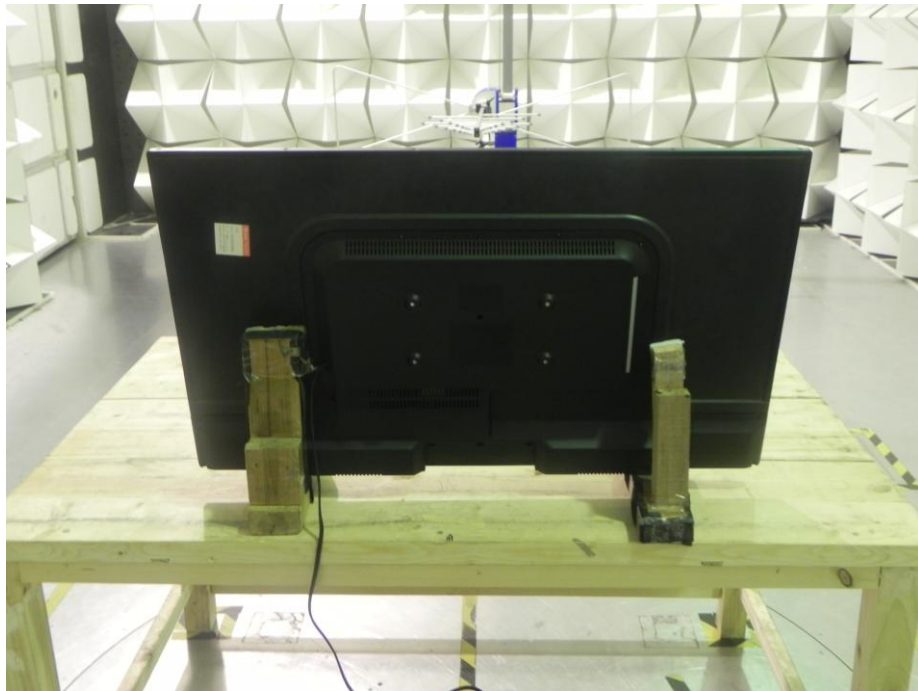



Test frequency above 1GHz at Test Site 1#





15 Photographs - Constructional Details



15.1 Model K42U-External Photos

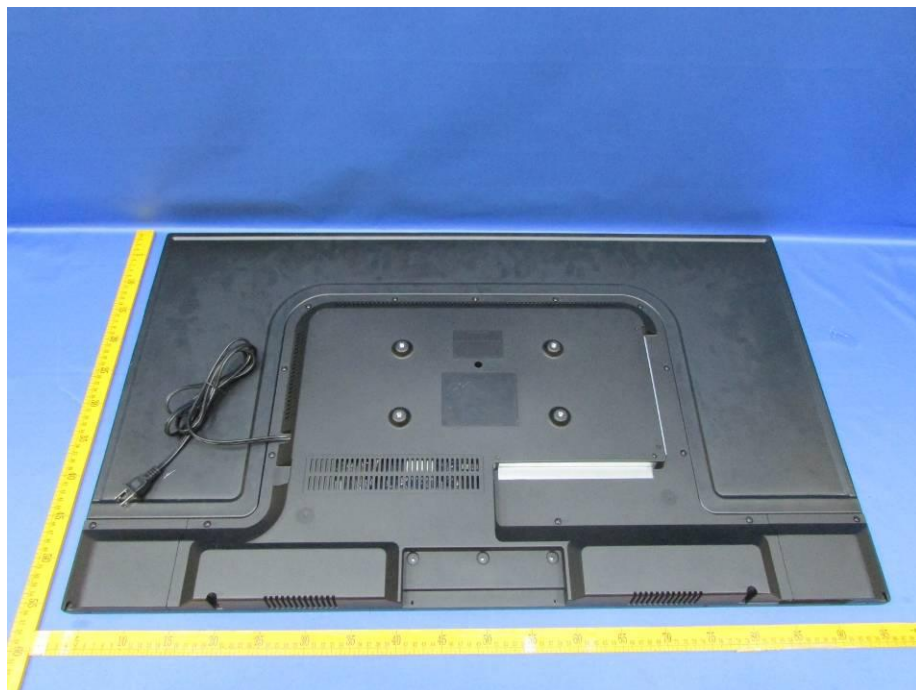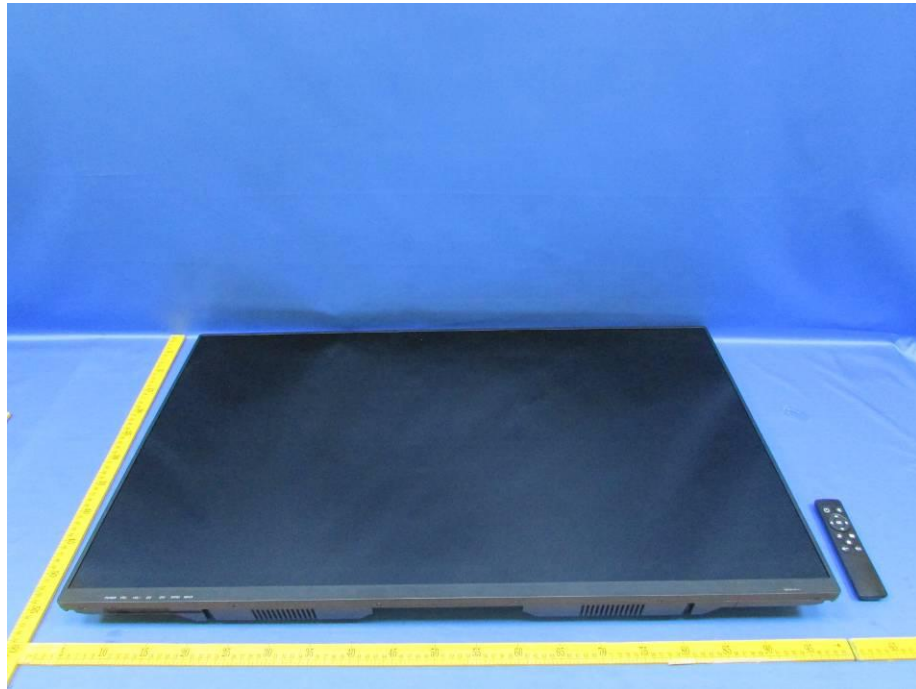



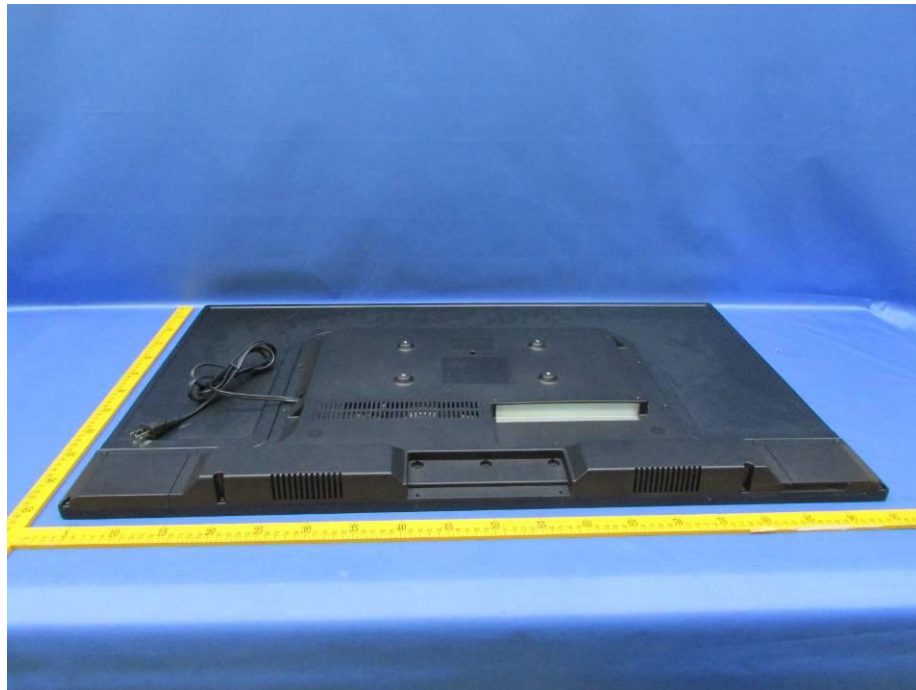


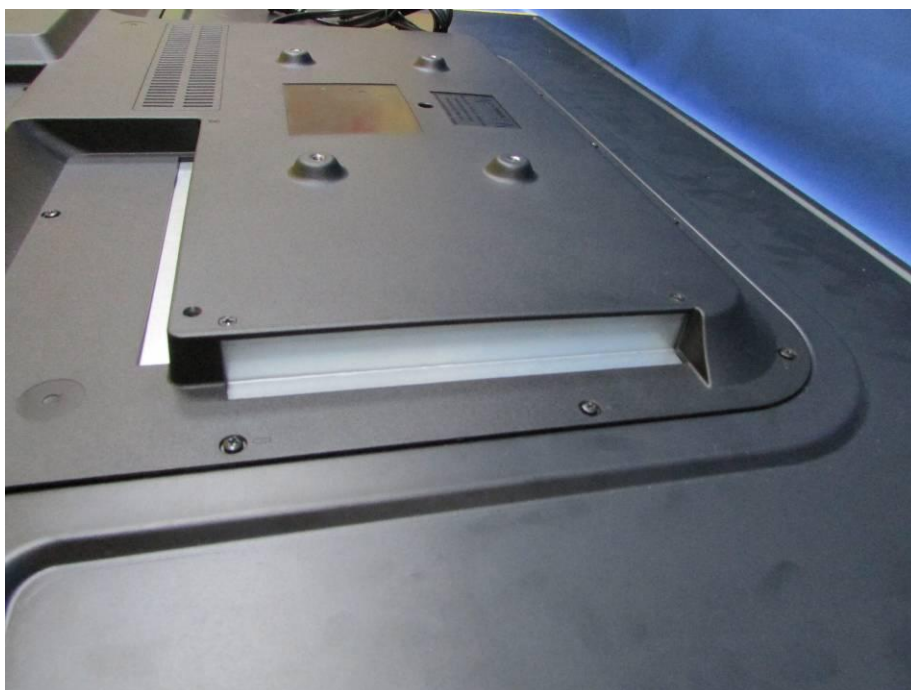
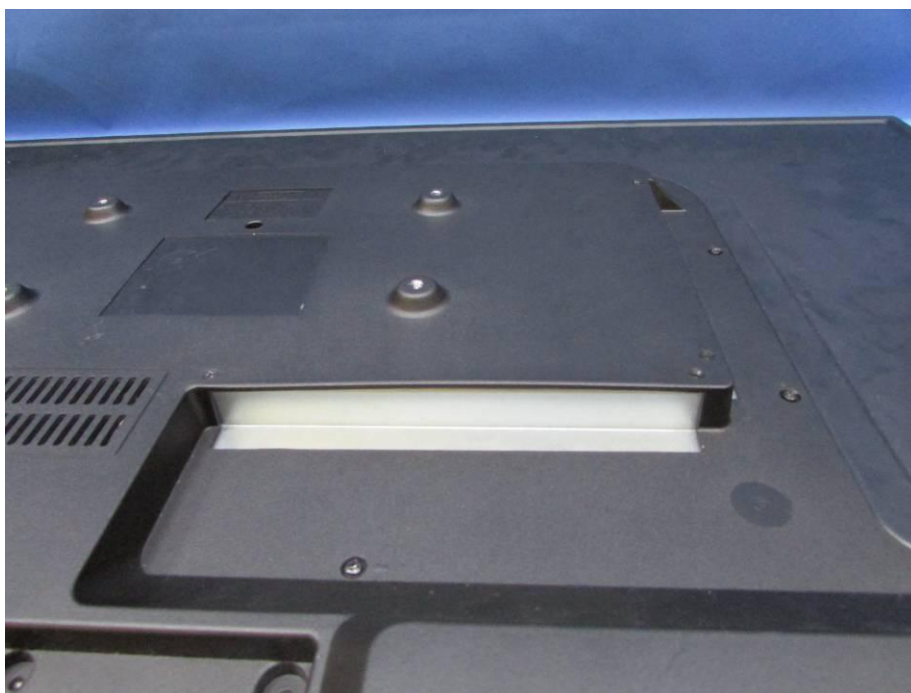




15.2 Model K42U– Internal Photos

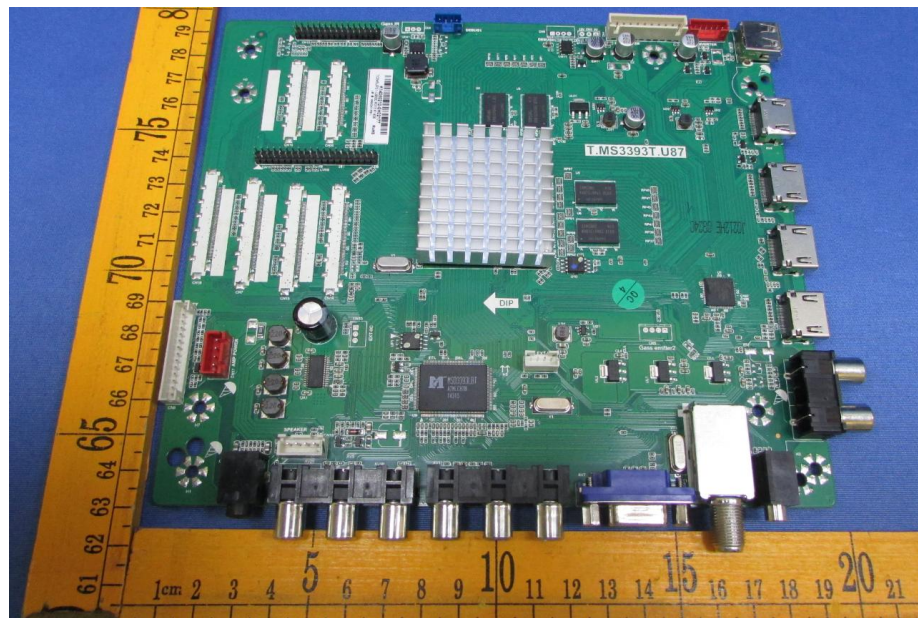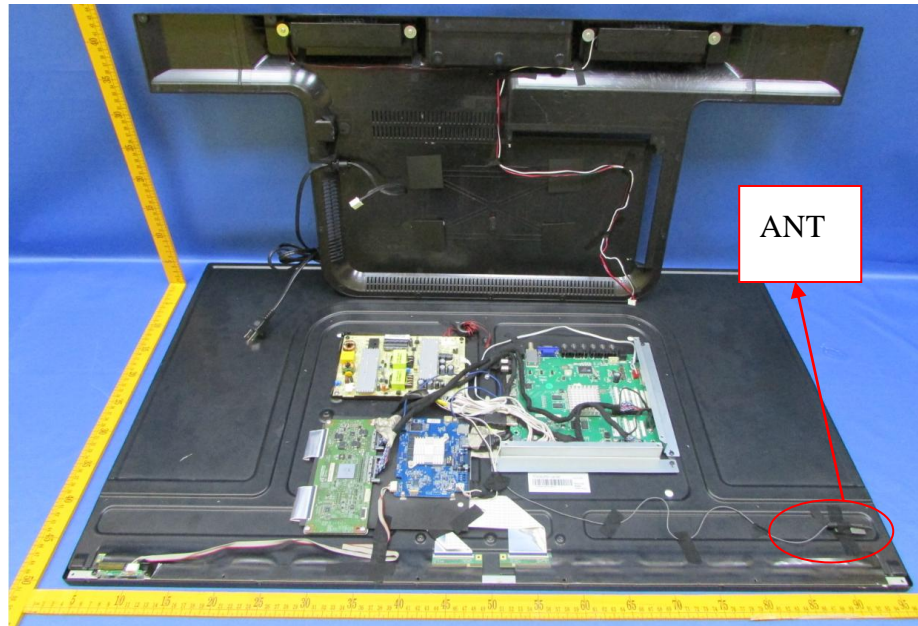


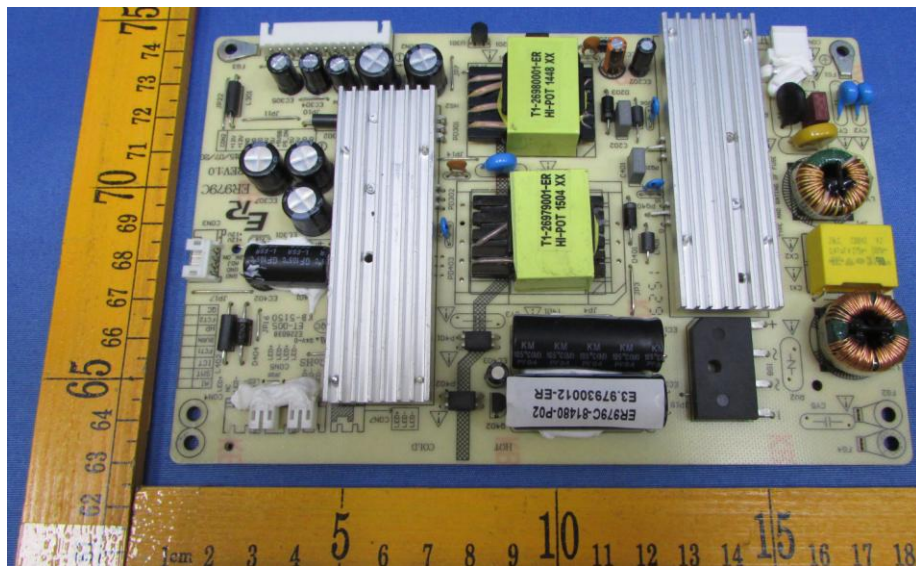

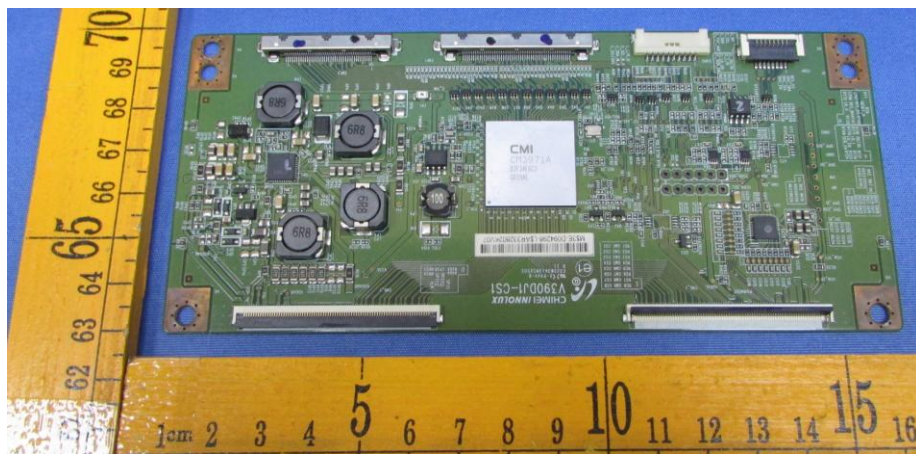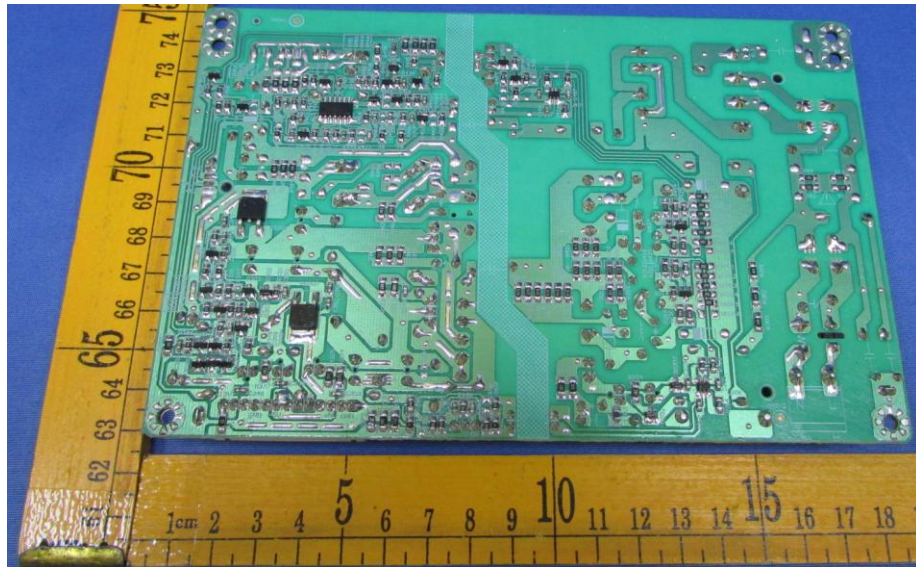

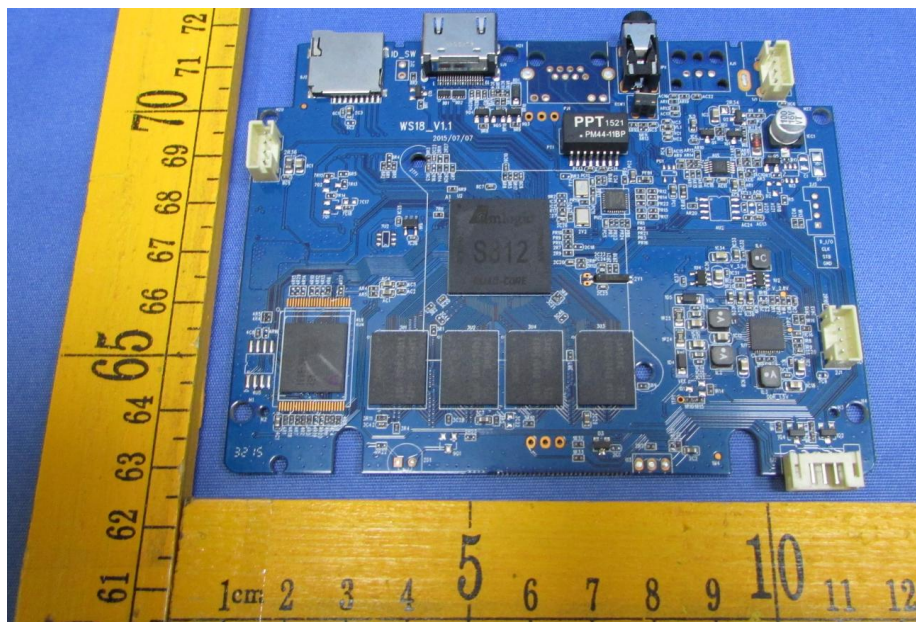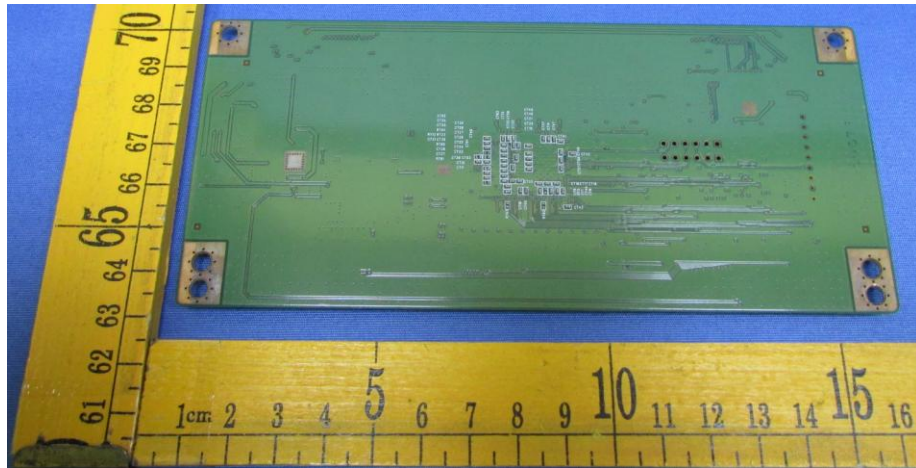

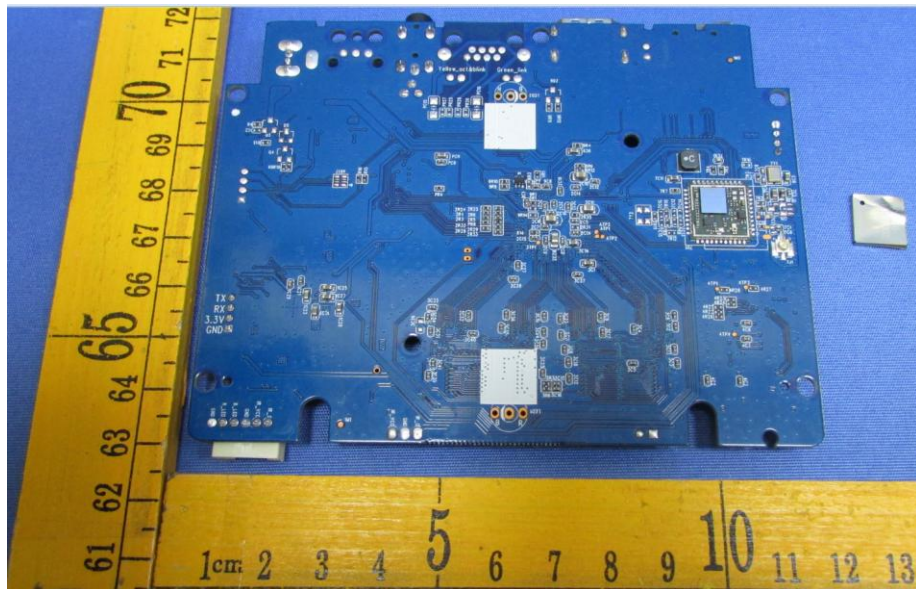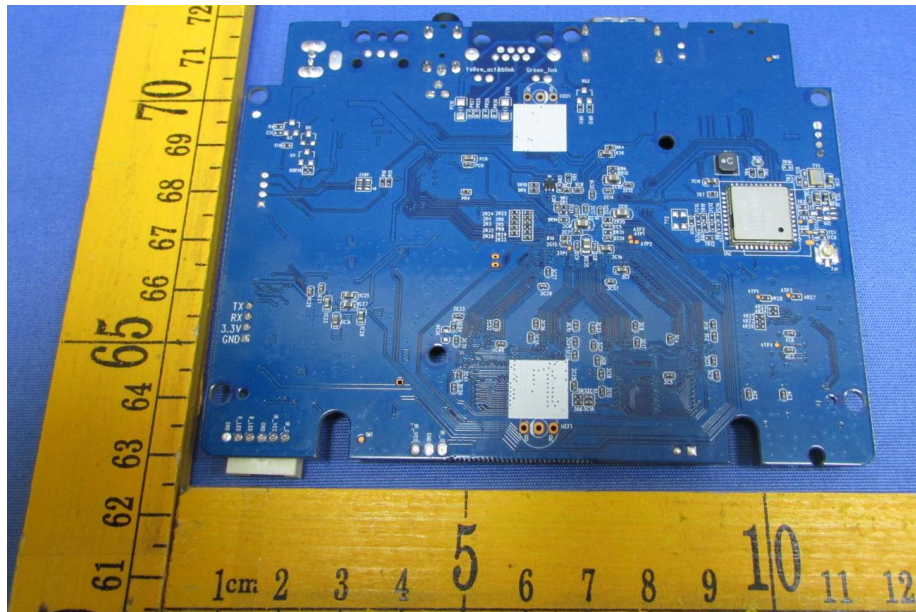

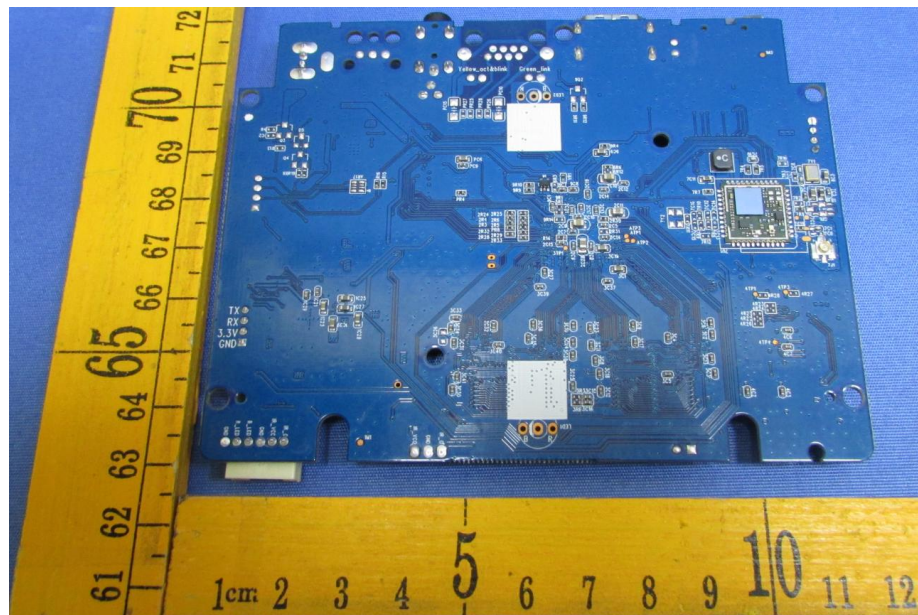

=====End of Report=====