

EMISSION BANDWIDTH

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval (mo)
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	2/10/2015	15
Meter - Multimeter	Fluke	117/EFSP	MLR	5/27/2015	36
Power Supply - DC	Agilent	U8002A	TPZ	NCR	0
Block - DC	Fairview Microwave	SD3379	AMI	9/18/2015	12
Attenuator	S.M. Electronics	SA26B-20	RFW	2/26/2016	12
Cable	ESM Cable Corp.	TTBJ141 KMKM-72	MNU	9/18/2015	12
Generator - Signal	Agilent	N5183A	TIK	10/17/2014	36

TEST DESCRIPTION

The transmit frequencies and data rates listed in the datasheet were measured in each band utilized by the radio. The transmit power was set to its default maximum.

A direct connection was made between the RF output of the EUT and a spectrum analyzer. Attenuation and a DC block were used. The reference level offset on the spectrum analyzer was adjusted to compensate for cable loss and the external attenuation used between the RF output and the spectrum analyzer input.

Per ANSI C63.10, the spectrum analyzer settings were as follows:

-RBW = Approx. 1% of the emission bandwidth (B).

-VBW = > RBW

-Detector = Peak

-

-Trace mode = max hold

The spectrum analyzer occupied bandwidth measurement function was then used to measure 26 dB emission bandwidth.


There is no required limit to be met in the rule part for this test. The purpose of the test is to both report the results as required and to utilize the emission bandwidth for setting the channel power integration bandwidth during conducted output power testing.

EMISSION BANDWIDTH


EUT:	X Series	Work Order:	LGPD0171			
Serial Number:	1023259	Date:	03/07/16			
Customer:	ZOLL Medical Corp.	Temperature:	22°C			
Attendees:	None	Humidity:	27%			
Project:	None	Barometric Pres.:	985.4			
Tested by:	Jared Ison	Power:	15 VDC			
TEST SPECIFICATIONS		Test Method	ANSI C63.10:2013			
FCC 15.407:2016						
COMMENTS	EUT set to single channel continuous transmission. Test modes were client provided.					
DEVIATIONS FROM TEST STANDARD						
None						
Configuration #	2	Signature				
		Value	Limit	Result		
5150 - 5250 MHz Band						
Low Channel, Ch 36 - 5180 MHz						
802.11(a) 6 Mbps		28.642 MHz	N/A	N/A		
802.11(a) 36 Mbps		22.505 MHz	N/A	N/A		
802.11(a) 54 Mbps		21.988 MHz	N/A	N/A		
802.11(n) MCS0		26.153 MHz	N/A	N/A		
802.11(n) MCS7		22.24 MHz	N/A	N/A		
High Channel, Ch 48 - 5240 MHz						
802.11(a) 6 Mbps		24.868 MHz	N/A	N/A		
802.11(a) 36 Mbps		23.044 MHz	N/A	N/A		
802.11(a) 54 Mbps		21.222 MHz	N/A	N/A		
802.11(n) MCS0		29.746 MHz	N/A	N/A		
802.11(n) MCS7		23.814 MHz	N/A	N/A		
5250 - 5350 MHz Band						
Low Channel, Ch 52 - 5260 MHz						
802.11(a) 6 Mbps		29.423 MHz	N/A	N/A		
802.11(a) 36 Mbps		22.573 MHz	N/A	N/A		
802.11(a) 54 Mbps		21.164 MHz	N/A	N/A		
802.11(n) MCS0		29.87 MHz	N/A	N/A		
802.11(n) MCS7		22.053 MHz	N/A	N/A		
High Channel, Ch 64 - 5320 MHz						
802.11(a) 6 Mbps		28.96 MHz	N/A	N/A		
802.11(a) 36 Mbps		21.876 MHz	N/A	N/A		
802.11(a) 54 Mbps		21.516 MHz	N/A	N/A		
802.11(n) MCS0		29.206 MHz	N/A	N/A		
802.11(n) MCS7		22.618 MHz	N/A	N/A		
5470 - 5725 MHz Band						
Low Channel, Ch 100 - 5500 MHz						
802.11(a) 6 Mbps		30.186 MHz	N/A	N/A		
802.11(a) 36 Mbps		23.547 MHz	N/A	N/A		
802.11(a) 54 Mbps		21.769 MHz	N/A	N/A		
802.11(n) MCS0		33.119 MHz	N/A	N/A		
802.11(n) MCS7		23.127 MHz	N/A	N/A		
Mid Channel, Ch 120 - 5600 MHz						
802.11(a) 6 Mbps		27.398 MHz	N/A	N/A		
802.11(a) 36 Mbps		21.998 MHz	N/A	N/A		
802.11(a) 54 Mbps		22.454 MHz	N/A	N/A		
802.11(n) MCS0		30.94 MHz	N/A	N/A		
802.11(n) MCS7		23.078 MHz	N/A	N/A		
High Channel, Ch 140 - 5700 MHz						
802.11(a) 6 Mbps		35.483 MHz	N/A	N/A		
802.11(a) 36 Mbps		24.349 MHz	N/A	N/A		
802.11(a) 54 Mbps		22.137 MHz	N/A	N/A		
802.11(n) MCS0		32.409 MHz	N/A	N/A		
802.11(n) MCS7		22.007 MHz	N/A	N/A		

EMISSION BANDWIDTH

5150 - 5250 MHz Band, Low Channel, Ch 36 - 5180 MHz, 802.11(a) 6 Mbps		
	Value	Limit
	28.642 MHz	N/A

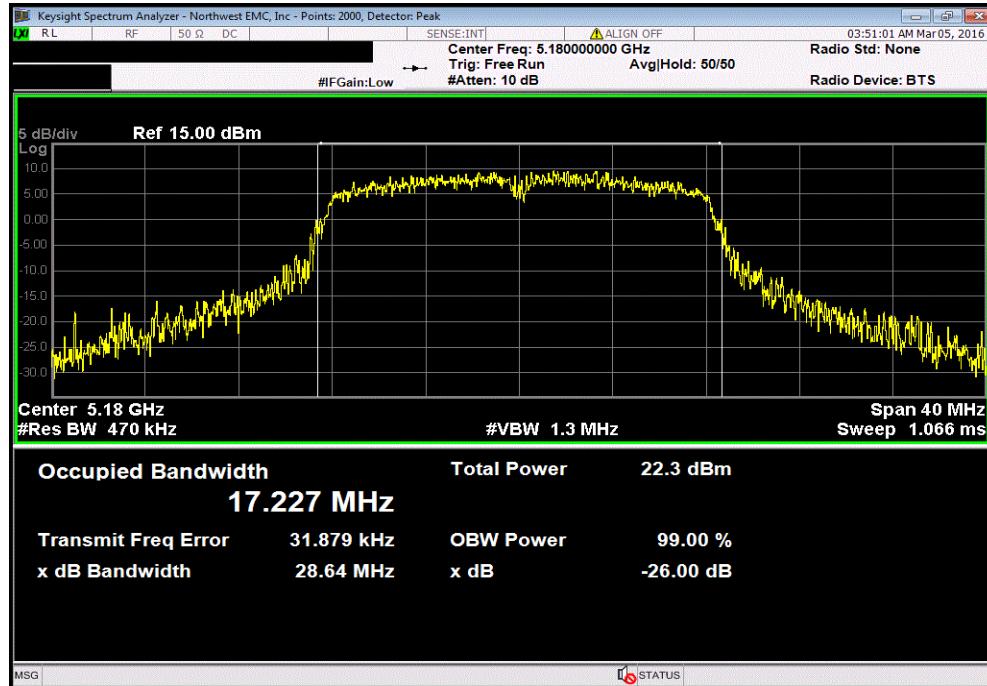


5150 - 5250 MHz Band, Low Channel, Ch 36 - 5180 MHz, 802.11(a) 36 Mbps		
	Value	Limit
	22.505 MHz	N/A

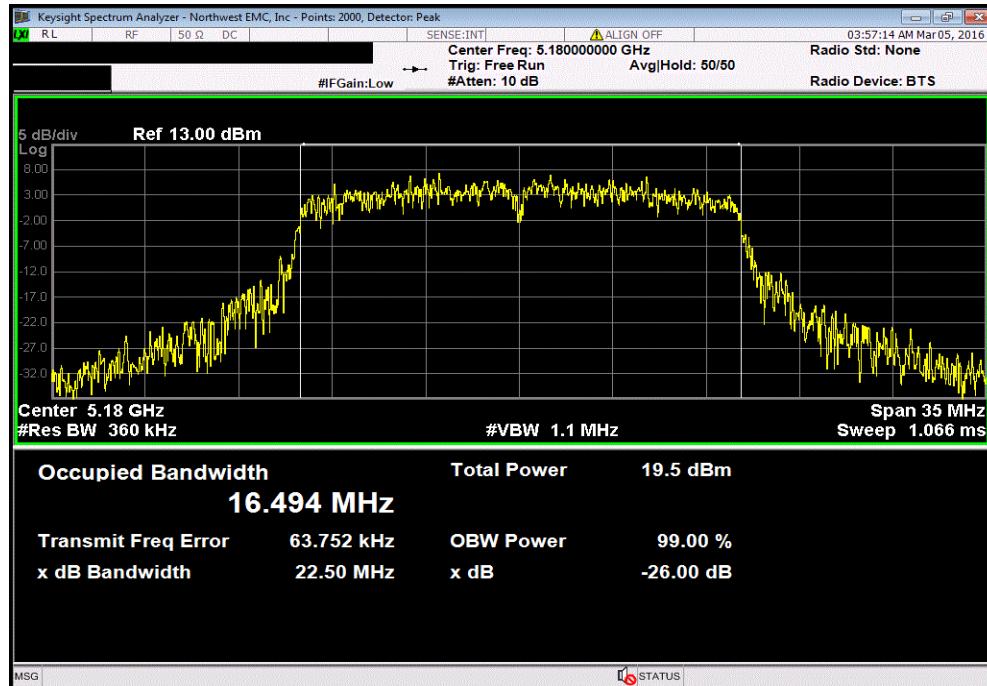


EMISSION BANDWIDTH

5150 - 5250 MHz Band, Low Channel, Ch 36 - 5180 MHz, 802.11(a) 54 Mbps		
	Value	Limit
	21.988 MHz	N/A

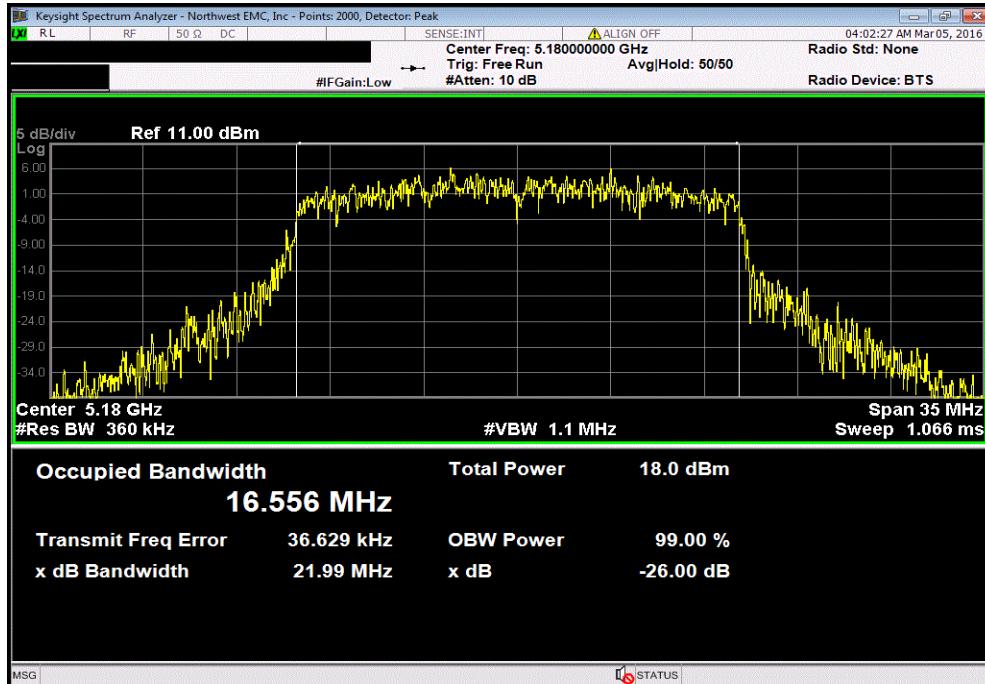


5150 - 5250 MHz Band, Low Channel, Ch 36 - 5180 MHz, 802.11(n) MCS0		
	Value	Limit
	26.153 MHz	N/A

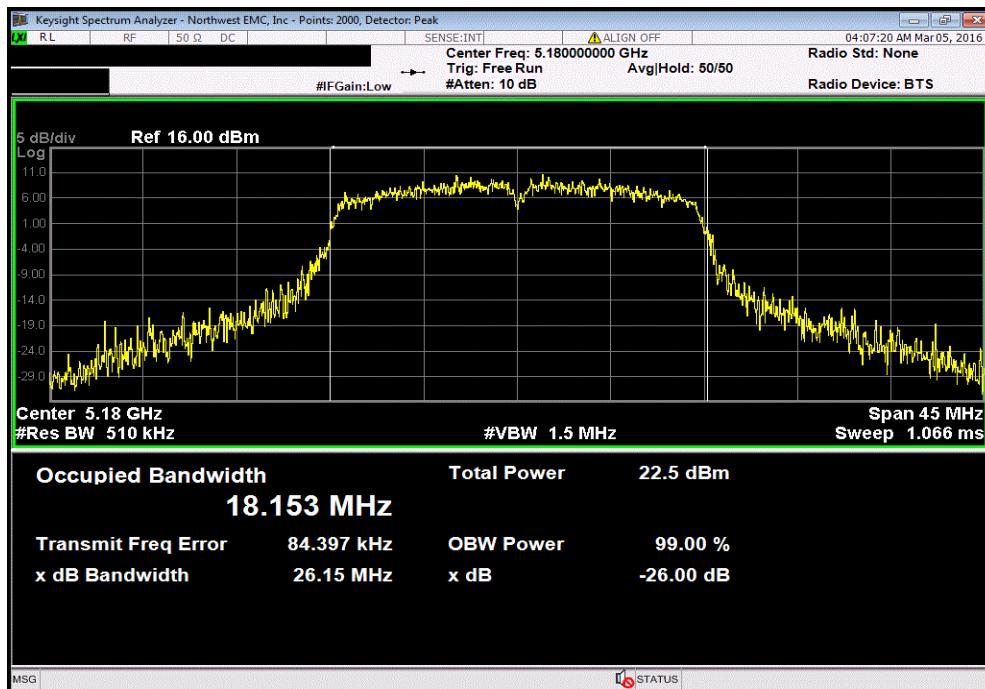


EMISSION BANDWIDTH

5150 - 5250 MHz Band, Low Channel, Ch 36 - 5180 MHz, 802.11(n) MCS7		
	Value	Limit
	22.24 MHz	N/A

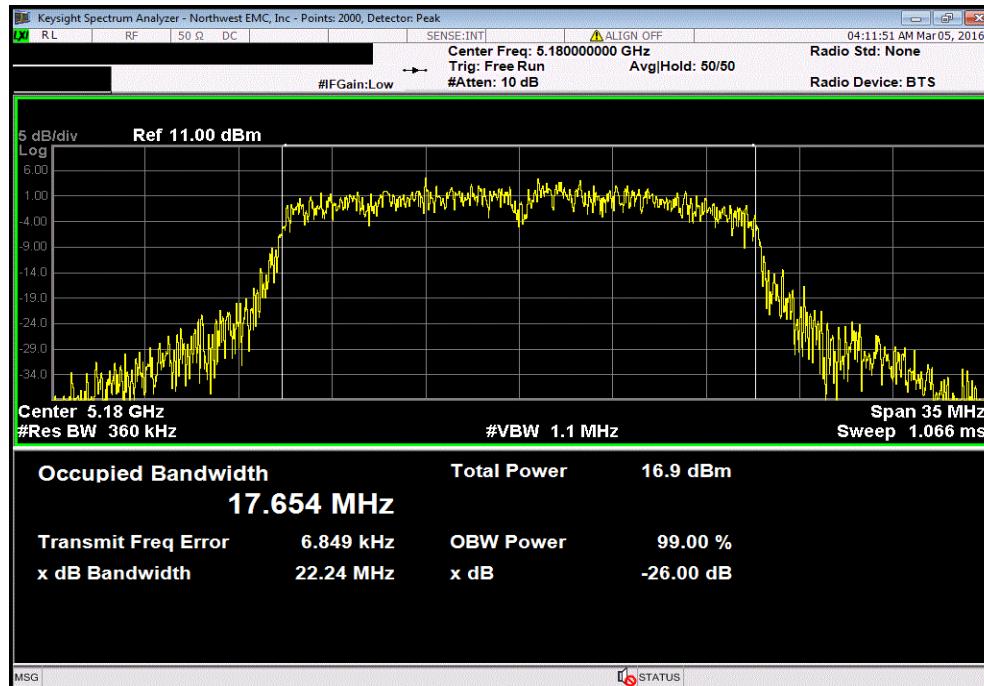


5150 - 5250 MHz Band, High Channel, Ch 48 - 5240 MHz, 802.11(a) 6 Mbps		
	Value	Limit
	24.868 MHz	N/A

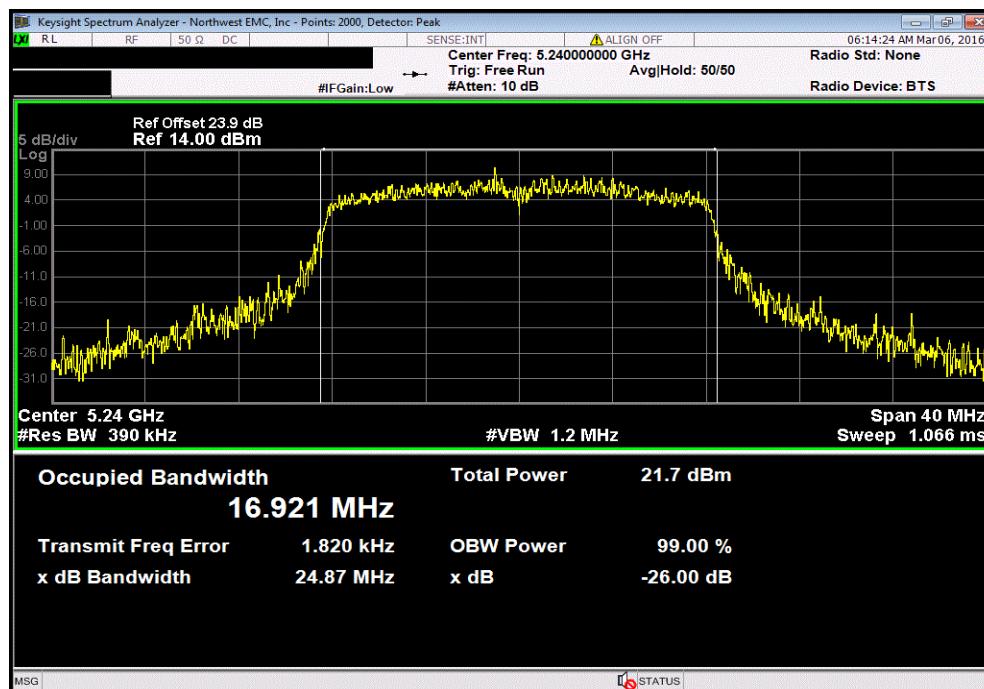


EMISSION BANDWIDTH

5150 - 5250 MHz Band, High Channel, Ch 48 - 5240 MHz, 802.11(a) 36 Mbps		
	Value	Limit
	23.044 MHz	N/A

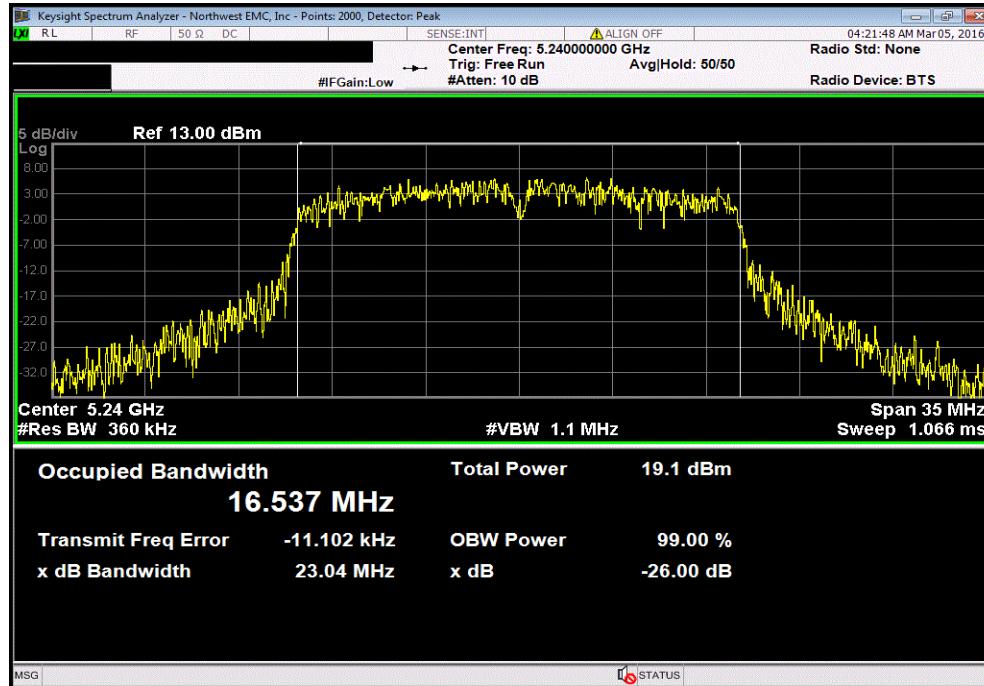


5150 - 5250 MHz Band, High Channel, Ch 48 - 5240 MHz, 802.11(a) 54 Mbps		
	Value	Limit
	21.222 MHz	N/A

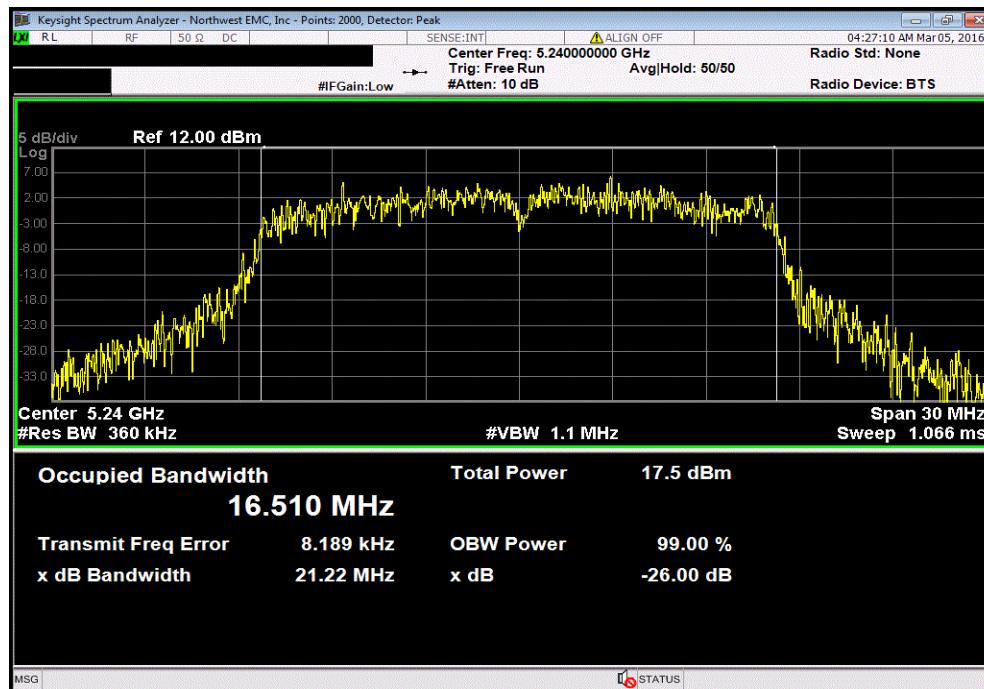


EMISSION BANDWIDTH

5150 - 5250 MHz Band, High Channel, Ch 48 - 5240 MHz, 802.11(n) MCS0		
	Value	Limit
	29.746 MHz	N/A

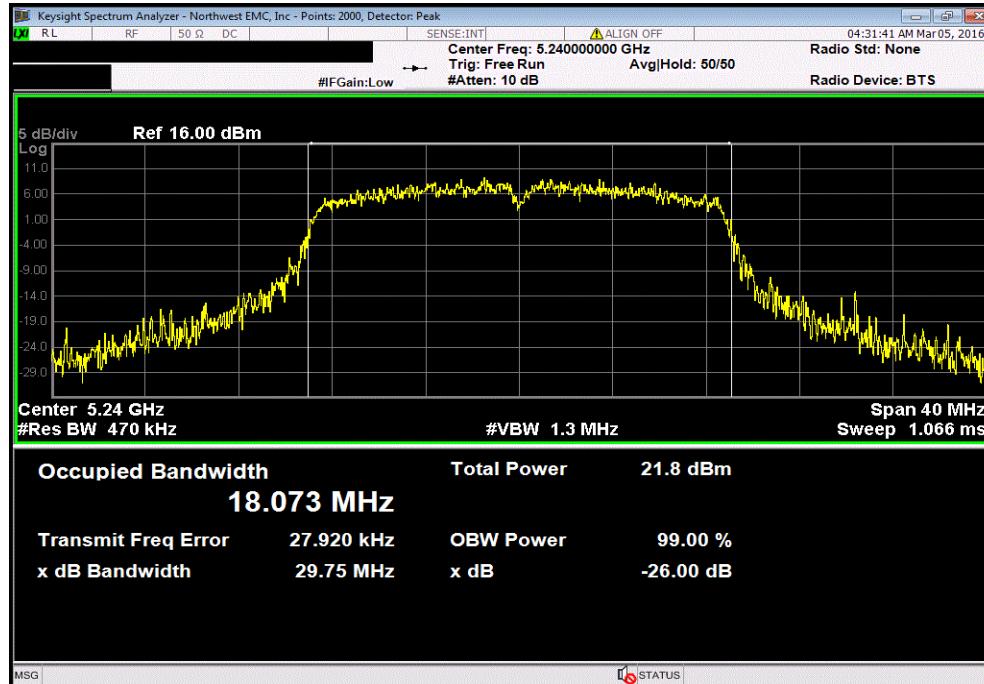


5150 - 5250 MHz Band, High Channel, Ch 48 - 5240 MHz, 802.11(n) MCS7		
	Value	Limit
	23.814 MHz	N/A

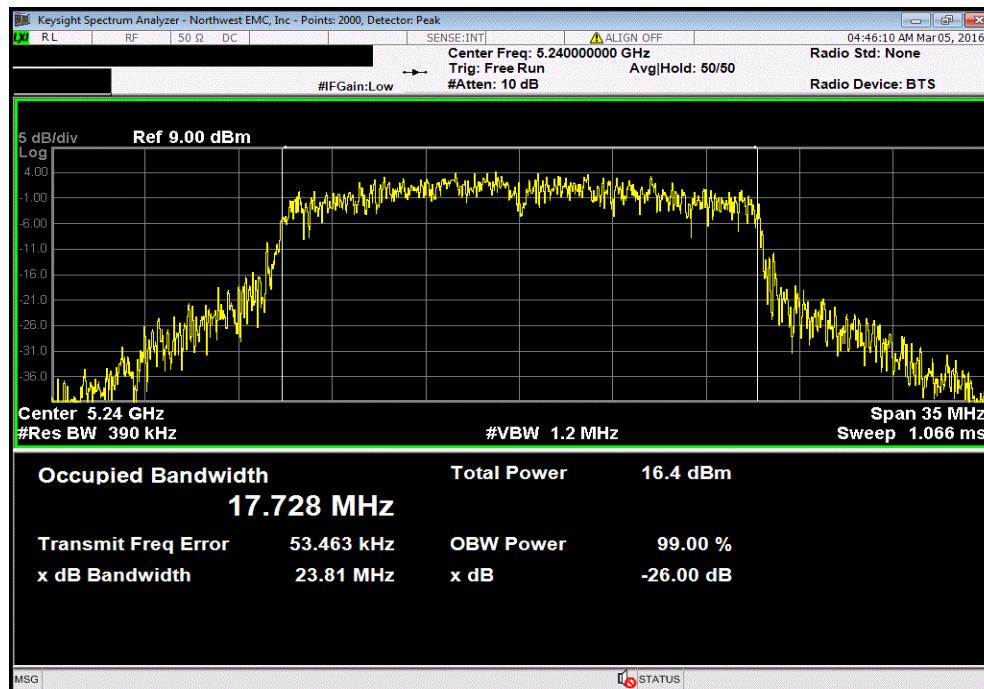


EMISSION BANDWIDTH

5250 - 5350 MHz Band, Low Channel, Ch 52 - 5260 MHz, 802.11(a) 6 Mbps		
	Value	Limit
	29.423 MHz	N/A

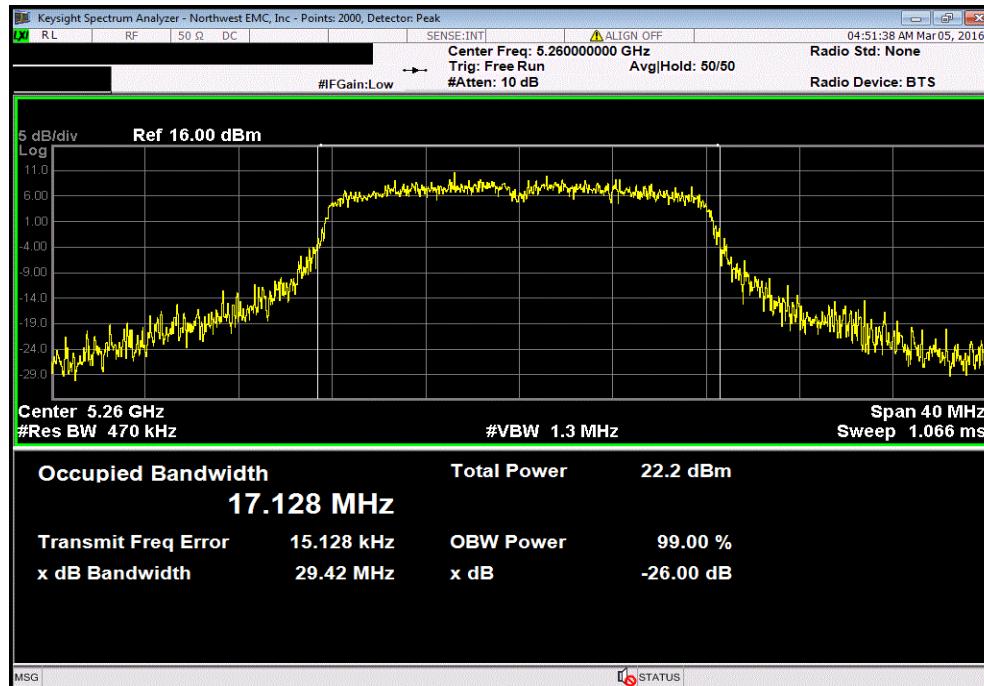


5250 - 5350 MHz Band, Low Channel, Ch 52 - 5260 MHz, 802.11(a) 36 Mbps		
	Value	Limit
	22.573 MHz	N/A

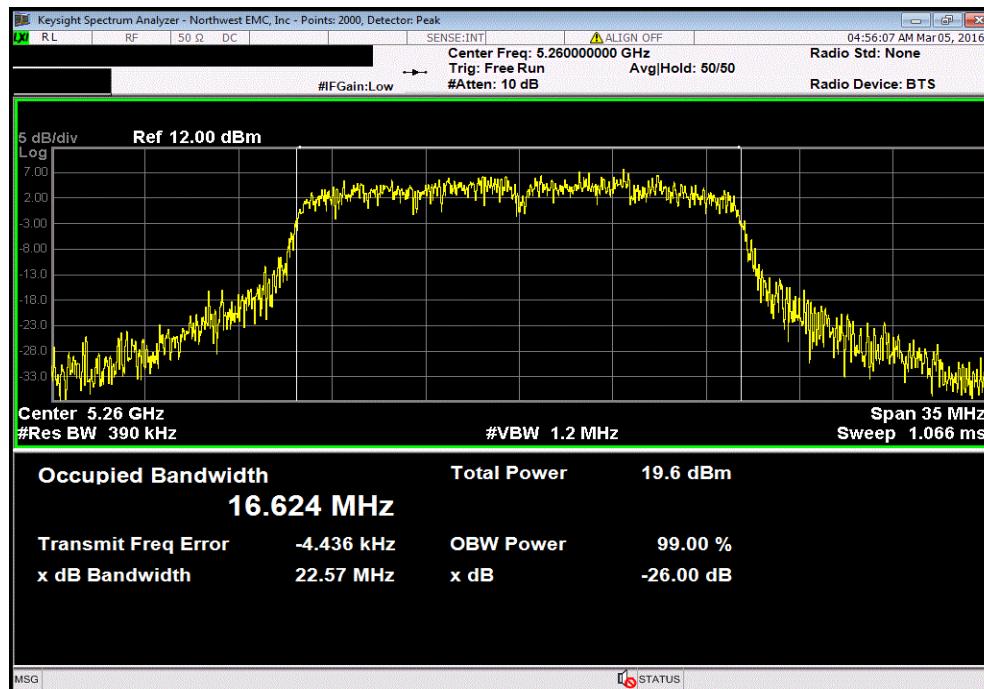


EMISSION BANDWIDTH

5250 - 5350 MHz Band, Low Channel, Ch 52 - 5260 MHz, 802.11(a) 54 Mbps		
	Value	Limit
	21.164 MHz	N/A

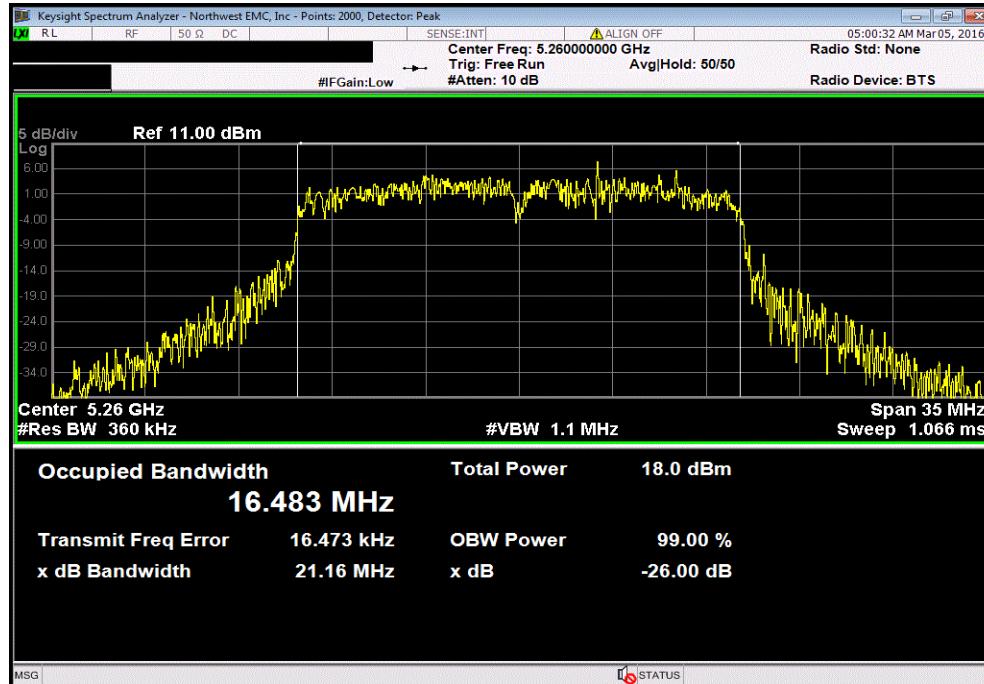


5250 - 5350 MHz Band, Low Channel, Ch 52 - 5260 MHz, 802.11(n) MCS0		
	Value	Limit
	29.87 MHz	N/A

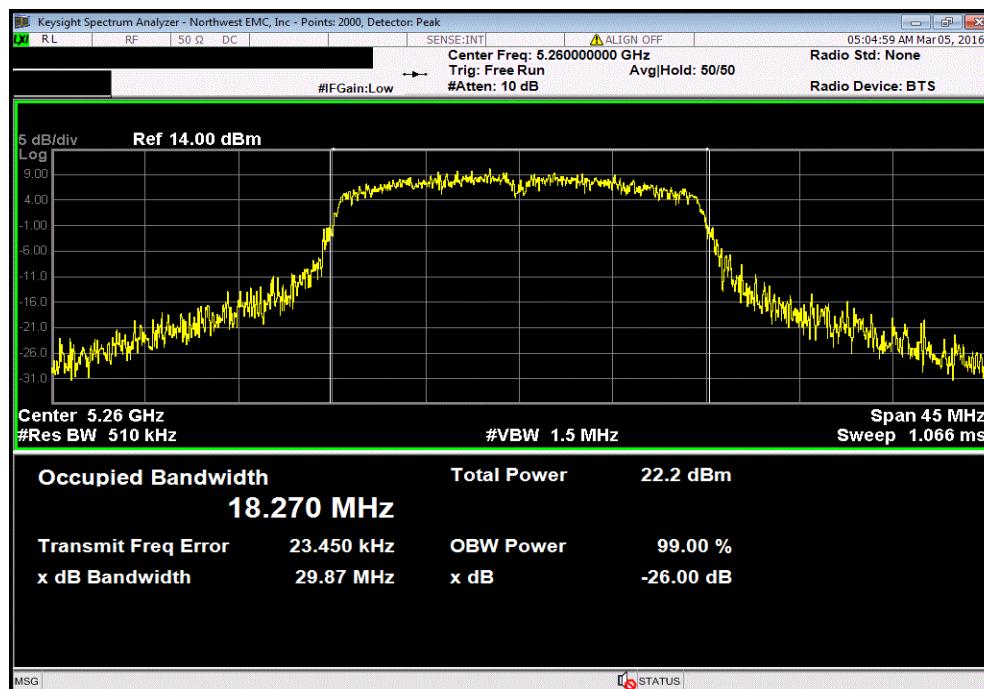


EMISSION BANDWIDTH

5250 - 5350 MHz Band, Low Channel, Ch 52 - 5260 MHz, 802.11(n) MCS7		
	Value	Limit
	22.053 MHz	N/A

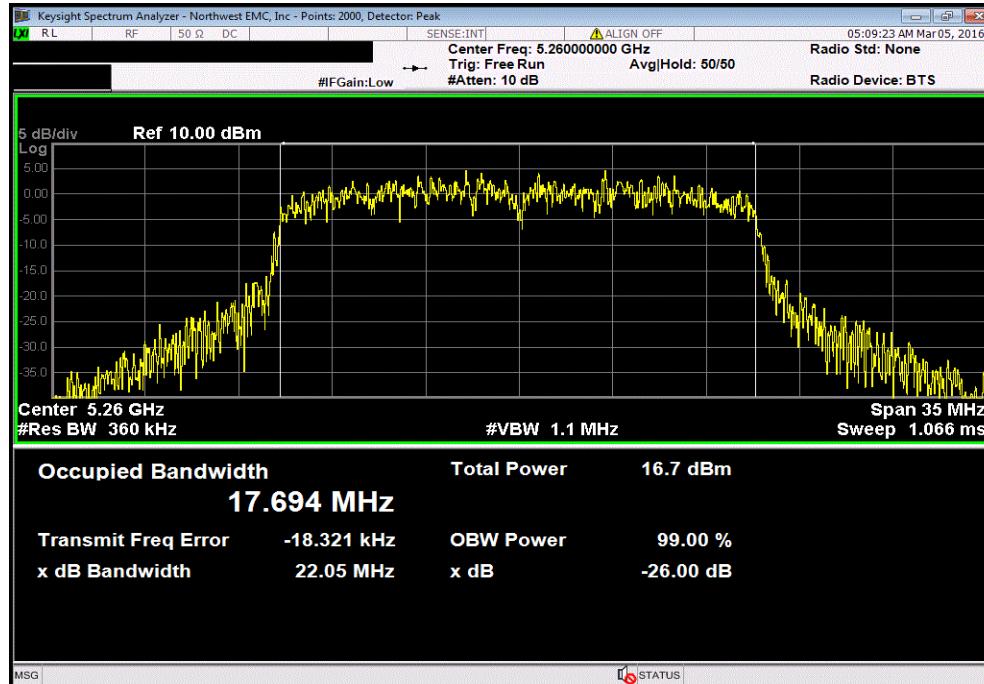


5250 - 5350 MHz Band, High Channel, Ch 64 - 5320 MHz, 802.11(a) 6 Mbps		
	Value	Limit
	28.96 MHz	N/A

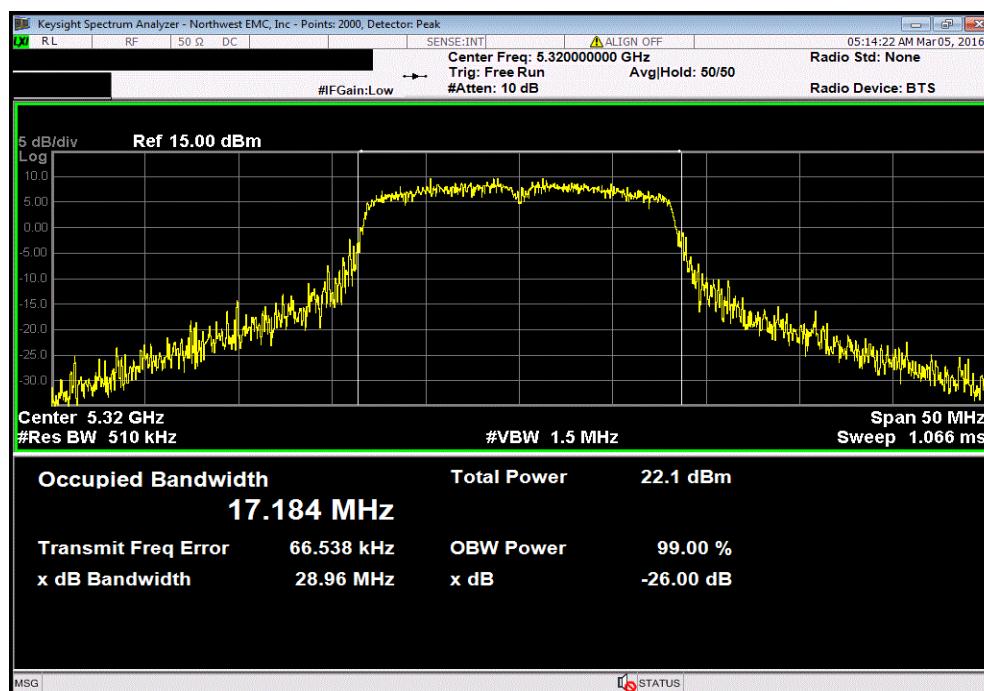


EMISSION BANDWIDTH

5250 - 5350 MHz Band, High Channel, Ch 64 - 5320 MHz, 802.11(a) 36 Mbps		
	Value	Limit
	21.876 MHz	N/A

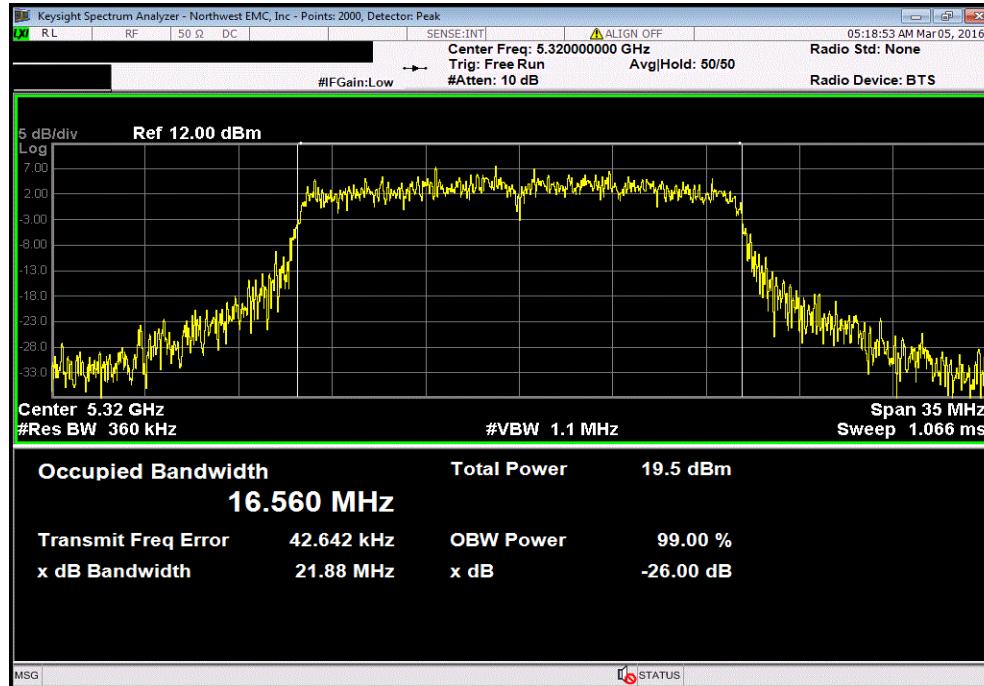


5250 - 5350 MHz Band, High Channel, Ch 64 - 5320 MHz, 802.11(a) 54 Mbps		
	Value	Limit
	21.516 MHz	N/A

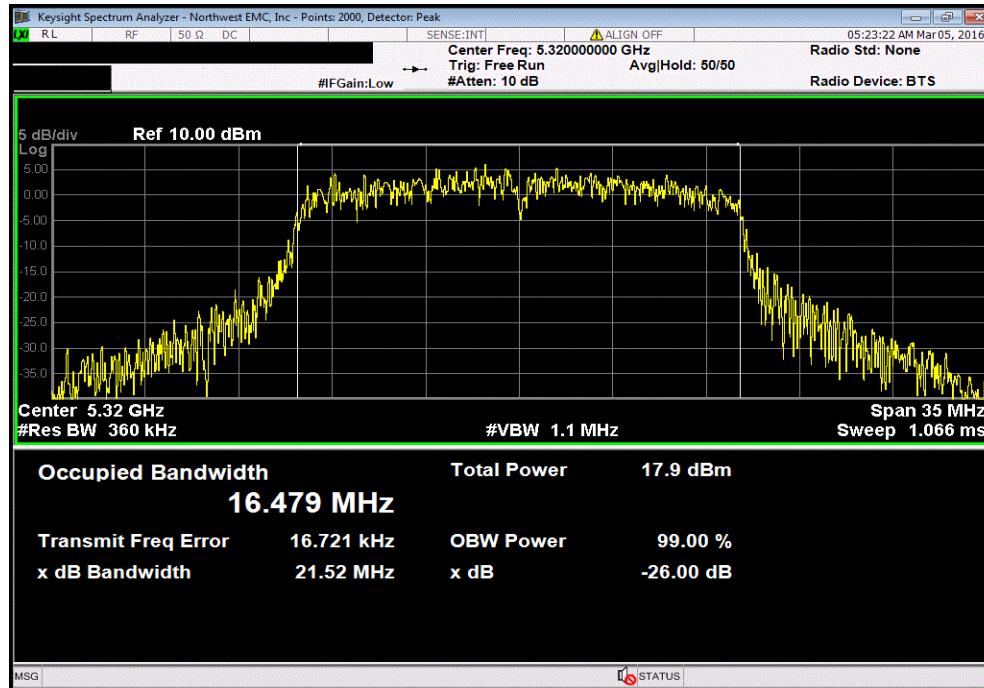


EMISSION BANDWIDTH

5250 - 5350 MHz Band, High Channel, Ch 64 - 5320 MHz, 802.11(n) MCS0			
	Value	Limit	Result
	29.206 MHz	N/A	N/A

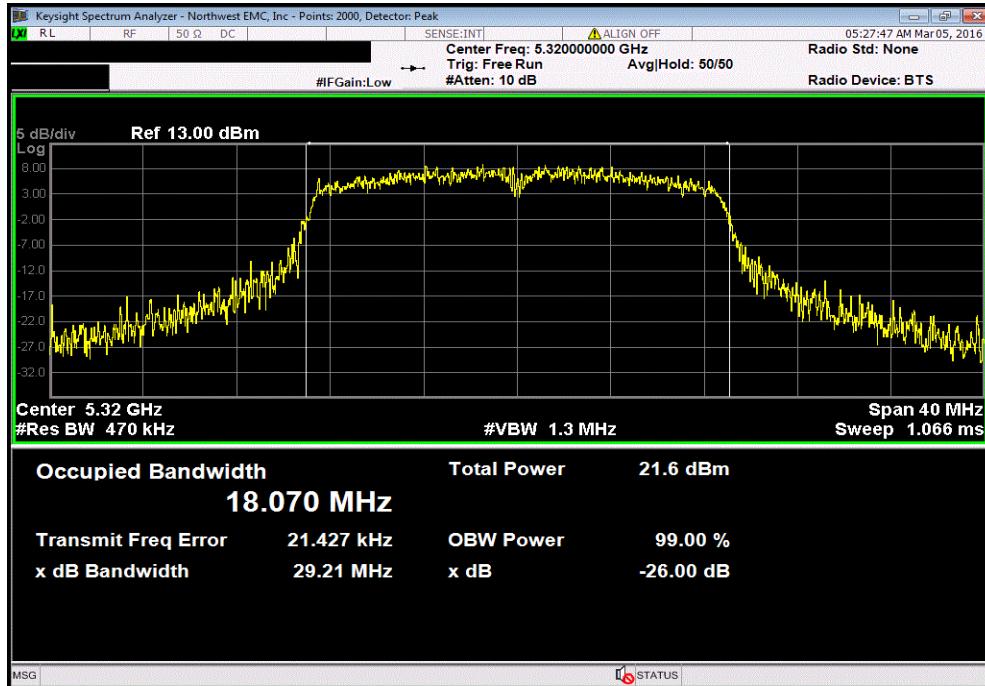


5250 - 5350 MHz Band, High Channel, Ch 64 - 5320 MHz, 802.11(n) MCS7			
	Value	Limit	Result
	22.618 MHz	N/A	N/A

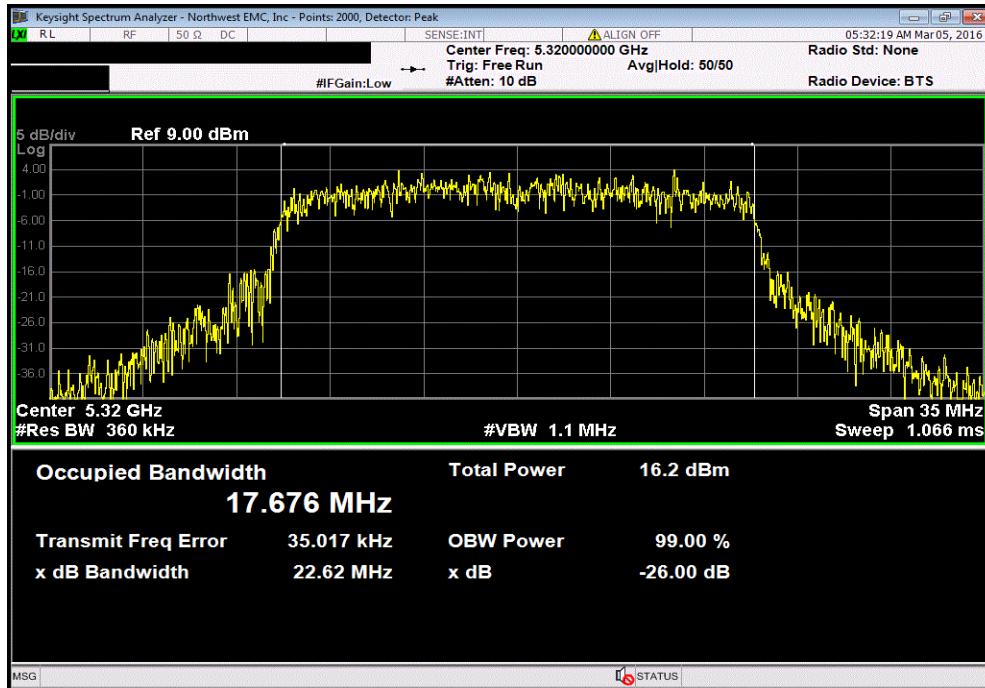


EMISSION BANDWIDTH

5470 - 5725 MHz Band, Low Channel, Ch 100 - 5500 MHz, 802.11(a) 6 Mbps			
	Value	Limit	Result
	30.186 MHz	N/A	N/A

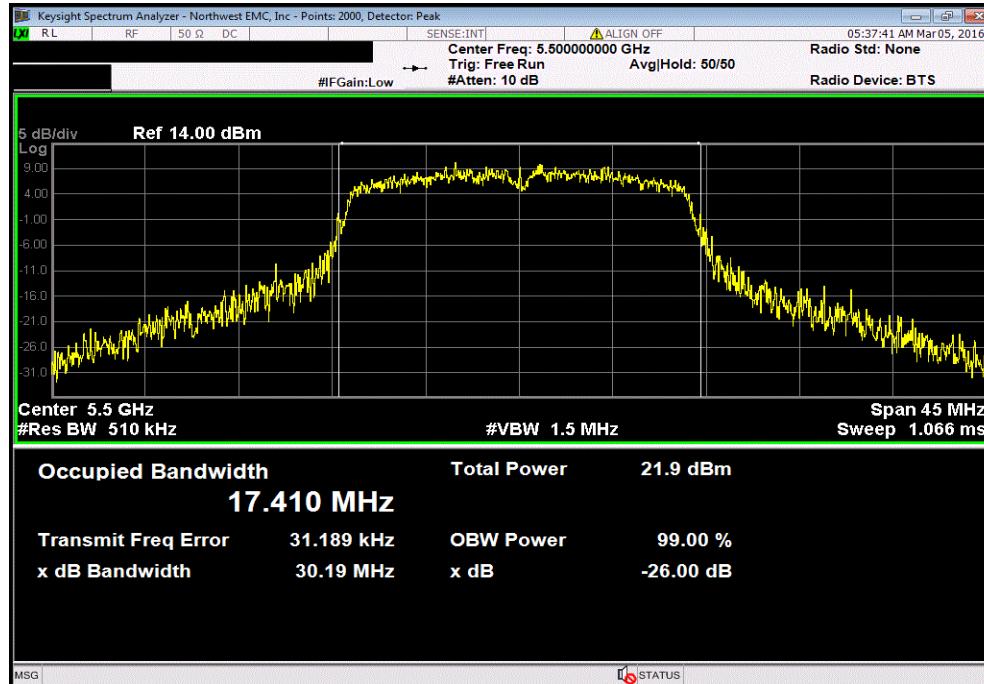


5470 - 5725 MHz Band, Low Channel, Ch 100 - 5500 MHz, 802.11(a) 36 Mbps			
	Value	Limit	Result
	23.547 MHz	N/A	N/A

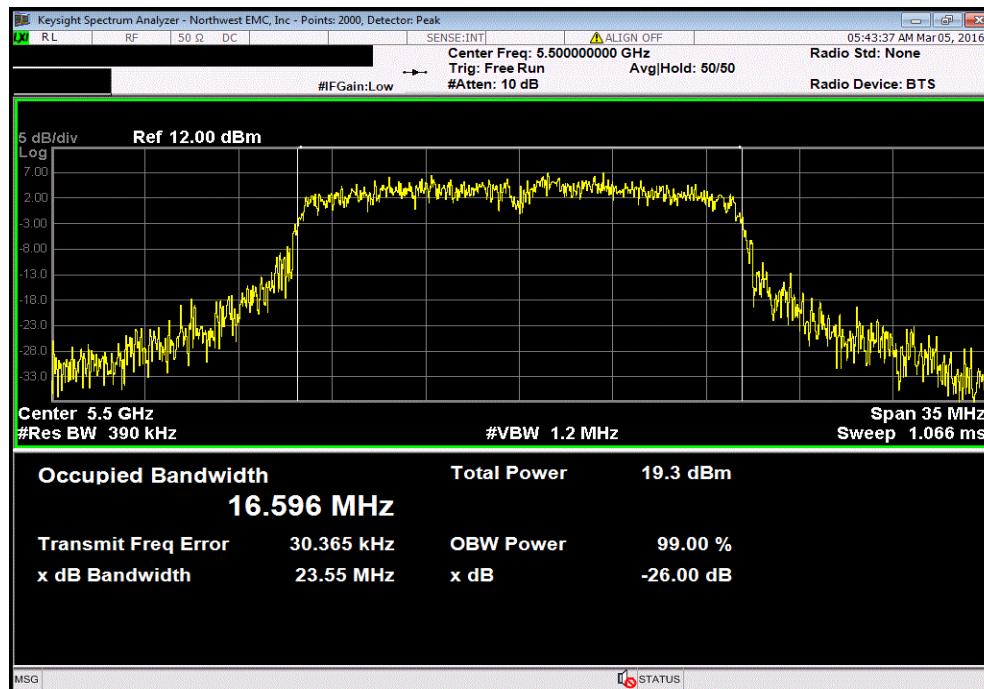


EMISSION BANDWIDTH

5470 - 5725 MHz Band, Low Channel, Ch 100 - 5500 MHz, 802.11(a) 54 Mbps		
	Value	Limit
	21.769 MHz	N/A

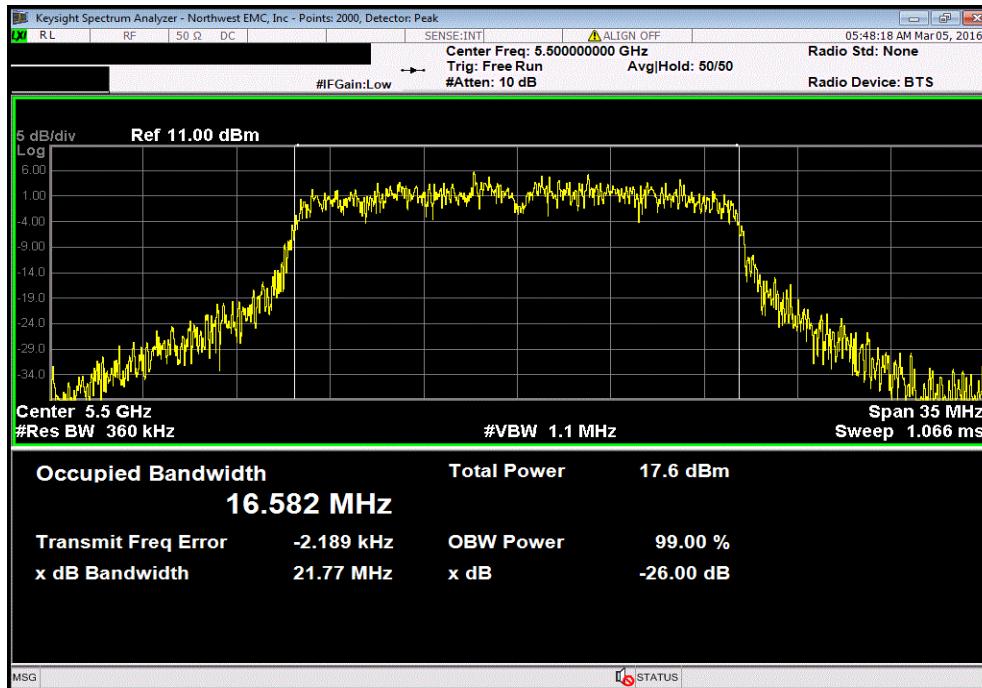


5470 - 5725 MHz Band, Low Channel, Ch 100 - 5500 MHz, 802.11(n) MCS0		
	Value	Limit
	33.119 MHz	N/A

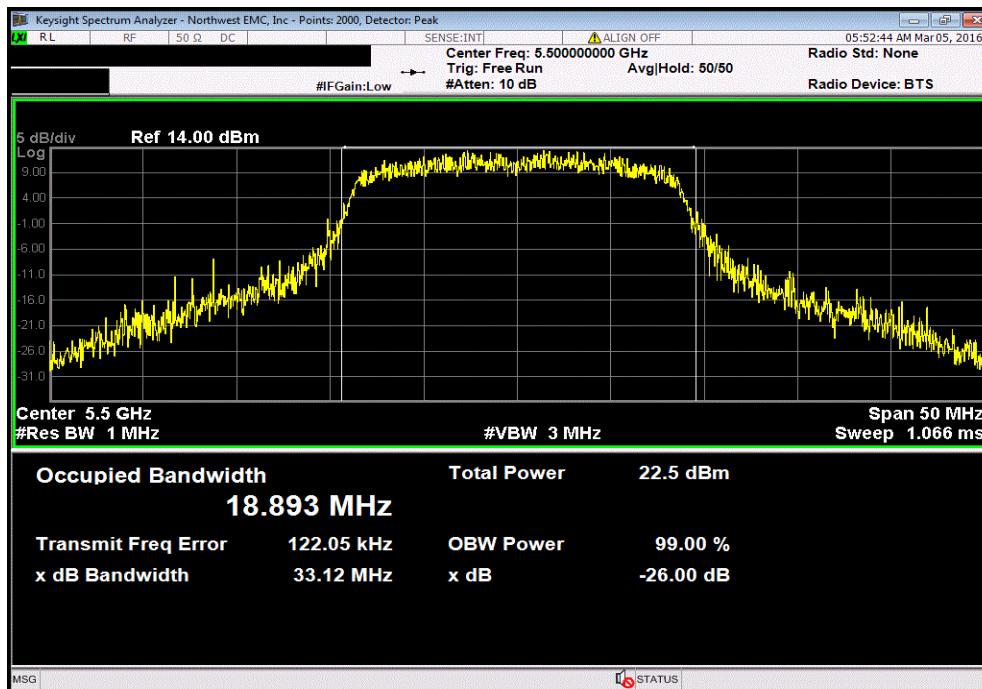


EMISSION BANDWIDTH

5470 - 5725 MHz Band, Low Channel, Ch 100 - 5500 MHz, 802.11(n) MCS7		
	Value	Limit
	23.127 MHz	N/A

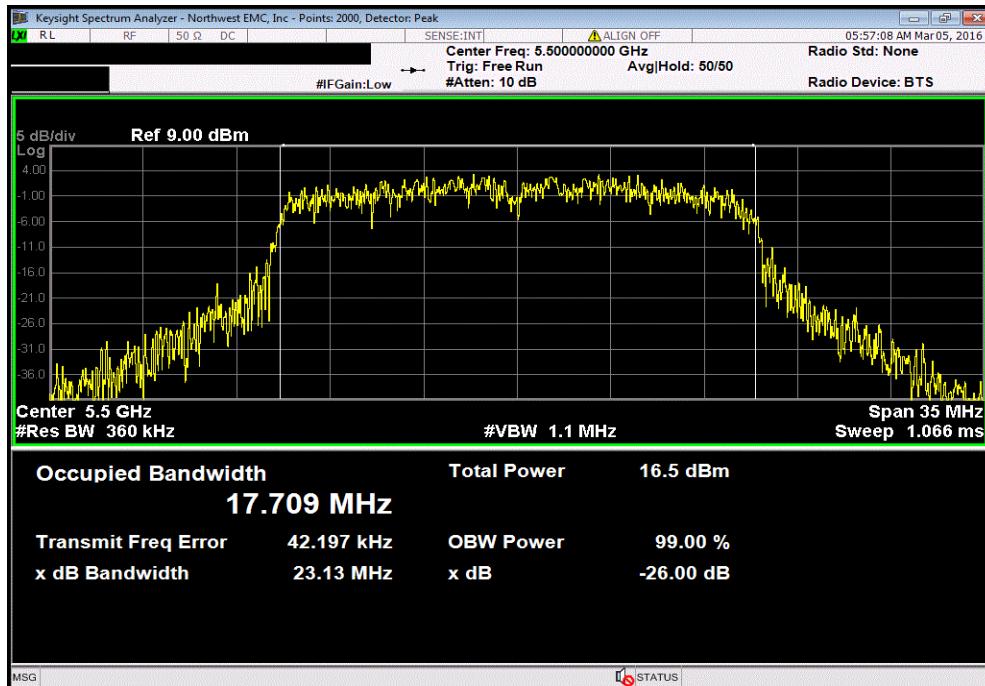


5470 - 5725 MHz Band, Mid Channel, Ch 120 - 5600 MHz, 802.11(a) 6 Mbps		
	Value	Limit
	27.398 MHz	N/A

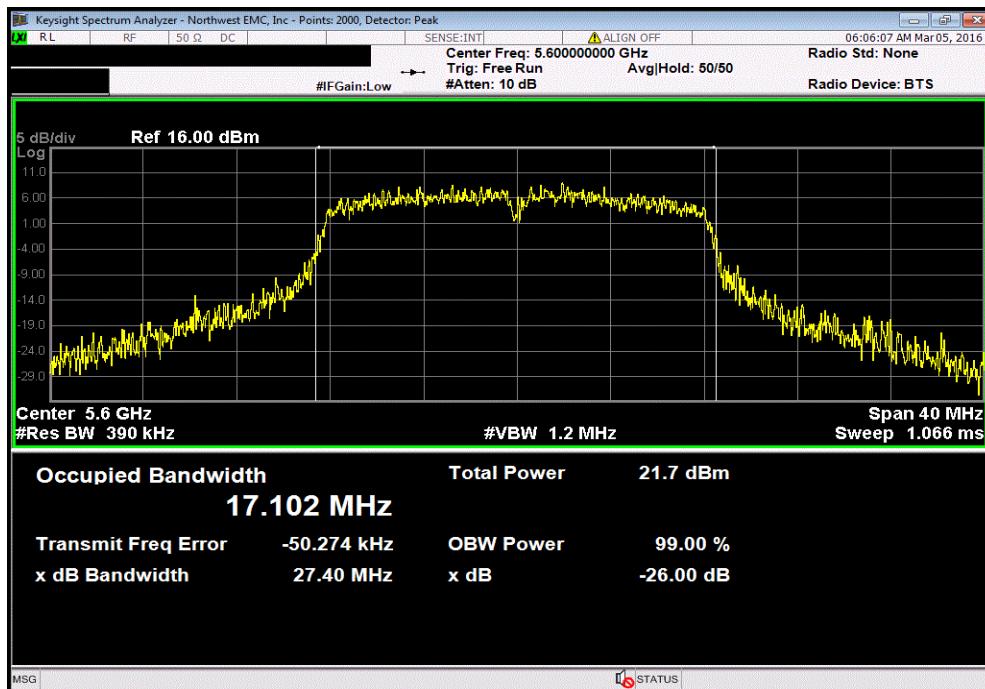


EMISSION BANDWIDTH

5470 - 5725 MHz Band, Mid Channel, Ch 120 - 5600 MHz, 802.11(a) 36 Mbps		
	Value	Limit
	21.998 MHz	N/A

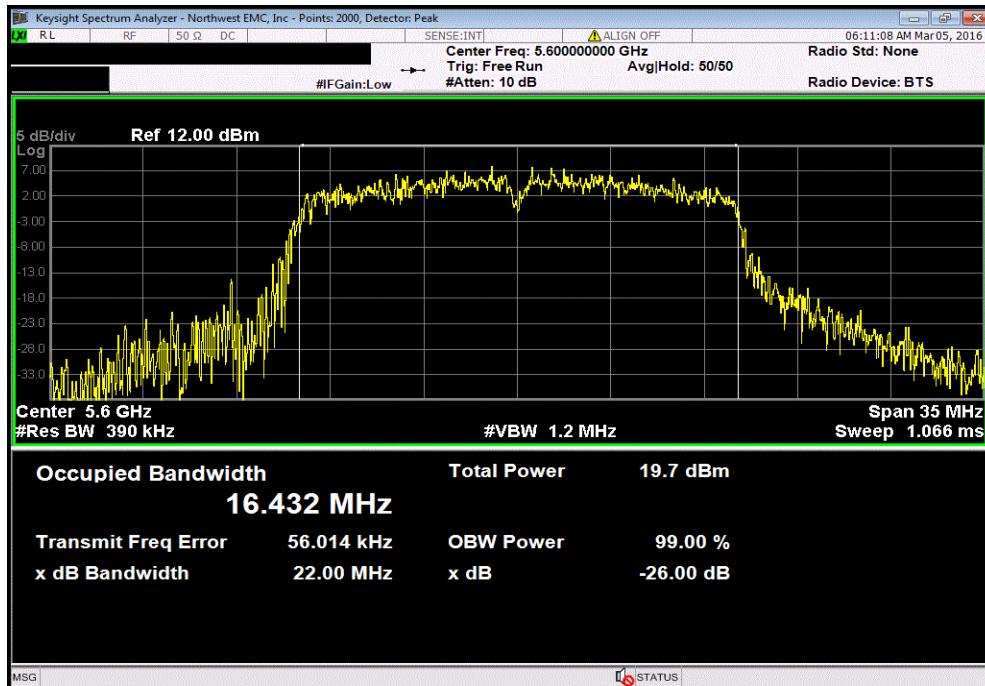


5470 - 5725 MHz Band, Mid Channel, Ch 120 - 5600 MHz, 802.11(a) 54 Mbps		
	Value	Limit
	22.454 MHz	N/A

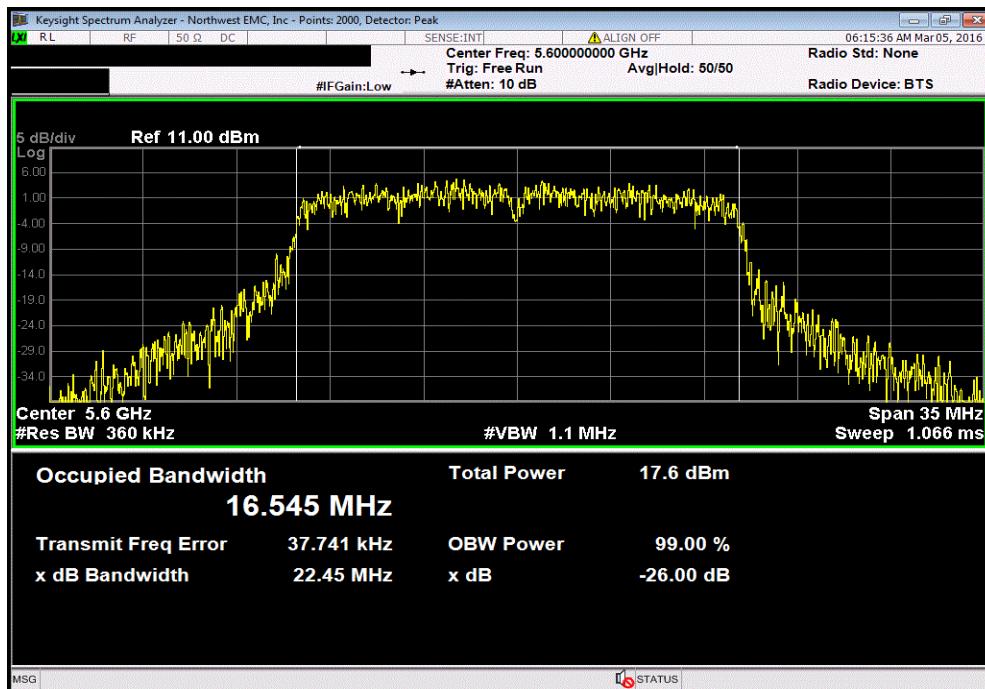


EMISSION BANDWIDTH

5470 - 5725 MHz Band, Mid Channel, Ch 120 - 5600 MHz, 802.11(n) MCS0		
	Value	Limit
	30.94 MHz	N/A

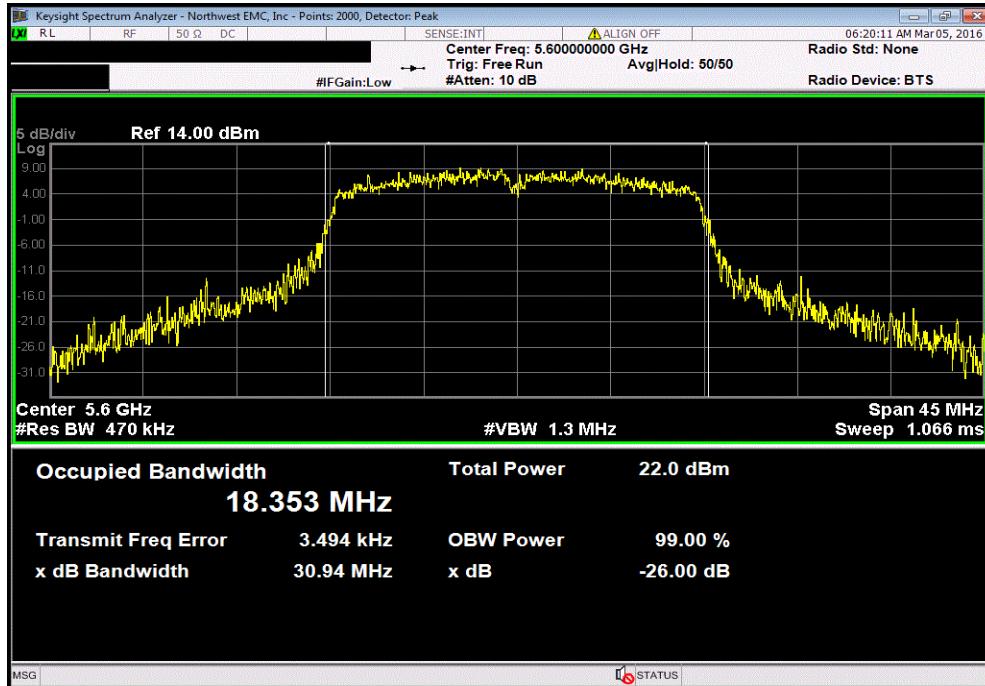


5470 - 5725 MHz Band, Mid Channel, Ch 120 - 5600 MHz, 802.11(n) MCS7		
	Value	Limit
	23.078 MHz	N/A

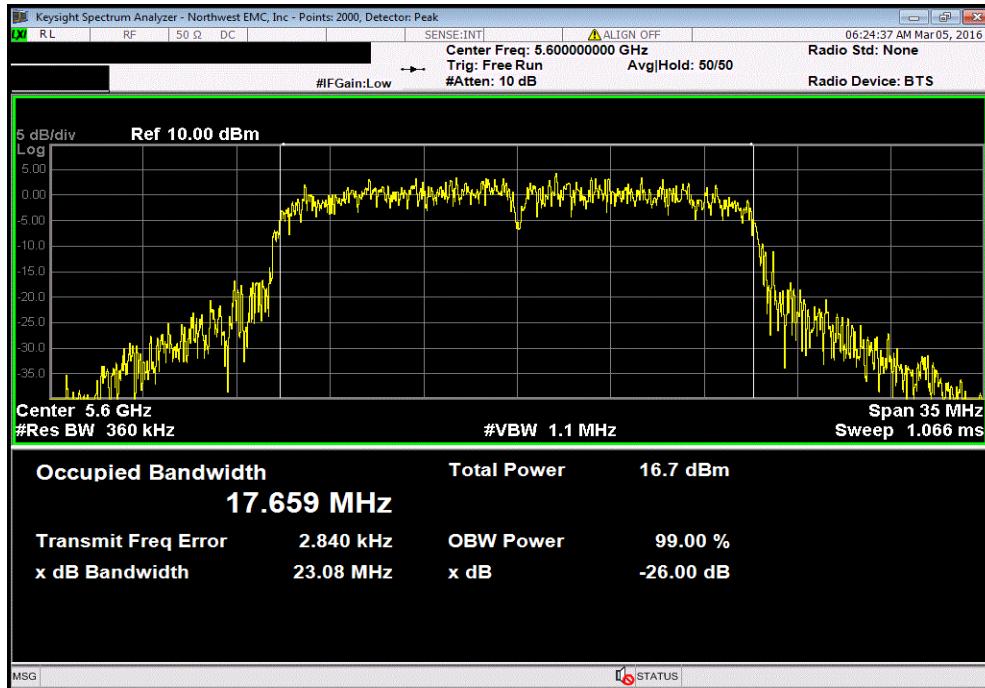


EMISSION BANDWIDTH

5470 - 5725 MHz Band, High Channel, Ch 140 - 5700 MHz, 802.11(a) 6 Mbps		
	Value	Limit
	35.483 MHz	N/A

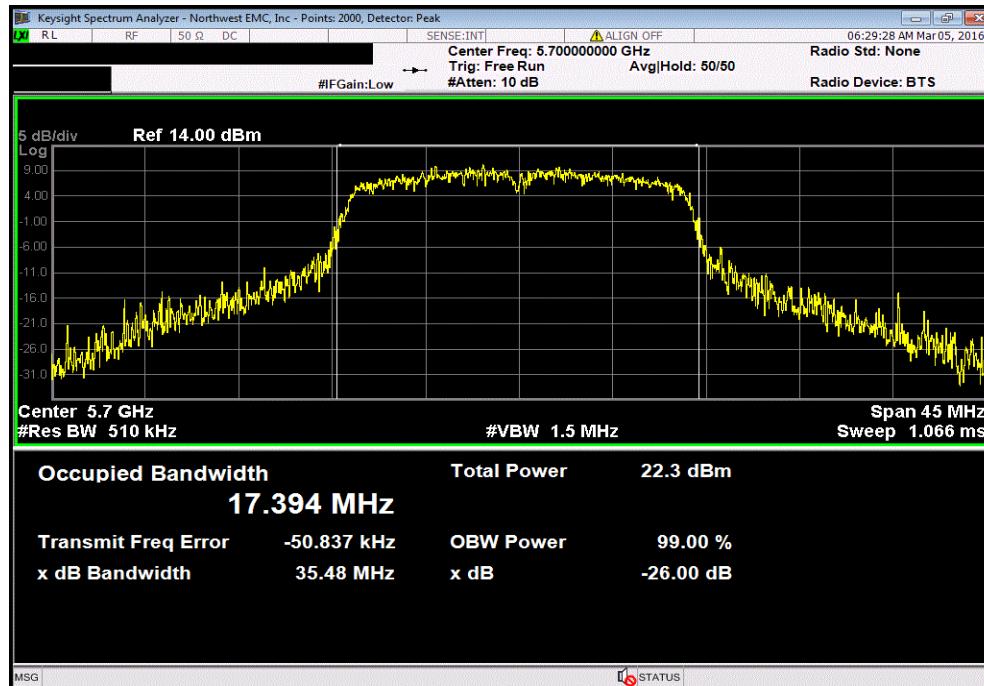


5470 - 5725 MHz Band, High Channel, Ch 140 - 5700 MHz, 802.11(a) 36 Mbps		
	Value	Limit
	24.349 MHz	N/A

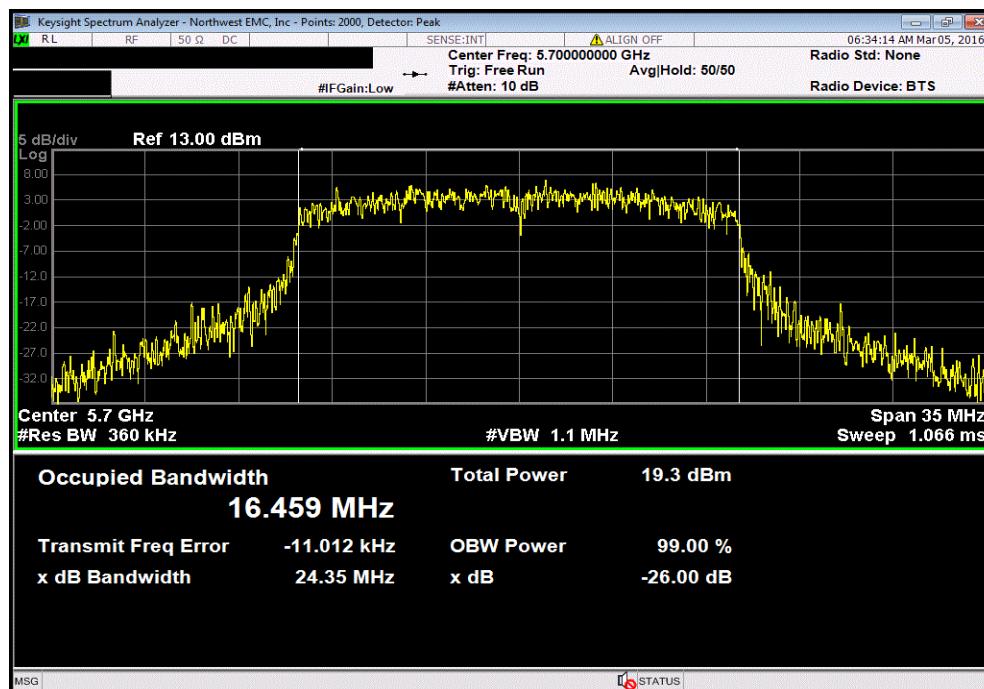


EMISSION BANDWIDTH


5470 - 5725 MHz Band, High Channel, Ch 140 - 5700 MHz, 802.11(a) 54 Mbps		
	Value	Limit
	22.137 MHz	N/A
	N/A	N/A

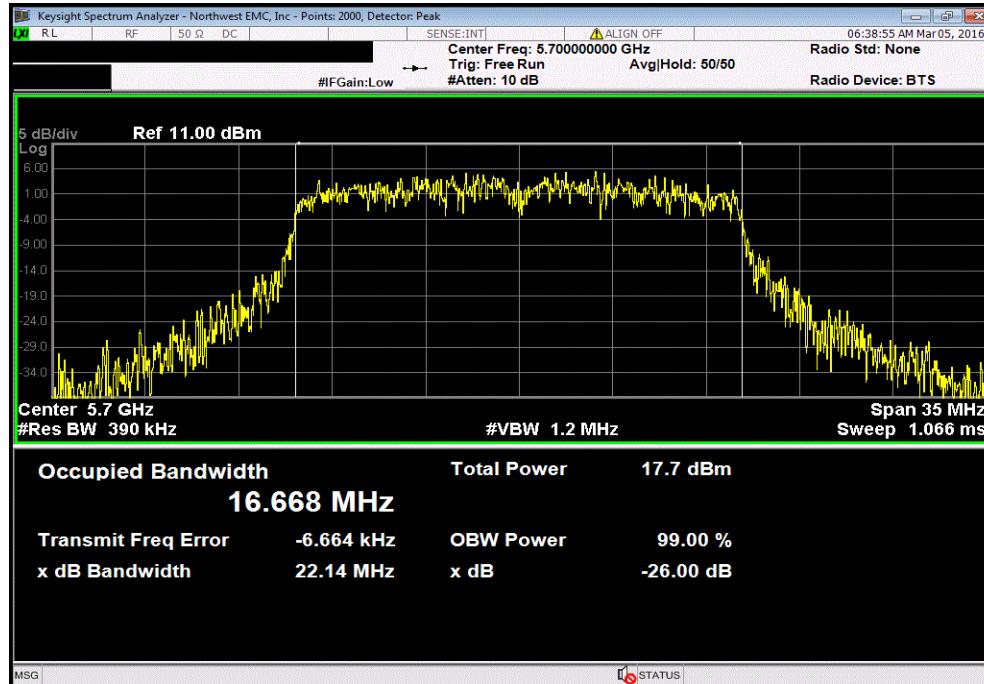

5470 - 5725 MHz Band, High Channel, Ch 140 - 5700 MHz, 802.11(n) MCS0		
	Value	Limit
	32.409 MHz	N/A
	N/A	N/A

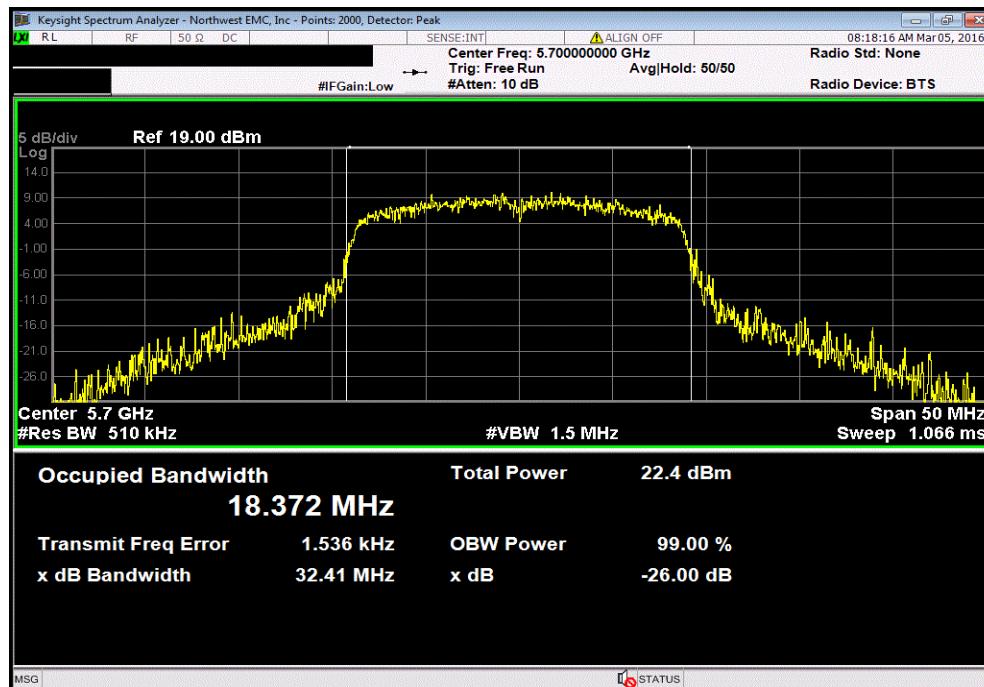

EMISSION BANDWIDTH

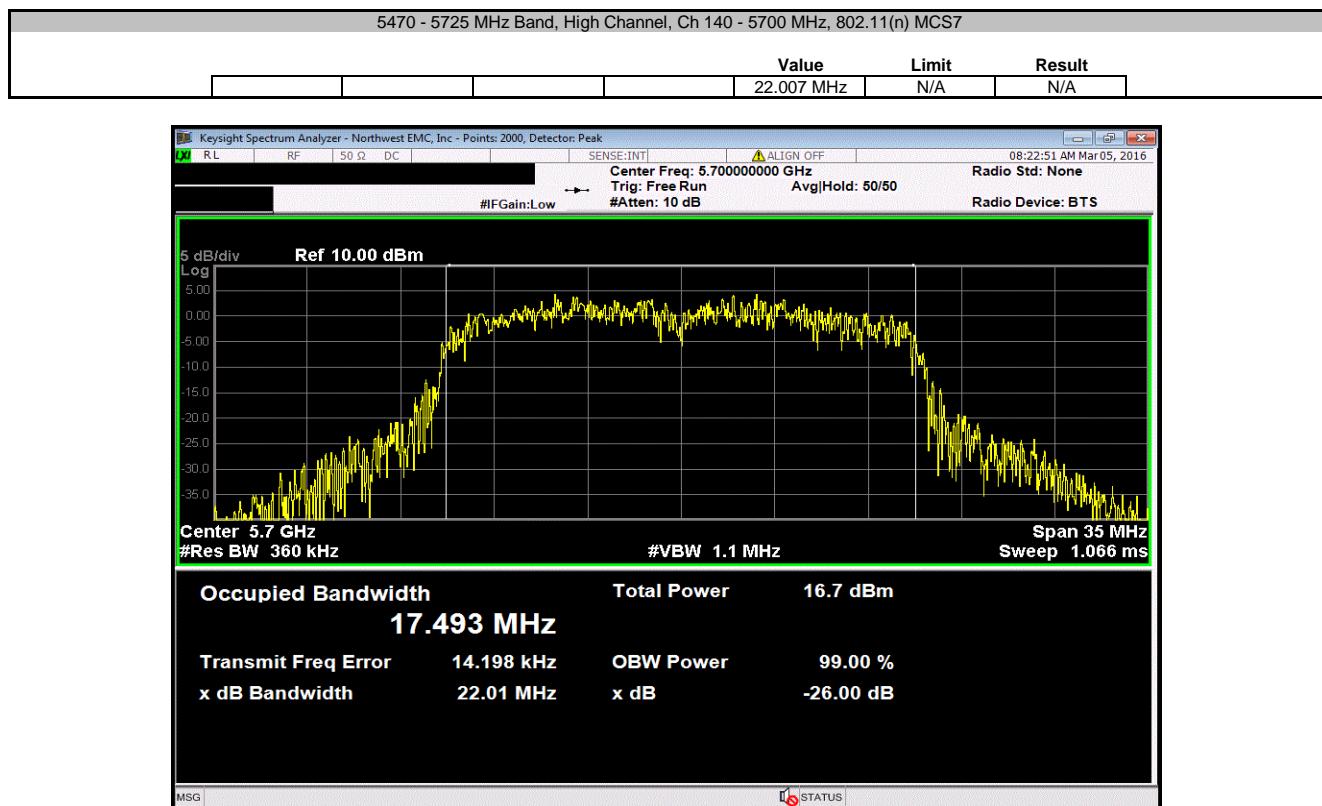

OCCUPIED BANDWIDTH

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval (mo)
Block - DC	Fairview Microwave	SD3379	AMI	9/18/2015	12
Attenuator	S.M. Electronics	SA26B-20	RFW	2/26/2016	12
Cable	ESM Cable Corp.	TTBJ141 KMKM-72	MNU	9/18/2015	12
Power Supply - DC	Agilent	U8002A	TPZ	NCR	0
Meter - Multimeter	Fluke	117/EFSP	MLR	5/27/2015	36
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	2/10/2015	15
Generator - Signal	Agilent	N5183A	TIK	10/17/2014	36

TEST DESCRIPTION

The transmit frequencies and data rates listed in the datasheet were measured in each band utilized by the radio. The transmit power was set to its default maximum.

A direct connection was made between the RF output of the EUT and a spectrum analyzer. Attenuation and a DC block were used. The reference level offset on the spectrum analyzer was adjusted to compensate for cable loss and the external attenuation used between the RF output and the spectrum analyzer input.

Per ANSI C63.10, the spectrum analyzer settings were as follows:

-RBW = 100 kHz

-VBW = $\geq 3 \times$ RBW

-Detector = Peak

-Trace mode = max hold

The spectrum analyzer occupied bandwidth measurement function was then used to measure the 6 dB emission bandwidth.


The 99.9% (approximate 26 dB) emission bandwidth (EBW) was also measured at the same time to be used for setting the channel power integration bandwidth during conducted output power testing.

OCCUPIED BANDWIDTH


EUT:	X Series		Work Order:	LGPD0171		
Serial Number:	1023259		Date:	03/07/16		
Customer:	ZOLL Medical Corp.		Temperature:	22°C		
Attendees:	None		Humidity:	27%		
Project:	None		Barometric Pres.:	985.4		
Tested by:	Jared Ison	Power:	15 VDC	Job Site:	MN08	
TEST SPECIFICATIONS			Test Method			
FCC 15.407:2016			ANSI C63.10:2013			
COMMENTS						
None						
DEVIATIONS FROM TEST STANDARD						
None						
Configuration #	2	Signature		Value	Limit (>)	Result
5725 - 5785 MHz Band						
Low Channel, Ch 149 - 5745 MHz						
802.11(a) 6 Mbps 13.459 MHz 500 kHz Pass						
802.11(a) 36 Mbps 14.015 MHz 500 kHz Pass						
802.11(a) 54 Mbps 15.683 MHz 500 kHz Pass						
802.11(n) MCS0 14.686 MHz 500 kHz Pass						
802.11(n) MCS7 12.811 MHz 500 kHz Pass						
Mid Channel, Ch 157 - 5785 MHz						
802.11(a) 6 Mbps 13.855 MHz 500 kHz Pass						
802.11(a) 36 Mbps 14.68 MHz 500 kHz Pass						
802.11(a) 54 Mbps 15.791 MHz 500 kHz Pass						
802.11(n) MCS0 15.484 MHz 500 kHz Pass						
802.11(n) MCS7 13.247 MHz 500 kHz Pass						
High Channel, Ch 165 - 5825 MHz						
802.11(a) 6 Mbps 14.096 MHz 500 kHz Pass						
802.11(a) 36 Mbps 14.789 MHz 500 kHz Pass						
802.11(a) 54 Mbps 15.432 MHz 500 kHz Pass						
802.11(n) MCS0 17.027 MHz 500 kHz Pass						
802.11(n) MCS7 15.893 MHz 500 kHz Pass						

OCCUPIED BANDWIDTH

5725 - 5785 MHz Band, Low Channel, Ch 149 - 5745 MHz, 802.11(a) 6 Mbps		
	Value	Limit
	13.459 MHz	500 kHz

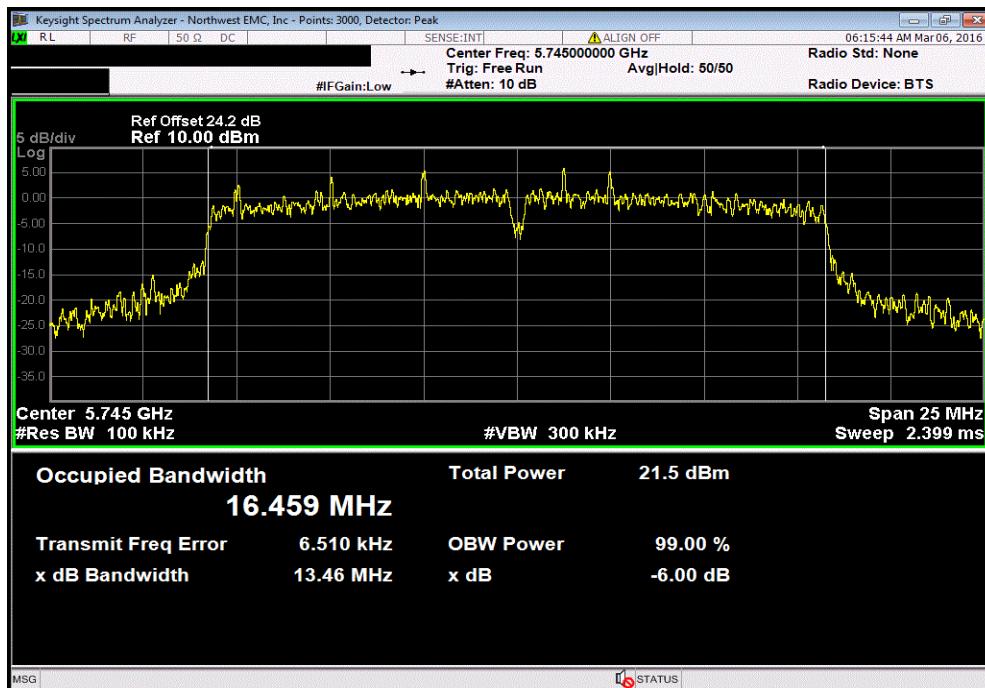


5725 - 5785 MHz Band, Low Channel, Ch 149 - 5745 MHz, 802.11(a) 36 Mbps		
	Value	Limit
	14.015 MHz	500 kHz

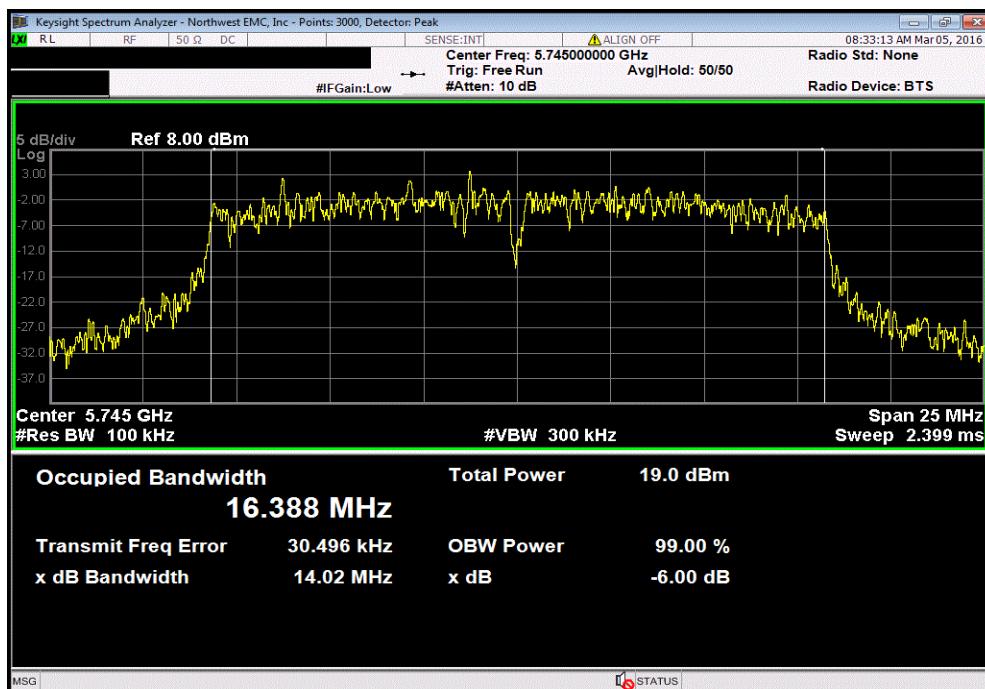


OCCUPIED BANDWIDTH

5725 - 5785 MHz Band, Low Channel, Ch 149 - 5745 MHz, 802.11(a) 54 Mbps			Limit
Value	(>)	Result	
15.683 MHz	500 kHz	Pass	

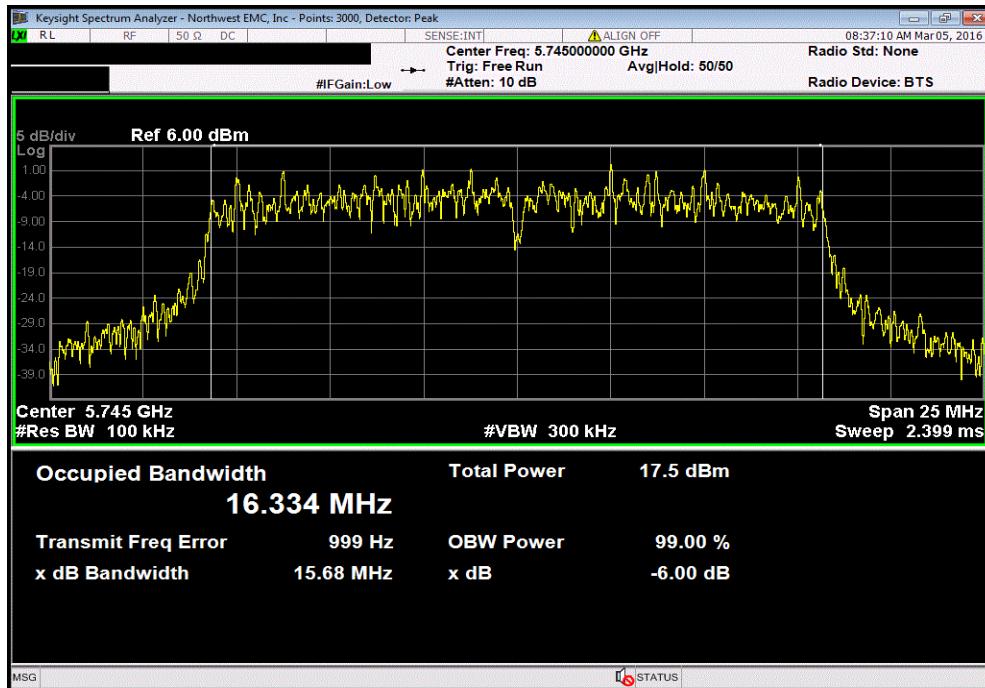


5725 - 5785 MHz Band, Low Channel, Ch 149 - 5745 MHz, 802.11(n) MCS0			Limit
Value	(>)	Result	
14.686 MHz	500 kHz	Pass	

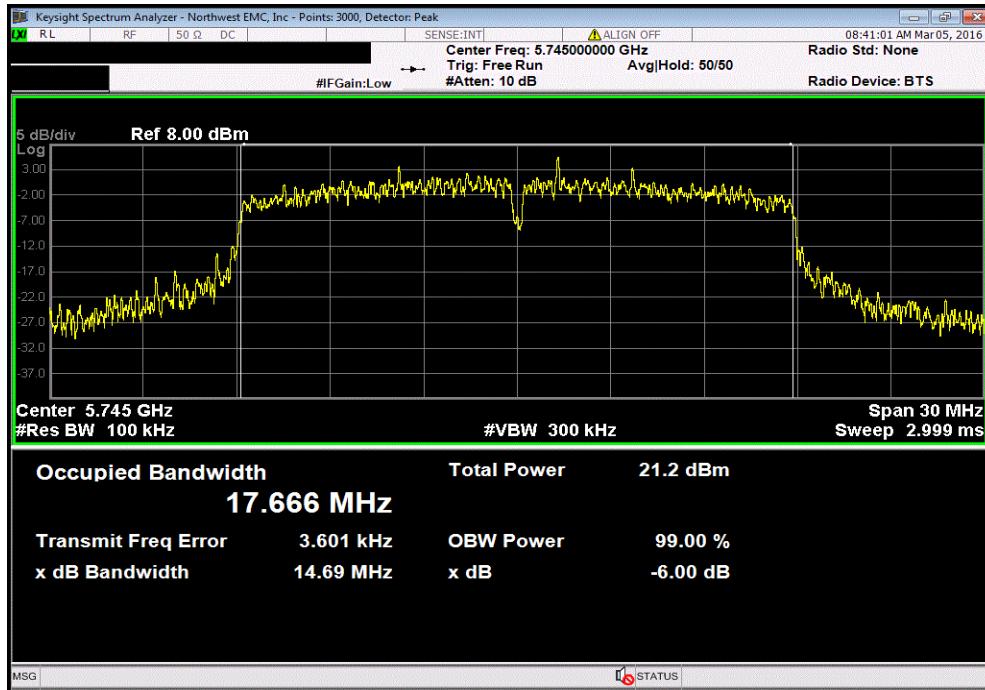


OCCUPIED BANDWIDTH

5725 - 5785 MHz Band, Low Channel, Ch 149 - 5745 MHz, 802.11(n) MCS7			Limit
Value	(>)	Result	
12.811 MHz	500 kHz	Pass	

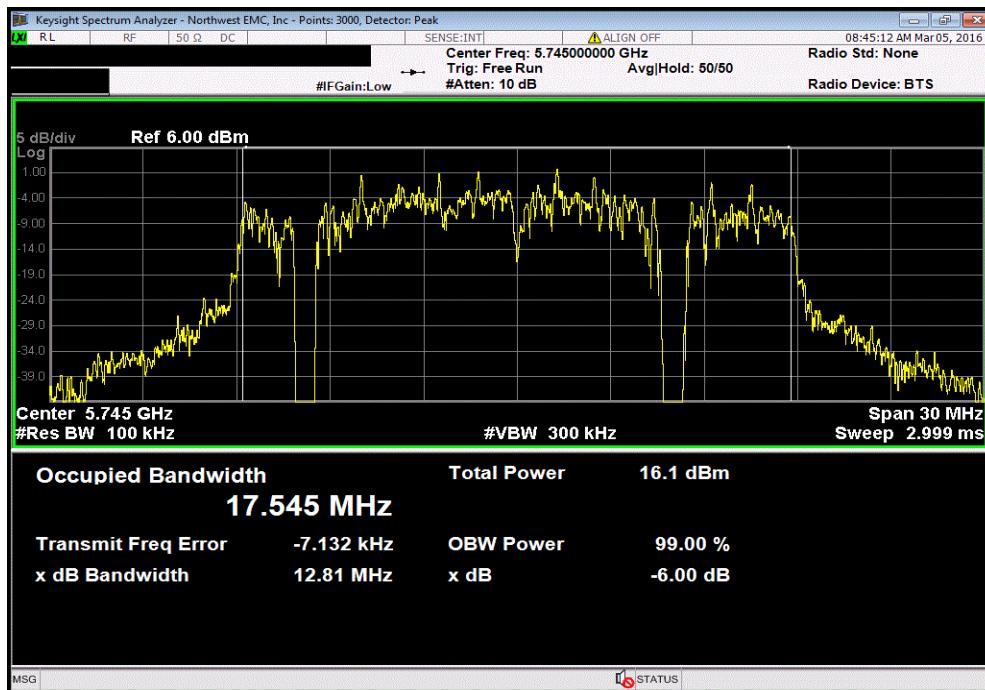


5725 - 5785 MHz Band, Mid Channel, Ch 157 - 5785 MHz, 802.11(a) 6 Mbps			Limit
Value	(>)	Result	
13.855 MHz	500 kHz	Pass	

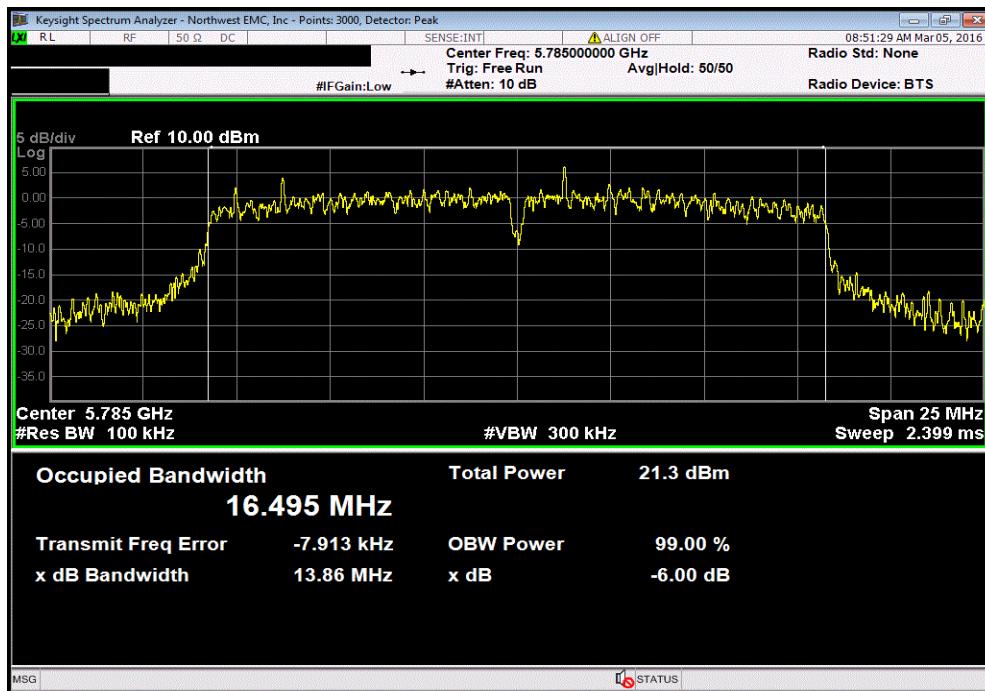


OCCUPIED BANDWIDTH

5725 - 5785 MHz Band, Mid Channel, Ch 157 - 5785 MHz, 802.11(a) 36 Mbps			Limit
Value	(>)	Result	
14.68 MHz	500 kHz	Pass	

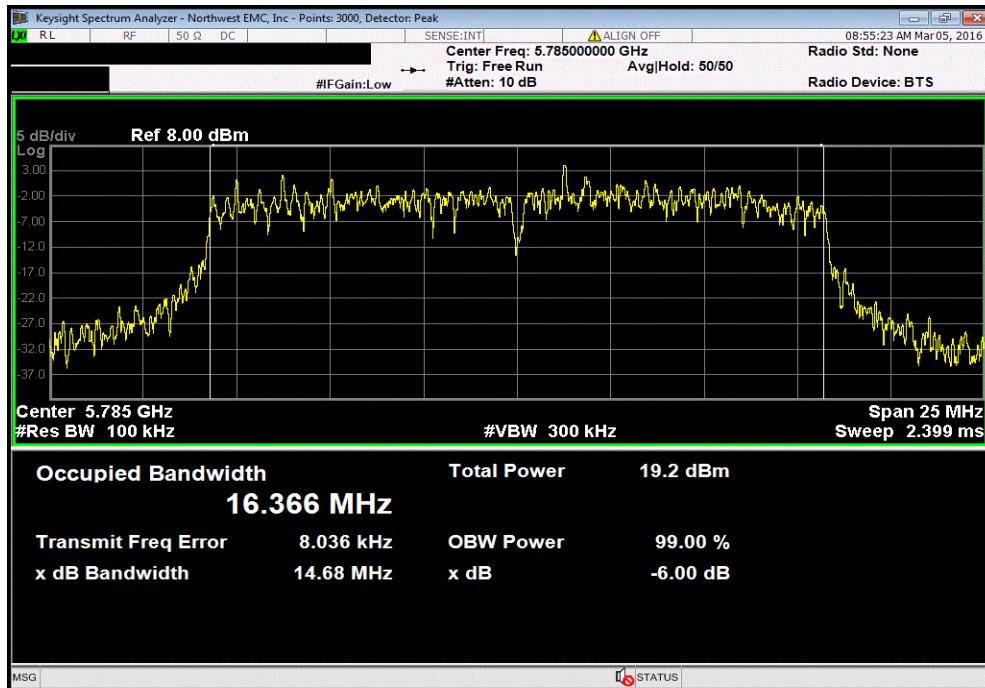


5725 - 5785 MHz Band, Mid Channel, Ch 157 - 5785 MHz, 802.11(a) 54 Mbps			Limit
Value	(>)	Result	
15.791 MHz	500 kHz	Pass	

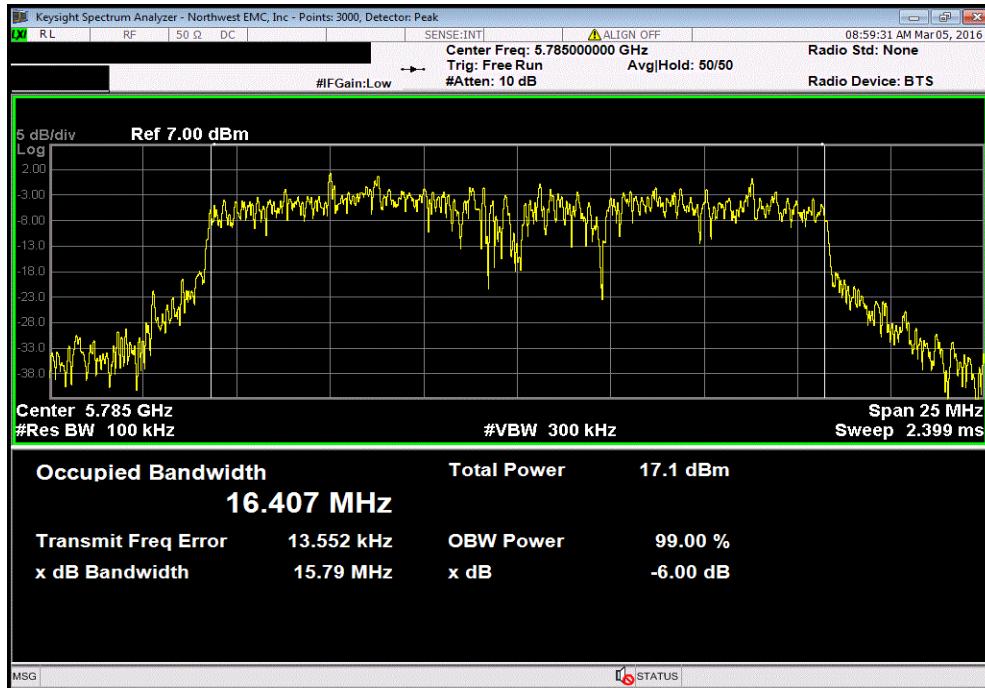


OCCUPIED BANDWIDTH

5725 - 5785 MHz Band, Mid Channel, Ch 157 - 5785 MHz, 802.11(n) MCS0		
	Value	Limit
	15.484 MHz	(>) 500 kHz

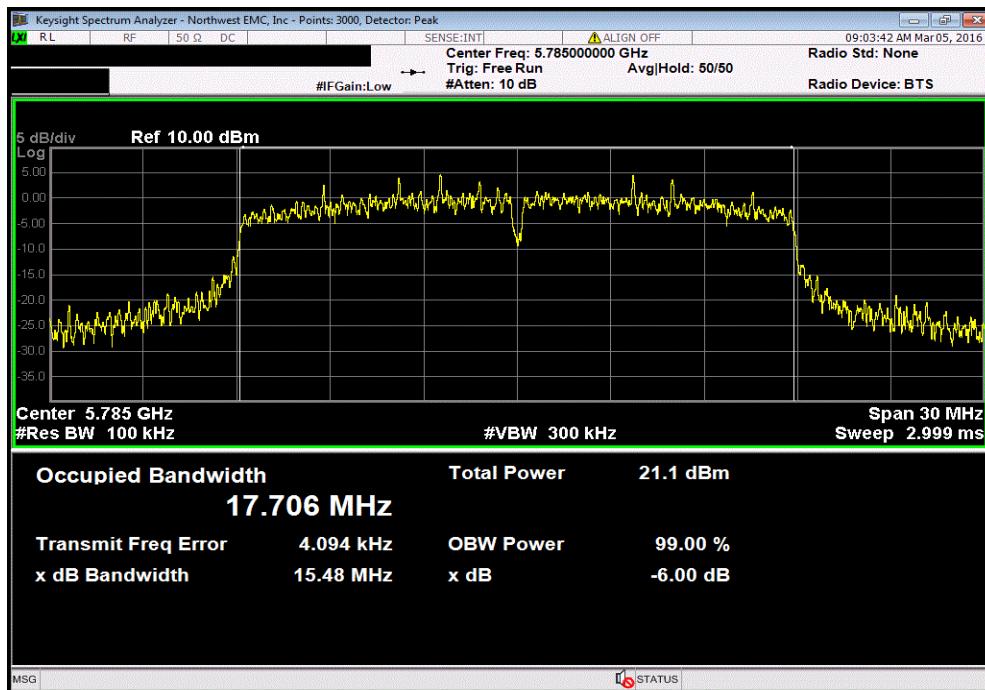


5725 - 5785 MHz Band, Mid Channel, Ch 157 - 5785 MHz, 802.11(n) MCS7		
	Value	Limit
	13.247 MHz	(>) 500 kHz

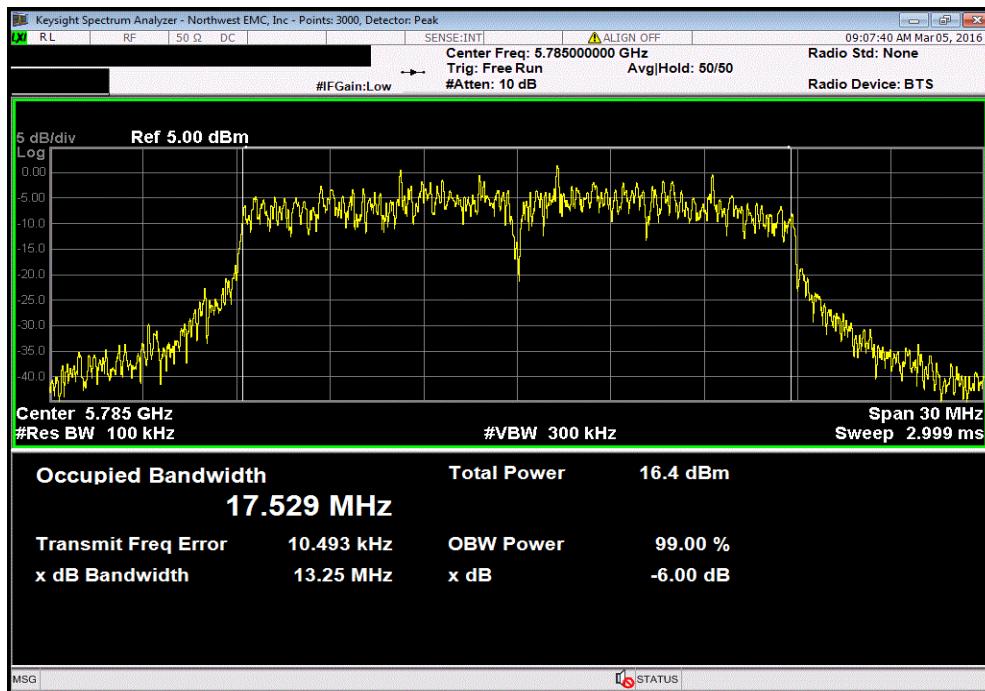


OCCUPIED BANDWIDTH

5725 - 5785 MHz Band, High Channel, Ch 165 - 5825 MHz, 802.11(a) 6 Mbps			Limit
Value	(>)	Result	
14.096 MHz	500 kHz	Pass	

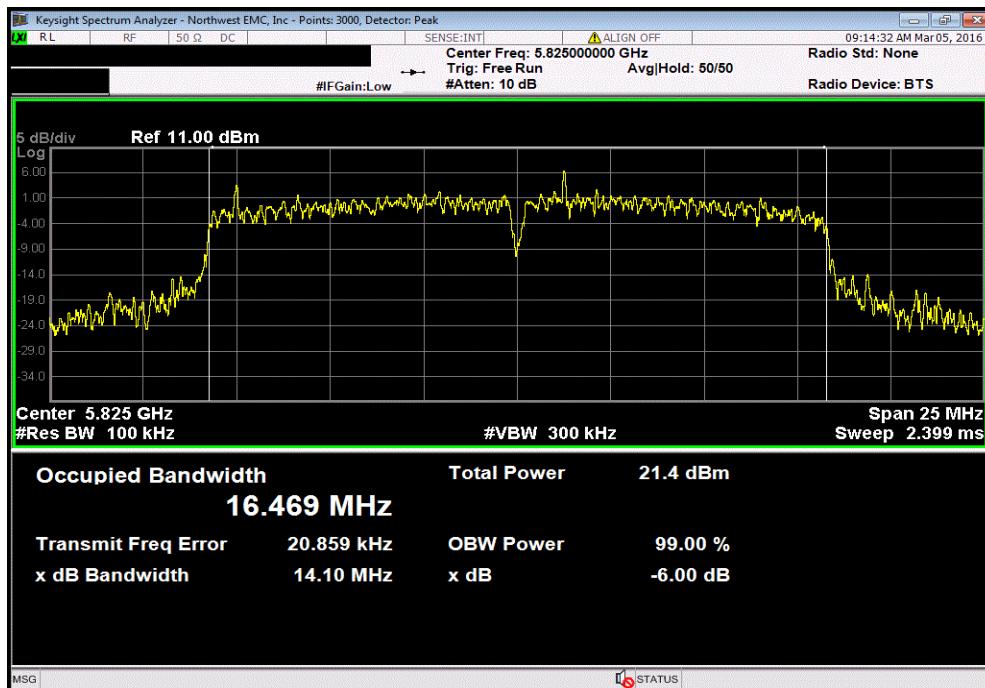


5725 - 5785 MHz Band, High Channel, Ch 165 - 5825 MHz, 802.11(a) 36 Mbps			Limit
Value	(>)	Result	
14.789 MHz	500 kHz	Pass	

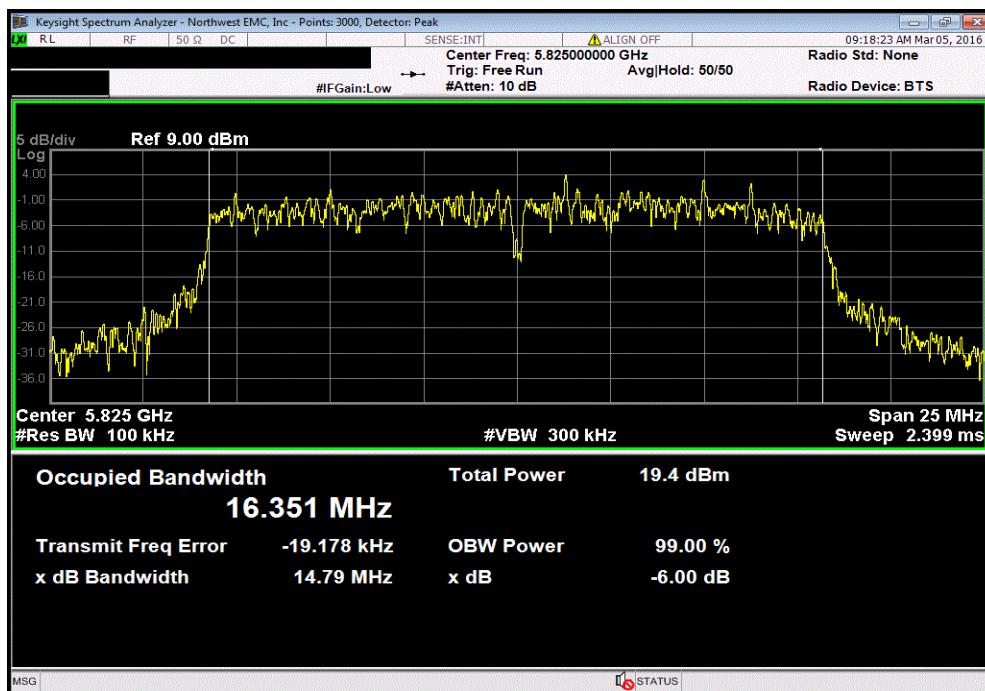


OCCUPIED BANDWIDTH


5725 - 5785 MHz Band, High Channel, Ch 165 - 5825 MHz, 802.11(a) 54 Mbps			Limit
Value	(>)	Result	
15.432 MHz	500 kHz	Pass	

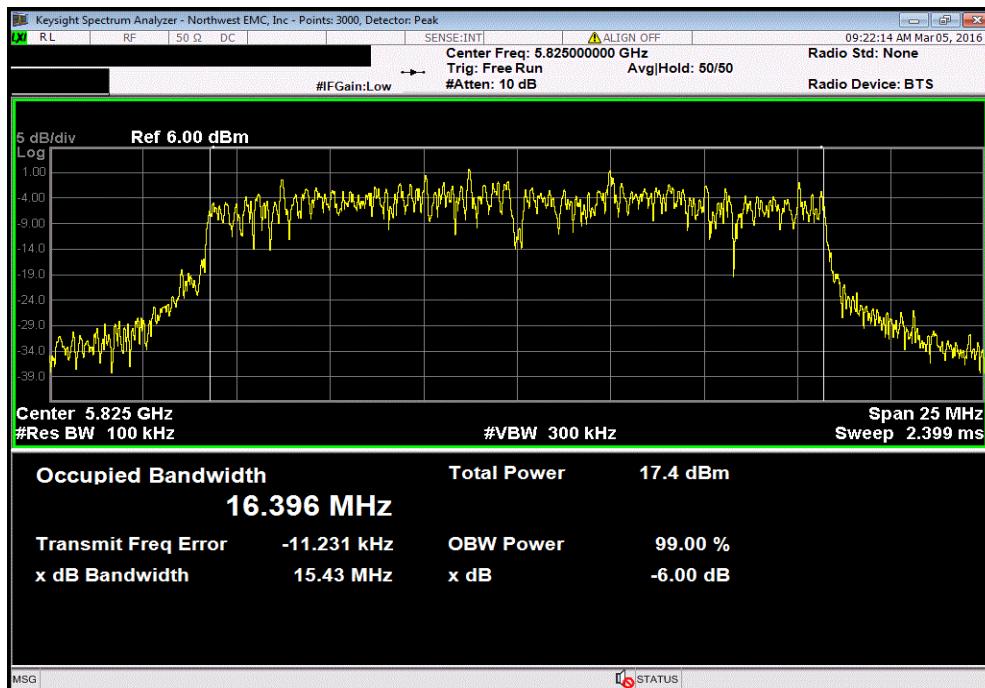

5725 - 5785 MHz Band, High Channel, Ch 165 - 5825 MHz, 802.11(n) MCS0			Limit
Value	(>)	Result	
17.027 MHz	500 kHz	Pass	

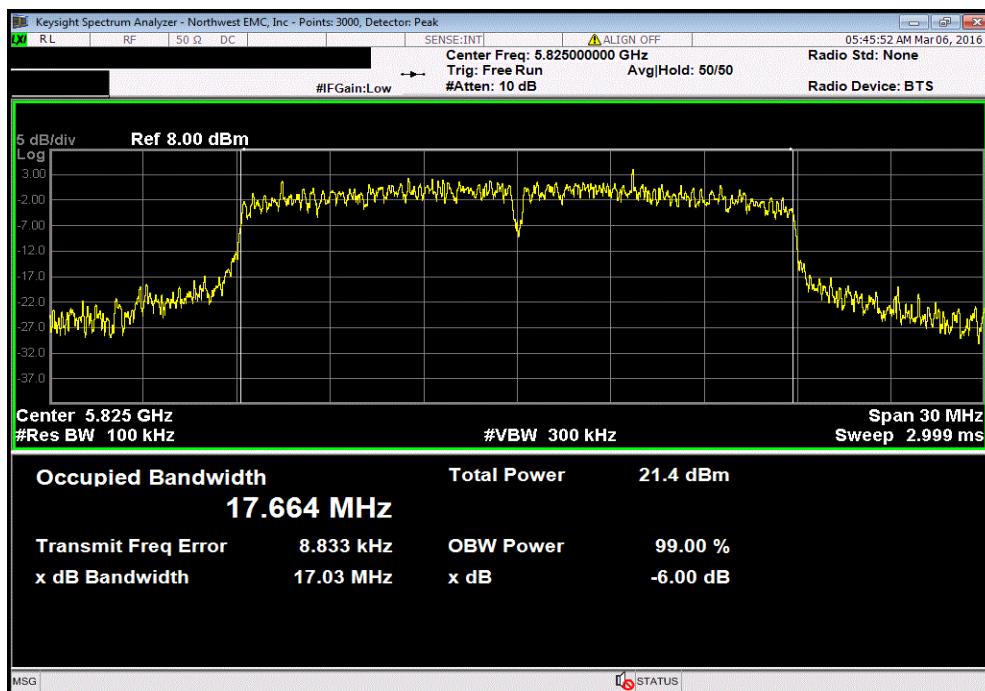

OCCUPIED BANDWIDTH

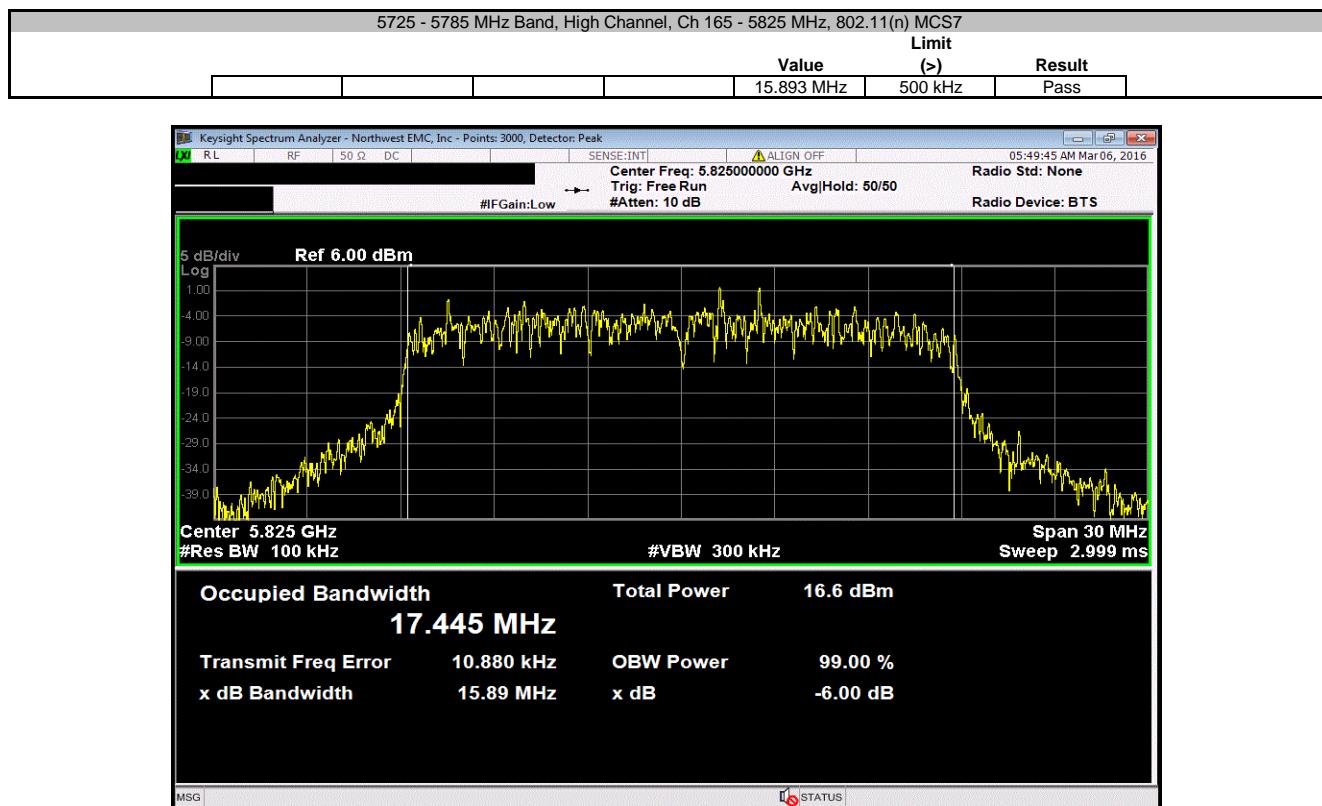

BAND EDGE

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval (mo)
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	2/10/2015	15
Attenuator	S.M. Electronics	SA26B-20	RFW	2/26/2016	12
Block - DC	Fairview Microwave	SD3379	AMI	9/18/2015	12
Cable	ESM Cable Corp.	TTBJ141 KMKM-72	MNU	9/18/2015	12
Power Supply - DC	Agilent	U8002A	TPZ	NCR	0
Meter - Multimeter	Fluke	117/EFSP	MLR	5/27/2015	36
Generator - Signal	Agilent	N5183A	TIK	10/17/2014	36

TEST DESCRIPTION

The 99% occupied bandwidth of the carrier was measured to ensure that no part of the carrier operating in a non-DFS band was operating in a band where DFS testing is required. This test is done with the U-NII-1 band (5.2 GHz band) to ensure no portion of the carrier is contained within the U-NII-2A band and with the U-NII-3 band (5.8 GHz band) to ensure no portion of the carrier is contained in the U-NII-2C band.

The transmit frequencies and data rates listed in the datasheet were measured. The transmit power was set to its default maximum.


A direct connection was made between the RF output of the EUT and a spectrum analyzer. Attenuation and a DC block were used. The reference level offset on the spectrum analyzer was adjusted to compensate for cable loss and the external attenuation used between the RF output and the spectrum analyzer input.

BAND EDGE


EUT:	X Series		Work Order:	LGPD0171	
Serial Number:	1023259		Date:	03/07/16	
Customer:	ZOLL Medical Corp.		Temperature:	22°C	
Attendees:	None		Humidity:	27%	
Project:	None		Barometric Pres.:	985.4	
Tested by:	Jared Ison	Power:	15 VDC	Job Site:	MN08
TEST SPECIFICATIONS			Test Method		
FCC 15.407:2016			ANSI C63.10:2013		
COMMENTS					
EUT set to single channel continuous transmission. Test modes were client provided.					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	2	Signature			
			OBW Within Band	Band Edge (MHz)	Result
5150 - 5250 MHz Band					
High Channel, Ch 48 - 5240 MHz					
802.11(a) 6 Mbps			Yes	5250	Pass
802.11(a) 36 Mbps			Yes	5250	Pass
802.11(a) 54 Mbps			Yes	5250	Pass
802.11(n) MCS0			Yes	5250	Pass
802.11(n) MCS7			Yes	5250	Pass
5725 - 5825 MHz Band					
Low Channel, Ch 149 - 5745 MHz					
802.11(a) 6 Mbps			Yes	5725	Pass
802.11(a) 36 Mbps			Yes	5725	Pass
802.11(a) 54 Mbps			Yes	5725	Pass
802.11(n) MCS0			Yes	5725	Pass
802.11(n) MCS7			Yes	5725	Pass

BAND EDGE

5150 - 5250 MHz Band, High Channel, Ch 48 - 5240 MHz, 802.11(a) 6 Mbps			
OBW	Band Edge	Within Band (MHz)	Result
Yes	5250	Pass	

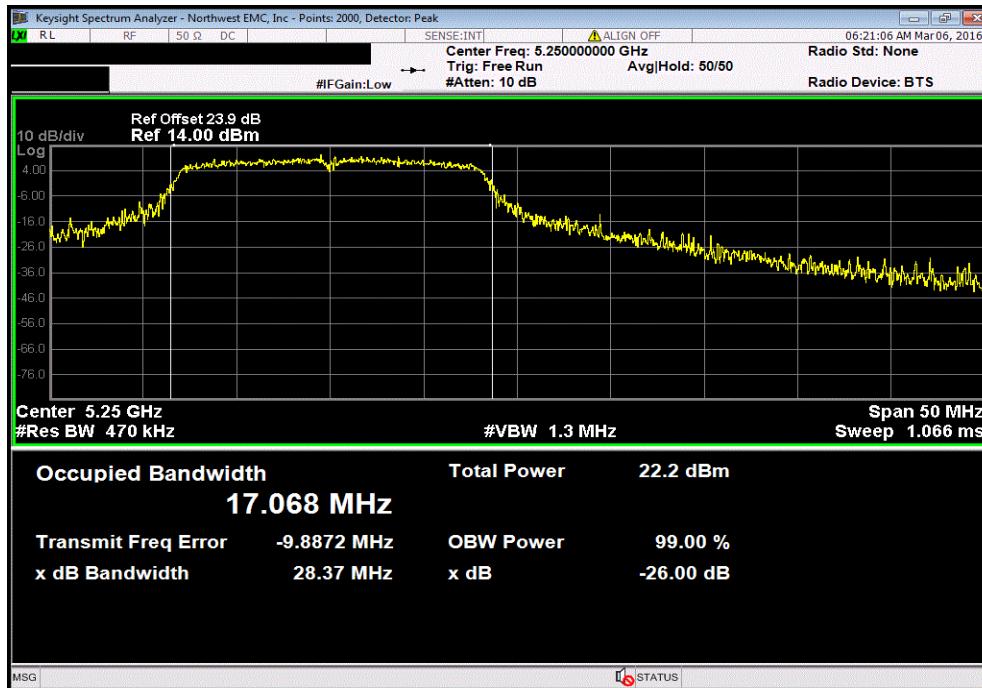


5150 - 5250 MHz Band, High Channel, Ch 48 - 5240 MHz, 802.11(a) 36 Mbps			
OBW	Band Edge	Within Band (MHz)	Result
Yes	5250	Pass	

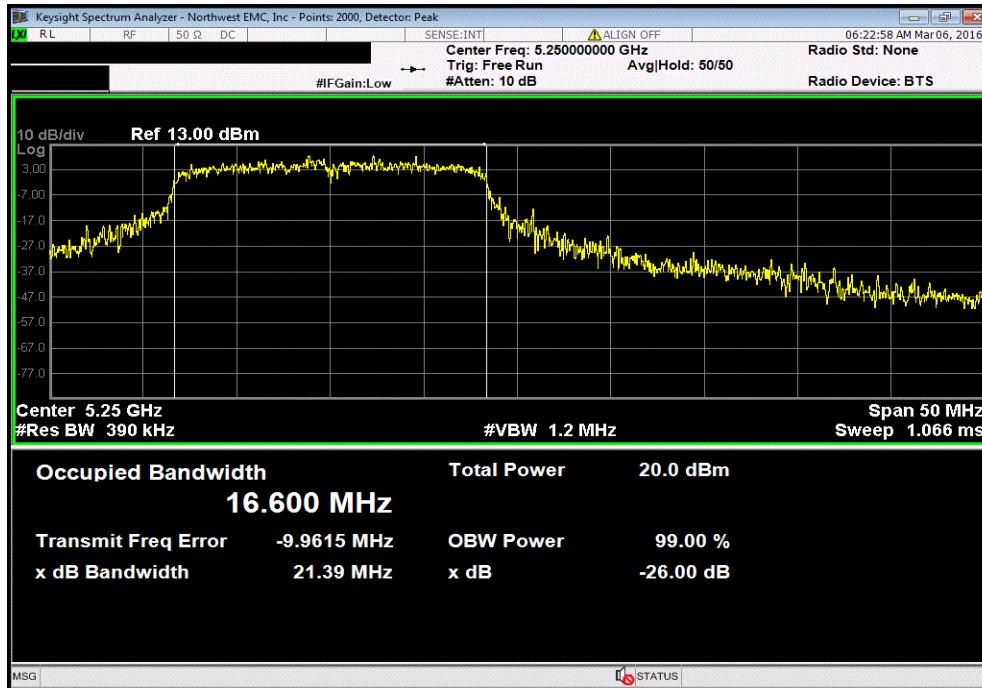


BAND EDGE

5150 - 5250 MHz Band, High Channel, Ch 48 - 5240 MHz, 802.11(a) 54 Mbps			
OBW	Band Edge	Within Band (MHz)	Result
Yes	5250	Pass	

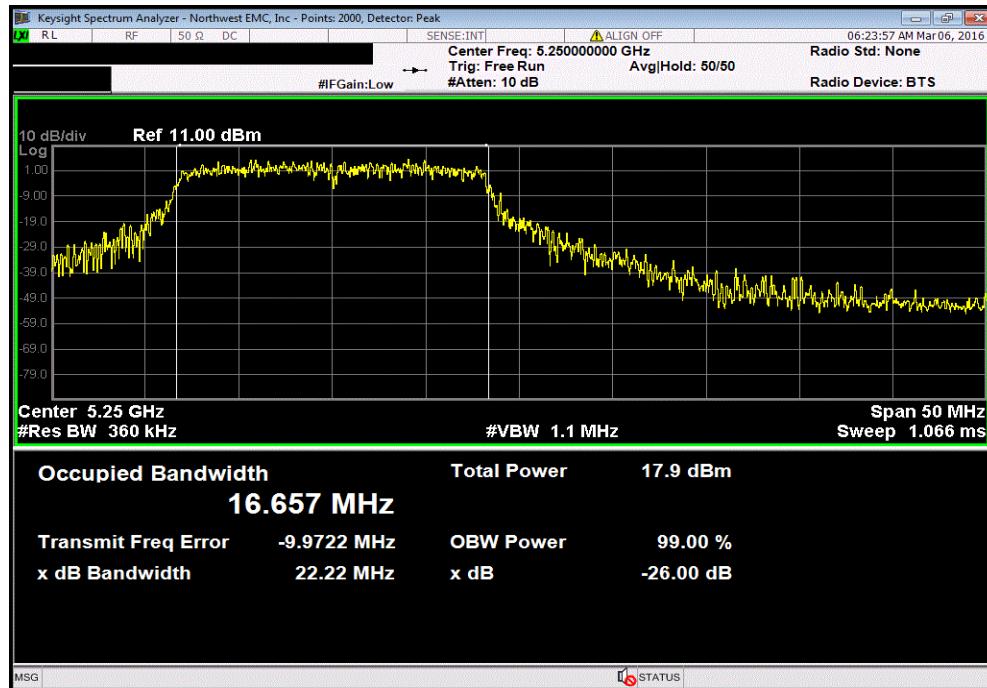


5150 - 5250 MHz Band, High Channel, Ch 48 - 5240 MHz, 802.11(n) MCS0			
OBW	Band Edge	Within Band (MHz)	Result
Yes	5250	Pass	

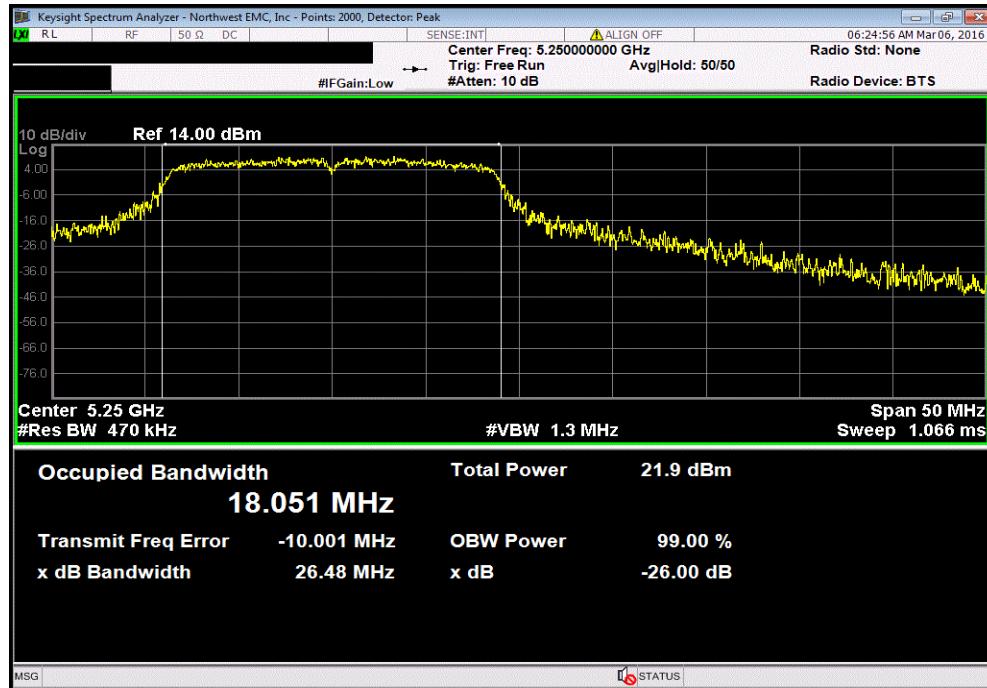


BAND EDGE

5150 - 5250 MHz Band, High Channel, Ch 48 - 5240 MHz, 802.11(n) MCS7			
OBW	Band Edge		
Within Band	(MHz)	Result	
Yes	5250	Pass	

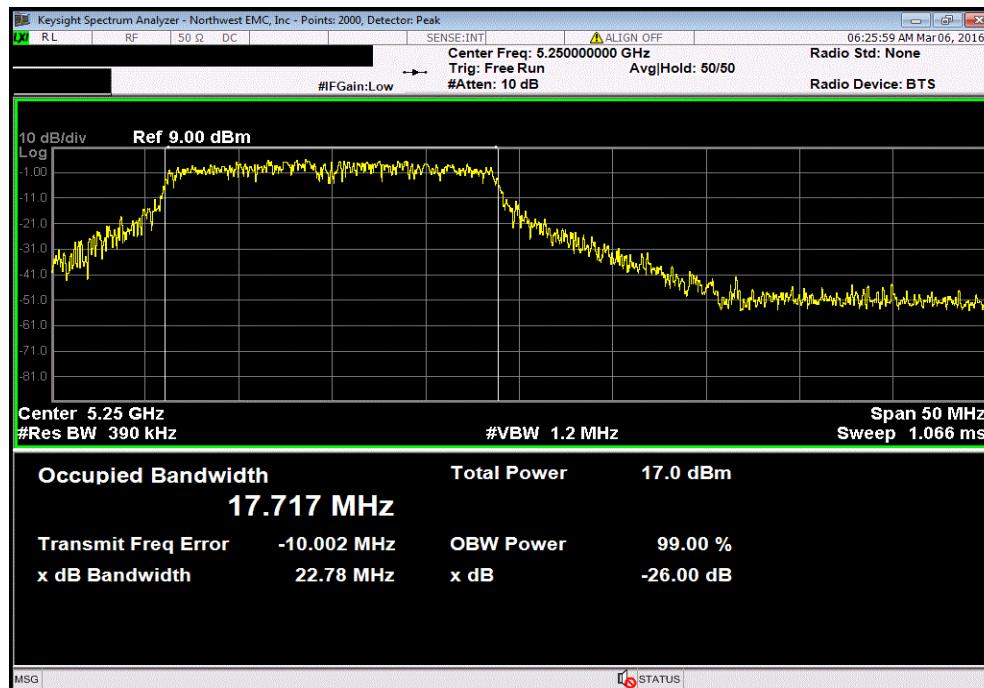


5725 - 5825 MHz Band, Low Channel, Ch 149 - 5745 MHz, 802.11(a) 6 Mbps			
OBW	Band Edge		
Within Band	(MHz)	Result	
Yes	5725	Pass	

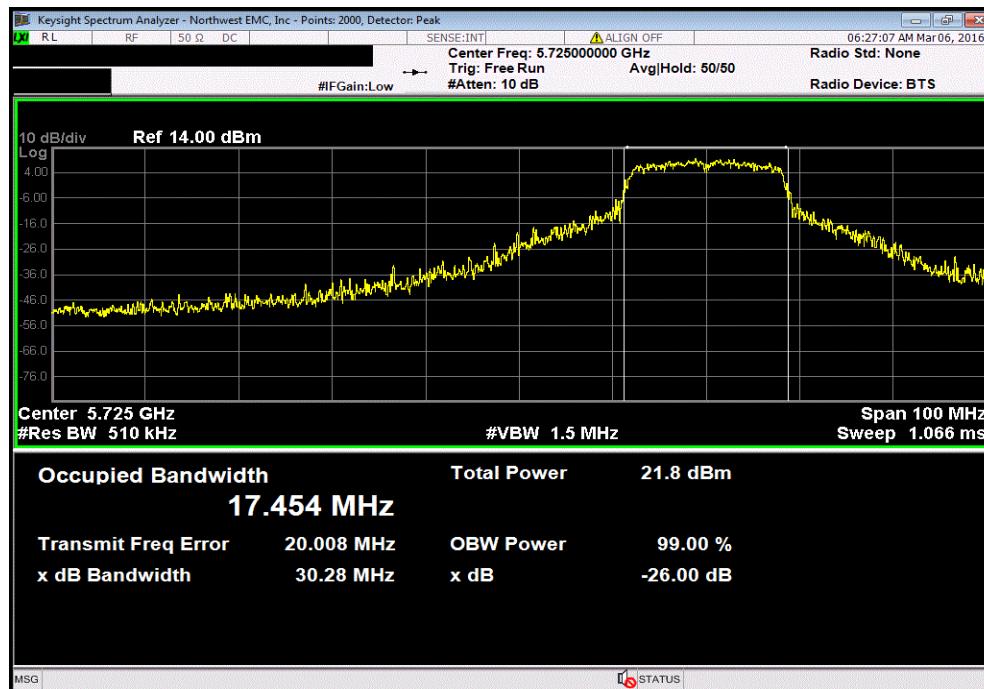


BAND EDGE

5725 - 5825 MHz Band, Low Channel, Ch 149 - 5745 MHz, 802.11(a) 36 Mbps			
OBW	Band Edge	Within Band (MHz)	Result
		Yes 5725	Pass

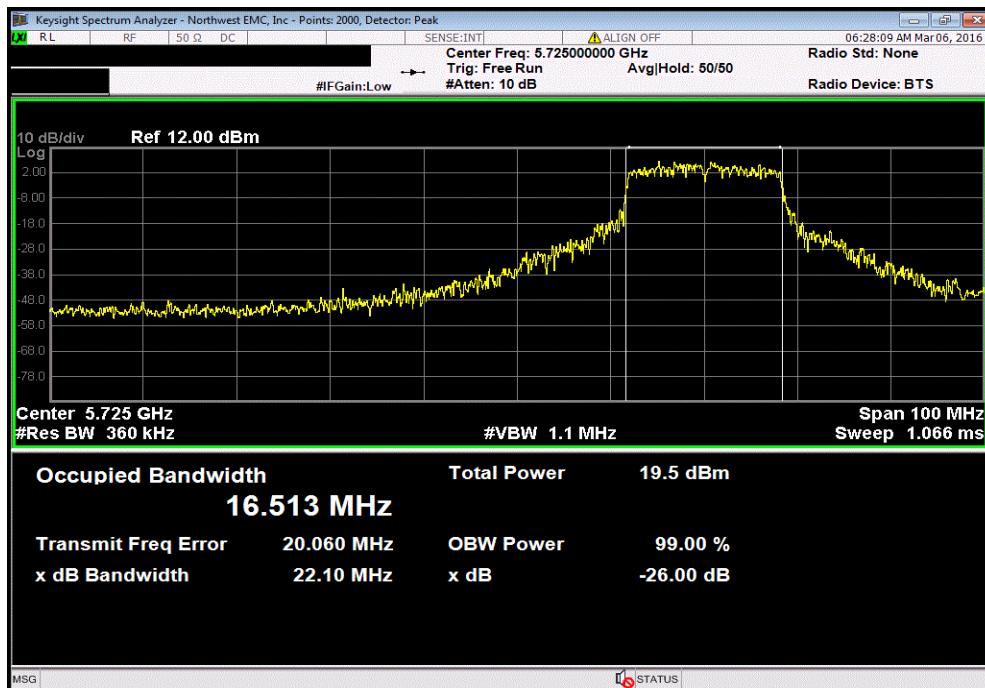


5725 - 5825 MHz Band, Low Channel, Ch 149 - 5745 MHz, 802.11(a) 54 Mbps			
OBW	Band Edge	Within Band (MHz)	Result
		Yes 5725	Pass

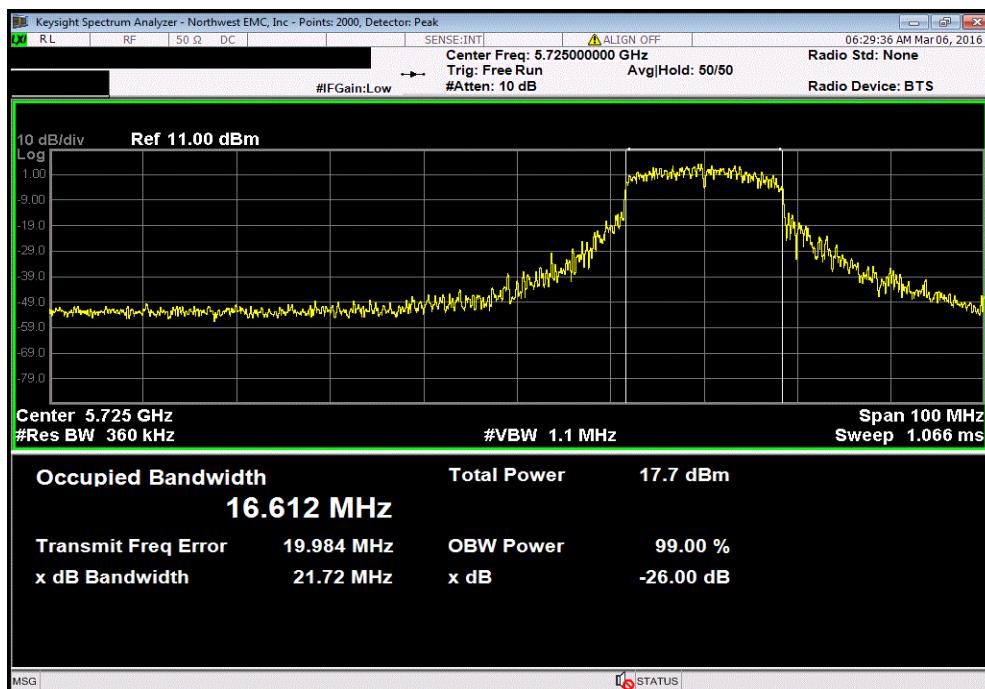

BAND EDGE

5725 - 5825 MHz Band, Low Channel, Ch 149 - 5745 MHz, 802.11(n) MCS0			
OBW	Band Edge	Within Band (MHz)	Result
		Yes 5725	Pass

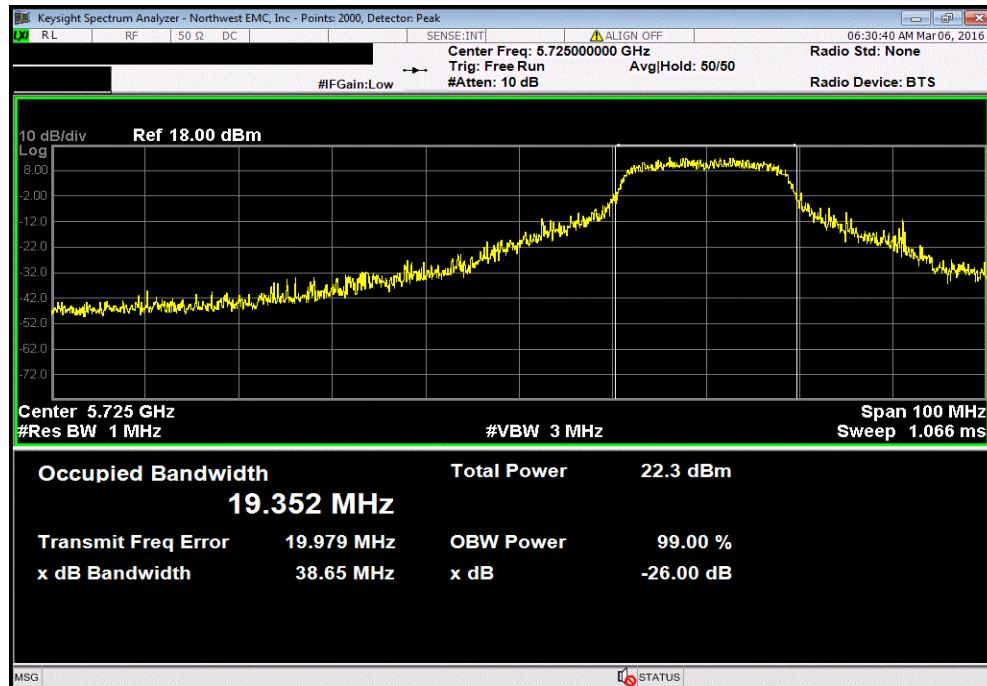

5725 - 5825 MHz Band, Low Channel, Ch 149 - 5745 MHz, 802.11(n) MCS7			
OBW	Band Edge	Within Band (MHz)	Result
		Yes 5725	Pass

