LTE Band 5

Peak-to-Average Ratio


Mode					
Mod.	QP	SK	16C	Limit: 13dB	
RB Size	1RB Full RB 1RB Full RB		Result		
Lowest CH	4.61	5.3	5.16	6.23	
Middle CH	4.55	5.16	5.45	6.2	PASS
Highest CH	4.46	5.25	5.25	6.17	


Report No.: FG552956B

SPORTON INTERNATIONAL INC. Page Number : A5-1 of 30

TEL: 886-3-327-3456

FAX: 886-3-328-4978 Report Template No.: BU5-FGLTE Version 1.3

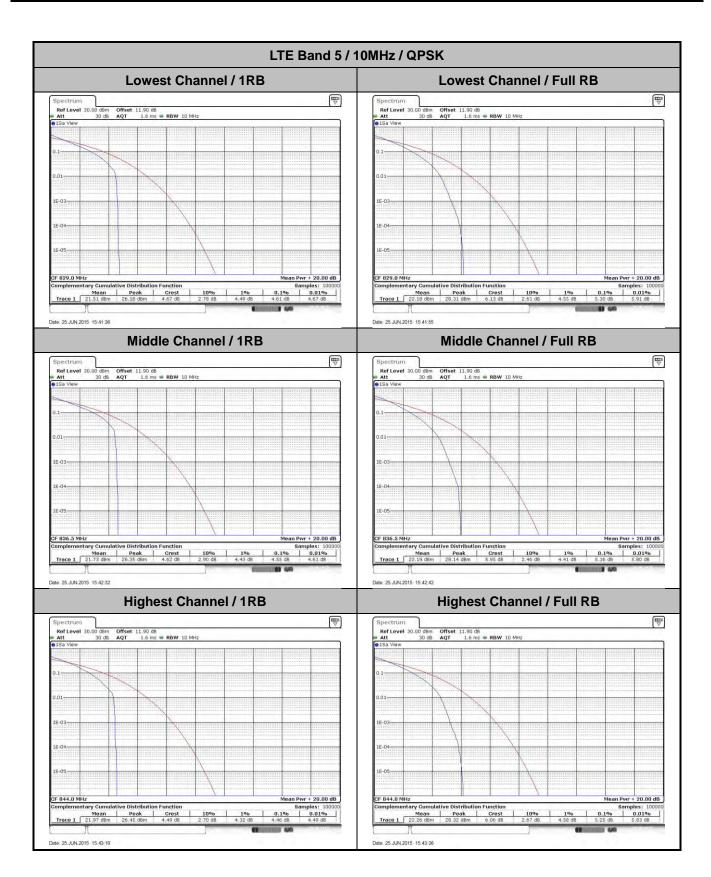

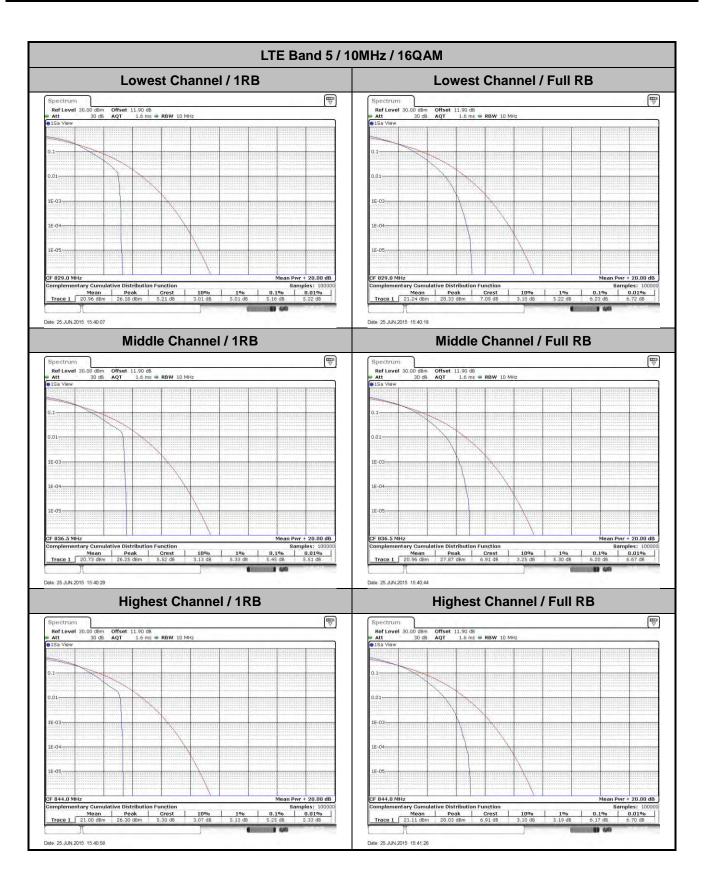

Report Template No.: BU5-FGLTE Version 1.3

26dB Bandwidth

Mode	LTE Band 5 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.29	1.29	3.05	3.48	5.06	5.06	10.01	9.93	-	-	-	-
Middle CH	1.29	1.29	3.05	3.06	5.03	5.04	9.95	9.95	-	-	-	-
Highest CH	1.28	1.29	3.05	3.06	5.05	5.06	10.03	9.97	-	-	-	-


Report No.: FG552956B

SPORTON INTERNATIONAL INC. Page Number : A5-4 of 30

TEL: 886-3-327-3456


FAX: 886-3-328-4978

Report Template No.: BU5-FGLTE Version 1.3

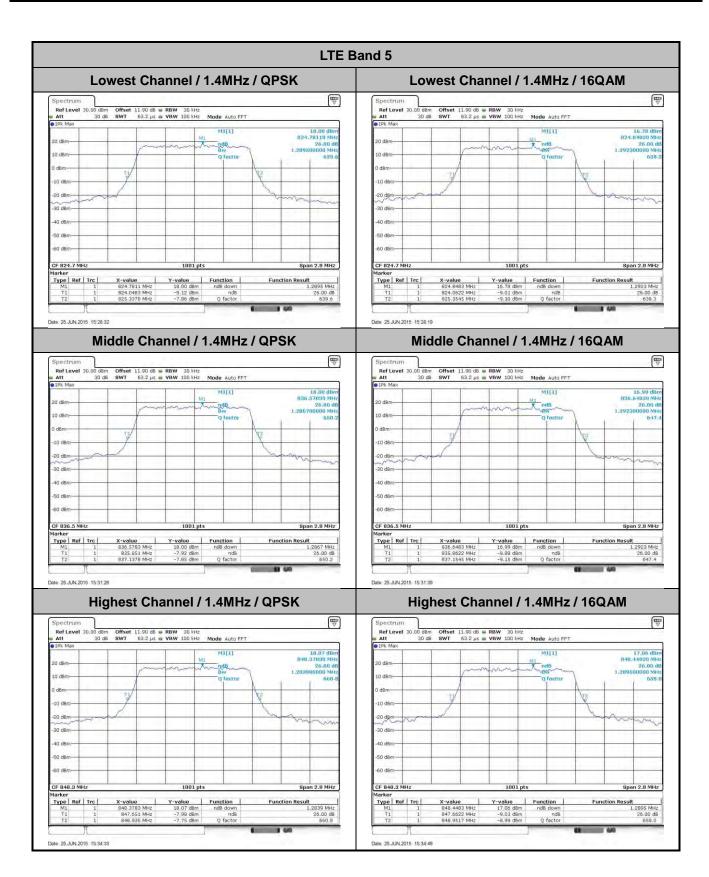


Page Number : A5-5 of 30


Report Template No.: BU5-FGLTE Version 1.3

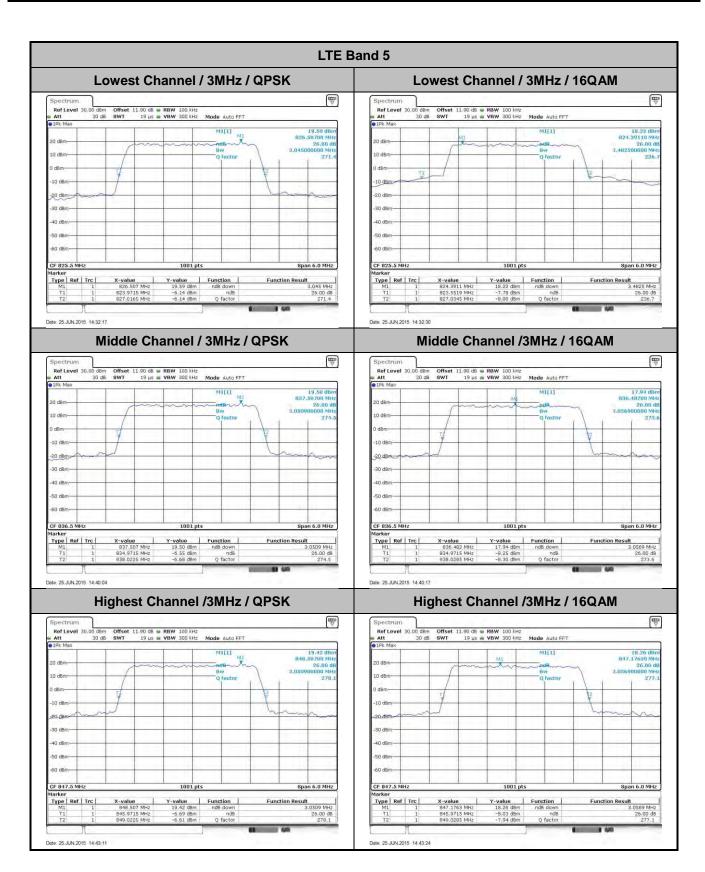

Page Number : A5-6 of 30

Report Template No.: BU5-FGLTE Version 1.3

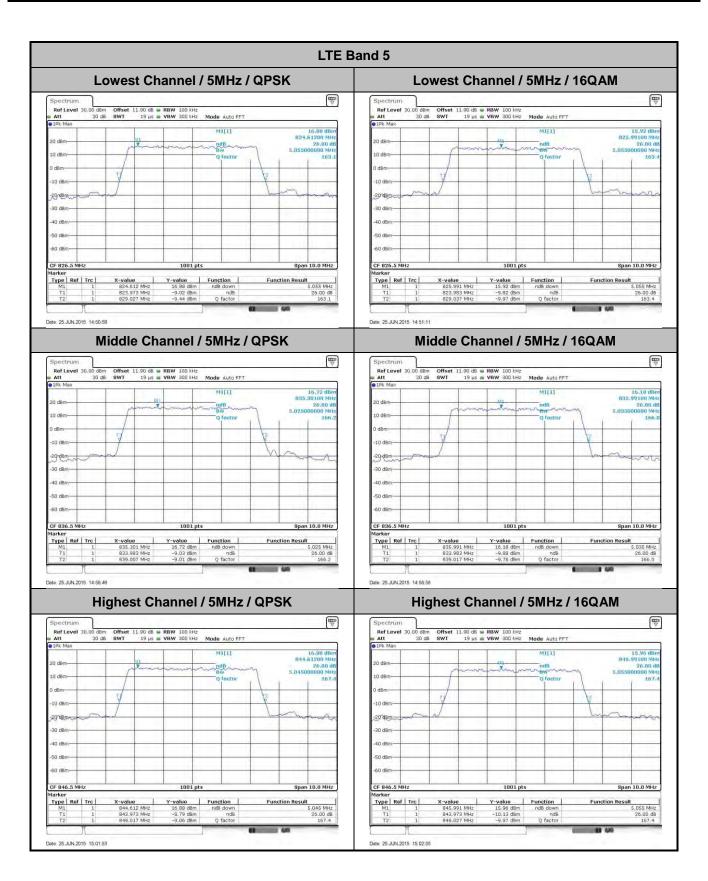

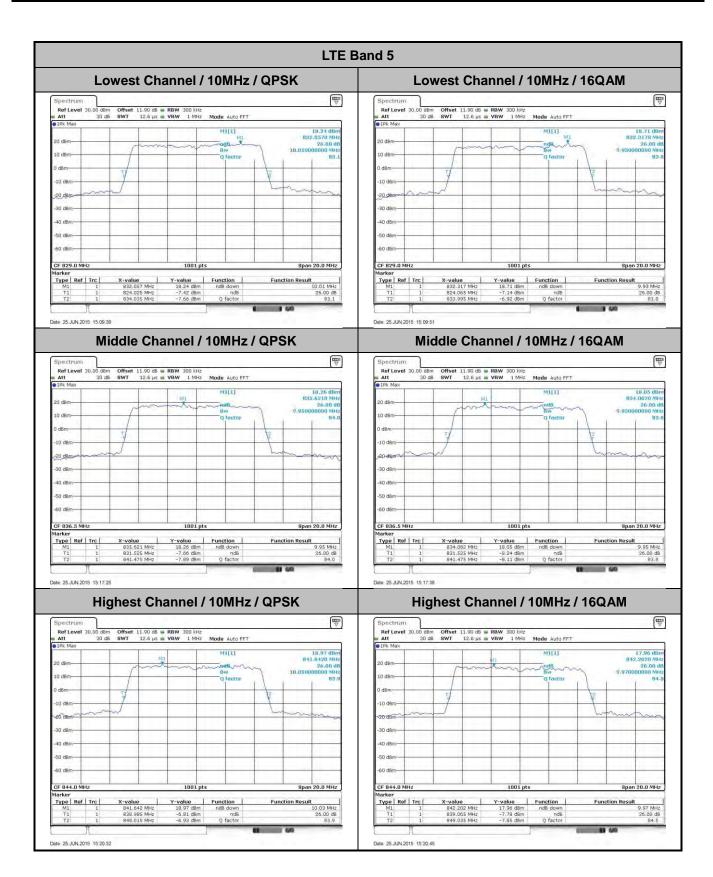

Page Number : A5-8 of 30

Report Template No.: BU5-FGLTE Version 1.3

Occupied Bandwidth

Mode	LTE Band 5 : 99%OBW(MHz)											
BW	1.41	ИНz	31/	lHz	5N	lHz	101	ИHz	15N	ИHz	201	ИHz
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.1	1.1	2.72	2.73	4.51	4.51	9.03	9.01	-	-	-	-
Middle CH	1.09	1.1	2.73	2.72	4.5	4.5	9.05	8.99	-	-	-	-
Highest CH	1.1	1.1	2.72	2.73	4.51	4.5	9.09	9.03	-	-	-	-


Report No.: FG552956B

SPORTON INTERNATIONAL INC. Page Number : A5-9 of 30

TEL: 886-3-327-3456


FAX: 886-3-328-4978

Report Template No.: BU5-FGLTE Version 1.3

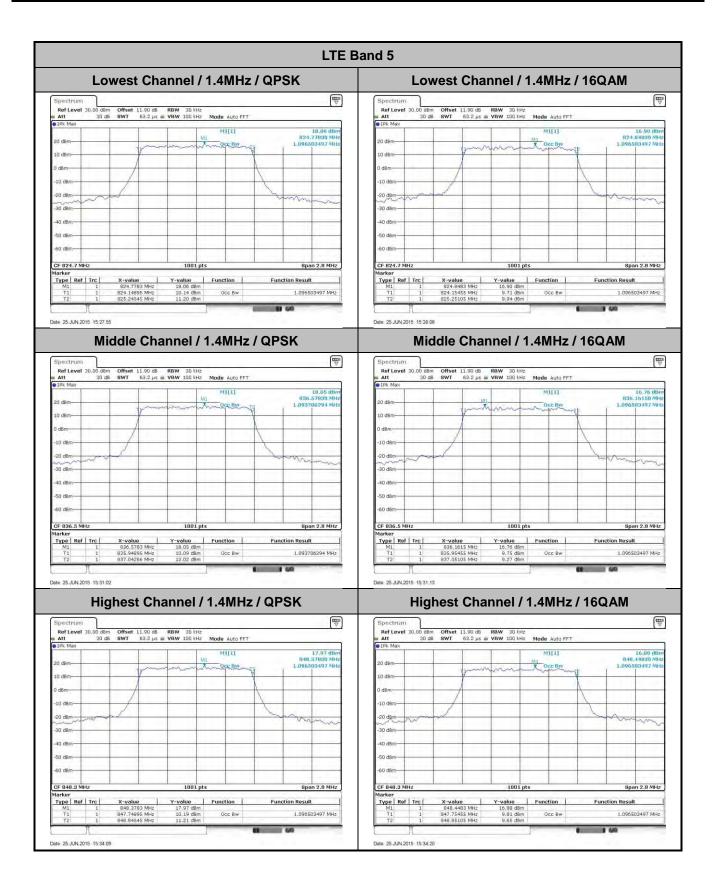


Page Number : A5-10 of 30

Report Template No.: BU5-FGLTE Version 1.3

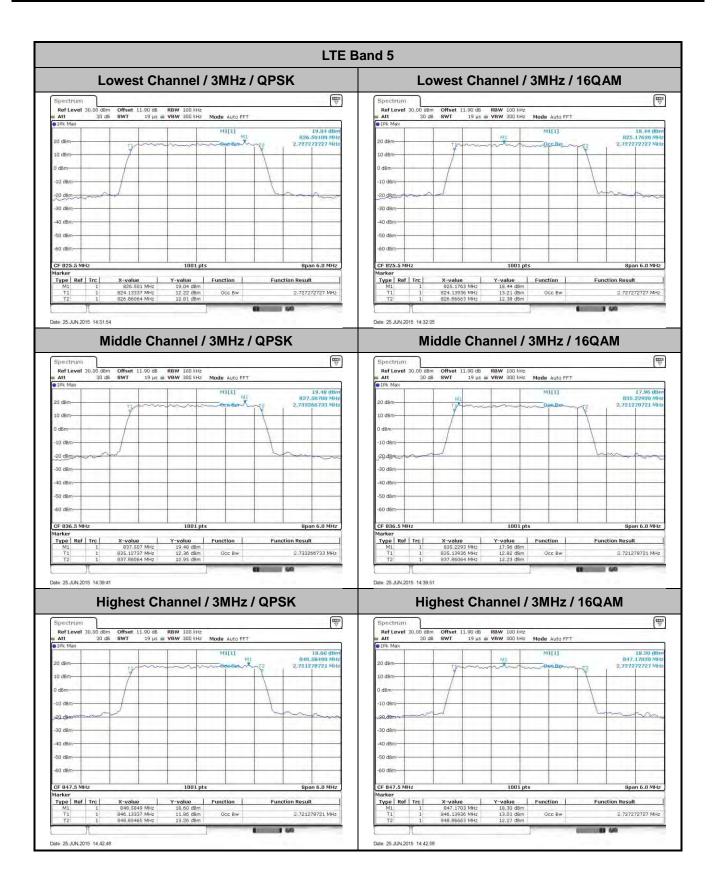


Page Number : A5-11 of 30

Report Template No.: BU5-FGLTE Version 1.3

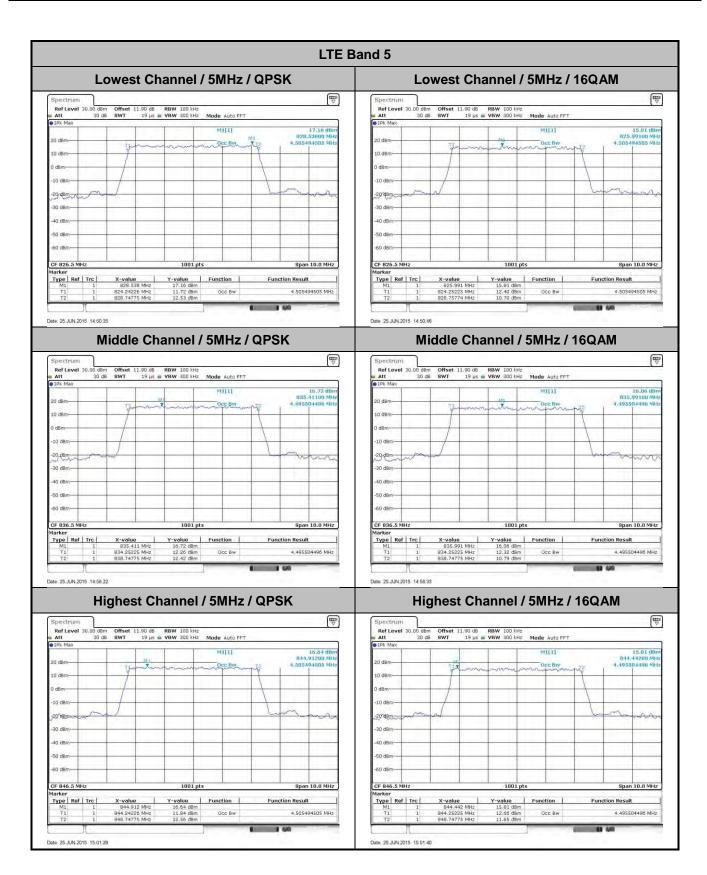

Page Number : A5-12 of 30

Report Template No.: BU5-FGLTE Version 1.3

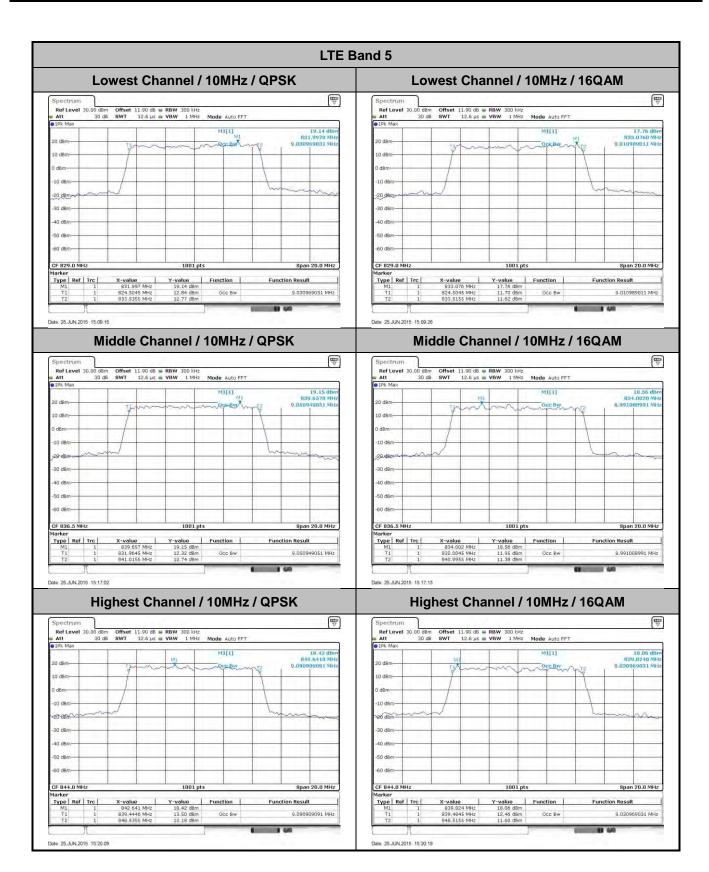

Page Number : A5-13 of 30

Report Template No.: BU5-FGLTE Version 1.3

Conducted Band Edge


Report No.: FG552956B

SPORTON INTERNATIONAL INC. Page Number : A5-14 of 30

TEL: 886-3-327-3456


FAX: 886-3-328-4978

Report Template No.: BU5-FGLTE Version 1.3

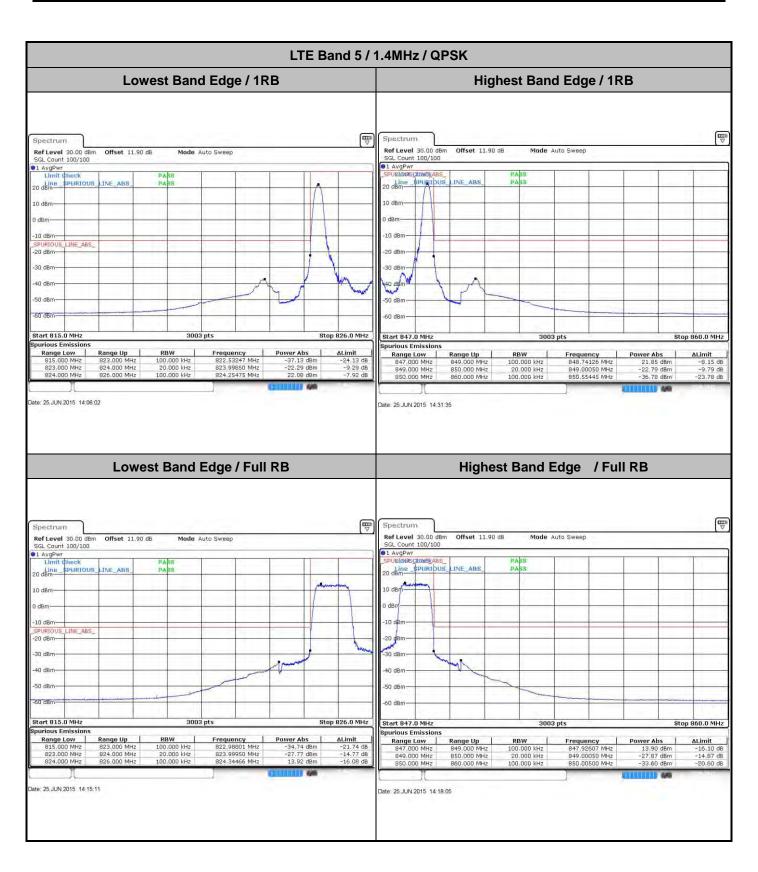


Page Number : A5-15 of 30

Report Template No.: BU5-FGLTE Version 1.3

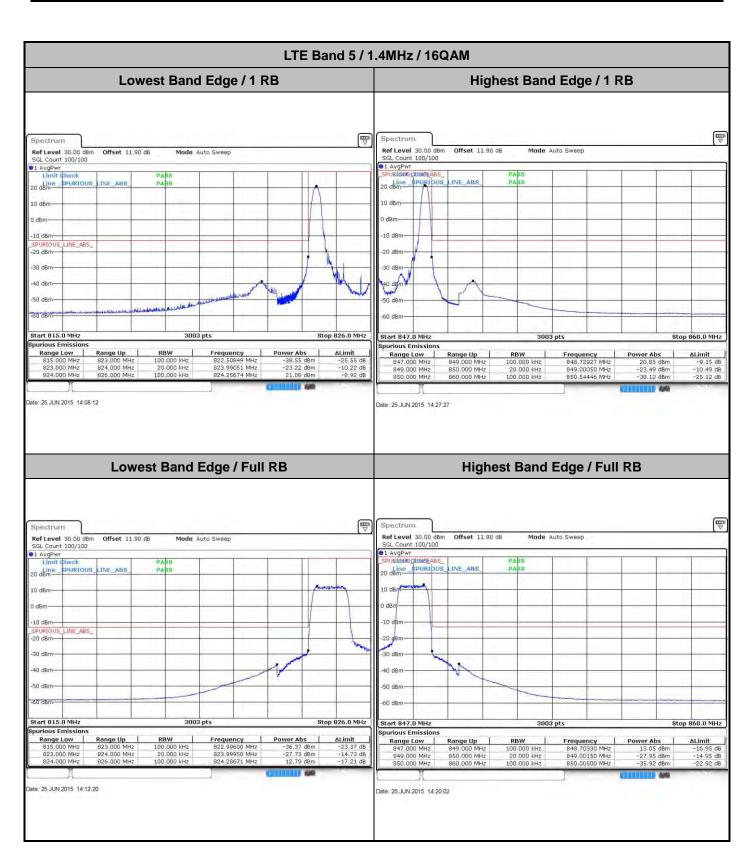


Page Number : A5-16 of 30

Report Template No.: BU5-FGLTE Version 1.3

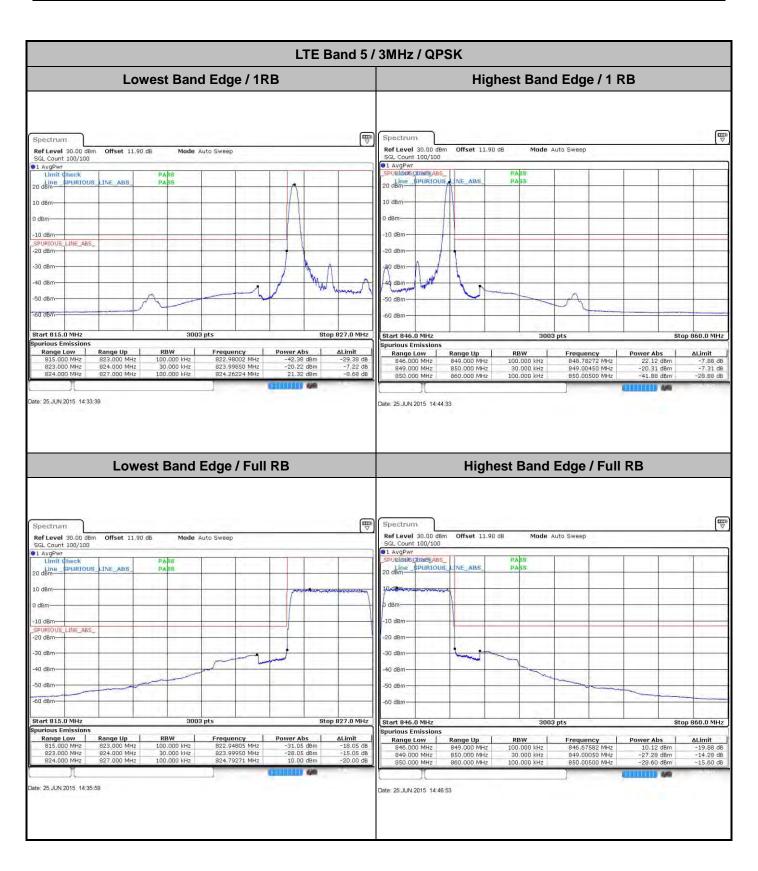


Page Number : A5-17 of 30

Report Template No.: BU5-FGLTE Version 1.3

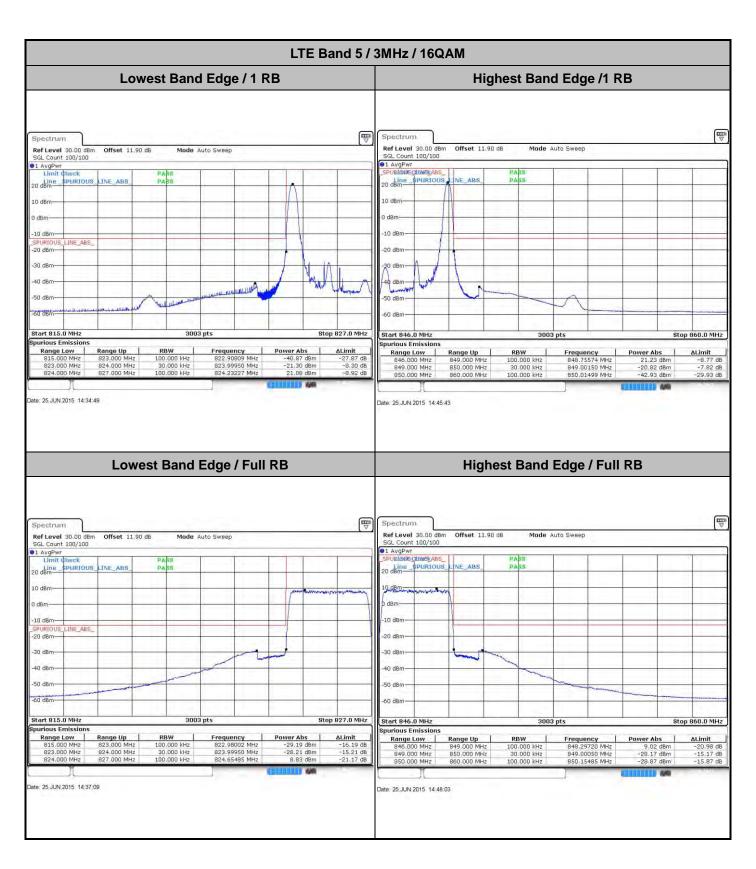


Page Number : A5-18 of 30

Report Template No.: BU5-FGLTE Version 1.3

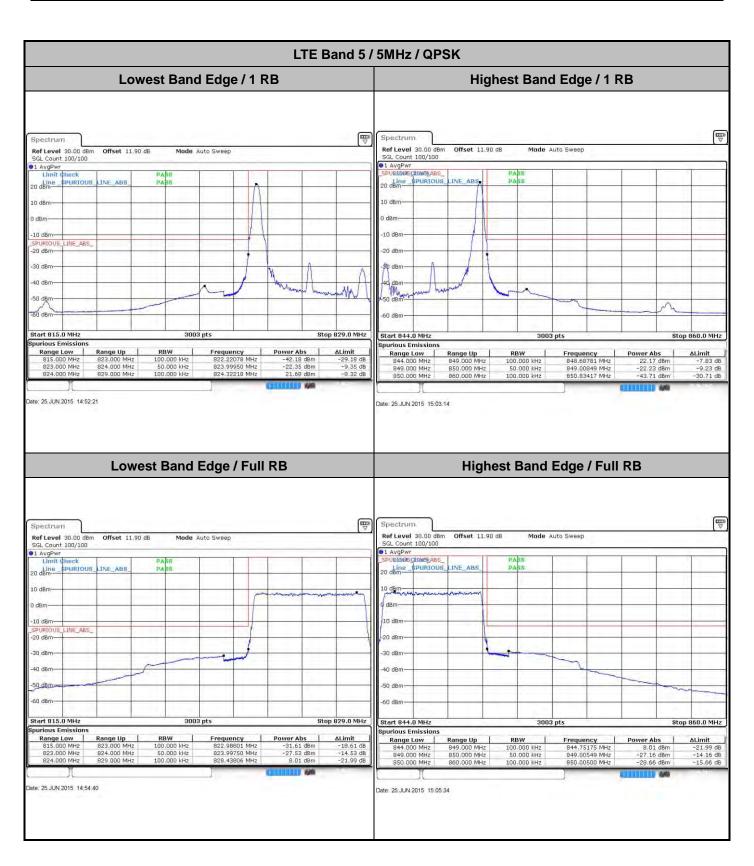


Page Number : A5-19 of 30

Report Template No.: BU5-FGLTE Version 1.3

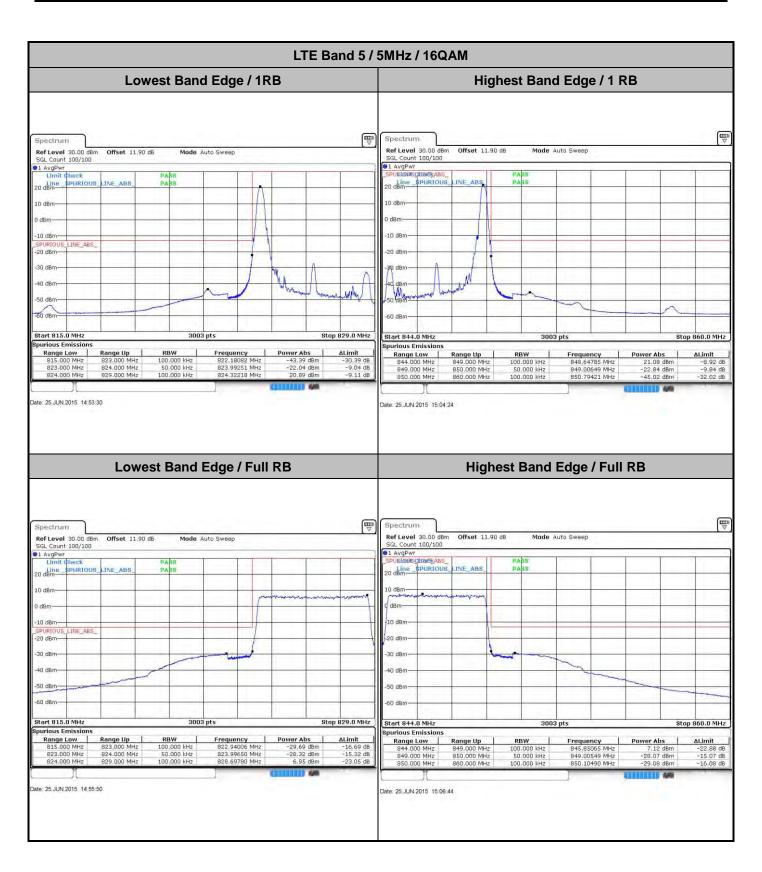


Page Number : A5-20 of 30

Report Template No.: BU5-FGLTE Version 1.3

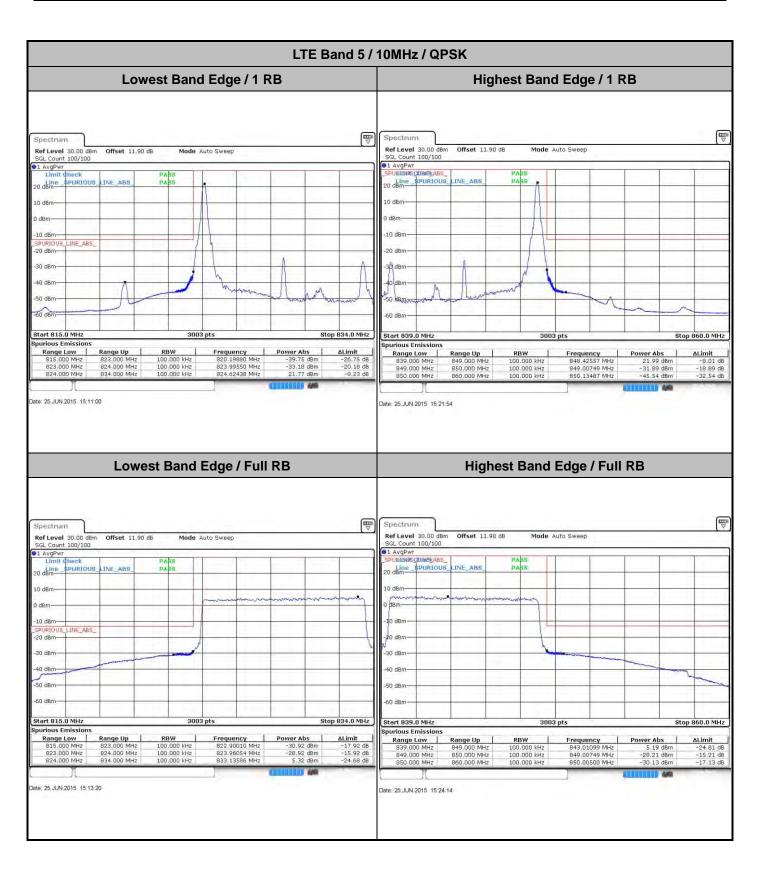

Page Number : A5-21 of 30

Report Template No.: BU5-FGLTE Version 1.3

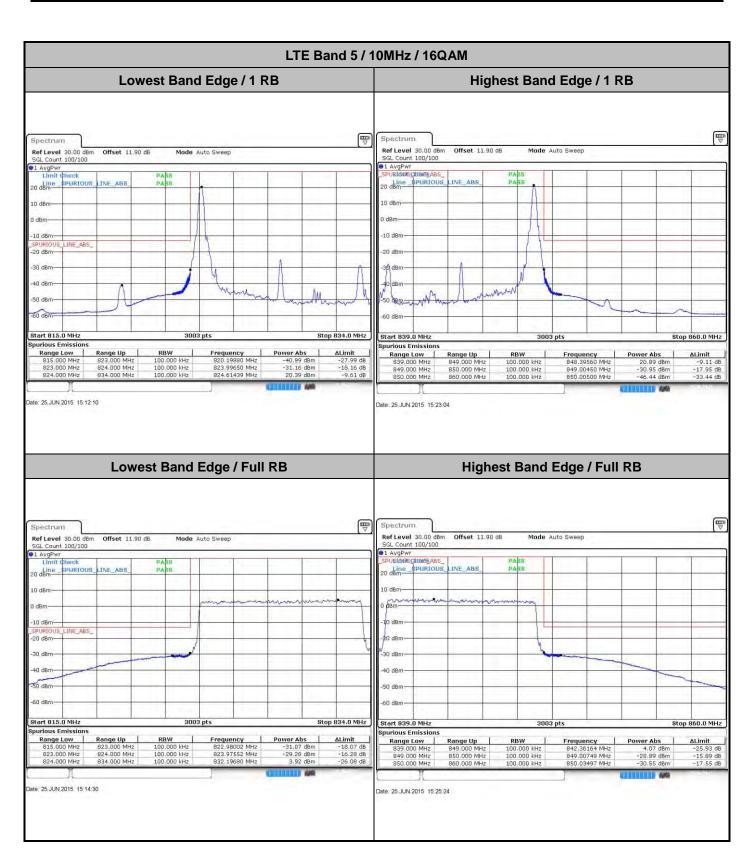

Page Number : A5-22 of 30

Report Template No.: BU5-FGLTE Version 1.3


TEL: 886-3-327-3456

Conducted Spurious Emission

Report No.: FG552956B

SPORTON INTERNATIONAL INC. Page Number : A5-23 of 30

FAX: 886-3-328-4978 Report Template No.: BU5-FGLTE Version 1.3

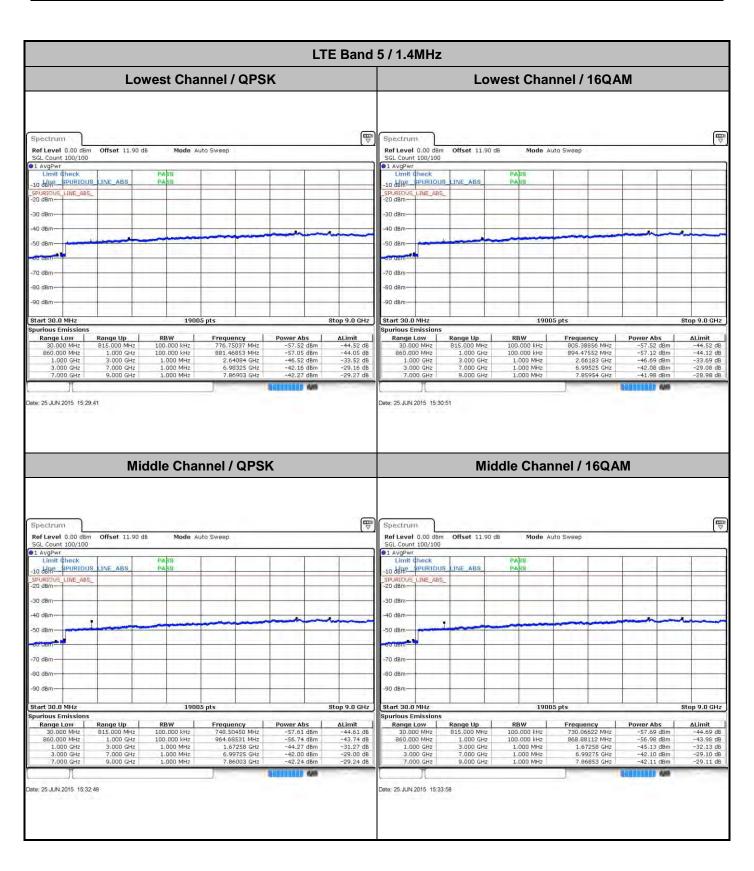

Page Number : A5-24 of 30

Report Template No.: BU5-FGLTE Version 1.3



SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 Page Number : A5-25 of 30

Report Template No.: BU5-FGLTE Version 1.3




Page Number : A5-26 of 30

Report Template No.: BU5-FGLTE Version 1.3



Page Number : A5-27 of 30

Report Template No.: BU5-FGLTE Version 1.3

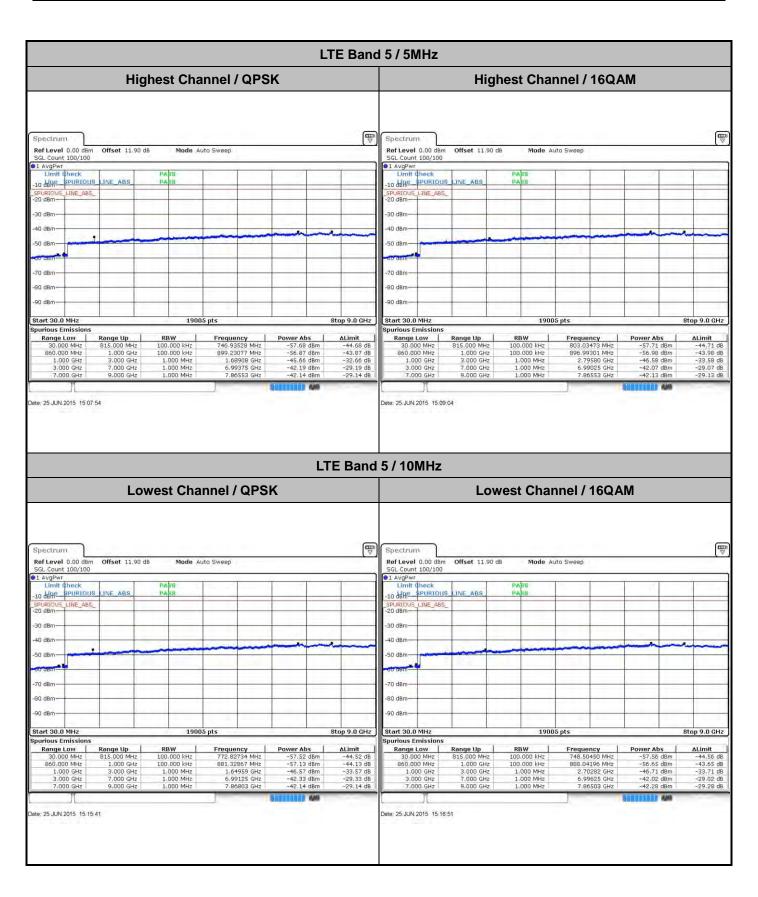

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 Page Number : A5-28 of 30

Report Template No.: BU5-FGLTE Version 1.3



Page Number : A5-29 of 30

Report Template No.: BU5-FGLTE Version 1.3

Frequency Stability

Test Conditions		LTE Band 5 (QPSK) / Middle Channel			
_		BW 10MHz	2.5ppm		
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result		
50	Normal Voltage	0.0060			
40	Normal Voltage	0.0002			
30	Normal Voltage	0.0014			
20(Ref.)	Normal Voltage	0.0000			
10	Normal Voltage	0.0005			
0	Normal Voltage	0.0002			
-10	Normal Voltage	0.0059	PASS		
-20	Normal Voltage	0.0016			
-30	Normal Voltage	0.0075			
20	Maximum Voltage	0.0008			
20	Normal Voltage	0.0000			
20	Battery End Point	0.0016			

Report No.: FG552956B

Note:

- 1. Normal Voltage = 3.9V. ; Battery End Point (BEP) = 3.4 V. ; Maximum Voltage =4.35 V
- 2. Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

SPORTON INTERNATIONAL INC. Page Number : A5-30 of 30

TEL: 886-3-327-3456

FAX: 886-3-328-4978

Report Template No.: BU5-FGLTE Version 1.3