



Shenzhen Certification Technology Service Co., Ltd
3F, Bldg27,Area A, Tanglang Industrial Zone, Xili Town,
Nanshan District, ShenZhen, Guang dong, P.R.
China.

TEST REPORT

FCC ID: ZOEDPAD

Applicant : Feihong Industry Co., Ltd
Address : Floor 2, Building 2, Xingke Hi tech industry base, no. 168, bulong road,
bui, longgang, Shenzhen, P.R China.

Equipment under Test (EUT):

Name : TABLET PC
Model : DPAD, TPAD
Standards : FCC PART 15, SUBPART C : 2010 (Section 15.247)

Report No. : STE110611477
Date of Test : June 13-19, 2011
Date of Issue : June 20, 2011

Test Result :	PASS *
----------------------	---------------

* In the configuration tested, the EUT complied with the standards specified above

Authorized Signature

(Mark Zhu)
General Manager

The manufacture should ensure that all the products in series production are in conformity with the product sample detailed in this report.

If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of Shenzhen Certification Technology Service Co., Ltd. Or test done by Shenzhen Certification Technology Service Co., Ltd. Approvals in connection with, distribution or use of the product described in this report must be approved by Shenzhen Certification Technology Service Co., Ltd. Approvals in writing.

TABLE OF CONTENT

Description	Page
1 General Information-----	4
1.1 Description of Device (EUT) -----	4
1.2 Description of Test Facility -----	5
2 EMC Equipment List-----	5
3 Test Procedure -----	6
4 Summary of Measurement-----	7
4.1 Summary of test result -----	7
4.2 Test mode-----	8
5 Spurious Emission -----	9
5.1 Conducted Spurious Emission -----	9
5.1.1 Test limit -----	9
5.1.2 Method of measurement-----	9
5.1.3 Test Setup-----	9
5.1.4 Test Results-----	9
5.2 Radiation Emission-----	16
5.2.1 Radiation Emission Limits(15.209)-----	16
5.2.2 Test Setup-----	16
5.2.3 Test Procedure-----	18
5.2.4 Test Equipment Setting For emission test.est Result-----	18
5.2.5 Test Condition -----	18
5.2.6 Test Result -----	18
6 POWER LINE CONDUCTED EMISSION-----	26
6.1 Conducted Emission Limits(15.209&249)-----	26
6.2 Test Setup-----	26
6.3 Test Procedure-----	27
6.4 Test Resluts-----	27
7 Peak Power-----	29
7.1 Test limit -----	29
7.2 Test Procedure-----	29
7.3 Test Setup-----	29
7.4 Test Results-----	29
8 PEAK POWER SPECTRAL DENSITY-----	30
8.1 Test limit -----	30
8.1.1 Please refer section15.247.-----	30
8.2 Method of measurement-----	30
8.3 Test Setup-----	30
8.4 Test Results-----	30
9 6dB Bandwidth-----	35
9.1 Test limit -----	35

9.2	Method of measurement-----	35
9.3	Test Setup-----	35
9.4	Test Results-----	35
10	NUMBER OF HOPPING FREQUENCY-----	40
10.1	Test limit -----	40
10.2	Method of measurement-----	40
10.3	Test Setup-----	40
10.4	Test Results-----	40
11	DWELL TIME-----	41
11.1	Test limit -----	41
11.2	Method of measurement-----	41
11.3	Test Setup-----	41
11.4	Test Results-----	41
12	Band Edge Check-----	42
12.1	Test limit -----	42
12.2	Test Procedure-----	42
12.3	Test Setup-----	42
12.4	Test Result -----	42
13	Antenna Requirement -----	51
13.1	Standard Requirement -----	51
13.2	Antenna Connected Construction -----	51
13.3	Result -----	51
14	Photographs of Test Setup -----	52
15	Photographs of EUT -----	55

1 General Information

1.1 Description of Device (EUT)

Trade Name	: N/A
EUT	: TABLET PC
Model No.	: DPAD, TPAD
Model difference	Just not the same appearance, the other the same
Type of Antenna	: Integral Antenna
Antenna Specification	: 1 dBi
Operation Frequency	: 2412~2462MHZ
Channel number	: 11
Modulation type	: IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) : IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK)
Power Supply	: DC 3.7V form battery or DC 5V from power adapter
Rated PF output Power	17.74 dBm
Applicant	: Feihong Industry Co., ltd
Address	: Floor 2, Building 2, Xingke Hi tech industry base, no. 168, bulong road, buji, longgang, Shenzhen, P.R China.
Manufacturer	: Feihong Industry Co., ltd
Address	: Floor 2, Building 2, Xingke Hi tech industry base, no. 168, bulong road, buji, longgang, Shenzhen, P.R China.

1.2 Description of Test Facility

Shenzhen Certification Technology Service Co.,Ltd.
 3F, Bldg.27, Area A, Tanglang Industrial Zone, Xili Town, Nanshan
 District, Shenzhen 518055, Guangdong, P.R. China
 FCC Registered No.:305283

2 EMC Equipment List

Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
3m Semi-Anechoic	ETS-LINDGREN	N/A	SEL0017	06/06/2011	1Year
Spectrum analyzer	Agilent	E4443A	MY46185649	06/06/2011	1Year
Receiver	R&S	ESCI	100492	04/06/2011	1Year
Receiver	R&S	ESCI	101202	04/06/2011	1Year
Bilog Antenna	Sunol	JB3	A121206	04/06/2011	1Year
Horn Antenna	EMCO	3115	640201028-06	04/06/2011	1Year
Power Meter	Anritsu	ML2487A	6K00001491	02/23/2011	1Year
ETS Horn Antenna	ETS	3160	SEL0076	12/08/2010	1Year
Active Loop Antenna	Beijing Daze	ZN30900A	SEL0097	06/06/2011	1Year
Cable	Resenberger	N/A	No.1	04/06/2011	1Year
Cable	SCHWARZBECK	N/A	No.2	04/06/2011	1Year
Cable	SCHWARZBECK	N/A	No.3	04/06/2011	1Year
Pre-amplifier	R&S	AFS42-00101 800-25-S-42	SEL0081	04/06/2011	1Year
Pre-amplifier	R&S	AFS33-18002650 -30-8P-44	SEL0080	04/06/2011	1Year

3 Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The test procedure used was ANSI Standard C63.4-2003 using a 50 μ H LISN. Both Lines were observed. The bandwidth of the receiver was 10kHz with an appropriate sweep speed. The ambient temperature of the EUT was 25°C with a humidity of 58%.

RADIATION INTERFERENCE: The test procedure used was ANSI Standard C63.4-2003 using a ANRITSU spectrum analyzer with a pre-selector. The analyzer was calibrated in dB above a micro volt at the output of the antenna. The resolution bandwidth was 100kHz and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3MHz above 1 GHz. The ambient temperature of the EUT was 25°C with a humidity of 58%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer and cable loss. The antenna correction factors and cable loss are stated in terms of dB. The gain of the Pre-selector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz) METER READING + ACF + CABLE = FS

33.20 dBuV + 10.36 dB + 0.9 dB= 44.46 dBuV/m @ 3m

ANSI STANDARD C63.4-2003 10.1.7 MEASUREMENT PROCEDURES: The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation. When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes. The situation was similar for the conducted measurement except that the table did not rotate. The EUT was setup as described in ANSI Standard C63.4-2003 10.1.7 with the EUT 40 cm from the vertical ground wall.

4 Summary of Measurement

4.1 Summary of test result

Test Item	Test Requirement	Stanadard Paragraph	Result
Spurious Emission	FCC PART 15 : 2010	Section 15.247&15.209	Compliance
Conduction Emission	FCC PART 15: 2010	Section 15.207	Compliance
6dB Bandwidth Test	FCC PART 15:2010	Section 15.247	Compliance
Peak Power	FCC PART 15:2010	Section 15.247	Compliance
Power Density	FCC PART 15:2010	Section 15.247	Compliance
Number Channel	FCC PART 15:2010	Section 15.247	Not applicable
Dwell Time	FCC PART 15:2010	Section 15.247	Not applicable
Band Edge	FCC PART 15:2010	Section 15.247	Compliance
Antenna Requirement	FCC PART 15 : 2010	Section 15.203	Compliance

Note: EUT can by powered with inside battery or power adapter from AC mains, according to exploratory test, when powered by power adapter from AC mains have worse emissions, and also can make sure EUT have enough power for wireless work, so all the final test were performed with power adapter.

4.2 Test mode

Tested mode, channel, and data rate information			
Mode	data rate (Mbps)(see Note)	Channel	Frequency (MHz)
IEEE 802.11b	11	Low :CH1	2412
	11	Middle: CH7	2437
	11	High: CH11	2462
IEEE 802.11g	6	Low :CH1	2412
	6	Middle: CH7	2437
	6	High: CH11	2462
Note: According exploratory test, EUT will have maximum output power in those data rate. so those data rate were used for all test.			

5 Spurious Emission

5.1 Conducted Spurious Emission

5.1.1 Test limit

Please refer section 15.247.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).


5.1.2 Method of measurement

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 KHz. The video bandwidth is set to 100 KHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

5.1.3 Test Setup

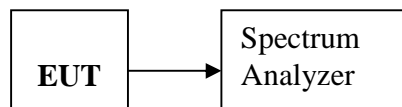

5.1.4 Test Results

PASS.


Detailed information please see the following page.

IEEE 802.11b:

CH Low : 30MHz-2.65GHz


Agilent 02:58:38 Jun 17, 2011

R T

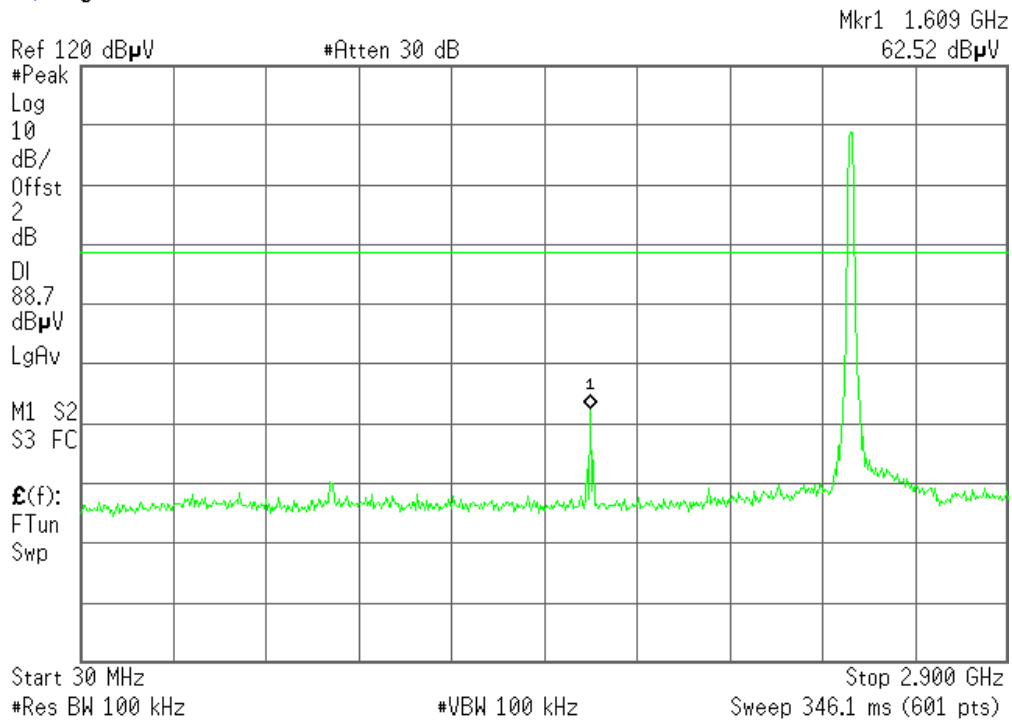

Agilent 02:59:08 Jun 17, 2011


R T

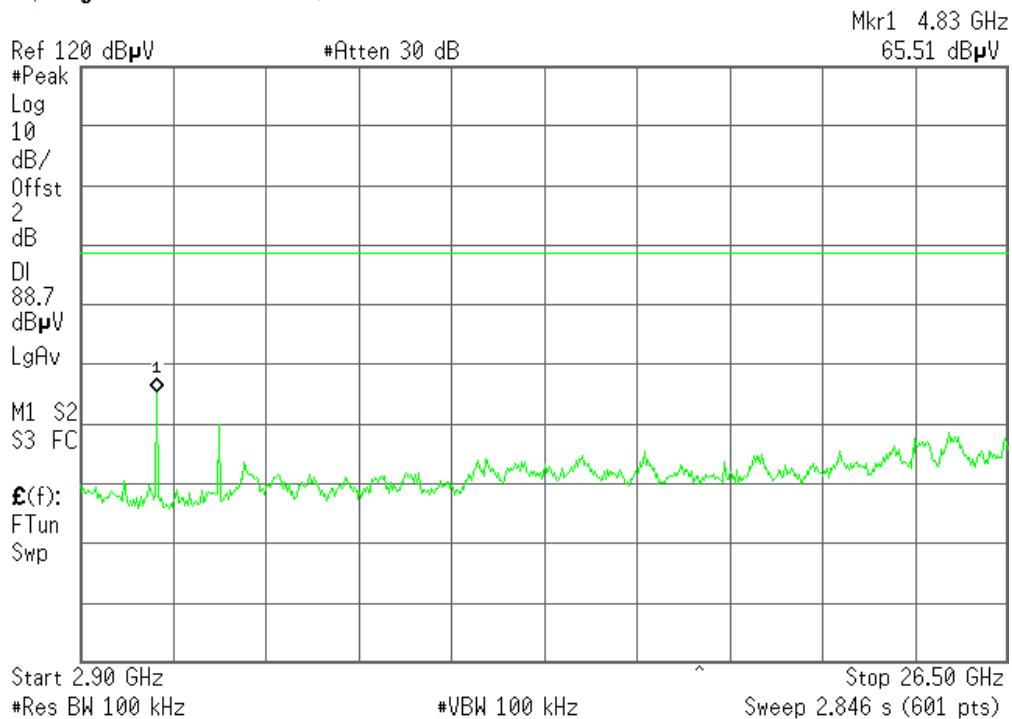

CH Mid : 30MHz-2.6.5GHz


Agilent 02:56:53 Jun 17, 2011

R T

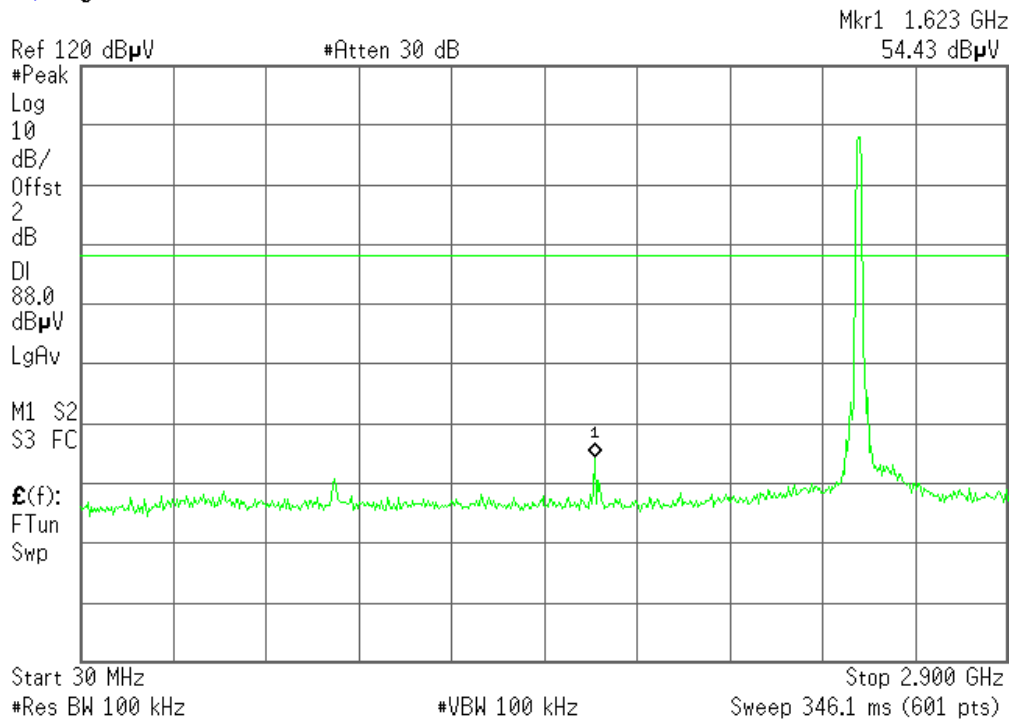

Agilent 02:57:21 Jun 17, 2011


R T

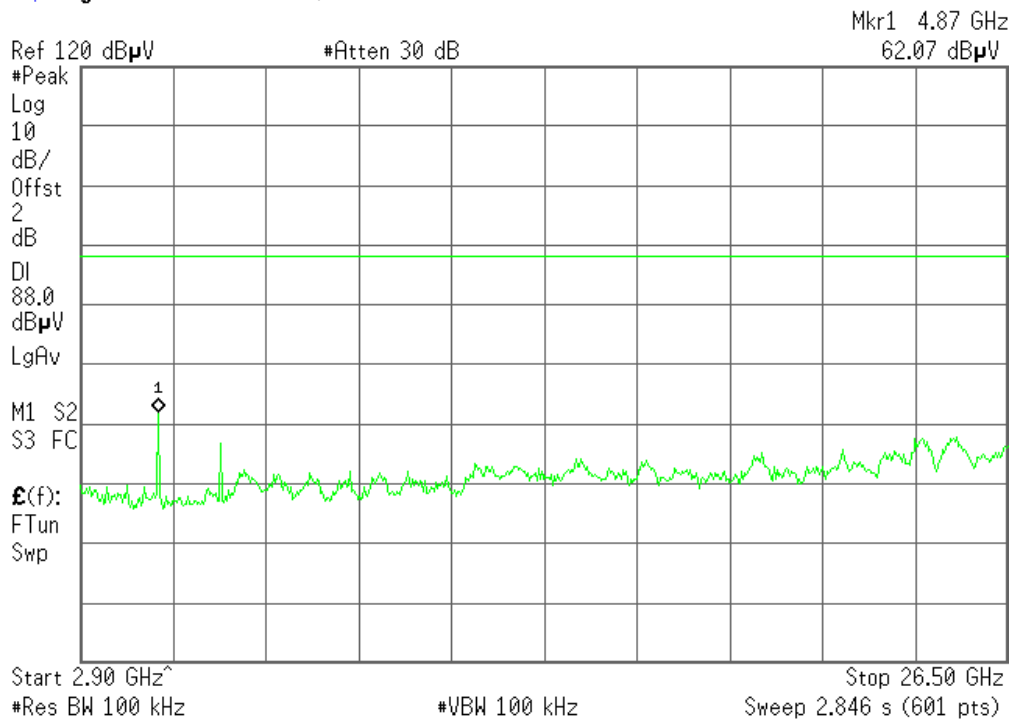

CH High : 30MHz-2.6.5GHz


Agilent 02:54:30 Jun 17, 2011

R T

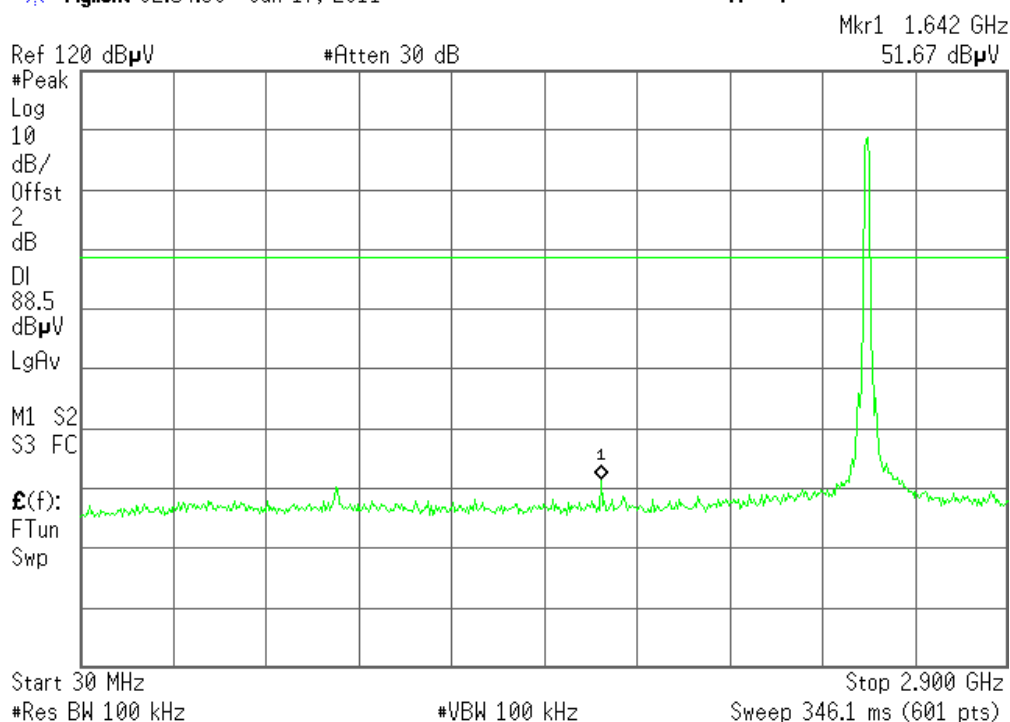

Agilent 02:55:15 Jun 17, 2011

R T

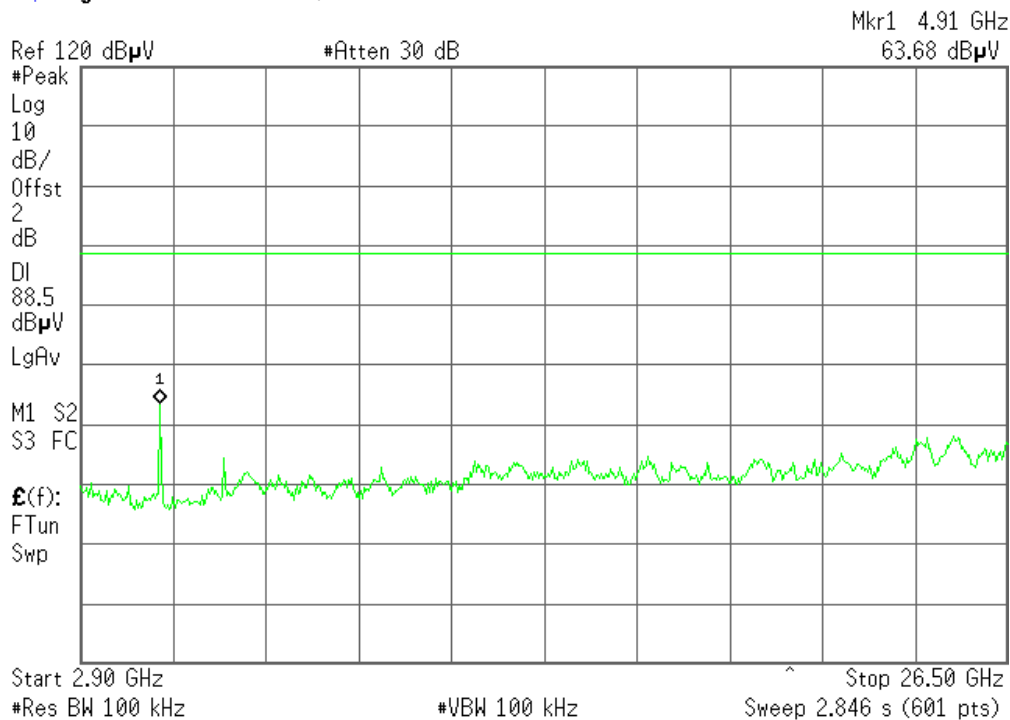


IEEE 802.11g:

CH Low : 30MHz-2.65GHz


Agilent 03:00:37 Jun 17, 2011

R T

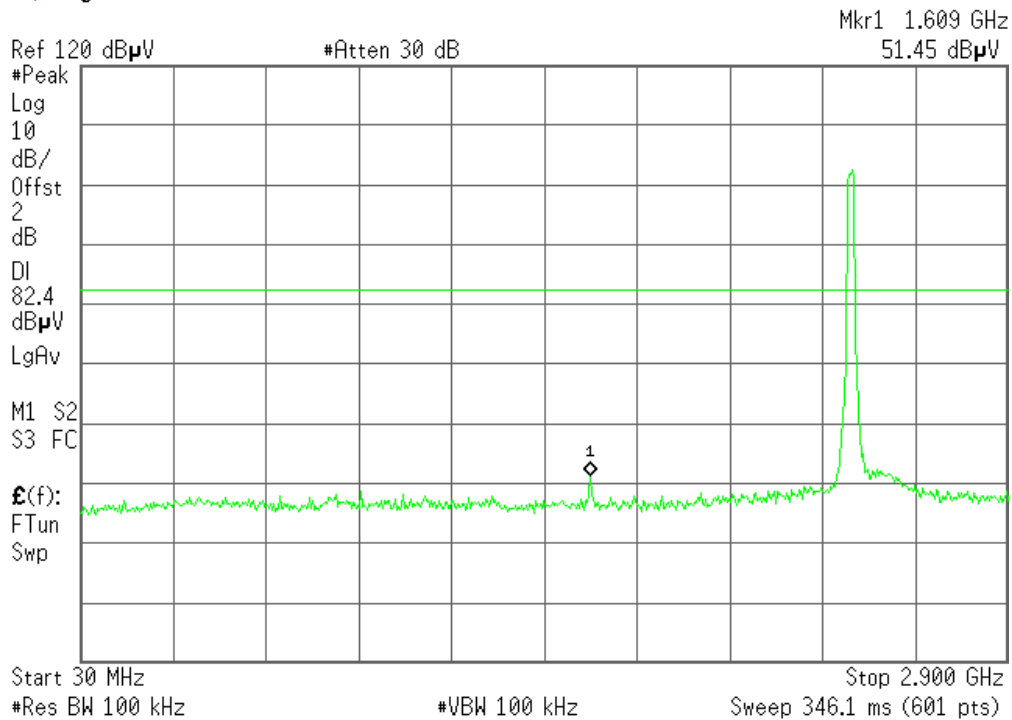

Agilent 03:01:21 Jun 17, 2011


R T

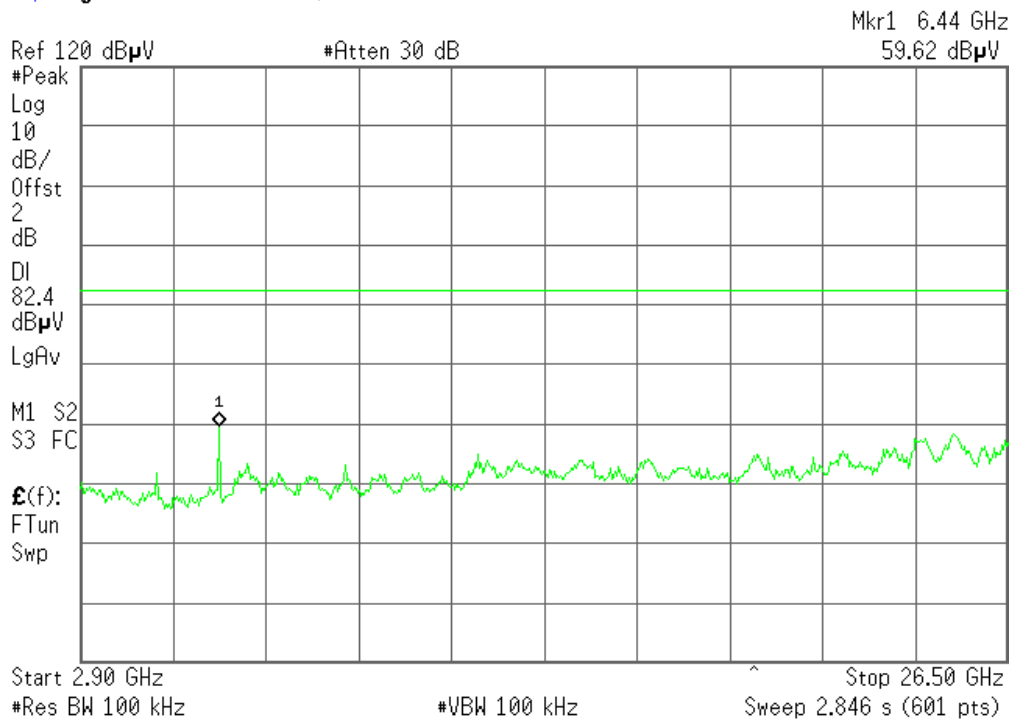

CH Mid : 30MHz-2.65GHz


Agilent 03:02:42 Jun 17, 2011

R T

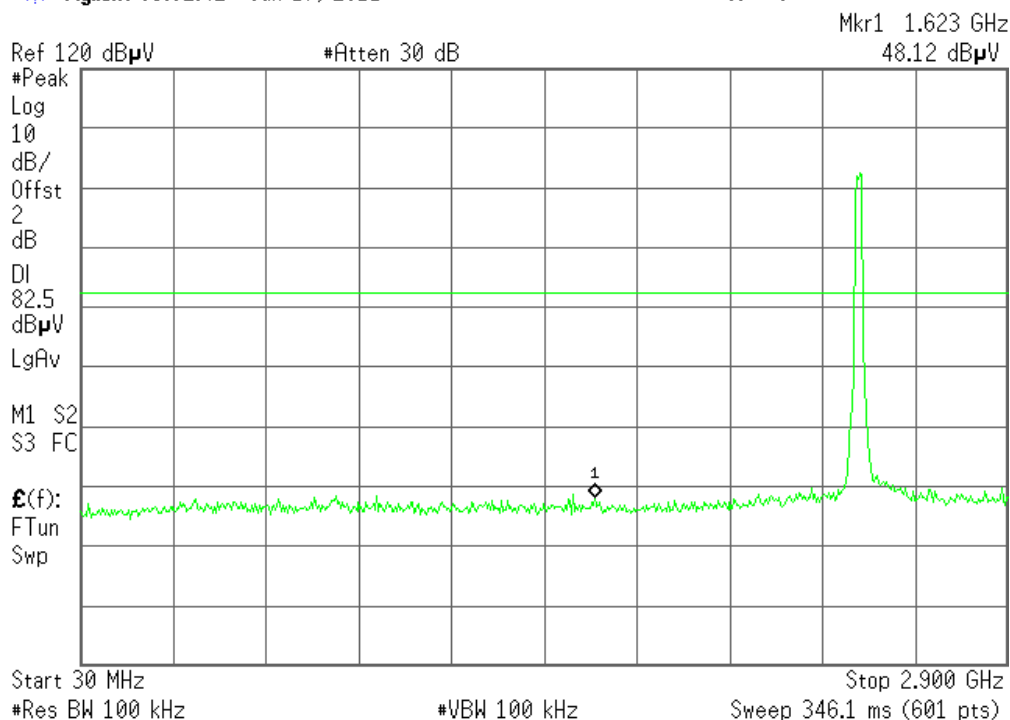

Agilent 03:03:11 Jun 17, 2011


R T

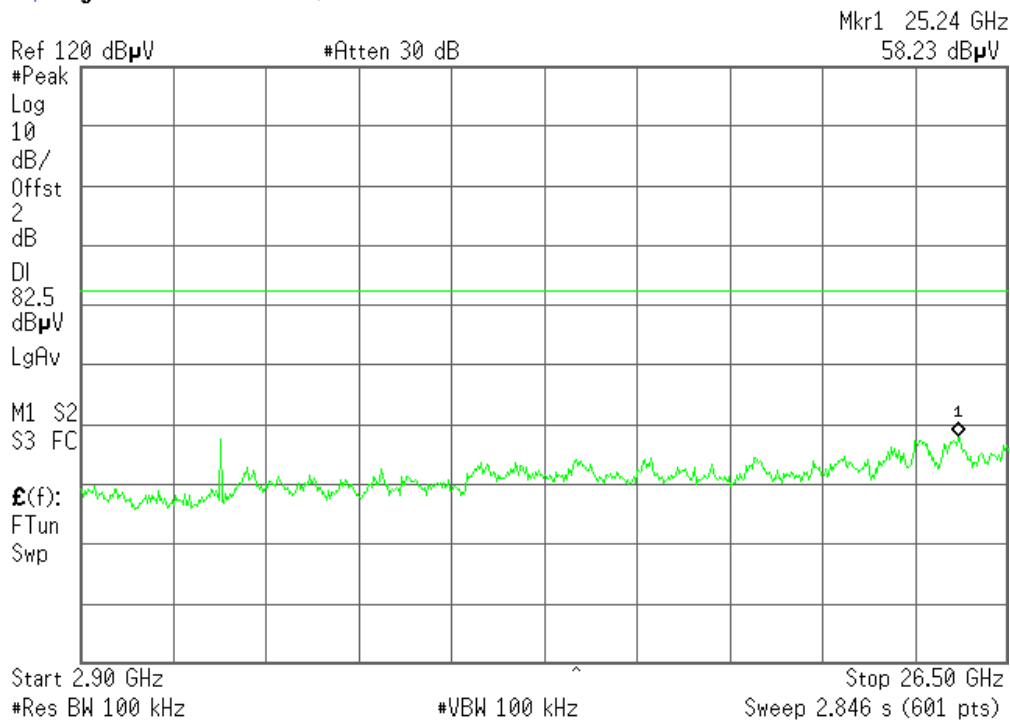

CH High : 30MHz-2.6.5GHz


✱ Agilent 03:04:27 Jun 17, 2011

R T

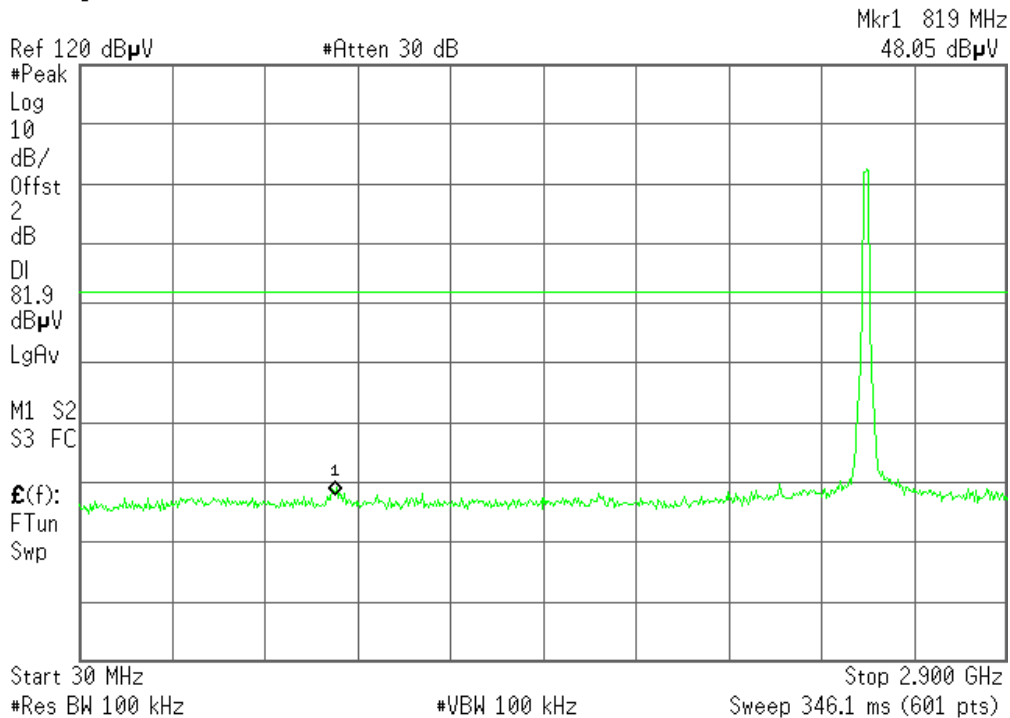

✱ Agilent 03:04:56 Jun 17, 2011

R T

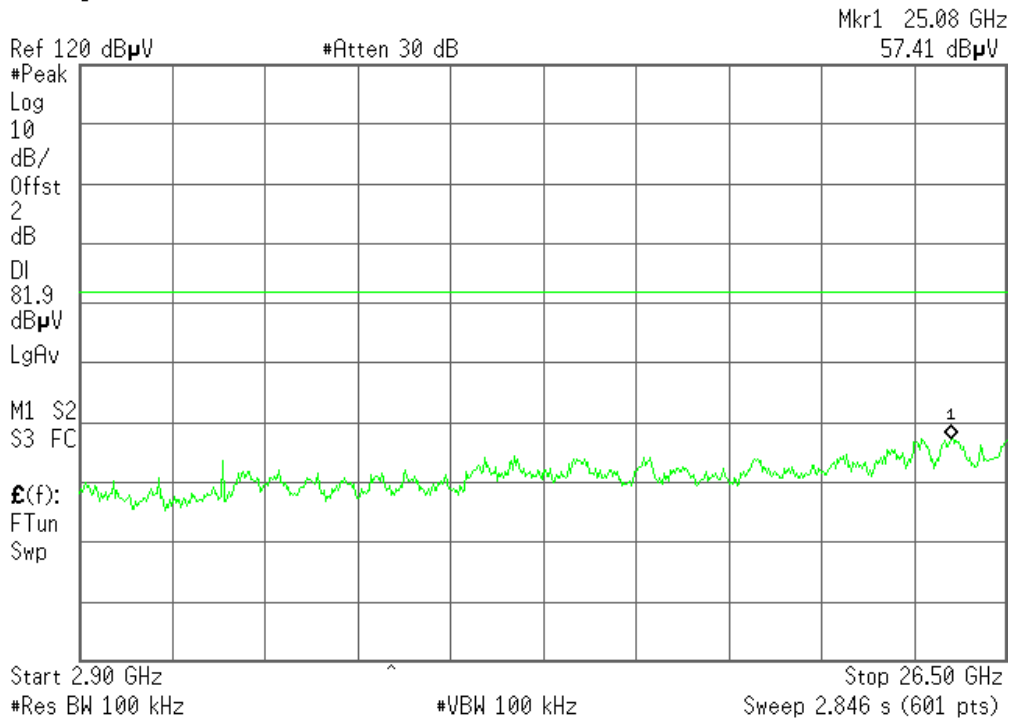

5.2 Radiation Emission

5.2.1 Radiation Emission Limits(15.209)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

NOTE:


- The tighter limit applies at the band edges.
- Emission Level(dB uV/m)=20log Emission Level(Uv/m)

5.2.2 Test Setup


See the next page

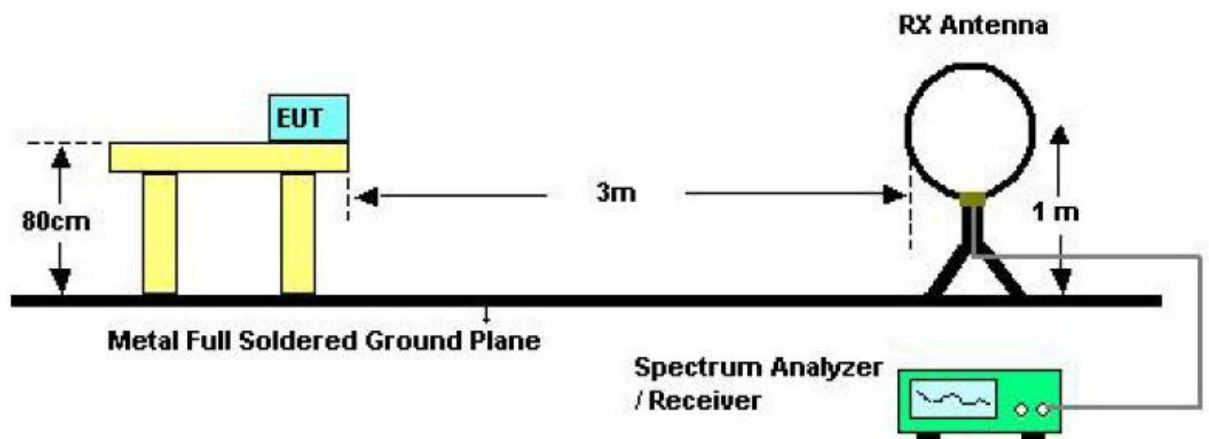

Below 30MHZ Test Setup

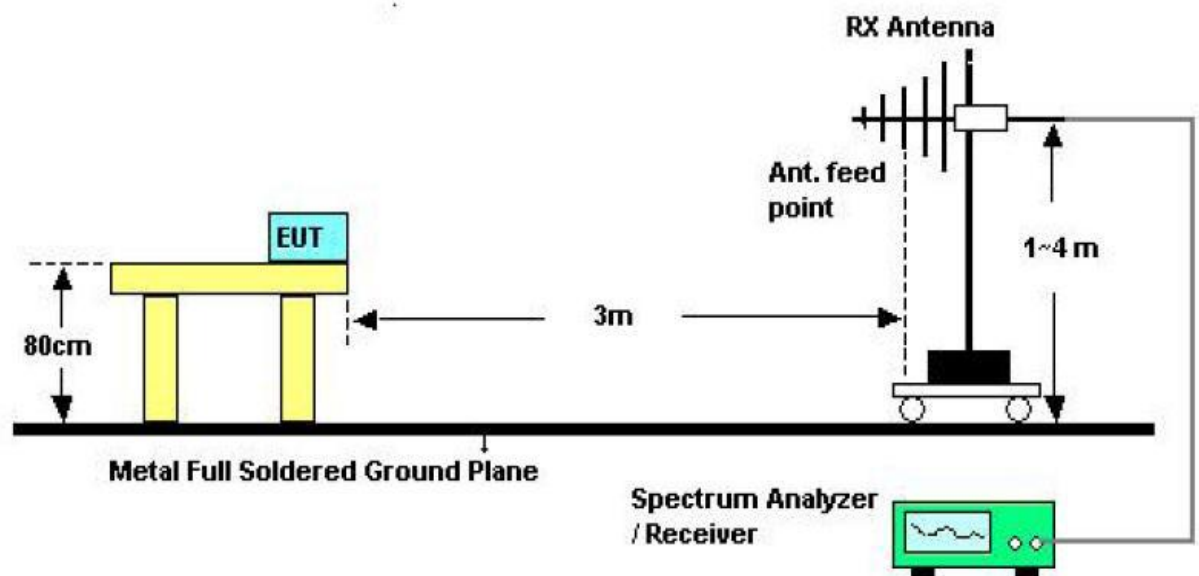

Above 30MHZ Test Setup

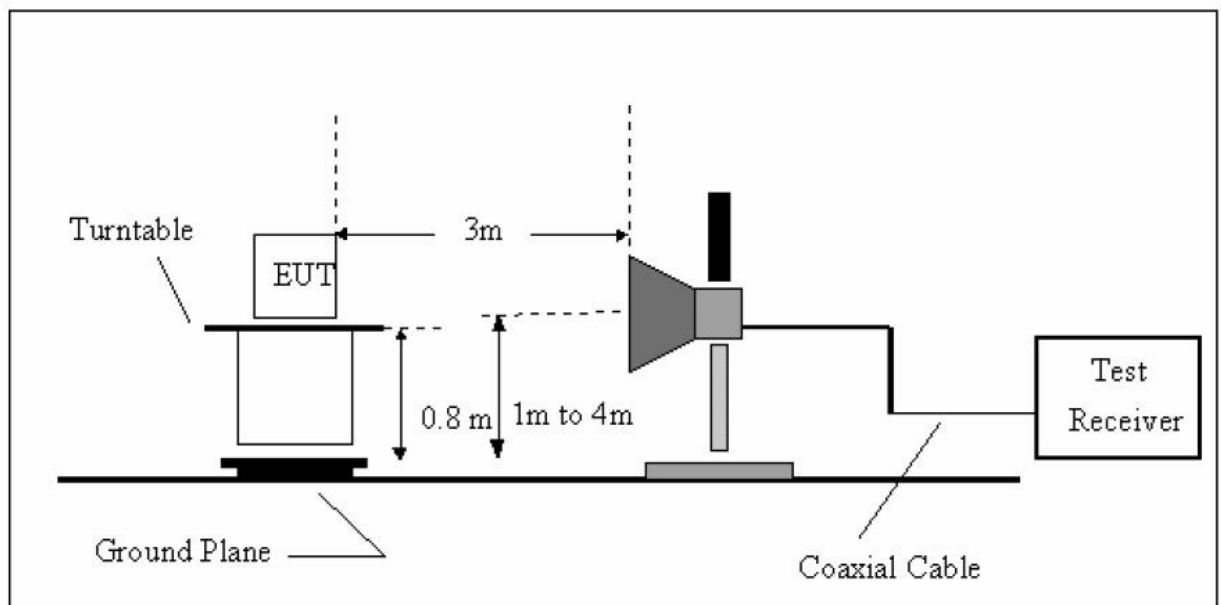

Above 1GHZ Test Setup

5.2.3 Test Procedure

- a) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1GHz, The EUT was placed on a rotating 0.8 m high above ground, The table was rotated 360 degrees to determine the position of the highest radiation
- b) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- c) The initial step in collecting conducted emission data is a spectrum analyzer Peak detector mode pre-scanning the measurement frequency range. Significant Peaks are then marked and then Quasi Peak Detector mode remeasured
- d) If Peak value comply with QP limit Below 1GHz. The EUT deemed to comply with QP limit. But the Peak value and average value both need to comply with applicable limit above 1GHz.
- e) For the actual test configuration, please see the test setup photo.

5.2.4 Test Equipment Setting For emission test. test Result

9KHZ~150KHZ	RBW 200HZ	VBW 1KHZ
150KHZ~30MHZ	RBW 9KHZ	VBW 30KHZ
30MHZ~1GHZ	RBW 120KHZ	VBW 300KHZ
Above 1GHZ	RBW 1MHZ	VBW 3MHZ

5.2.5 Test Condition

Continual Transmitting in maximum power.

5.2.6 Test Result

Detailed information please see the following page.

EUT	TABLET PC	Model Name	DPAD
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V supply by adapter
Test Mode	TX		

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/OP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limits 3m (dBuV/m)	Margin (dBuV/m)
40.670	V	Peak	42.33	-15.19	27.14	40.00	-12.86
159.010	V	Peak	46.50	-13.59	32.91	43.50	-10.59
321.970	V	Peak	50.25	-13.80	36.45	46.00	-9.55
513.060	V	Peak	46.77	-9.86	36.91	46.00	-9.09
680.870	V	Peak	44.36	-6.95	37.41	46.00	-8.59
778.840	V	Peak	45.87	-5.54	40.33	46.00	-5.67

EUT	TABLET PC	Model Name	DPAD
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V supply by adapter
Test Mode	TX		

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/OP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limits 3m (dBuV/m)	Margin (dBuV/m)
50.370	H	Peak	49.23	-15.68	33.55	40.00	-6.45
67.830	H	Peak	47.21	-17.08	30.13	40.00	-9.87
114.390	H	Peak	50.66	-16.25	34.41	43.50	-9.09
426.730	H	Peak	45.82	-11.39	34.43	46.00	-11.57
438.370	H	Peak	46.36	-11.12	35.24	46.00	-10.76
602.30	H	Peak	45.34	-8.26	37.08	46.00	-8.92

Notes: Above is Below 1GHZ test data

IEEE 802.11b

EUT	TABLET PC	Model Name	DPAD
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V supply by adapter
Test Mode	TX Low		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1273	V	54.75	---	-10.96	43.79	---	74.00	54.00	-10.21	Peak
1609	V	54.36	---	-9.84	44.52	---	74.00	54.00	-9.48	Peak
3126	V	49.88	---	-5.63	44.25	---	74.00	54.00	-9.75	Peak
4823	V	45.22	---	0.64	45.86	---	74.00	54.00	-8.14	Peak
N/A										

EUT	TABLET PC	Model Name	DPAD
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V supply by adapter
Test Mode	TX Low		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1371	H	54.85	---	-10.43	44.42	---	74.00	54.00	-9.58	Peak
1609	H	53.67	---	-9.84	43.83	---	74.00	54.00	-10.17	Peak
2154	H	53.81	---	-8.24	45.57	---	74.00	54.00	-8.43	Peak
4823	H	44.10	---	0.64	44.74	---	74.00	54.00	-9.26	Peak
N/A										

Notes:AV Means AV detector test data,Peak Means Peak detector test data.
Emissions attenuated more than 20 dB below the permissible value are not reported.

EUT	TABLET PC	Model Name	DPAD
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V supply by adapter
Test Mode	TX Mid		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1376	V	53.91	---	-10.43	43.48	---	74.00	54.00	-10.52	Peak
1623	V	53.87	---	-9.84	44.03	---	74.00	54.00	-9.97	Peak
2764	V	52.07	---	-6.38	45.69	---	74.00	54.00	-8.31	Peak
4872	V	42.45	---	0.76	43.21	---	74.00	54.00	-10.79	Peak

EUT	TABLET PC	Model Name	DPAD
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V supply by adapter
Test Mode	TX Mid		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1623	H	55.58	---	-9.84	45.74	---	74.00	54.00	-8.26	Peak
1754	H	55.78	---	-9.27	46.51	---	74.00	54.00	-7.49	Peak
3065	H	50.53	---	-5.74	44.79	---	74.00	54.00	-9.21	Peak
4872	H	44.76	---	0.76	45.52	---	74.00	54.00	-8.48	Peak

Notes:AV Means AV detector test data,Peak Means Peak detector test data.
Emissions attenuated more than 20 dB below the permissible value are not reported.

EUT	TABLET PC	Model Name	DPAD
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V supply by adapter
Test Mode	TX High		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1527	V	54.83	---	-10.14	44.69	---	74.00	54.00	-9.31	Peak
1642	V	53.11	---	-9.84	43.27	---	74.00	54.00	-10.73	Peak
1977	V	54.13	---	-8.64	45.49	---	74.00	54.00	-8.51	Peak
4913	V	44.31	---	0.87	45.18	---	74.00	54.00	-8.82	Peak

EUT	TABLET PC	Model Name	DPAD
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V supply by adapter
Test Mode	TX High		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1436	H	56.76	---	-10.29	46.47	---	74.00	54.00	-7.53	Peak
1642	H	54.20	---	-9.84	44.36	---	74.00	54.00	-9.64	Peak
1829	H	54.79	---	-9.16	45.63	---	74.00	54.00	-8.37	Peak
4913	H	43.98	---	0.87	44.85	---	74.00	54.00	-9.15	Peak

Notes:AV Means AV detector test data,Peak Means Peak detector test data.
Emissions attenuated more than 20 dB below the permissible value are not reported.

IEEE 802.11 g:

EUT	TABLET PC	Model Name	DPAD
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V supply by adapter
Test Mode	TX Low		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1327	V	55.33	---	-10.84	44.49	---	74.00	54.00	-9.51	Peak
1609	V	53.56	---	-9.84	43.72	---	74.00	54.00	-10.28	Peak
1954	V	54.27	---	-8.64	45.63	---	74.00	54.00	-8.37	Peak
4823	V	44.12	---	0.64	44.76	---	74.00	54.00	-9.24	Peak
N/A										

EUT	TABLET PC	Model Name	DPAD
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V supply by adapter
Test Mode	TX Low		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1428	H	55.75	---	-10.29	45.46	---	74.00	54.00	-8.54	Peak
1609	H	54.63	---	-9.84	44.79	---	74.00	54.00	-9.21	Peak
2894	H	50.35	---	-5.87	44.48	---	74.00	54.00	-9.52	Peak
4823	H	44.88	---	0.64	45.52	---	74.00	54.00	-8.48	Peak
N/A										

Notes:AV Means AV detector test data,Peak Means Peak detector test data.
Emissions attenuated more than 20 dB below the permissible value are not reported.

EUT	TABLET PC	Model Name	DPAD
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V supply by adapter
Test Mode	TX Mid		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1271	V	56.20	---	-10.96	45.24	---	74.00	54.00	-8.76	Peak
1623	V	54.57	---	-9.84	44.73	---	74.00	54.00	-9.27	Peak
2796	V	51.03	---	-6.38	44.65	---	74.00	54.00	-9.35	Peak
4872	V	44.40	---	0.76	45.16	---	74.00	54.00	-8.84	Peak

EUT	TABLET PC	Model Name	DPAD
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V supply by adapter
Test Mode	TX Mid		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1216	H	57.62	---	-11.25	46.37	---	74.00	54.00	-7.63	Peak
1324	H	55.93	---	-10.84	45.09	---	74.00	54.00	-8.91	Peak
1623	H	55.70	---	-9.84	45.86	---	74.00	54.00	-8.14	Peak
4872	H	43.65	---	0.76	44.41	---	74.00	54.00	-9.59	Peak

Notes:AV Means AV detector test data,Peak Means Peak detector test data.
Emissions attenuated more than 20 dB below the permissible value are not reported.

EUT	TABLET PC	Model Name	DPAD
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V supply by adapter
Test Mode	TX High		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1642	V	53.58	---	-9.84	43.74	---	74.00	54.00	-10.26	Peak
1754	V	54.90	---	-9.27	45.63	---	74.00	54.00	-8.37	Peak
2186	V	52.72	---	-8.24	44.48	---	74.00	54.00	-9.52	Peak
4913	V	44.42	---	0.87	45.29	---	74.00	54.00	-8.71	Peak

EUT	TABLET PC	Model Name	DPAD
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V supply by adapter
Test Mode	TX High		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1432	H	56.08	---	-10.29	45.79	---	74.00	54.00	-8.21	Peak
1642	H	56.19	---	-9.84	46.35	---	74.00	54.00	-7.65	Peak
3572	H	49.42	---	-4.76	44.66	---	74.00	54.00	-9.34	Peak
4913	H	45.07	---	0.76	45.83	---	74.00	54.00	-8.17	Peak

Notes:AV Means AV detector test data,Peak Means Peak detector test data.
Emissions attenuated more than 20 dB below the permissible value are not reported.


6 POWER LINE CONDUCTED EMISSION

6.1 Conducted Emission Limits(15.209&249)

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50

- Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.
3. The limit decreases in line with the logarithm of the frequency in the rang of 0.15 to 0.50 MHz.

6.2 Test Setup

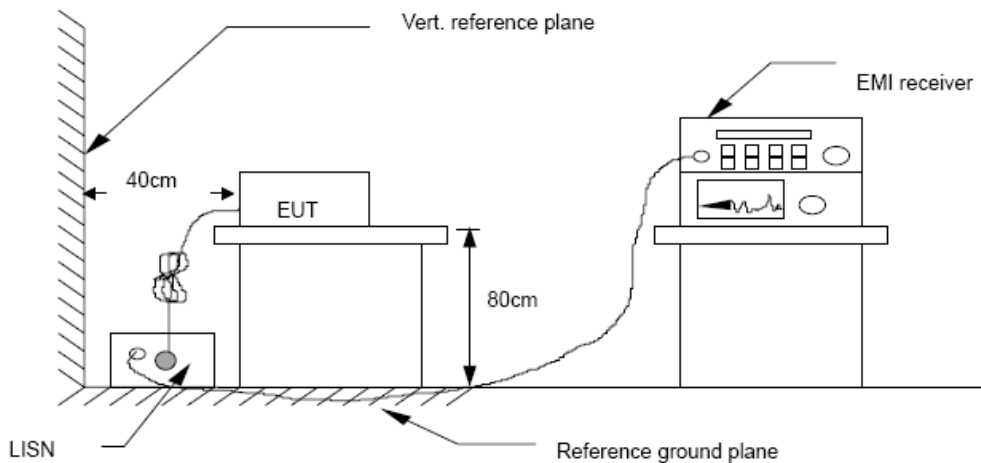

6.3 Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4-2003 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9 kHz.

6.4 Test Results

PASS

Detailed information please see the following page.

EUT	TABLET PC	Model Name	DPAD
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test voltage	DC 5V supply by adapter
Test Mode	Noraml		

FREQ MHz	PEAK dBuV	Q.P. See Peak dBuV	AVG See Peak dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dBuV	AVG Margin dBuV	NOTE
0.356	39.93	---	---	58.96	48.96	-19.03	-9.03	L1
0.702	41.05	---	---	56.00	46.00	-14.95	-4.95	L1
1.050	41.25	---	---	56.00	46.00	-14.75	-4.75	L1
1.400	40.16	---	---	56.00	46.00	-15.84	-5.84	L1
2.790	40.74	---	---	56.00	46.00	-15.26	-5.26	L1
3.160	40.57	---	---	56.00	46.00	-15.43	-5.43	L1
0.357	43.39	---	---	60.24	50.24	-16.85	-6.85	L2
0.602	38.47	---	---	56.00	46.00	-17.53	-7.53	L2
0.951	34.70	---	---	56.00	46.00	-21.30	-11.3	L2
1.550	38.38	---	---	56.00	46.00	-17.62	-7.62	L2
2.850	38.03	---	---	56.00	46.00	-17.97	-7.97	L2
3.840	38.92	---	---	56.00	46.00	-17.08	-7.08	L2

Note: L1=Line One (Live Line) /L2= Line Two (Neutral Line)
 PEAK greater than QP greater than AVG

7 Peak Power

7.1 Test limit


Please refer section 15.247.

Regulation 15.247(b) The limit of Maximum Peak Output Power Measurement is 1W(30dBm)

7.2 Test Procedure

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.

7.3 Test Setup

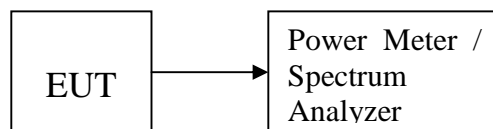

7.4 Test Results

Channel	Frequency (MHz)	Reading Power (dBm)	Factor (dB)	Out put Power (dBm)	Out put Power (W)	Limit (W)	Result
IEEE 802.11b:							
Mid	2412	13.42	2.50	15.92	0.03908	1	PASS
High	2437	15.24	2.50	17.74	0.05943		PASS
Low	2462	14.72	2.50	17.22	0.05272		PASS
IEEE 802.11g:							
Low	2412	12.51	2.50	15.01	0.03170	1	PASS
Mid	2437	11.84	2.50	14.34	0.02716		PASS
High	2462	12.93	2.50	15.43	0.03491		PASS

8 PEAK POWER SPECTRAL DENSITY


8.1 Test limit

- 8.1.1 Please refer section 15.247.
- 8.1.2 For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
- 8.1.3 The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

8.2 Method of measurement

- 8.2.1 Place the EUT on the table and set it in transmitting mode.
- 8.2.2 Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 8.2.3 Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s.
- 8.2.4 Record the max. reading.
- 8.2.5 Repeat the above procedure until the measurements for all frequencies are completed.

8.3 Test Setup

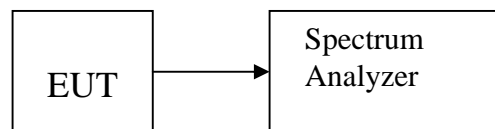

8.4 Test Results

PASS.

Detailed information please see the following page.


IEEE 802.11b:

CH Low :

Agilent 02:46:33 Jun 17, 2011

R T

Mkr1 2.411 855 9 GHz
-23.26 dBm

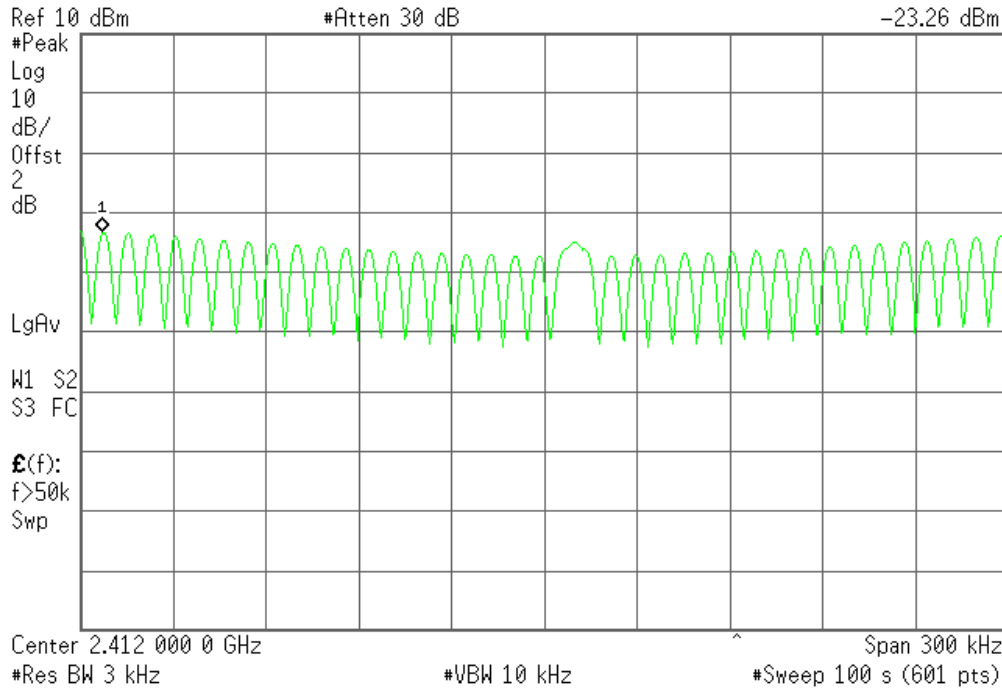


CH Mid


Agilent 02:49:03 Jun 17, 2011

R T

Mkr1 2.437 009 5 GHz
-23.45 dBm

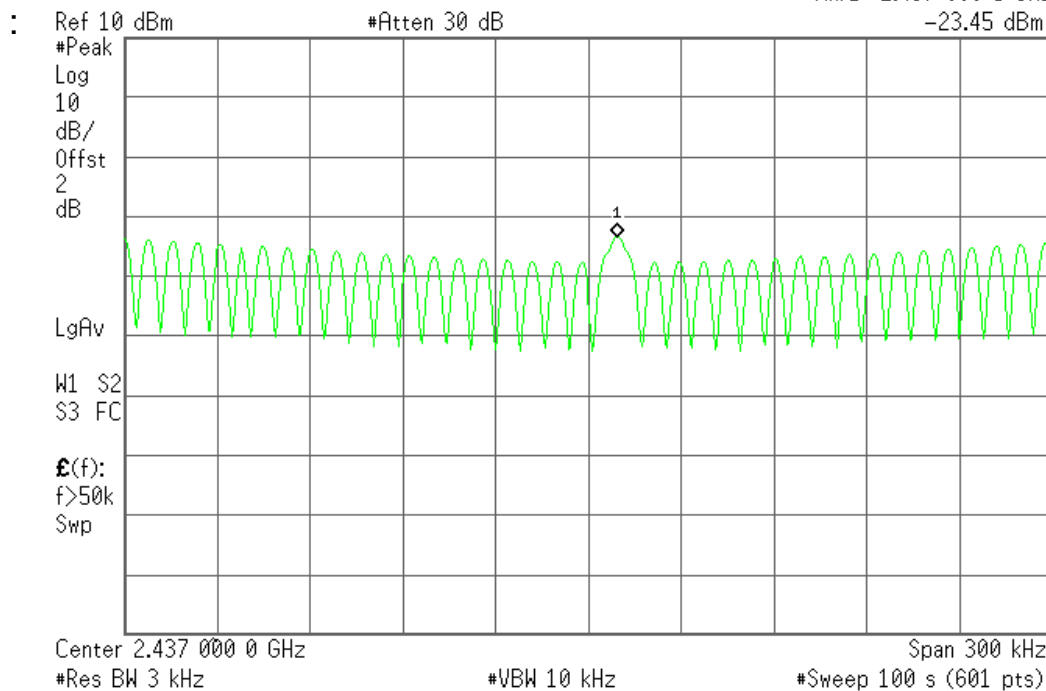

CH High :

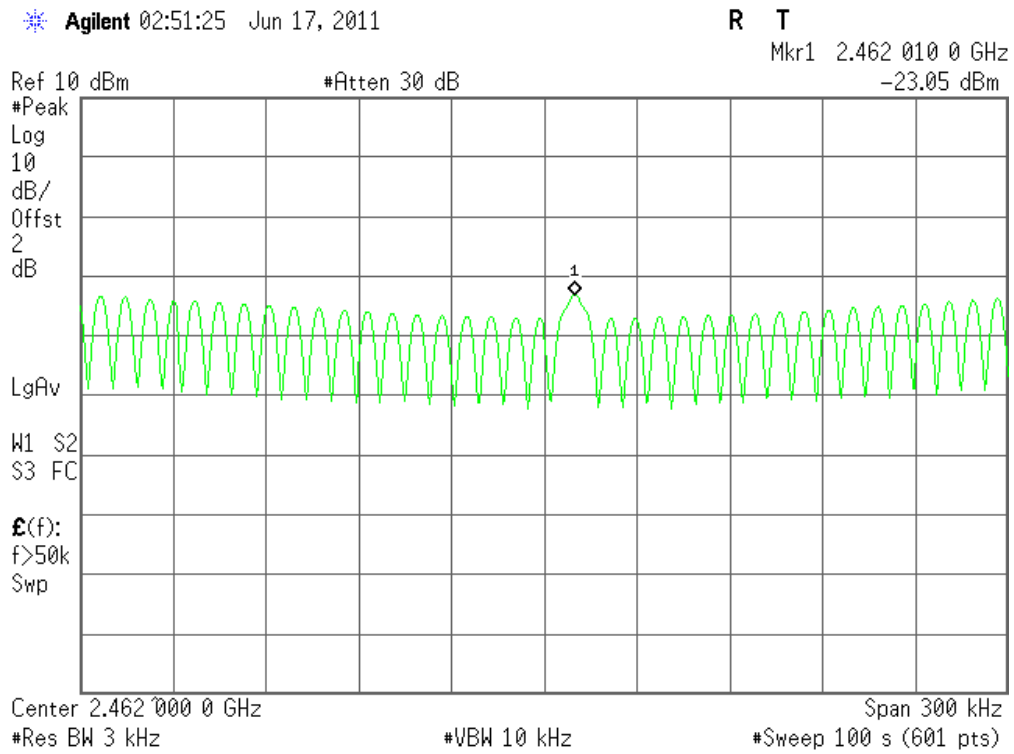


IEEE 802.11g:

CH Low :

Agilent 02:40:40 Jun 17, 2011

R T

Mkr1 2.411 853 4 GHz
-25.48 dBm

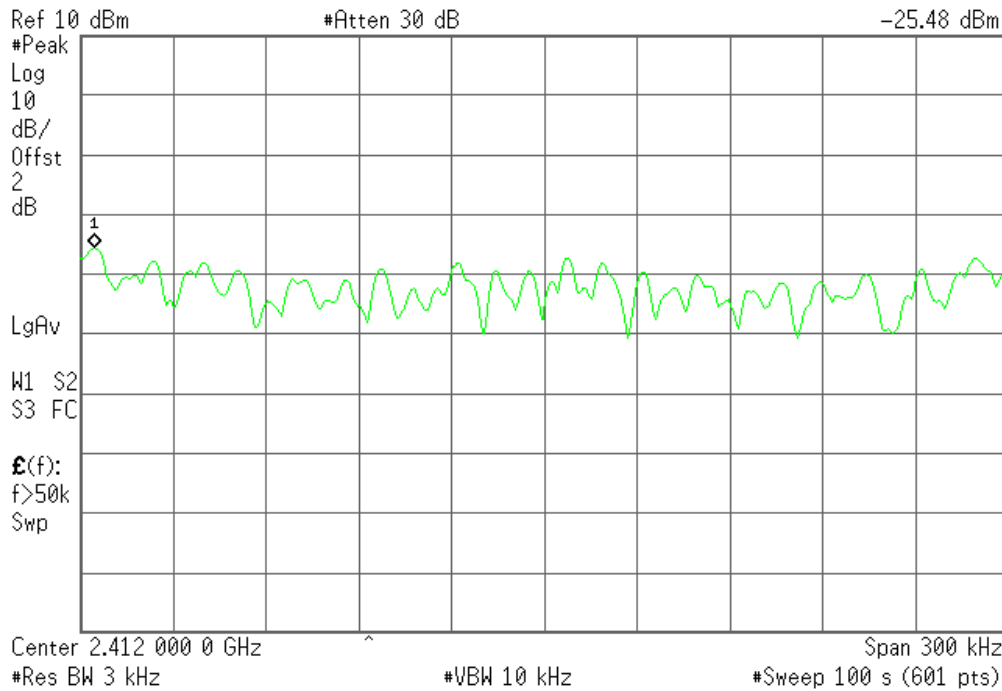


CH Mid :


Agilent 02:37:49 Jun 17, 2011

R T

Mkr1 2.436 852 3 GHz
-25.40 dBm

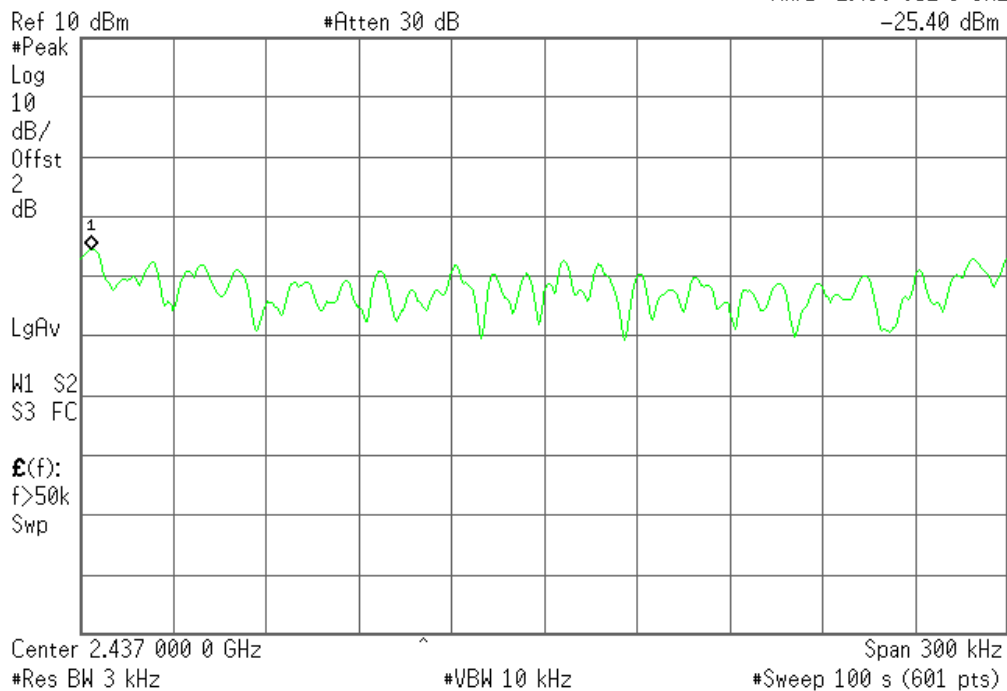

CH High :

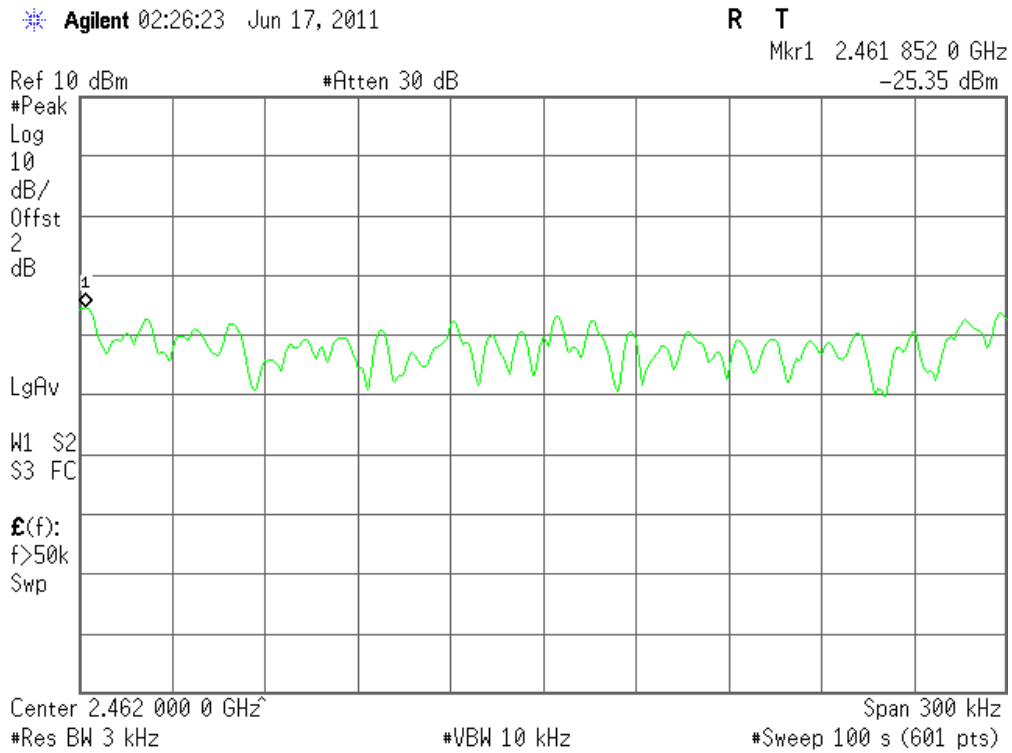

9 6dB Bandwidth

9.1 Test limit

Please refer section 15.247

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz.

9.2 Method of measurement

a) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

b) The test receiver RBW set 100KHZ, VBW set 100KHZ, Sweep time set auto.

9.3 Test Setup

Same as 7.3


9.4 Test Results

PASS.


Detailed information please see the following page.

IEEE 802.11b:


CH Low :

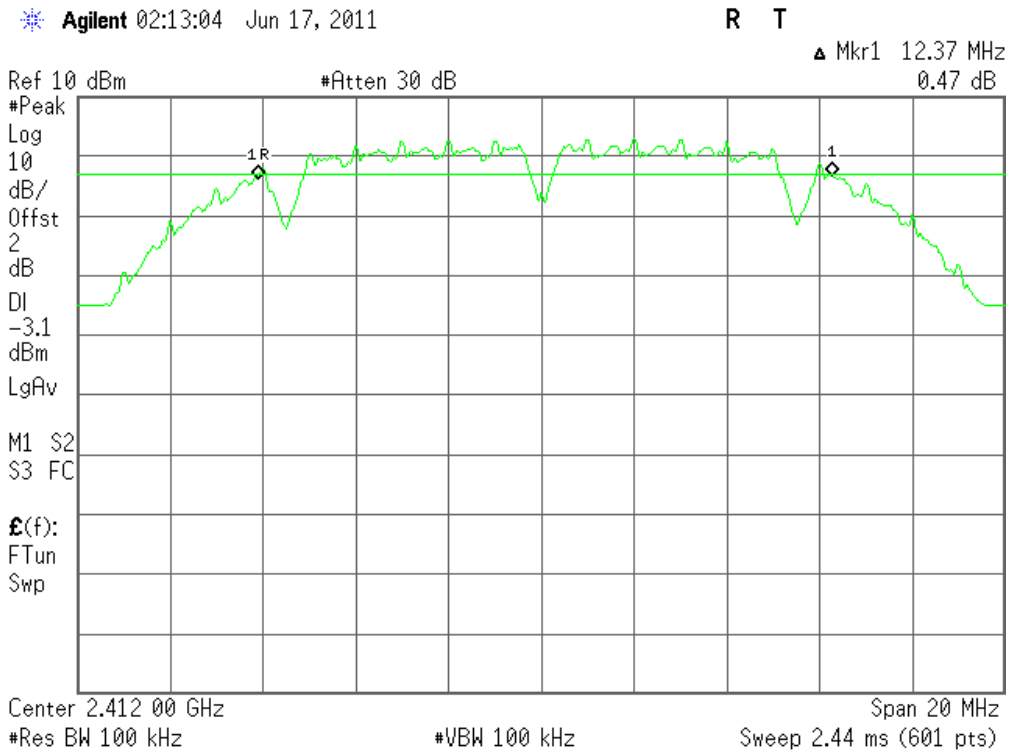

CH Mid :

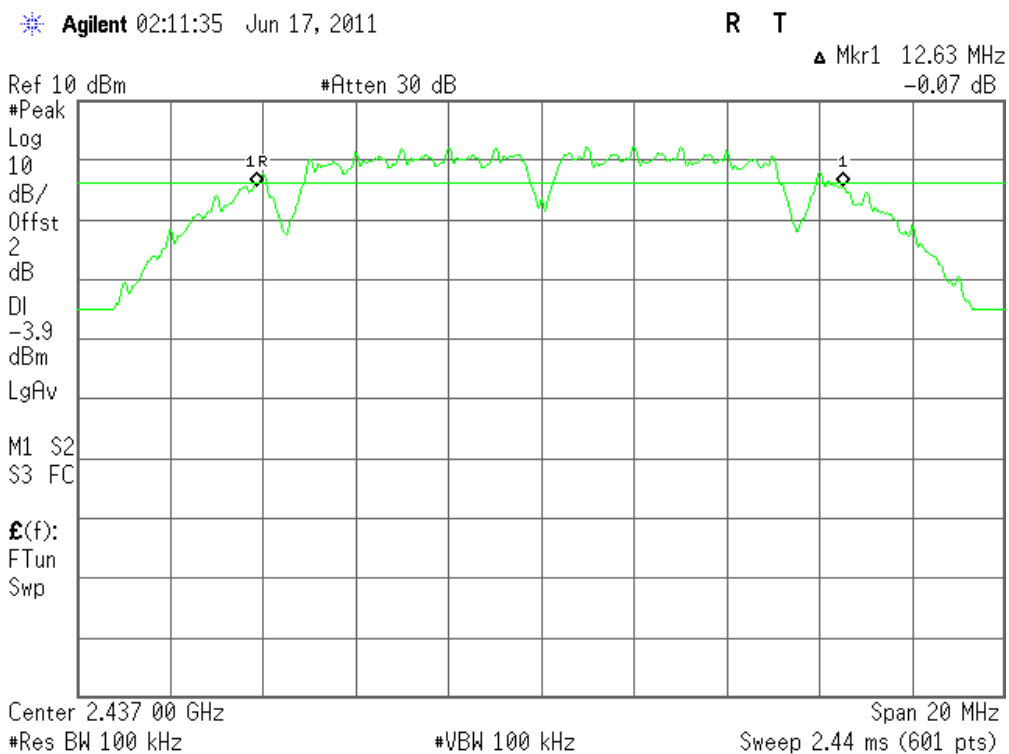

CH High :

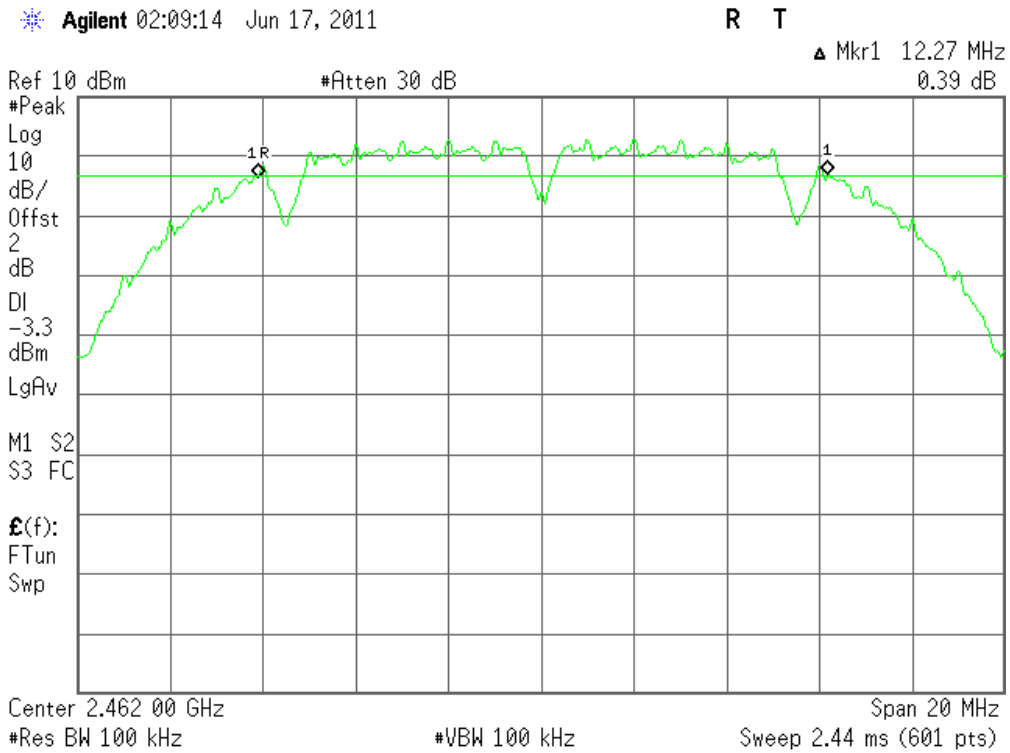


IEEE 802.11g:

CH Low :

Agilent 02:14:48 Jun 17, 2011

R T

Δ Mkr1 16.53 MHz
-0.49 dB

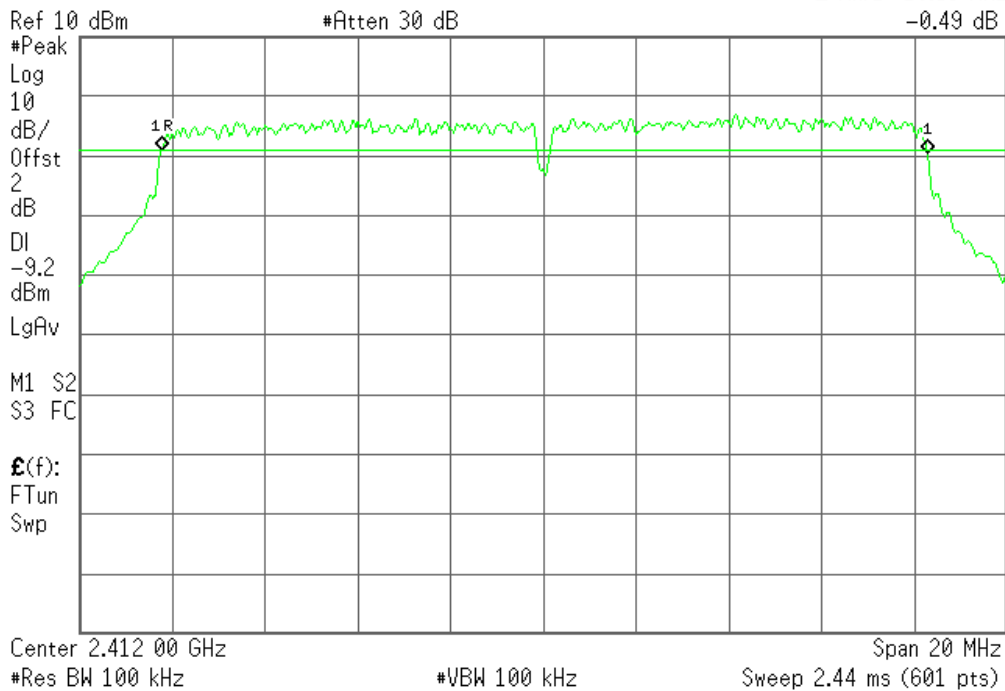


CH Mid :


Agilent 02:16:07 Jun 17, 2011

R T

Δ Mkr1 16.57 MHz
-0.70 dB

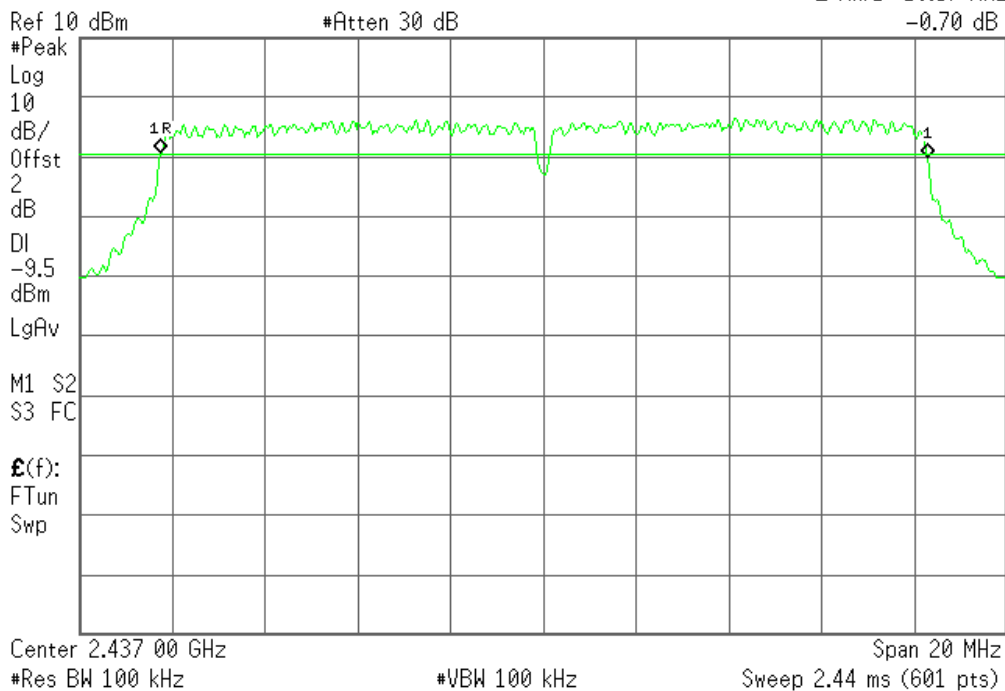

CH High :

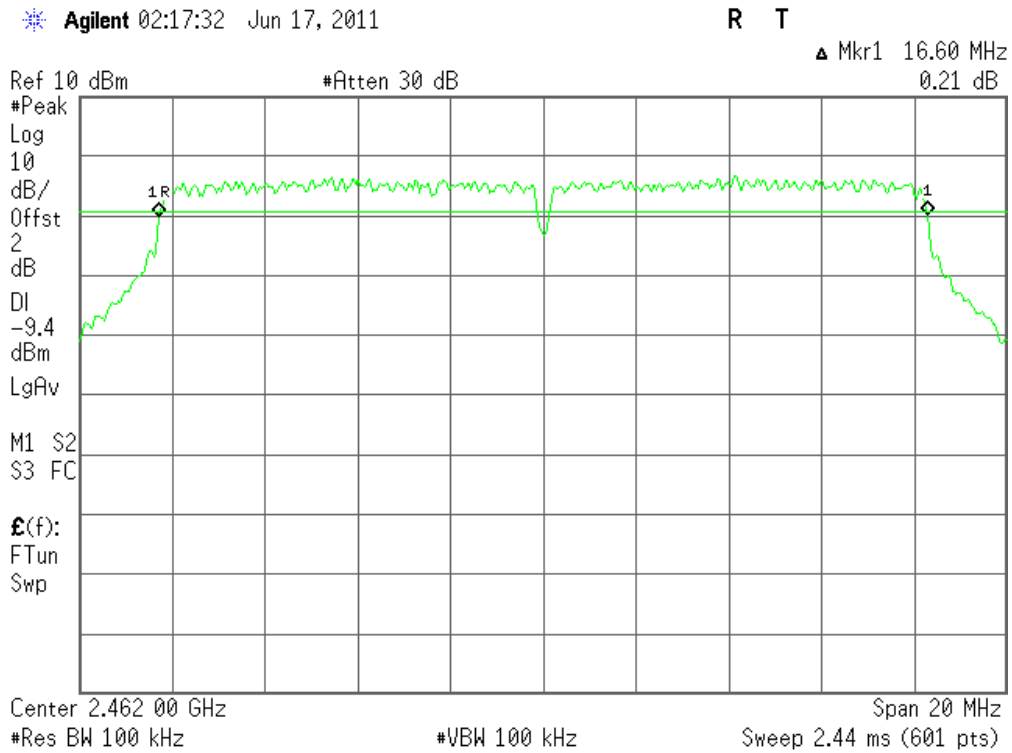

10NUMBER OF HOPPING FREQUENCY

10.1 Test limit

Please refer section15.247

According to § 15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

10.2 Method of measurement

10.2.1. Place the EUT on the table and set it in transmitting mode.

10.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

10.2.3. Set spectrum analyzer Start=2400MHz, Stop = 2441.5MHz, Sweep = 1ms and Start=2441.5MHz, Stop = 2483.5MHz, Sweep = 1ms.

10.2.4. Set the spectrum analyzer as RBW, VBW=510kHz,

10.2.5. Max hold, view and count how many channel in the band.

10.3 Test Setup

Same as 7.3

10.4 Test Results

The test is not applicable

11 DWELL TIME

11.1 Test limit

Please refer section 15.247

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

11.2 Method of measurement

- 11.2.1. Place the EUT on the table and set it in transmitting mode.
- 11.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 11.2.3. Set center frequency of spectrum analyzer = operating frequency.
- 11.2.4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
- 11.2.5. Repeat above procedures until all frequency measured were complete.

11.3 Test Setup

Same as 7.3

11.4 Test Results

The test is not applicable

12 Band Edge Check

12.1 Test limit

Please refer section 15.247

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

12.2 Test Procedure

12.2.1 Put the EUT on a 0.8m high table, power on the EUT. Emissions were scanned and measured rotating the EUT to 360 degrees, Find the maximum Emission

12.2.2 Turning to Low and High frequency, then reduced 50dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency.

12.2.3 Check the spurious emissions out of band.

12.2.4 RBW, VBW Setting, please see the following test plot.

12.3 Test Setup

Same as 5.2.2.

12.4 Test Result

PASS.

Detailed information please see the following page.

IEEE 802.11b:

IEEE 802.11g:

IEEE 802.11b:

CH LOW :

Detector mode: Peak

Agilent 11:57:49 Jun 16, 2011

Polarity: Horizontal

R T

Mkr1 2.390 0 GHz

53.37 dBμV


Ref 120 dBμV

#Atten 30 dB

#Peak
Log
10
dB/

DI
74.0
dBμV
LgAv

M1 S2
S3 FC
A
E(f):
FTun
Swp

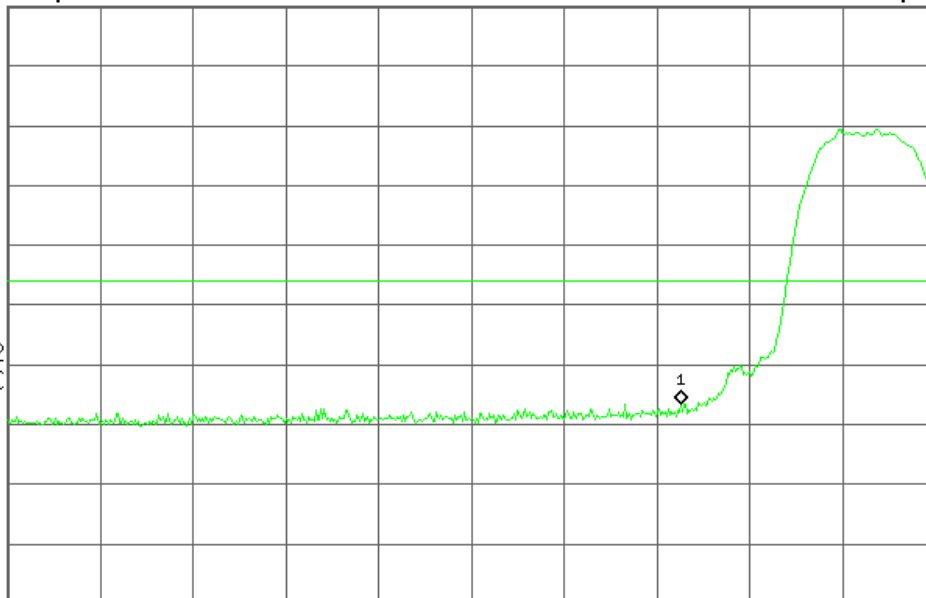

Start 2.310 0 GHz

Stop 2.420 0 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1 ms (601 pts)

Detector mode: Average

Agilent 11:58:54 Jun 16, 2011

Polarity: Horizontal

R T

Mkr1 2.390 0 GHz

42.51 dBμV


Ref 120 dBμV

#Atten 30 dB

#Avg
Log
10
dB/

DI
54.0
dBμV
PAvg

W1 S2
S3 FC
A
E(f):
FTun
Swp

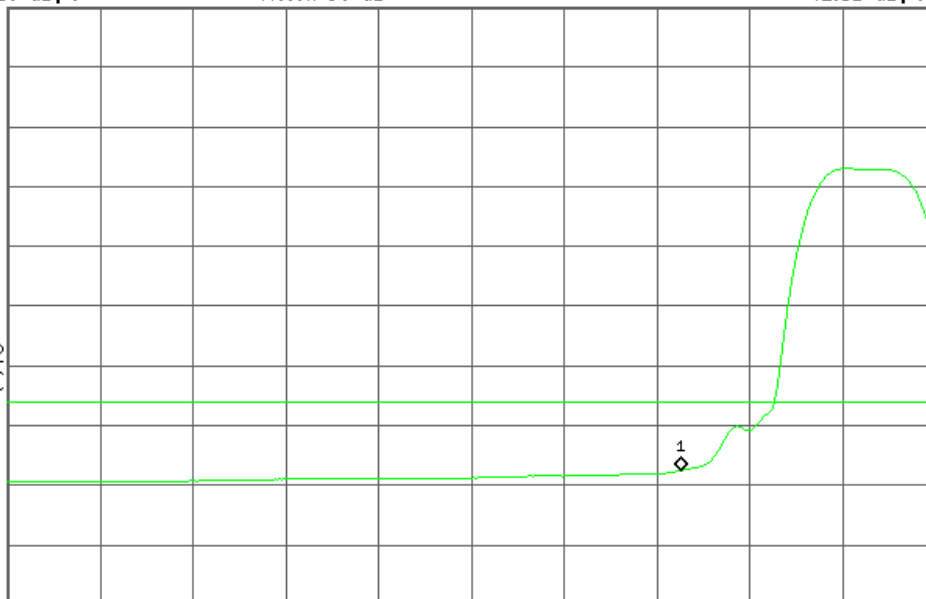

Start 2.310 0 GHz

Stop 2.420 0 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 27.12 s (601 pts)

CH High :

Detector mode: Peak


Agilent 12:02:27 Jun 16, 2011

Polarity: Horizontal

R T

Mkr1 2.483 50 GHz

51.65 dB μ V

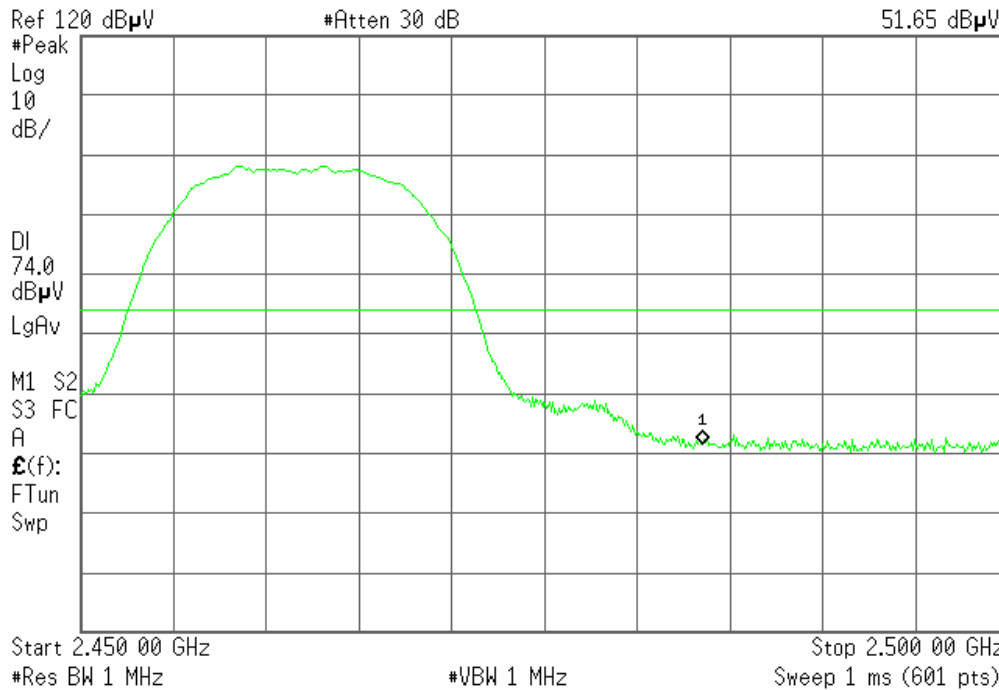

Detector mode: Average


Agilent 12:03:08 Jun 16, 2011

Polarity: Horizontal

R T

Mkr1 2.483 50 GHz

42.01 dB μ V

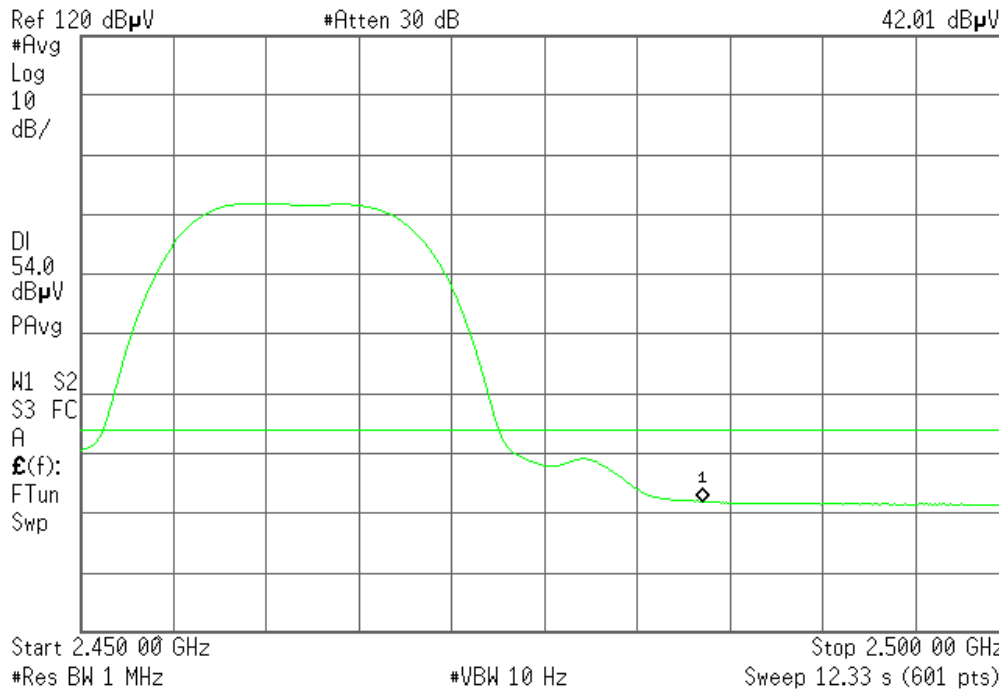

CH LOW :

Detector mode: Peak


✱ Agilent 11:10:26 Jun 16, 2011

Polarity: Vertical

R T

Mkr1 2.390 0 GHz

54.97 dBμV

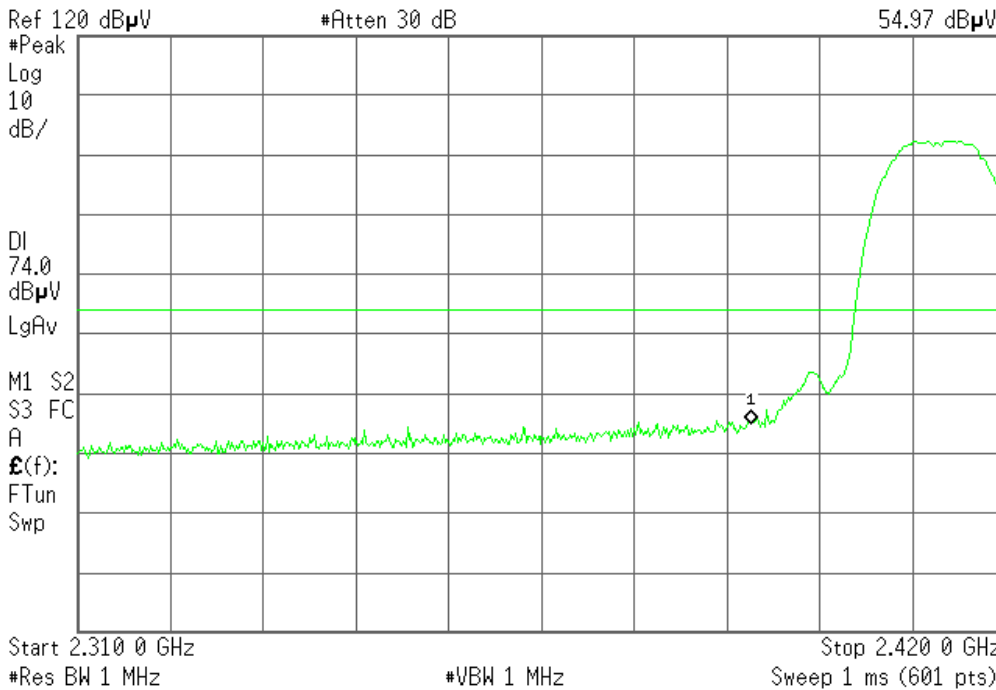

Detector mode: Average


✱ Agilent 11:12:12 Jun 16, 2011

Polarity: Vertical

R T

Mkr1 2.390 0 GHz

46.40 dBμV

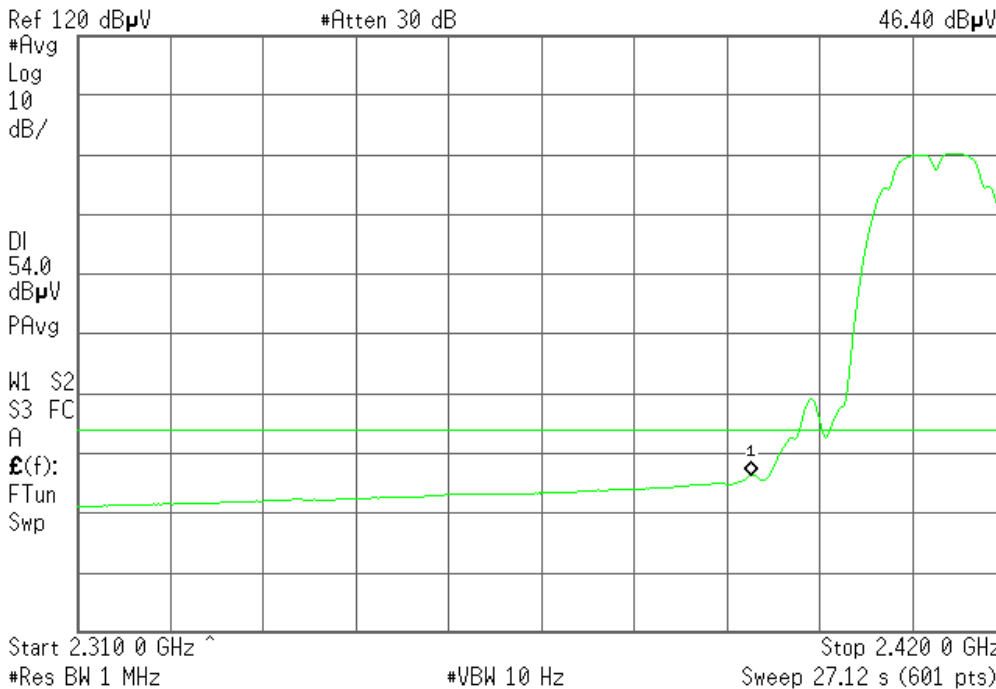

Report No.:STE110611477

CH High :

Detector mode: Peak

✱ Agilent 11:18:23 Jun 16, 2011

Polarity: Vertical

R T

Mkr1 2.483 50 GHz

56.99 dBμV

Ref 120 dBμV

#Atten 30 dB

#Peak

Log

10

dB/

DI

74.0

dBμV

LgAv

M1 S2

S3 FC

A

E(f):

FTun

Swp

Start 2.450 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Stop 2.500 00 GHz

Sweep 1 ms (601 pts)

Detector mode: Average

Polarity: Vertical

✱ Agilent 11:19:21 Jun 16, 2011

R T

Mkr1 2.483 50 GHz

46.33 dBμV

Ref 120 dBμV

#Atten 30 dB

#Avg

Log

10

dB/

DI

54.0

dBμV

PAvg

M1 S2

S3 FC

A

E(f):

FTun

Swp

Start 2.450 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.500 00 GHz

Sweep 12.33 s (601 pts)

IEEE 802.11g:

CH LOW :

Detector mode: Peak

Agilent 11:45:04 Jun 16, 2011

Polarity: Horizontal


R T

Mkr1 2.390 0 GHz

51.84 dBμV

Ref 120 dBμV

#Atten 30 dB

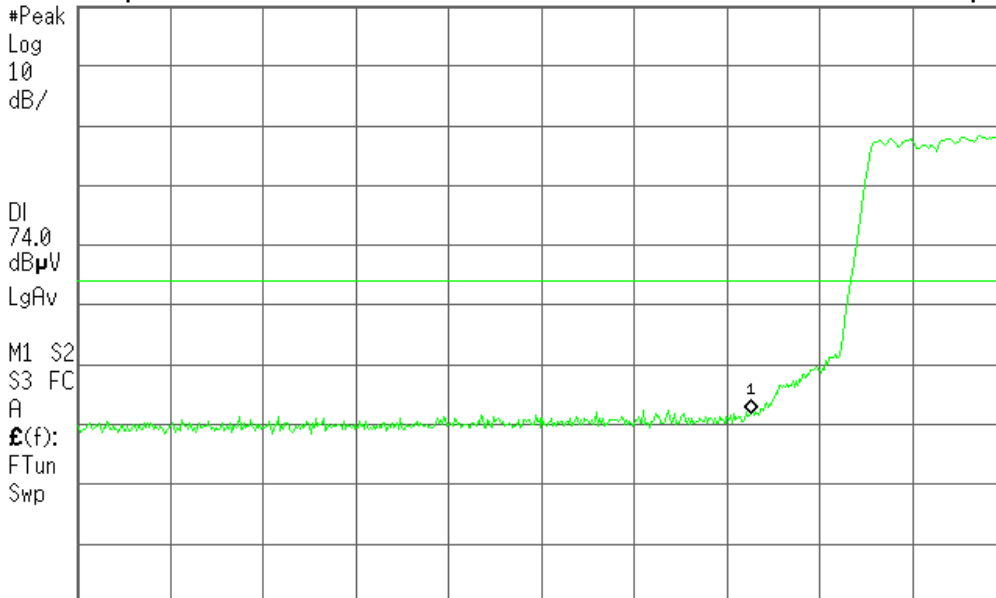

Start 2.310 0 GHz

Stop 2.420 0 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1 ms (601 pts)

Detector mode: Average

Agilent 11:46:05 Jun 16, 2011

Polarity: Horizontal


R T

Mkr1 2.390 0 GHz

41.72 dBμV

Ref 120 dBμV

#Atten 30 dB

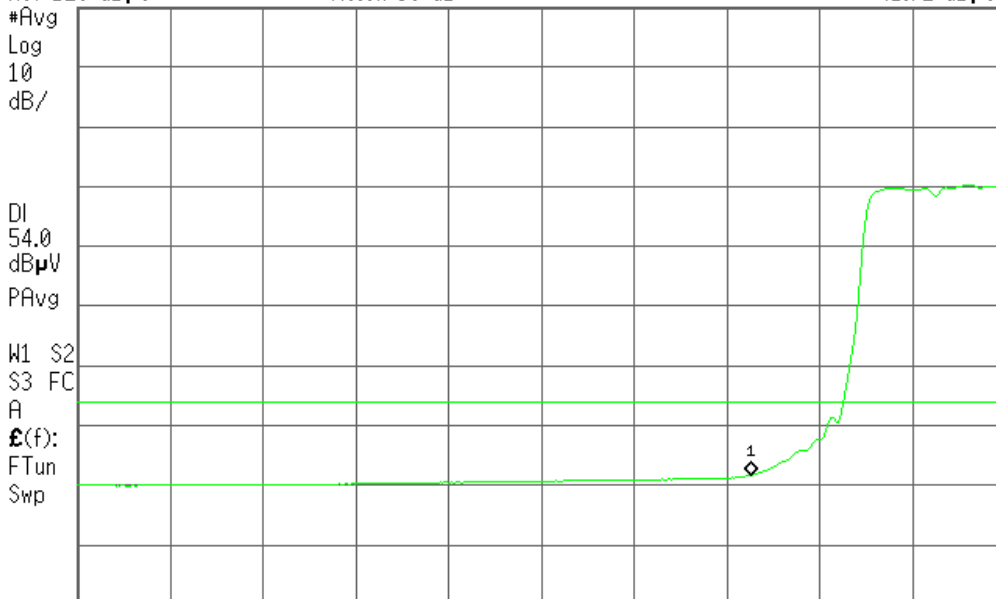

Start 2.310 0 GHz

Stop 2.420 0 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 27.12 s (601 pts)

CH High :

Detector mode: Peak


✱ Agilent 11:34:12 Jun 16, 2011

Polarity: Horizontal

R T

Mkr1 2.483 50 GHz

51.13 dBμV

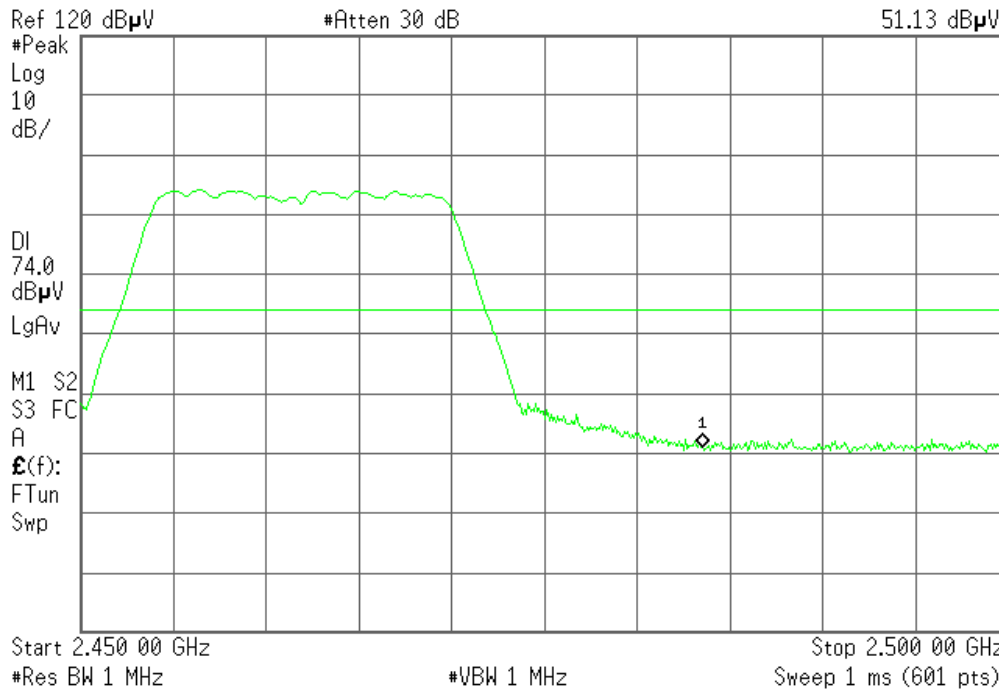

Detector mode: Average


✱ Agilent 11:40:34 Jun 16, 2011

Polarity: Horizontal

R T

Mkr1 2.483 50 GHz

41.24 dBμV

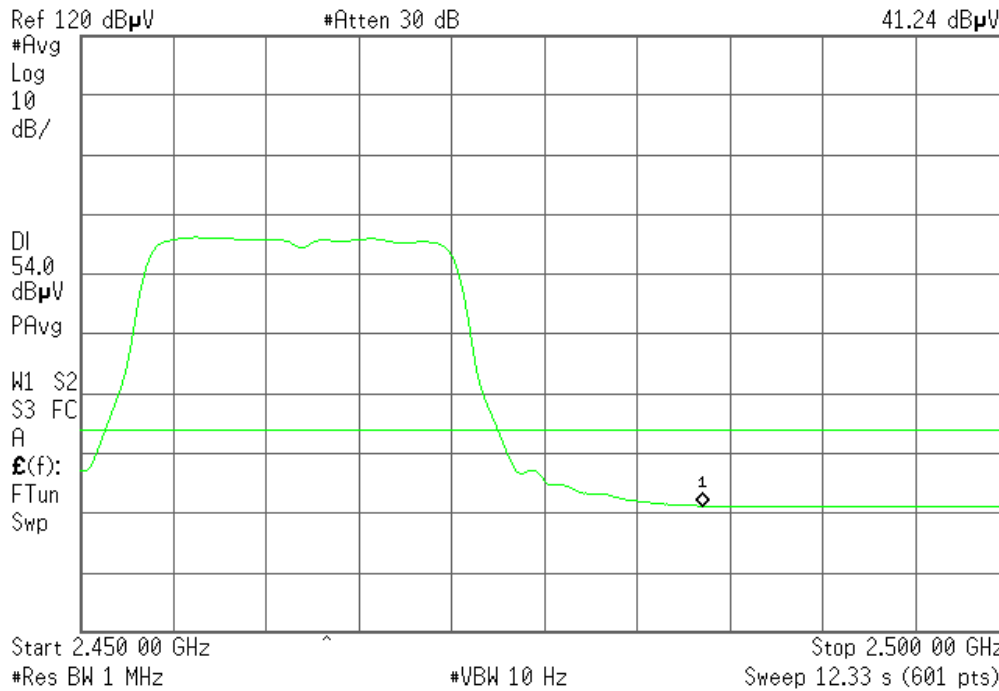

CH LOW :

Detector mode: Peak

✱ Agilent 11:50:28 Jun 16, 2011

Polarity: Vertical

R T

Mkr1 2.390 0 GHz

52.84 dB μ V

Ref 120 dB μ V

#Atten 30 dB

#Peak

Log

10

dB/

DI

74.0

dB μ V

LgAv

M1 S2

S3 FC

A

$\mathcal{E}(f)$:

FTun

Swp

Start 2.310 0 GHz

#Res BW 1 MHz

#VBW 1 MHz

Stop 2.420 0 GHz

Sweep 1 ms (601 pts)

Detector mode: Average

✱ Agilent 11:51:39 Jun 16, 2011

Polarity: Horizontal

R T

Mkr1 2.390 0 GHz

43.08 dB μ V

Ref 120 dB μ V

#Atten 30 dB

#Avg

Log

10

dB/

DI

54.0

dB μ V

PAvg

M1 S2

S3 FC

A

$\mathcal{E}(f)$:

FTun

Swp

Start 2.310 0 GHz

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.420 0 GHz

Sweep 27.12 s (601 pts)

CH High :

Detector mode: Peak


* Agilent 11:25:42 Jun 16, 2011

Polarity: Vertical

R T

Mkr1 2.483 50 GHz

53.32 dBμV

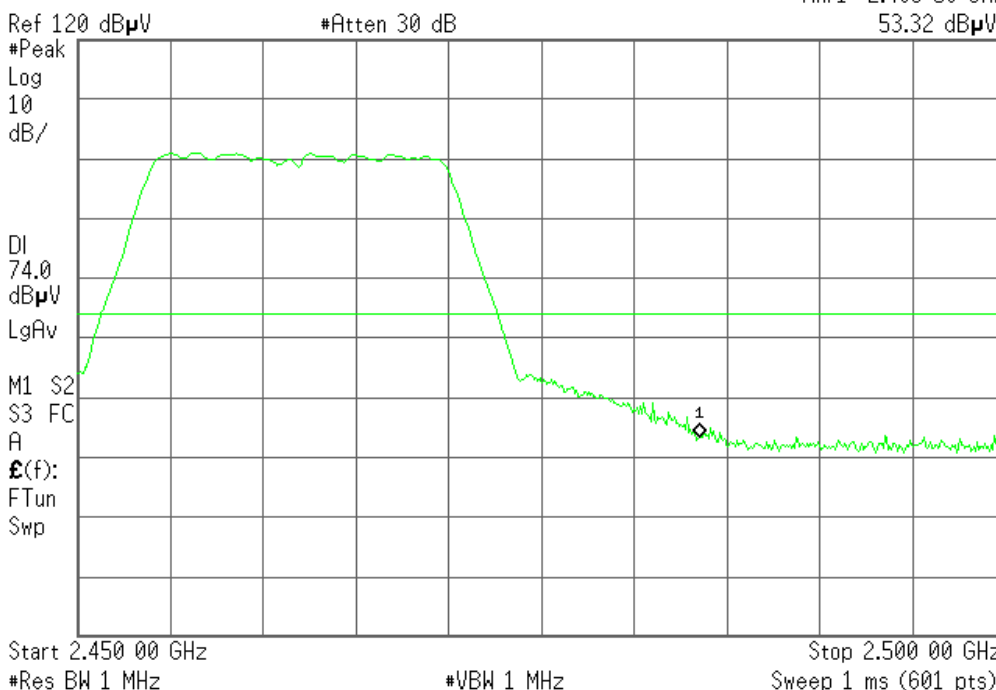

Detector mode: Average


* Agilent 11:26:55 Jun 16, 2011

Polarity: Horizontal

R T

Mkr1 2.483 50 GHz

43.66 dBμV

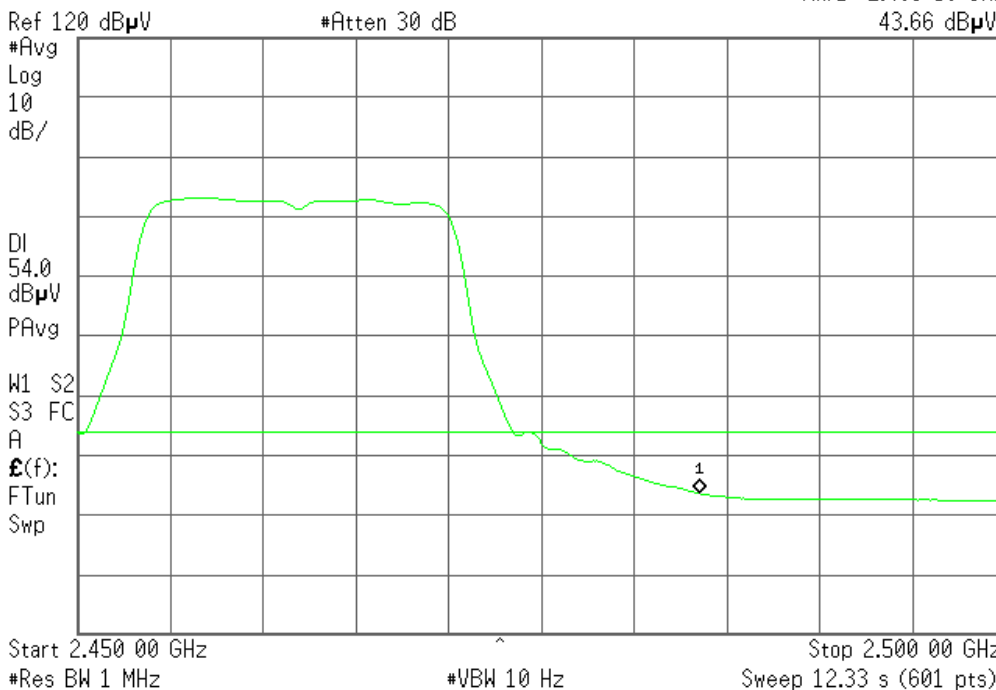

13 Antenna Requirement

13.1 Standard Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

13.2 Antenna Connected Construction

The directional gains of antenna used for transmitting is 1 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.


13.3 Result

The EUT antenna is integral Antenna. It comply with the standard requirement.


14 Photographs of Test Setup

Photographs-Radiated Emission Test Setup in Chamber

Below 1G

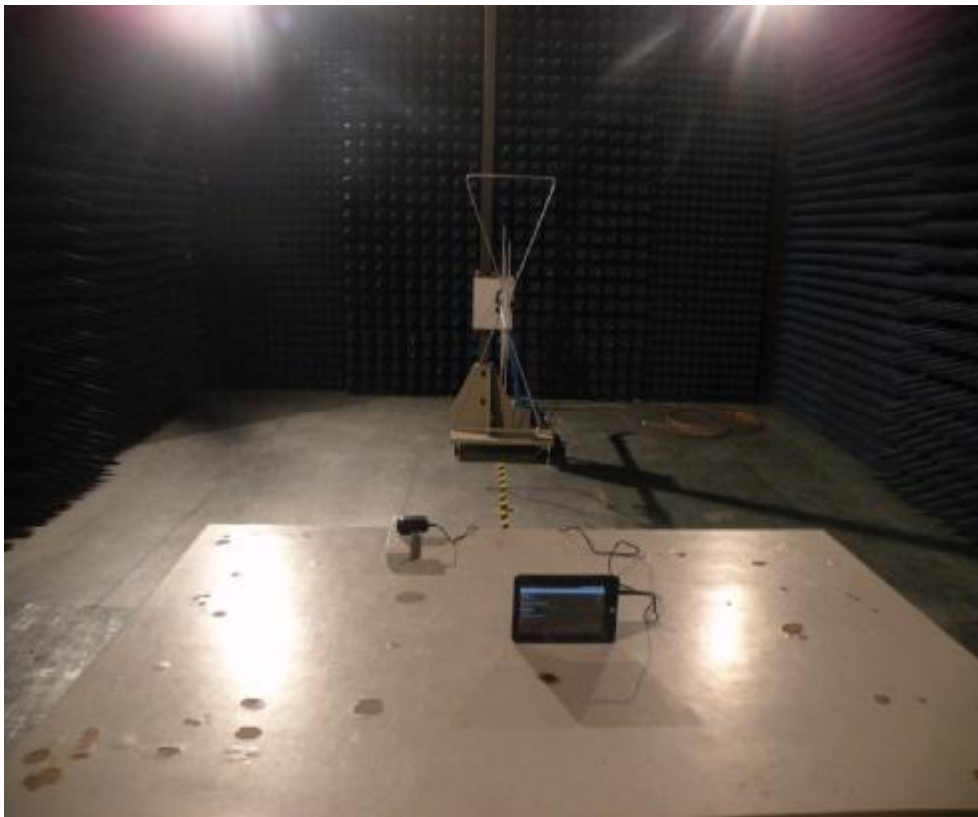

Above 1G

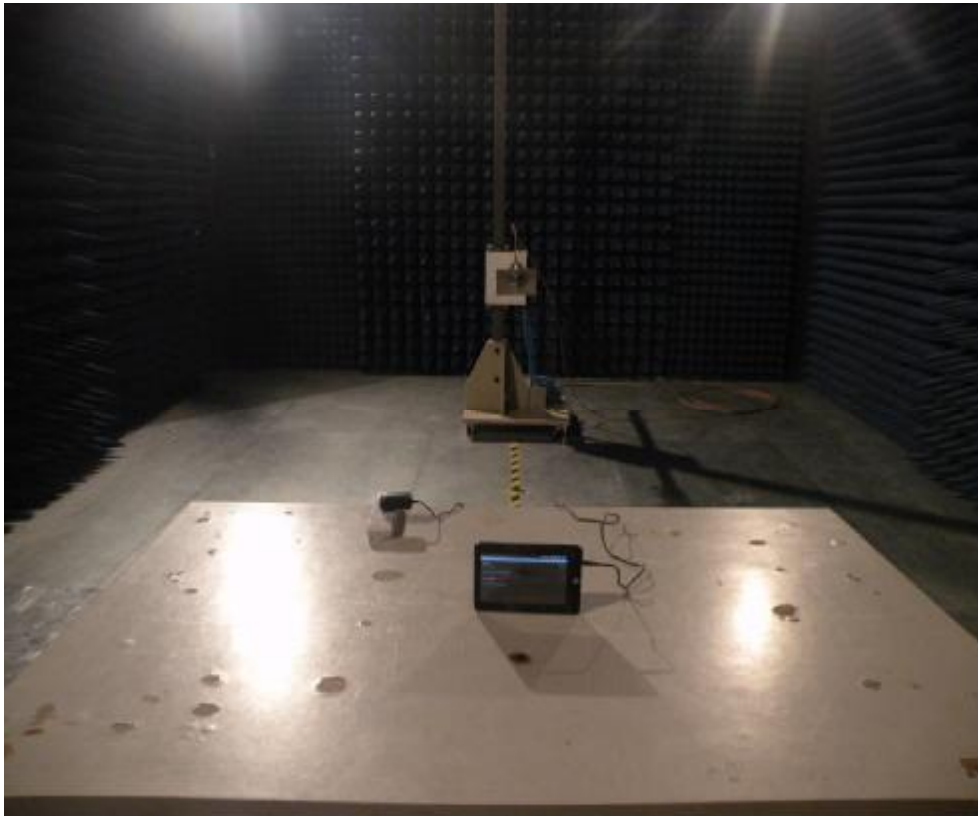

Photographs-Conducted Emission Test Setup



15 Photographs of EUT

Figure 1

Photo of EUT

Front View ☐

Rear View ☐

Full View ☒

Bottom View ☐

Left View ☐

Right View ☐

Full View ☐



Figure 2

Photo of EUT

Front View ☐

Rear View ☐

Top View ☒

Bottom View ☐

Left View ☐

Right View ☐

Full View ☐



Figure 3

Photo of EUT

Front View ☐

Rear View ☐

Top View ☐

Bottom View ☒

Left View ☐

Right View ☐

Full View ☐



Figure 4

Photo of EUT

Front View ☒

Rear View ☐

Top View ☐

Bottom View ☐

Left View ☐

Right View ☐

Internal View ☐



Figure 5

Photo of EUT

Front View []

Rear View []

Top View []

Bottom View[]

Left View [✓]

Right View []

Internal View []



Figure 6

Photo of EUT

Front View []

Rear View [✓]

Top View []

Bottom View[]

Left View []

Right View []

Internal View []

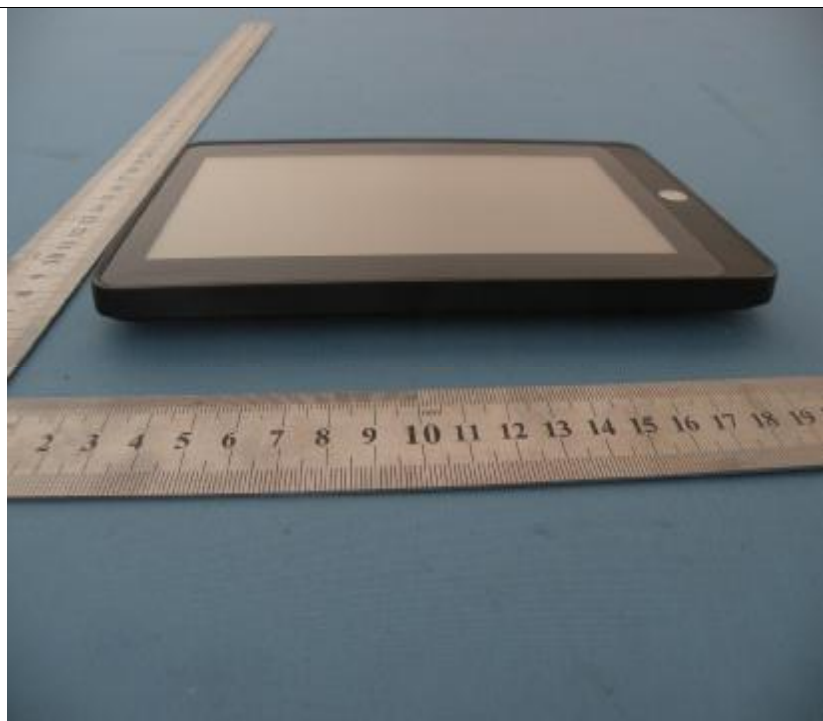


Figure 7

Photo of EUT

Front View []

Rear View []

Top View []

Bottom View[]

Left View []

Right View [✓]

Internal View []



Figure 8

Photo of EUT

Front View []

Rear View []

Top View []

Bottom View[]

Left View []

Right View []

Internal View [✓]



Figure 9

Photo of EUT

Front View []

Rear View []

Top View []

Bottom View[]

Left View []

Right View []

Internal View [✓]



Figure 10

Photo of EUT

Front View []

Rear View []


Top View []

Bottom View[]

Left View []

Right View []

Internal View [✓]

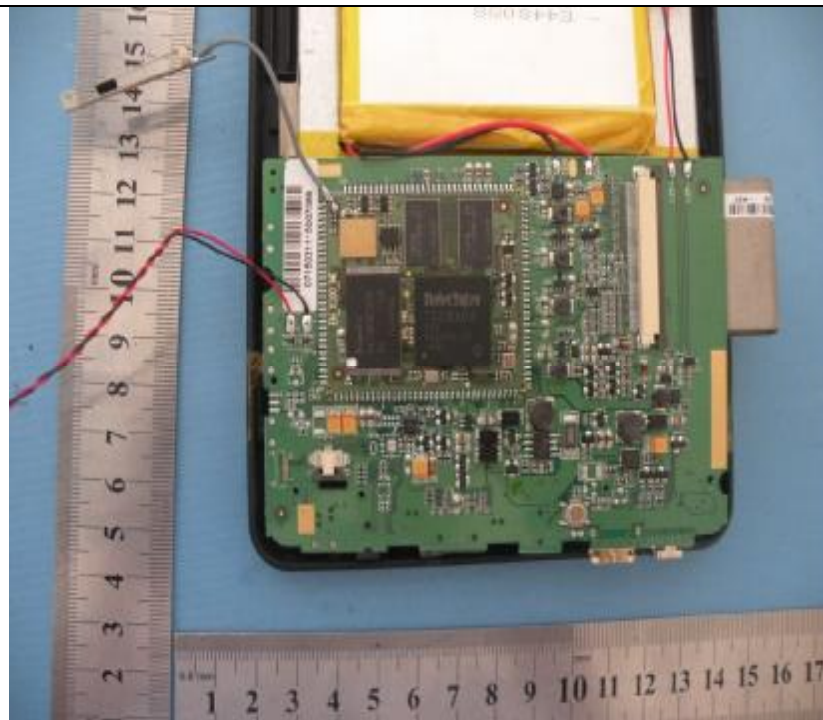

-----END OF THE REPORT-----