Milwaukee

M18 FUEL

1" & 1-1/8" SDS Plus Rotary Hammers

FASTEST DRILLING | **AUTOSTOP™** CONTROL, ENHANCED SAFETY | UP TO **125** 3/8" x 2" **HOLES** PER CHARGE

FASTEST DRILLING HARDEST HITTING | **AUTOSTOP™** CONTROL, ENHANCED SAFETY | UP TO **50** 5/8" x 3" **HOLES** PER CHARGE

1" SDS PLUS Rotary Hammer
131291222DE, 131291222, 131291220

1-1/8" SDS PLUS Rotary Hammer w/ ONE-KEY™
131291522DE, 131291522, 131291520

REDLITHIUM HIGH OUTPUT™ XC6.0

PERFORMANCE DRIVEN
TRADE FOCUSED
SYSTEM WIDE

M18 FUEL™ 1" SDS PLUS ROTARY HAMMER KIT

1,330 no-load rpm, 4,800 bpm, 2 ft-lbs. blow energy

- 3 Modes: Rotary Hammer, Hammer Only, Rotary Only
- AUTOSTOP Kickback Control enhances safety by electronically sensing a tool bind-up and shutting the tool off
- AVS Anti-Vibration System: Minimizes vibration for maximum comfort
- REDLINK PLUS™ Intelligence integrates full-circle communication between tool, battery and charger to protect from overloading, overheating, and over-discharging

Includes: (2) M18 REDLITHIUM™ HIGH OUTPUT™ XC6.0 battery packs, (1) M18™ & M12™ rapid charger

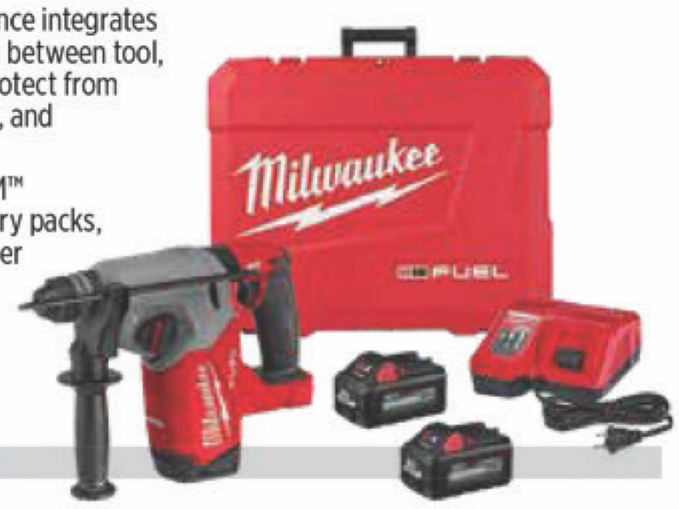

PRODUCT NO.
2912-22

M18 FUEL™ 1" SDS PLUS ROTARY HAMMER WITH DUST EXTRACTOR KIT

1,330 no-load rpm, 4,800 bpm, 2 ft-lbs. blow energy

- 3 Modes: Rotary Hammer, Hammer Only, Rotary Only
- AUTOSTOP Kickback Control enhances safety by electronically sensing a tool bind-up and shutting the tool off
- AVS Anti-Vibration System: Minimizes vibration for maximum comfort
- REDLINK PLUS™ Intelligence integrates full-circle communication between tool, battery and charger to protect from overloading, overheating, and over-discharging

Includes: (2) M18™ REDLITHIUM™ HIGH OUTPUT™ XC6.0 battery packs, (1) M18™ & M12™ rapid charger, (1) M18 FUEL™ HAMMERVAC™ 1" dedicated dust extractor

PRODUCT NO.
2912-22DE

M18 FUEL™ 1-9/16" SDS-MAX ROTARY HAMMER KIT

0-450 rpm, 0-3,000 bpm, 5.1 ft-lb blow energy

- POWERSTATE™ Brushless Motor for more power, more run-time, and longer life
- REDLINK PLUS™ Electronic Intelligence for advanced communication between battery and tool
- Over 20 minutes of continuous chipping
- Able to drill as fast as corded

Includes: 2 M18 REDLITHIUM™ 9.0 high demand battery packs, rapid charger, side handle, depth rod, carrying case

PRODUCT NO.
2717-22HD

M18™ FUEL™ 2-TOOL COMBO KIT

POWERSTATE™ Brushless Motor and REDLINK PLUS™ Intelligence

- M18 FUEL™ 1/2" Hammer Drill/Driver: 0-550/0-2,000 rpm, 32,000 bpm, 1,200 in-lbs. peak torque, 1/2" all metal ratcheting chuck, 14 clutch settings
- M18 FUEL™ 1/4" Hex Impact Driver: 0-3,600 rpm, 0-4,300 ipm, 2,000 in-lbs. max torque, 1/4" hex chuck

Includes: 1 M18 FUEL™ 1/2" Hammer Drill/Driver, 1 M18 FUEL™ 1/4" Hex Impact Driver, 2 M18™ REDLITHIUM™ XC5.0 extended capacity battery packs, 1 M18™ & M12™ rapid charger, 1 side handle, 1 belt clip, 1 bit holder, carrying case

BEST SELLER

PRODUCT NO.
2997-22

M18 FUEL™ 1/2" HAMMER DRILL/DRIVER KIT

0-550/0-2,000 rpm, 32,000 bpm, 1,200 in-lbs peak torque, 1/2" all metal ratcheting chuck, 14 clutch settings

- POWERSTATE™ Brushless Motor
- REDLINK PLUS™ Intelligence
- LED on foot of tool for better lighting in dark spaces
- Up to 1-1/2" shorter than other drills in its class for better access in tight spaces
- 4-Mode DRIVE CONTROL™ for greater control over output speed and power

Includes: 2 M18™ REDLITHIUM™ XC5.0 extended capacity battery packs, M18™ & M12™ Multi-Voltage Charger, 1 side handle, 1 belt clip, 1 bit holder, carrying case

PRODUCT NO.	DESCRIPTION
2804-22	KIT W/ 2 XC5.0 BATTERY PACKS
2804-20	BARE TOOL

STANLEY_SUPPLY.indd 190-191

M18 FUEL™ 4-1/2"/5" GRINDER WITH NO-LOCK PADDLE SWITCH

8,500 rpm, 5/8"-11 spindle

- Tool-Free Guard Adjustment for faster guard installations and adjustments
- Electronic clutch for kickback protection
- Tool-free accessory change with integrated FIXTEC technology
- Anti-vibration side handle for increased user comfort and safety

Includes: (1) T27 guard, (1) T1 clip-on guard, (1) side handle, (1) wrench, (1) back flange, (1) flange nut

PRODUCT NO.
2880-20

M18 FUEL™ 1/4" HEX IMPACT DRIVER BARE TOOL

0-3,600 rpm, 0-4,300 ipm, 2,000 in-lbs. max torque, 1/4" hex chuck

- POWERSTATE™ Brushless Motor
- REDLINK PLUS™ Intelligence
- Single handed bit insertion for faster, easier bit changes
- Self-tapping screw mode for faster installation time and reduces stripping of fasteners
- 4-Mode DRIVE CONTROL™ for greater control over output speed and power
- Most compact impact driver in its class at 4.59" in length

Includes: 1 belt clip, 1 bit holder

PRODUCT NO.
2853-20

M18 FUEL™ SAWZALL® RECIP SAW

0-3,000 spm, 1-1/4" stroke length

- Built-in LED light illuminates work surface while cutting
- Hang hook for convenient storage on the job
- Lever Action QUIK-LOK™ blade clamp for fast and easy blade changes
- Anti-corrosion blade clamp for less downtime

PRODUCT NO.	DESCRIPTION
2821-21	M18 FUEL SAWZALL RECIPROCATING SAW KIT MILWAUKEE
2821-20	M18 FUEL SAWZALL RECIP SAW (TOOL ONLY) MILWAUKEE

M18 FUEL™ 1/4" HEX IMPACT DRIVER KIT

0-3,600 rpm, 0-4,300 ipm, 2,000 in-lbs max torque, 1/4" hex chuck

- POWERSTATE™ Brushless Motor
- REDLINK PLUS™ Intelligence
- Single handed bit insertion for faster, easier bit changes
- Self-tapping screw mode for faster installation time and reduces stripping of fasteners
- 4-Mode DRIVE CONTROL™ for greater control over output speed and power
- Most compact impact driver in its class at 4.59" in length

Includes: 2 M18™ REDLITHIUM™ XC5.0 extended capacity battery packs, 1 M18™ & M12™ Multi-Voltage Charger, 1 belt clip, 1 bit holder, carrying case

PRODUCT NO.
2853-22

M18 FUEL™ DEEP-CUT BAND SAW KIT

0-380 sfpm – Industry's largest cut capacity: 5" x 5"

- Constant Power Technology (CPT™): Maintains cut speed in the toughest applications for optimal performance
- Maximum tool life, requiring less servicing than a chain drive

Includes: 1 M18™ REDLITHIUM™ XC5.0 battery, M12™/M18™ multi-voltage charger, blade, carrying case

PRODUCT NO.
2729-21

M18 FUEL™ HIGH TORQUE 1/2" IMPACT WRENCH

0-950/0-1,500/0-1,800/1,800-750 rpm, 1,150/2,100/2,400/2,400 ipm, 750 ft-lbs. fastening torque

- Bolt removal mode for maximum nut-busting torque to break fastener free
- REDLINK PLUS™ intelligence prevents damage to tool and battery
- Pin detent design for maximum socket retention
- Built-in LED light
- 5-year limited warranty

Includes: 2 M18™ REDLITHIUM™ XC5.0 batteries, 1 M18™/M12™ charger, carrying case

PRODUCT NO.	DESCRIPTION
2766-22	WITH PIN DETENT
2767-22	WITH FRICTION RING

M18™ LED FLOOD LIGHT

Uses 8 high-quality LEDs to provide 1,300 lumens

- Up to 30% brighter than corded 250 halogen lights
- Up to 8 hours of run-time
- Limited lifetime LED warranty
- Innovative roll cage design
- Battery and charger not included

BATTERY AND CHARGER SOLD SEPARATELY

PRODUCT NO.
2361-20

M18™ ROCKET™ DUAL POWER TOWER LIGHT

2,500 Lumens of TRUEVIEW™ high definition output

- Sets up in 5 seconds, 7' max extension
- Adjustable head rotates 230° vertically, pivots 240° horizontally
- Powered by M18™ battery or extension cord
- Impact resistant light head and reinforced legs
- Battery and charger not included

BATTERY AND CHARGER SOLD SEPERATETLY

PRODUCT NO.
2131-20

M18™ RADIUS™ LED COMPACT SITE LIGHT

18V Lighting for task, area and overhead

- 4,400 lumens of TRUEVIEW™ high definition output
- High impact polycarbonate lens
- AC in and out: string up to 10 together
- Protected AC plugs, self-centering hang hook
- 180 and 360 electronic light control
- Low battery indicator
- Battery and charger not included

Includes: Security cable

BATTERY AND CHARGER SOLD SEPARATELY

PRODUCT NO.
2145-20

M18™ REDLITHIUM HIGH OUTPUT™ XC8.0 BATTERY

Provides 50% more power and runs 50% cooler

- REDLINK™ Intelligence for optimized performance and overload protection
- Onboard fuel gauge displays remaining run-time
- Increased power in extreme cold weather (0°F/-18°C)

PRODUCT NO.
48-11-1880

MULTI-VOLTAGE CHARGER

Accepts all M18™ and M12™ battery packs

- Charges batteries sequentially, using a first-in, first-charged sequence
- Communicates with battery packs to manage individual cell voltage, temperature and charge status

PRODUCT NO.
48-59-1812

M18™ REDLITHIUM™ EXTENDED CAPATIY AND HIGH OUTPUT BATTERIES

Delivers up to 2.5X more run-time, 20% more power and 2X more life than standard 18 volt lithium-ion batteries

PRODUCT NO.	DESCRIPTION
48-11-1850	M18™ REDLITHIUM™ XC5.0 BATTERY PACK
48-11-1852	M18™ REDLITHIUM™ XC5.0 BATTERY, 2-PACK
48-11-1812	M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 BATTERY PACK

M18™ 6 PACK SEQUENTIAL CHARGER

Charges M18™ compact batteries in 30 minutes and extended capacity (XC) batteries in 60 minutes

- Convenient carrying handle
- Pass through plug
- Compact size

PRODUCT NO.
48-59-1806

STANLEY_SUPPLY.indd 192-193

1/2" MAGNUM® DRILL

5.5 amps, 0–950 rpm

- Heavy-duty industrial chuck
- Exclusive brush cartridge system changes brushes in less than one minute
- Use this tool with a variety of accessories to drill into wood, metal, plastics and composites
- 8' 3-wire Quik-Lok® cord with easy detachment for storage and service

Includes: 5-year manufacturer's warranty, side handle, chuck key with holder

PRODUCT NO.
0234-6

1/2" SUPER HAWG™

13 amps, 1,750/450 rpm

- Low-speed clutch – protects gear train
- Fast drilling – highest rpm in its class
- Rotating handle
- T-Bar front grip – helps guide bit with ease
- Cushion grips – more comfortable, secure gripping

Includes: Side handle

PRODUCT NO.
1680-20

1/2" HOLE-HAWG® DRILL

7.5 amps, 300 and 1,200 rpm, reversing

- Handles up to 4-5/8" self-feed bits
- High torque and high speed makes this perfect for the heavy-duty user

Includes: Pipe handle

PRODUCT NO.
16756

1/2" D-HANDLE RIGHT ANGLE DRILL KIT

7 amps, 0–335/0–750 rpm, reversing

- 1/2" steel capacity, up to 4-5/8" self-feed bit
- Head and handle swivel 360°

Includes: RAD assembly, side handle, 9/16" open-end wrench, 3/16" socket wrench, chuck remover bar, carrying case

PRODUCT NO.
3107-6

CHUCK KEYS

- For cordless tools
- Easy replacement

PRODUCT NO.	DESCRIPTION
48-66-3080	3/8" CHUCK KEY
48-66-3280	1/4" CHUCK KEY

CHUCK KEY HOLDERS

- Precision formed
- Great value
- Easy Replacement

PRODUCT NO.
48-66-4040

SUPER SAWZALL® RECIPROCATING SAW

15 amps, 1-1/4" stroke length, variable speed 0–2,800 spm

- Constant Power Technology™ maintains constant speed under load
- Patented gear protecting clutch extends gear and motor life
- Patented counter-balanced mechanism
- Variable-speed trigger and dial speed control
- Quik-Lok™ blade clamp system – provides fast and easy blade changes

Includes: Carrying case

PRODUCT NO.
6538-21

SUPER SAWZALL® RECIPROCATING SAW

13 amps, 1-1/4" stroke length, 0-3,000 spm

- Orbital cutting action for faster, more aggressive cuts
- Counter balanced/gear protection systems
- Speed dial and variable speed trigger
- Quik-Lok™ blade clamp provides fast, tool-free blade changes
- Gear protecting clutch extends gear and motor life

Includes: carrying case

PRODUCT NO.
6536-21

SAWZALL® RECIPROCATING SAW

12 amps, 0-3,000 spm, 3/4" stroke length

- Gear protecting clutch extends gear and motor life
- Counter weighted mechanism provides reduced vibration for smoother operation
- Quik-Lok™ blade clamp provides fast, tool-free blade changes

Includes: Carrying case

PRODUCT NO.
6509-31

DEEP CUT PORTABLE BAND SAW KIT

11 amps, 14.5 lbs., 0-380 sfpm, 120 AC

- Job Site Armor™ technology
- Versatility to cut up to 5" by 5" material in one pass
- All metal direct drive gearing
- Variable speed
- Revolutionary cut visibility and built-in LED light
- Tool-free locking adjustable shoe
- Debris protection system

Includes: Carrying case

PRODUCT NO.
6232-21

3/4" DRIVE IMPACT WRENCH

7 amps, 1,750 rpm, 2,600 ipm

- 380 ft-lbs torque
- Rocker switch for quick selection of forward and reverse
- Lightweight (6.2 lbs.) with balanced feel and cushioned grip
- Friction ring and through hole socket retention

Includes: 8' two-wire fixed cord, 5-year manufacturer's warranty

PRODUCT NO.
9075-20

1/2" DRIVE IMPACT WRENCH

7 amps, 1,800 rpm, 2,600 ipm

- 300 ft-lbs of torque
- Rocker switch for quick selection of forward and reverse
- Lightweight (6 lbs.) with balanced feel and cushioned grip
- Pin detent system to securely retain sockets and adapters

Includes: 8' 2-wire fixed cord, 5-year manufacturer's warranty

PRODUCT NO.
1907-020

BAND SAW BLADES

For Milwaukee Compact and M18™ Band Saws

- Bi-Metal Multi-Pitch
- Long tooth life and exceptional durability in metal-cutting applications, including strut, conduit, angle iron, copper tube, threaded rod and pipe
- Matrix II high speed steel teeth deliver maximum durability
- 3-pack

PRODUCT NO.	DESCRIPTION
48-39-0572	27"18TPI SUB COMPACT BAND BLADE 3-PACK
48-39-0529	3PK 18TPI 35-3/8" BAND SAW BLADE
48-39-0519	3PK 14TPI 35-3/8" BAND SAW BLADE

STANLEY_SUPPLY.indd 194-195

M18 FUEL

Deep Cut Band Saw Kit

- Tool-free shoe, LED light, hang hook
- **Kit Includes:** Battery Pack(s), Charger, Blade and Carrying Case

PART NO.	DESC.
2729-22HD	(2) HD9.0 Battery Kit
2729-22	(2) XC5.0 Battery Kit
2729-21	(1) XC5.0 Battery Kit
2729-20	TOOL ONLY

BAND SAW BLADES

PART NO.	DESCRIPTION (ALL ARE 3PK)
48-39-0501	10 TPI Standard Deep Cut Portable
48-39-0511	14 TPI Standard Deep Cut Portable
48-39-0521	18 TPI Standard Deep Cut Portable
48-39-0531	24 TPI Standard Deep Cut Portable
48-39-0551	10/14 TPI Standard Deep Cut Portable
48-39-0561	14/18 TPI Standard Deep Cut Portable
48-39-0601	8/10 TPI Extreme Metal Deep Cut Portable
48-39-0611	12/14 TPI Extreme Metal Deep Cut Portable

M18™ Band Saw Kit

- Tool-free shoe, LED light
- **Kit Includes:** (2) XC3.0 Battery Packs, Charger, Blade and Carrying Case

PART NO.	DESC.
2629-22	Kit
2629-20	TOOL ONLY

BAND SAW BLADES

PART NO.	DESCRIPTION (ALL ARE 3PK)
48-39-0509	10 TPI Compact Portable
48-39-0519	14 TPI Compact Portable
48-39-0529	18 TPI Compact Portable
48-39-0539	24 TPI Compact Portable
48-39-0609	8/10 TPI Extreme Metal Compact Portable
48-39-0619	12/14 TPI Extreme Metal Compact Portable

We have many bandsaw blades in stock & we can custom weld to meet your needs. Please ask your salesperson.

CIRCULAR SAW BLADES

We carry a huge assortment of ferrous and non-ferrous blades, dado, ripping, miter, framing... Please ask your salesperson for more information

10"X40X5/8" ATB CIRCULAR SAW BLADE
10"X50TX5/8" ATB COMBINATION SAW BLADE
10"X60X5/8" ATB COMBINATION SAW BLADE
10"X60X5/8" TCG CIRCULAR SAW BLADE
10"X80X5/8" ATB CIRCULAR SAW BLADE
10"X80X5/8" ATB HDCIRCULAR SAW BLADE RAS,TABLE,MITER, CIRC
10"X30X1" FTG HD RIP BLADE RAS,TABLE,MITER
12"X60TX1" ATB MITER BLADE
12"X60X1" COMBINATION SAW BLADE
12"X72X1" TCG LAMINATE CIRCULAR SAW BLADE
12"X80TX1" ATB PRO WOOD BLADE
12"X90X1" COMB CIRCULAR SAW BLADE RAS SLIDE MITER
12"X96X1" ATB HD CIRCULAR SAW BLADE
14"X80T FERROUS METAL CIRCULAR SAW BLADE
SAW BLADE AND BIT CLEANER
10"X80X5/8" COMB HD CIRCULAR SAW BLADE

6 1/2X18T GENERAL SAW BLADE
10"X52TX5/8" STEEL PRO BLADE FERROUS
6 1/2X18T FINISH SAW BLADE
6 3/4"X40T FERROUS STEEL CIRCULAR SAW BLADE
6" DIAMOND GRIT EDGE BLADE 7/8-5/8 ARBOR
7-1/4"X40T CROSSCUT BLADE
7-1/4"X48T STEEL PRO BLADE TENRYU
7"X56T FOR ALUMINUM BLADE
7 1/4"X68T THIN STEEL BLADE IRWIN
7"X40 TOOTH STEEL BLADE MORSE (20MM ARBOR
8-1/4"X40T ATB WOOD BLADE
8" DADO BLADE W/5/8 ARBOR
8"X60T FOR ALUMINUM BLADE
10"X60X5/8" FLAT TOP SAW BLADE RAS,MITER ANI SAWS
10"X60X5/8"GLUE LINE RIPPING SAW BLADE
10"X40X5/8" ATB CIRCULAR SAW BLADE

6/15/24 12:52 PM

CHARGERS & BATTERIES

Milwaukee M12

CHARGING STATIONS

48-59-1806	M18™ Six-Pack Sequential Charging Station	
48-59-1810	M18™/M12™ AC/DC Wall/Vehicle Charger	
48-59-1812	M18™/M12™ Multi-Voltage Charger	
48-59-1204	M12™ 4-Bay Sequential Charger	
48-59-1808	M18™/M12™ Rapid Charger	
48-59-1807	M18™/M12™ Rapid Charge Station; (3) M18™/(3) M12™	

COMPACT CP BATTERIES

48-11-1820	M12™ 1.5 Ah Compact Battery Pack	
48-11-2411	M12™ 1.5 Ah Compact Battery Pack 2/Pack	
48-11-2420	M12™ 2.0 Ah Compact Battery Pack	
48-11-2430	M12™ 3.0 Ah Compact Battery Pack	

EXTRA CAPACITY XC BATTERIES

48-11-2402	M12™ XC3.0 Ah Battery Pack	
48-11-2412	M12™ XC3.0 Ah Battery 2/Pack	
48-11-2440	M12™ XC4.0 Ah Battery Pack	
48-11-2460	M12™ XC6.0 Ah Battery Pack	

XC BATTERY 3 YEAR | COMPACT BATTERY 2 YEAR WARRANTY™

STANLEY_SUPPLY.indd 196-197

BATTERY CHARGERS

M18™ & M12™ Rapid Charger

- On-board indicator light, integrated hang holes and cell voltage monitoring
- Charges individual batteries up to 40% faster

SPECIFICATIONS

Compatibility: All M18™ & M12™ batteries
Charge Sequence: Sequential (First in, first charged)

PART NO.	DESC.
48-59-1808	Charger

M18™ & M12™ Multi-Voltage Charger

- On-board indicator light, integrated hang holes and cell voltage monitoring

SPECIFICATIONS

Compatibility: All M18™ & M12™ batteries
Charge Sequence: Sequential (First in, first charged)

PART NO	DESC.
48-59-1812	Charger

M18™ & M12™ Vehicle Charger

- On-board indicator light and cell voltage monitoring

SPECIFICATIONS

Compatibility: All M18™ & M12™ batteries
Charge Sequence: Sequential (First in, first charged)

PART NO.	DESC.
48-59-1810	Charger

M18™ Six-Pack Sequential Charger

Pass-Through Plug

- On-board indicator light, pass through plug and cell voltage monitoring
- Skip button to manually designate which battery charges first

SPECIFICATIONS

Compatibility: All M18™ batteries
Charge Sequence: Sequential (counter-clockwise rotation)

PART NO.	DESC.
48-59-1806	Charger

M18™ & M12™ Rapid Charge Station

Pass-Through Plug

- Integrated hang-hole, pass through plug and cell voltage monitoring
- Charges individual batteries up to 40% faster
- Holds (3) M18™ and (3) M12™ batteries

SPECIFICATIONS

Compatibility: All M18™ & M12™ batteries
Charge Sequence: Charges 3 batteries simultaneously

PART NO.	DESC.
48-59-1806	Charger

M18 BATTERIES

CP — Less weight and smaller size for light drilling and fastening

48-11-1820 M18™ REDLITHIUM™ CP2.0 Battery Pack

48-11-1815 M18™ REDLITHIUM™ CP1.5 Battery Pack — **48-11-1811** 2-Pack

XC — More power and run-time, great performance for all demands

HIGH OUTPUT™
48-11-1865 M18™ REDLITHIUM™ HIGH OUTPUT™ XC6.0 Battery Pack — **48-11-1862** 2-Pack

48-11-1860 M18™ REDLITHIUM™ XC6.0 Battery Pack

48-11-1850 M18™ REDLITHIUM™ XC5.0 Battery Pack — **48-11-1852** 2-Pack, **48-11-1851** 10-Pack

48-11-1840 M18™ REDLITHIUM™ XC4.0 Battery Pack

48-11-1828 M18™ REDLITHIUM™ XC3.0 Battery Pack — **48-11-1822** 2-Pack, **48-11-1841** 10-Pack

HD — Best performance for high demand applications

HIGH OUTPUT™
48-11-1812 M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Battery Pack

48-11-1890 M18™ REDLITHIUM™ HD9.0 Battery Pack

THE TORCH™ SAWZALL® DEMOLITION BLADES

Milwaukee

APPLICATION: Metal pipe, channels, tubing, angle iron up to 4", steel, conduit, strut and other metal materials

- Optimized tooth design providing 2X more life than our previous generation SAWZALL® blades
- Tough Neck™ ribs strengthen the blade tang and minimize breakage
- Grid Iron™ honeycomb pattern increases blade rigidity to resist blade buckling
- 5 pack of blades

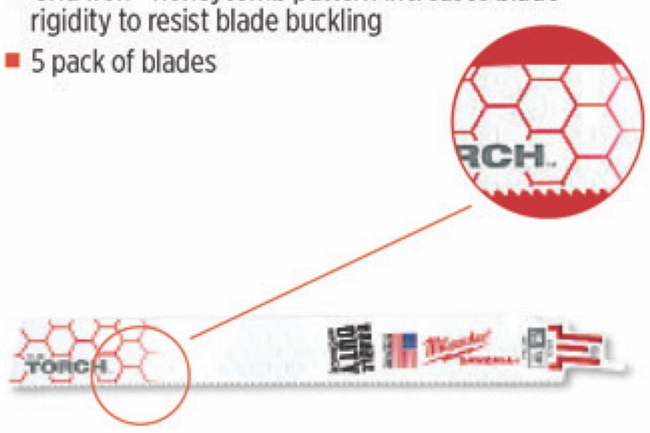

PRODUCT NO.	SIZE	TPI
48-00-5712	6" X 1.0" X .042"	10
48-00-5782	6" X 1.0" X .042"	14
48-00-5787	9" X 1.0" X .042"	14
48-00-8787	9" X 1.0" X .042"	14
48-00-5784	6" X 1.0" X .042"	18
48-00-8784	6" X 1.0" X .042"	18
48-00-5788	9" X 1.0" X .042"	18
48-00-8788	9" X 1.0" X .042"	18
48-00-5789	12" X 1.0" X .042"	18
48-00-8789	12" X 1.0" X .042"	18

THE WRECKER™ SAWZALL® DEMOLITION BLADES

Milwaukee

APPLICATION: Cut into ferrous or non-ferrous metal, plastics and nail-embedded wood

- Optimized tooth design providing 2X more life than our previous generation SAWZALL® blades
- Tough Neck™ ribs strengthen the blade tang and minimize breakage
- Grid Iron™ honeycomb pattern increases blade rigidity to resist blade buckling
- 5 pack of blades

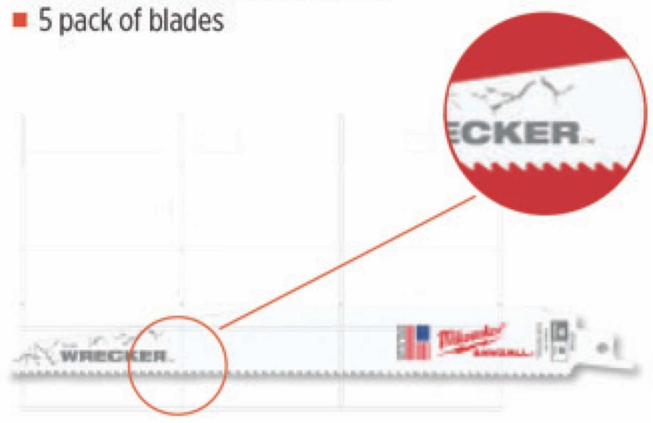

PRODUCT NO.	SIZE	TPI
48-00-5701	6" X 1.0" X .062"	8
48-00-5706	9" X 1.0" X .062"	8
48-00-5711	12" X 1.0" X .062"	8

THE AX™ SAWZALL® DEMOLITION BLADES

Milwaukee

APPLICATION: Cut into walls that contain wood, nails, plaster and aluminum; great for demolition work

- FANG TIP™ bites into wood on first contact
- NAIL GUARD™ 5 TPI pattern for faster cuts and protection against tooth fracture
- 5 pack of blades

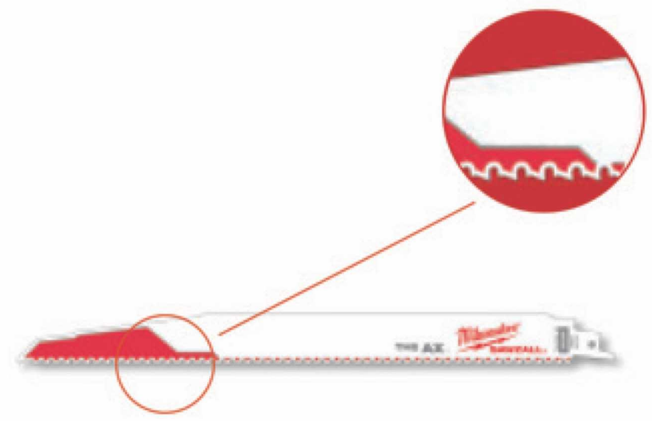

PRODUCT NO.	SIZE	TPI
48-00-5021	6" X 1.0" X .062"	5
48-00-5026	9" X 1.0" X .062"	5
48-00-8026	9" X 1.0" X .062"	5/8
48-00-5027	12" X 1.0" X .062"	5
48-00-8027	12" X 1.0" X .062"	5/8

5-PC. UNIVERSAL FIT GENERAL PURPOSE OSCILLATING BLADE SET

DIABLO

High performance carbide and bi-metal blades for greater durability, life and quality of cut

- Features application specific blades ranging from nail-embedded wood, clean wood, metal, plastics and drywall
- Universal interface design fits most tools, no adapters needed
- Not compatible with Starlock tools

Includes: (1) 1-1/4" bi-metal blade for nail-embedded wood, (1) 1-1/4" bi-metal blade for clean wood, (1) 1-1/4" carbide blade for general purpose cuts, (1) 1-1/4" carbide blade for metal, (1) 2" bi-metal blade for drywall

PRODUCT NO.
DOU5S

5-PC. STARLOCK GENERAL PURPOSE OSCILLATING BLADE SET

DIABLO

High performance carbide and bi-metal blades for greater durability, life and quality of cut

- Features application specific blades ranging from nail-embedded wood, clean wood, metal, plastics and drywall

Includes: (1) 1-1/4" bi-metal blade for nail-embedded wood, (1) 1-1/4" bi-metal blade for clean wood, (1) 1-1/4" carbide blade for general purpose cuts, (1) 1-1/4" carbide blade for metal, (1) 2" bi-metal blade for drywall

PRODUCT NO.
DOS5S

OSCILATING BLADES

DIABLO

FOR GENERAL PURPOSE CUTS

PRODUCT NO.	DESCRIPTION
DOU125CGP3	1-1/4" UNIVERSAL FIT CARBIDE OSCILLATING BLADE (3/PK)
DOU275RCGP	2-3/4" UNIVERSAL FIT CARBIDE OSCILLATING BLADE (1/PK)

FOR ULTRA-HARDENED CUTTING

PRODUCT NO.	DESCRIPTION
DOU125BF	1-1/4" OSCILLATING BLADE FOR METAL (1/PK)
DOU125BW3	1-1/4" OSCILLATING BLADE FOR NAIL-EMBEDDED WOOD (3/PK)
DOU125JBW3	1-1/4" OSCILLATING BLADE FOR CLEAN WOOD (3/PK)
DOU200RBD	2" OSCILLATING BLADE FOR DRYWALL (1/PK)
DOU350RBGP	3-1/2" OSCILLATING BLADE FOR GENERAL PURPOSE CUTS (1/PK)

FOR DIAMOND GRIT CUTTING

PRODUCT NO.	DESCRIPTION
DOU16DGX	DIAMOND GRIT BLADE (UNIVERSAL FIT)

FOR REMOVAL OF GROUT, MORTAR AND TILE ADHESIVE

PRODUCT NO.	DESCRIPTION
DOSCGX	2-3/4" CARBIDE GRIT BLADE (STARLOCK)

STANLEY_SUPPLY.indd 198-199

MULTIMASTER MM 700 MAX TOP

PART NUMBER: 72296864090

KIT INCLUDES: 1 MM 700, 31 accessories, 1 L-Boxx pro tool case

MULTIMASTER 700 1.7 CAULKING SET

PART NUMBER: 72297162090

KIT INCLUDES: 1 MM700 1.7, 7 accessories, 1 L-Boxx pro tool case

18V CORDLESS MULTIMASTER 500 SELECT

PART NUMBER: 71293862090

SELECT TOOL BUNDLE INCLUDES: 1 AMM500, 1 accessory, 1 L-Boxx pro tool case

MULTIMASTER 700 1.7Q AUTOGLASS

PART NUMBER: 72297065090

KIT INCLUDES: 1 MM700 1.7Q, 14 accessories, 1 L-Boxx pro tool case

18V CORDLESS MULTIMASTER 500 TOP KIT 4Ah

PART NUMBER: 71293861090

KIT INCLUDES: 1 AMM500, 2 4Ah CORE 18V batteries, 1 Fast charger, 31 accessories, 1 L-Boxx pro tool case

18V CORDLESS MULTIMASTER 700 1.7Q AUTOGLASS

PART NUMBER: 71293762090

KIT INCLUDES: 1 AMM700 1.7Q, 2 4Ah CORE 18V batteries, 1 Fa charger, 14 accessories, 1 L-Boxx pro tool case

MULTIMASTER MM 700 MAX BASIC

PART NUMBER: 72296863090

KIT INCLUDES: 1 MM 700, 1 accessory, 1 L-Boxx pro tool case

6/15/24 12:52 PM

SPECIALTY OSCILLATING

The FEIN 1.7 series oscillating tool offers uncompromising performance for demanding applications and all day use.

CAULKING CUTTER BLADES

SEGMENT BLADE
For V-cuts and for cuts in corners, 1-1/4" blade length, 2-pack

PART NUMBER:
63903132010

DIAMOND SEGMENT BLADE
Diamond-coated, for corners 3/32". For marble and cement mortar

PART NUMBER:
63903162017

CLEANING BLADE
Diamond-coated, for cleaning mortar flanks before refilling, 5-pack

PART NUMBER:
63903161030

MUSHROOM BLADE
For cutting elastic silicon or acrylic connecting joints as well as for separation of insulating glass. 5-pack

PART NUMBER:
63903128012

NEW!

CUTTER BLADE
Elongated pointed blade for very deep joints, 5-pack

PART NUMBER:
63903116011

XL VERSION PART NUMBER:
63903271020

NEW!

STRAIGHT CUTTER BLADE
Universal blade for removal of almost all expansion joints, 5-pack

77MM **PART NUMBER:**
63903117015

90MM **XL VERSION PART NUMBER:**
63903270030

AUTOGLASS BLADES

U-SHAPED CUTTING BLADE
For removal glass from behind the hood. Reinforced design, serrated, 2-pack

PART NUMBER:
63903212018

L-SHAPED CUTTING BLADE
Serrated, 2-pack

PART NUMBER:
63903209014

L-SHAPED CUTTING BLADE
Serrated, 2-pack

PART NUMBER:
63903208010

L-SHAPED CUTTING BLADE
Serrated, 2-pack

PART NUMBER:
63903207012

U-SHAPED CUTTING BLADE
Ideal for glass removal from behind the hood. Reinforced design, 2-pack

PART NUMBER:
63903157011

U-SHAPED CUTTING BLADE
Ideal for glass removal from behind the hood. Reinforced design, 2-pack

PART NUMBER:
63903111019

STRAIGHT CUTTING BLADE
Z-bend, with adjustable depth stop, 2-pack

PART NUMBER:
63903143013

STRAIGHT CUTTING BLADE
Suitable for removal of attached body parts.

Z-bend, serrated, 2-pack

PART NUMBER:
63903081013

STANLEY_SUPPLY.indd 200-201

FLEXVOLT ADVANTAGE ™ 20V MAX* 4-1/2" - 5" BRUSHLESS CORDLESS ANGLE GRINDER WITH PADDLE SWITCH

DEWALT

9,000 no-load rpm

- E-CLUTCH® shuts down motor in under a tenth of a second when a pinch/stall is detected
- E-Switch Protection™ requires trigger switch be cycled (on/off) in the event of a power outage or other unexpected shutdown to restart
- Kickback Brake engages with maximum force to quickly stop the wheel and shutoff the grinder when a bind-up occurs
- Tool Connect™ Chip ready (sold separately)

Includes: (1) 4-1/2" T27 guard, 1 side handle, 1 wrench, 1 inner flange, 1 outer flange

PRODUCT NO.
DCG416B

20V MAX* FLEXVOLT® ADVANTAGE™ BRUSHLESS CORDLESS 2-TOOL KIT

DEWALT

With Tool Connect™ Chip Read

- 20V MAX* FlexVolt® Advantage™ 1/2" Hammer Drill/Driver: heavy-duty 1/2" ratcheting nitro-carburized metal chuck with carbide inserts, 3-speed transmission, 3-mode LED work light 20x brighter than DCD985
- 20V MAX* 1/4" XR® 3-Speed Impact Driver: 0-1,000/2,800/3,250 no-load rpm, 0-3,800 ipm, 3 LED worklight with 20-second delay after trigger release

Includes: (1) 20V MAX* FlexVolt® Advantage™ 1/2" Hammer Drill/Driver, (1) 20V MAX* 1/4" XR® Impact Driver, (2) 20V MAX* 5.0Ah lithium-ion batteries, (1) 8A fast charger, 2 belt hooks, kit bag

BEST SELLER

PRODUCT NO.
DCK2100P2

20V MAX* BRUSHLESS CORDLESS RECIPROCATING SAW WITH FLEXVOLT ADVANTAGE™

DEWALT

0-3,000 spm, 1-1/8" stroke length

- Keyless lever-actin blade clamp for quick and easy blade changes
- Bright LED for better visibility in low-light work areas
- Tool Connect™ Chip Ready

PRODUCT NO.
DCS386B

⚠ **WARNING** ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

20V MAX* 7-1/4" BRUSHLESS CORDLESS CIRCULAR SAW WITH FLEXVOLT ADVANTAGE™

DEWALT

5,500 rpm, 2-9/16" at 90° max cutting depth (2" at 45°

- Electronic brake stops blade after trigger release
- Bright LED for increased visibility and cut accuracy
- Integrated rafter hook for quick and easy storage
- Tool Connect™ Chip Ready
- Compatible with all DeWalt® 20V MAX* and FlexVolt® batteries

PRODUCT NO.
DCS573B

⚠ **WARNING** ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

20V MAX* 1/2" BRUSHLESS CORDLESS HAMMER DRILL/DRIVER WITH FLEXVOLT ADVANTAGE™

DEWALT

2,000 rpm, 3-speed transmission

- Heavy-duty 1/2" ratcheting nitro-carburized metal chuck with carbide inserts for superior bit gripping strength
- 3-mode LED for lighting in dark or confined spaces up to 20x brighter than DCD985
- Spotlight mode features 20-minute shutoff function for extended work time in dark or confined areas
- Tool Connect™ Chip Ready
- Compatible with all DeWalt® 20V MAX* and FlexVolt® batteries

PRODUCT NO.
DCD999B

⚠ **WARNING** ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

6/15/24 12:52 PM

20V MAX* XR® BRUSHLESS DEEP CUT BAND SAW BARE TOOL

DEWALT 20V MAX BRUSHLESS MOTOR

4-3/4" max cutting capacity

- LED work light with 20-second delay illuminates dark work surfaces for accurate cutting
- Variable speed trigger for versatility and control
- Integrated hang hook
- Tool-less blade changing lever loosens blade tension
- DEWALT-built brushless motor for performance and durability

PRODUCT NO.	DESCRIPTION
DCS374P2	KIT
DCS374B	BARE TOOL

⚠ WARNING ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

20V MAX* XR BRUSHLESS HIGH TORQUE 1/2" IMPACT WRENCH KIT WITH DETENT ANVIL

DEWALT 20V MAX BRUSHLESS MOTOR

0-400/1,200/1,900 rpm, 1/2" anvil with detent pin

- Up to 700 ft-lbs of max torque and 1,200 ft-lbs of max breakaway torque
- Compact design of 8-13/16" in length and weighs only 7.2 lbs
- LED light with 20 second delay for increased visibility

Includes: (2) DCB205 20V MAX* 5.0Ah Battery, (1) DCB115 Charger, contractor bag

PRODUCT NO.	DESCRIPTION
DCF899P2	KIT
DCF899B	BARE TOOL

⚠ WARNING ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

ATOMIC 20V MAX* BRUSHLESS CORDLESS 1-3/4" BANDSAW KIT

DEWALT 20V MAX BRUSHLESS MOTOR

1-3/4" cut capacity, 6.6 lbs.

- Lightweight with an integrated guard, making it ideal for overhead and one-handed cutting applications
- 1-3/4 in. cut capacity allows for cuts in small-sized metal diameters
- Variable-speed trigger and speed dial
- Integrated hang hook

Includes: (1) DCS377 20V MAX* Cordless One-Handed Bandsaw, (1) DCB240 20V MAX* 4.0Ah Battery, (1) 14/18 TPI Blade, (1) Blade Tracking Wrench, (1) DCB115 Charger, (1) Kit Bag

PRODUCT NO.	DESCRIPTION
DCS377Q1	KIT
DCS377B	BARE TOOL

⚠ WARNING ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

20V MAX* XR BRUSHLESS 1/4" 3-SPEED IMPACT DRIVER KIT (4.0 AH)

DEWALT 20V MAX BRUSHLESS MOTOR

0-1,000/2,800/3,250 rpm, 3,600 ipm, 1,825 in-lbs max torque

- Brushless motor and XR lithium ion batteries for more run time and capacity
- 3-speed settings for optimized application versatility
- One-handed loading 1/4" hex chuck with easy grip sleeve, accepts 1" bit tips
- 3 LEDs with 20-second delay after trigger release for visibility without shadows

PRODUCT NO.	DESCRIPTION
DCF887M2	KIT
DCF887B	BARE TOOL

⚠ WARNING ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

20V MAX LI-ION BAND SAW KIT

DEWALT 20V MAX BRUSHLESS MOTOR

Integrated hang hook allows user to hang the saw without damaging the front handle or base

- 2-1/2" cut capacity cuts up to 2" SCH 40 pipe
- Center handle position provides superior balance and ergonomics and allows for more accurate cuts and less user fatigure
- LED work light with 20 second dealy

Includes: DCS371 20V Max Band Saw, (1) DCB204 20V Max XR Premium Li-Ion Battery (4.0AH), 14/18 TPI blade, fast charger, blade tracking wrench, kit bag

PRODUCT NO.	DESCRIPTION
DCS371M1	BAND SAW KIT
DCS371B	TOOL ONLY

⚠ WARNING ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

20V MAX* XR® 1/2" MID-RANGE IMPACT WRENCH WITH DETENT PIN ANVIL

DEWALT 20V MAX BRUSHLESS MOTOR

600 ft-lbs max fastening torque, 800 ft-lbs max breakaway torque

- Four speed settings with a variable speed trigger
- Precision Wrench™ control helps prevent overtightening and fastener run-off
- On-tool LED work light
- Tool Only

Includes: Belt Clip

PRODUCT NO.
DCF892B

⚠ WARNING ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

STANLEY_SUPPLY.indd 202-203

1/2" PISTOL-GRIP VSR DRILL

DEWALT

7.8 amp motor, 0-850 rpm

- Helical-cut steel, heat-treated gears
- Metal gear housing for jobsite durability
- Two-finger trigger for increased comfort
- Applications include spade bit drilling, self-feed bit drilling, hole saw drilling and auger bit drilling in wood, twist bit drilling and hole saw drilling in steel

Includes: 360° side handle, chuck key with holder

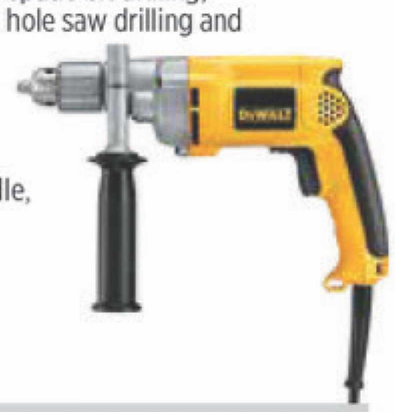

PRODUCT NO.
DW235G

⚠ WARNING ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

4-1/2" SMALL ANGLE PADDLE SWITCH GRINDER

DEWALT

11 amps, 11,000 rpm, 5/8" spindle

- Dust Ejection System™ ejects damaging dust and debris particles that enter the tool
- One-Touch™ Guard allows for 360° rotation of the guard with a single action
- Oversized brushes provide 2X brush life over previous model (D28402)

Includes: 2-position side handle, One-Touch™ (T27) Guard

PRODUCT NO.	DESCRIPTION
DWE402	4-1/2" 11A SMALL ANGLE GRINDER WITH PADDLE SWITCH DEWALT
DWE402N	4-1/2" 11A AN GRINDER PADDLE WITH NO LOCK ON SWITCH DEWALT

⚠ WARNING ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

7" 4.7 HP ANGLE GRINDER

DEWALT

15 amps, 4.7 HP (maximum motor HP) 8,500 rpm

- Dust Ejection System™ protects the motor from damaging particles entering air intake
- Anti-Vibe Trigger Handle reduces user fatigue
- Lightweight design (11.6 lbs.)
- Automatic turn-off brushes shut down the tool when brushes need to be changed to avoid tool damage

PRODUCT NO.
DWE4557

⚠ WARNING ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

1/2" SPADE HANDLE DRILL

DEWALT

9 amp, 0-550 rpm, 7.5 lbs.

- Variable speed reversible switch
- Soft grip handle
- 2-position rear spade handle and 3-position side handle for greater control

Includes: Chuck key with holder

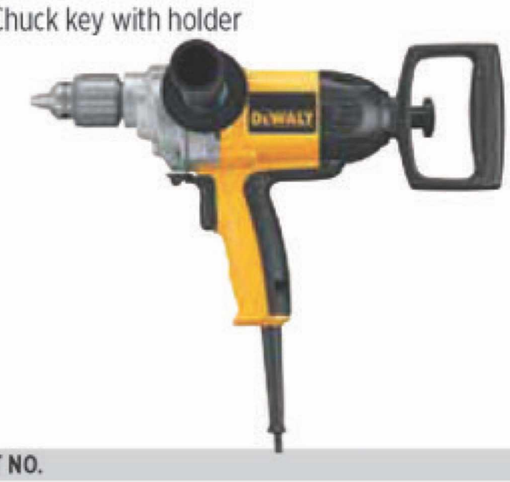

PRODUCT NO.
DW130V

⚠ WARNING ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

4-1/2" - 5" HIGH PERFORMANCE GRINDER

DEWALT

13 amps, 11,000 rpm, slide switch, AC/DC

- Dust Ejection System™
- Jam-pot, low profile gear case
- Quick-Change™ wheel release
- Keyless adjustable guard

Includes: 2-position side handle, depressed center wheel, keyless adjustable guard wrench

PRODUCT NO.	DESCRIPTION
DWE43114	W/ LOCK-ON
DWE43114N	W/ NO LOCK-ON

⚠ WARNING ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

9" HIGH-PERFORMANCE ANGLE GRINDER

DEWALT

13 amps, 4 HP, 6,500 rpm

- Epoxy coated field and armature
- Automatic turn-off brushes shut down the tool when brushes need to be changed to avoid tool damage
- 2 position side handle provides improved ergonomics for specific applications
- Low profile gearcase allows for work in tight areas
- Weight 12.3 lbs.

Includes: 9" guard, 2-position side handle

PRODUCT NO.
DWE4519

⚠ WARNING ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

1/2" DETENT PIN ANVIL IMPACT WRENCH

DEWALT

7.5 amps, 2,100 rpm, 2,700 ipm

- 345 ft-lbs of deliverable torque in forward and reverse
- AC/DC forward/reverse rocking switch
- Soft grip handle
- Ball bearing construction

Includes: 90-day money back guarantee, 1-year free service contract, 3-year limited warranty

PRODUCT NO.
DW292

⚠ WARNING ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

6" HIGH PERFORMANCE PADDLE SWITCH GRINDER

DEWALT

13 amps, 2.3 hp, 1,700W, 9,000 rpm, 5/8"-11 spindle thread

- E-Clutch™ activates in less than a tenth of a second when a pinch or stall is detected
- Power Loss Reset® prevents accidental restarts following a power disruption when tool is left in "on" position

Includes: Side handle, inner and outer flange, 6" Type 27 guard, 6" Type 1 guard

Product No.	DESCRIPTION
DWE43144	W/LOCK-ON PADDLE SWITCH
DWE43144N	W/NO LOCK-ON PADDLE SWITCH

⚠ WARNING ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

7" OR 9" LARGE ANGLE GRINDER

DEWALT

15 amps, 3,950W, 5.3 hp, 6,000 rpm, 5/8"-11 spindle thread

- 2-wire double insulated "S" jacket rubber cord
- Keyless adjustable guard
- Low profile gear case allows for work in tight areas
- Automatic turn-off brushes

Includes: 5-position side handle, 7" and 9" guard

PRODUCT NO.
D28499X

⚠ WARNING ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

6/15/24 12:52 PM

FLEXVOLT® 60V MAX* BRUSHLESS 7-1/4" CIRCULAR SAW WITH BRAKE KIT

DEWALT FLEXVOLT

2-9/16" depth of cut @ 90° (2" @ 45°), 57° maximum bevel capacity

- Electric brake system stops blade after trigger is released
- Integrated LED for increased visbility and cut accuracy
- Integrated rafter hook for quick and easy storage

Includes: (2) FLEXVOLT® 9.0Ah batteries, (1) charger, (1) blade, (1) blade wrench, kit bag

PRODUCT NO.
DCS578X2

⚠ WARNING ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

FLEXVOLT® 60V MAX* BRUSHLESS MIXER/ DRILL KIT WITH E-CLUTCH® SYSTEM

DEWALT FLEXVOLT

0-600 no-load rpm, 1/2" chuck size

- Mix up to 19 premixed drywall buckets, 17 buckets of tile mortar, or 9 buckets of concrete on a single charge with 6.0Ah FLEXVOLT® battery
- Integrated E-Clutch® System to improve user control
- Continuous variable speed trigger

Includes: (1) 6.0Ah FLEXVOLT® battery pack, (1) 20V/60V MAX* rapid charger, side handle, chuck key and holder

PRODUCT NO.
DCD130T1

⚠ WARNING ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

FLEXVOLT™ 60V MAX* 1-9/16" SDS-MAX COMBINATION HAMMER KIT

DEWALT FLEXVOLT SDS max

6.1 Js of impact energy provides corded power without the cord

- E-Clutch® for maximum control in bind-up situations – a Perform & Protect™ feature
- SHOCKS™ – Active Vibration Control System
- DEWALT-built brushless motor for all day runtime and durability

Includes: DCH481 Hammerdrill, side handle, (2) DCB609 20V/60V MAX* FLEXVOLT 9.0 Ah batteries, DCB118 20V MAX* fan cooled fast charger

PRODUCT NO.
DCH481X2

⚠ WARNING ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

FLEXVOLT® 60V MAX* BRUSHLESS 4-1/2" - 6" GRINDER WITH KICKBACK BRAKE KIT

DEWALT FLEXVOLT

9,000 no-load rpm, 3 hp peak

- Kickback Brake engages with maximum force to quickly stop the wheel, reduce the movement of and shutdown the grinder when a pinch, stall or bind-up event is sensed

Includes: (2) FLEXVOLT® 9.0Ah batteries, (1) charger, (1) 6" T27 guard, (1) 4-1/2" T27 guard, (1) side handle, (1) wrench, (2) flanges, kit bag

PRODUCT NO.
DCG418X2

⚠ WARNING ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

FLEXVOLT® 60V MAX* BRUSHLESS CORDLESS RECIPROCATING SAW KIT

DEWALT FLEXVOLT

3,000 no-load spm

- Delivers the power of a corded recip saw with the portability and convenience of cordless

PRODUCT NO.
DCS389X2

⚠ WARNING ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

FLEXVOLT® 60V MAX* 7" BRUSHLESS CORDLESS GRINDER WITH KICKBACK BRAKE KIT

DEWALT FLEXVOLT

2,300 unit watts, 3 HP max output

- E-CLUTCH® immediately shuts down motor when pinch or stall is detected
- Instant brake when trigger is released
- Versatile pipeline grip gearcase cover for precise control and accuracy

Includes: (1) DCG440 7 in. Grinder, (2) DCB609 DEWALT® FLEXVOLT® Batteries, (1) DCB118 Fast Charger, (1) Side Handle, (1) Type 27 Guard, (1) DW4547 7 in. x 1/4 in. Grinding Wheel, (1) Hex Key, (1) Threaded Outer Flange Nut, (1) Kit Bag

PRODUCT NO.
DCG440X2

⚠ WARNING ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

STANLEY_SUPPLY.indd 204-205

FLEXVOLT™ 60V MAX* BRUSHLESS 7-1/4" WORM DRIVE STYLE SAW

DEWALT FLEXVOLT BRUSHLESS MOTOR

5,800 rpm, 2-7/16" cut capacity at 90°, direct drive motor

- Rear-handle and left-oriented blade for easy line of sight
- Bevel capacity of 53° with stops at 45° and 22.5°
- Integrated dust blower to clear line of sight
- Electronic brake stops blade when trigger released
- Durable, high-grade magnesium shoe and efficient brushless motor for smooth, accurate cuts and long runtime
- Onboard blade wrench storage and integrated rafter hook

Includes: 20V MAX fan corded fast charger, 1 FLEXVOLT™ 9.0 Ah battery, (1) 7-1/4" FLEXVOLT™ carbide-tipped circular saw blade, blade wrench, user manual, contractor bag

PRODUCT NO.	DESCRIPTION
DCS577B	BARE TOOL
DCS577X1	60V FRAME SAW KIT

⚠ WARNING ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

FLEXVOLT™ 20V/60V MAX* LITHIUM-ION 9.0AH BATTERY

DEWALT FLEXVOLT

Powers all 20V Max, 60V Max, and 120V Max tools

- LED state of charge display
- 9.0 Ah capacity when used with 20V Max tool
- Compatible with all 20V Max tools

PRODUCT NO.	DESCRIPTION
DCB6092	9.0AH 2-PACK
DCB609	9.0AH 1-PACK

⚠ WARNING ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

FLEXVOLT™ 20V/60V MAX* 6.0 AH BATTERY

DEWALT FLEXVOLT

Powers a new line of 60V MAX and 120V MAX tools, compatible with the 20V MAX* system of tools and chargers

- 3-LED fuel gauge
- One piece cell holder construction
- Shipping Cap for use when shipping converts battery pack to 3 x 40Whr configuration
- 3X power compared to DC9096 18V battery, 4X runtime compared to DCB201 1.5Ah battery pack
- Weighs 2.3 lbs.

PRODUCT NO.	DESCRIPTION
DCB6062	2-PACK BATTERIES
DCB606	BATTERY

⚠ WARNING ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

DEWALT

NEW

DCS692X2

60V MAX* BRUSHLESS CORDLESS 9" CUT-OFF SAW (9.0 Ah) (2 BATTERY KIT)

- Rotatable, 5-position guard for optimized approach angle and improved visibility versus fixed guard.
- 3-1/4" (83 mm) depth of cut for single pass in pavestones, rebar cutting, and concrete scoring.
- All-metal drivetrain for durability and efficiency.
- Latched battery box protects against airborne dust and water.
- Dual-sided water delivery system for optimal dust management when cutting concrete.
- Tool Connect™ System TAG READY - Track This Tool™
- New Battery Door Designed to fit DCB615 (15.0 Ah battery) for extended run time.
- Wireless Tool Control - Tool activated remote control for water management.
- 2-stage trigger required to meet safety requirements.

TOOL CONNECT™ | 60V MAX* BRUSHLESS | POWERED BY FLEX VOLT™

Maximum initial battery voltage (measured without a workload) is 20 and 60 volts. Nominal voltage is 18 and 54. All amp hours (Ah) shown with 60V MAX products are measured in 20V MAX* mode.

GDS/22-2911636

6/15/24 12:52 PM

20V MAX* XR BRUSHLESS 1" D-HANDLE SDS-PLUS ROTARY HAMMER KIT

DEWALT

2.6 Joules impact energy, 0-1,500 rpm, 0-5,550 bpm

- Durable German engineered mechanism for long service life, even in the hardest concrete
- Compatible with DWH200D and D25301D dust extractors

Includes: (2) 4.0 Ah packs, adjustable side handle with integrated depth stop rod, charger, soft sided case

PRODUCT NO.
DCH133M2

⚠ WARNING ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

20V MAX* XR BRUSHLESS 1" SDS-PLUS L-SHAPE ROTARY HAMMER KIT

DEWALT

0-1,100 rpm, 0-4,600 bpm, 2.1 Joules impact energy

- SHOCKS Active Vibration Control®
- Factory-set clutch reduces sudden, high torque reactions if bit jams
- Compatible with Dust Extractor DWH303DH
- 2-year warranty

Includes: 2 DCB205 5.0 Ah batteries, 1 DCB101 charger, 360° side handle, depth rod, retractable utility hook

PRODUCT NO.
DCH273P2

⚠ WARNING ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

1-1/8" SDS-PLUS D-HANDLE ROTARY HAMMER KIT

DEWALT

0-1,165 rpm, 0-4,300 bpm, 3 Joules impact energy

- Durable three-mode German-engineered mechanism
- Factory-set clutch reduces sudden, high-torque reactions if bit jams
- SHOCKS Active Vibration Control® system reduces vibration felt at the handles

Includes: 1 low-vibration side handle, 1 depth rod, (2) 20V MAX* premium XR 6.0Ah lithium-ion battery packs, 1 high-speed charger

PRODUCT NO.
DCH263R2

⚠ WARNING ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

20V MAX* XR LI-ION BRUSHLESS COMPACT DRILL/DRIVER AND IMPACT DRIVER COMBO KIT

DEWALT

Brushless motor delivers up to 57% more run-time over brushed

- DCD791: 20V MAX 1/2" drill/driver: compact (6.9" front to back) and lightweight (3.4 lb.) design
- DCF887: 20V MAX 1/4" impact driver: compact (5.3" front to back) design
- Features 3-mode LED with with 20-minute trigger release delay in Spotlight Mode

PRODUCT NO.
DCK283D2

⚠ WARNING ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

20V MAX* XR BL COMPACT HAMMERDRILL/ IMPACT DRIVER COMBO KIT

DEWALT

XR Li-Ion batteries with fuel gauge

- DCD796: 20V Max XR BL Compact Hammer Drill: 2 amps, 0-550/0-2,000 rpm, 3-mode LED lighting, 1/2" metal ratcheting chuck, 15 clutch settings, variable-speed trigger
- DCF887: 20V Max XR 1/4" 3-Speed Impact Driver: 0-1,000/2,800/3,250 rpm, 0-3,800 ipm, 3 LEDs with 20-second delay after trigger release, 1/4" hex chuck, variable-speed trigger

PRODUCT NO.
DCK287D2

⚠ WARNING ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

20V MAX* XR LI-ION BRUSHLESS 3-SPEED HAMMERDRILL KIT

DEWALT

5.0 Ah, 1/2" chuck size, 820 UWO, 0-38,250 bpm, 11 clutch settings

- Brushless motor delivers up to 57% more run time over brushed
- Heavy-duty 1/2" ratcheting nitro-carburized metal chuck with carbide inserts
- LED Spotlight Mode features 20 minute shutoff function, 3-mode LED up to 20X brighter than previous model

PRODUCT NO.
DCD996P2

⚠ WARNING ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

20V MAX* LITHIUM-ION RECIPROCATING SAW KIT

DEWALT

0-3,000 spm, 1-1/8" stroke length

- 4-Position blade clamp for flush cutting and increased positional versatility with tool free blade changes
- Pivoting adjustable shoe extends blade life and allows depth of cut control
- Rubber overmolded comfort grip
- Double oil sealed shaft resists contamination and increases durability

PRODUCT NO.	DESCRIPTION
DCS380P1	KIT
DCS380B	TOOL ONLY

⚠ WARNING ⚠
Cancer and Reproductive Harm - **www.P65Warnings.ca.gov**

STANLEY_SUPPLY.indd 206-207

CHARGERS

20V MAX* CHARGERS

12V-20V/60V MAX* Dual Port Charger

DCB102

12V 20V 60V

SPECIFICATIONS	
Compatibility	12V MAX*, 20V MAX*, 20V/60V MAX*
Output Current	4 Amps per Port
Wall Mountable	No
Handle	No
Tool Connect Tag Ready™	No
USB Outlets	Yes
Fan Cooled	No

12V-20V/60V MAX* Vehicle Charger

DCB119

12V 20V 60V

SPECIFICATIONS	
Compatibility	12V MAX*, 20V MAX*, 20V/60V MAX*
Output Current	4 Amps
Wall Mountable	No
Handle	No
Tool Connect Tag Ready™	No
USB Outlets	No
Fan Cooled	No

12V-20V-60V MAX* Charger

DCB115

12V 20V 60V

SPECIFICATIONS	
Compatibility	12V MAX*, 20V MAX*, 20V/60V MAX*
Output Current	4 Amps
Wall Mountable	Yes
Handle	No
Tool Connect Tag Ready™	No
USB Outlets	No
Fan Cooled	No

20V MAX* Fast Charger

DCB118

20V 60V

SPECIFICATIONS	
Compatibility	12V MAX*, 20V MAX*, 20V/60V MAX*
Output Current	4 Amps
Wall Mountable	Yes
Handle	No
Tool Connect Tag Ready™	No
USB Outlets	No
Fan Cooled	Yes

1800 Watt Portable Power Station™ and Simultaneous Charger

DCB1800B

SPECIFICATIONS	
Output	120V MAX*
Compatibility	20V MAX* Lithium Ion Batteries and 20V/60V MAX* FLEXVOLT® Lithium Ion Batteries
Max AC Output	3600 Watts Peak
Rated AC Output	1800 Watts Continuous
Power Source	Extension cord, and batteries sold separately.

20V 60V

Simultaneous Four-Port Fast Charger

DCB104

12V 20V 60V

SPECIFICATIONS	
Compatibility	12V MAX*, 20V MAX*, 20V/60V MAX*
Output Current	8 Amps per Port (4 Ports)
Wall Mountable	Yes
Handle	Yes
Tool Connect Tag Ready™	Yes
*TOUGH*SYSTEM® Compatible	Yes
USB Outlets	No
Fan Cooled	No

Combination Dual Port Charger

DCB103

12V 18 VOLT 20V 60V

SPECIFICATIONS	
Compatibility	7.2V-18V, 12V MAX*, 20V MAX*, 20V/60V MAX*
Output Current	2.5 Amps, 4 Amps
Wall Mountable	No
Handle	No
Tool Connect Tag Ready™	No
USB Outlets	No
Fan Cooled	No

20V MAX* BATTERY ACCESSORIES

18V to 20V MAX* Adapter

DCA1820

18 VOLT 20V

SPECIFICATIONS	
Voltage	18V to 20V MAX*
Not For Use With	DEWALT 18V Nailers, DEWALT Charger / Radios, DCS370 Band Saw

AVAILABLE	
DCA1820	Battery Adapter Only.
DCA2203C	Also Includes: (2) 20V MAX* Lithium Ion Batteries (2.0 Ah) and Charger

USB Power Source

DCB090

12V 20V 60V

SPECIFICATIONS	
Voltage	12V MAX*, 20V MAX*, 20V/60V MAX*
USB Ports	2
State of Charge Indicator	Yes
Tool Weight (Tool only)	0.5 lbs

6/15/24 12:52 PM

CHARGERS

20V MAX* CHARGERS

12V-20V/60V MAX* Dual Port Charger

DCB102

12V 20V 60V

SPECIFICATIONS	
Compatibility	12V MAX*, 20V MAX*, 20V/60V MAX*
Output Current	4 Amps per Port
Wall Mountable	No
Handle	No
Tool Connect Tag Ready™	No
USB Outlets	Yes
Fan Cooled	No

12V-20V/60V MAX* Vehicle Charger

DCB119

12V 20V 60V

SPECIFICATIONS	
Compatibility	12V MAX*, 20V MAX*, 20V/60V MAX*
Output Current	4 Amps
Wall Mountable	No
Handle	No
Tool Connect Tag Ready™	No
USB Outlets	No
Fan Cooled	No

12V-20V-60V MAX* Charger

DCB115

12V 20V 60V

SPECIFICATIONS	
Compatibility	12V MAX*, 20V MAX*, 20V/60V MAX*
Output Current	4 Amps
Wall Mountable	Yes
Handle	No
Tool Connect Tag Ready™	No
USB Outlets	No
Fan Cooled	No

20V MAX* Fast Charger

DCB118

20V 60V

SPECIFICATIONS	
Compatibility	12V MAX*, 20V MAX*, 20V/60V MAX*
Output Current	4 Amps
Wall Mountable	Yes
Handle	No
Tool Connect Tag Ready™	No
USB Outlets	No
Fan Cooled	Yes

1800 Watt Portable Power Station™ and Simultaneous Charger

DCB1800B

SPECIFICATIONS	
Output	120V MAX*
Compatibility	20V MAX* Lithium Ion Batteries and 20V/60V MAX* FLEXVOLT® Lithium Ion Batteries
Max AC Output	3600 Watts Peak
Rated AC Output	1800 Watts Continuous
Power Source	Extension cord, and batteries sold separately.

20V 60V

Simultaneous Four-Port Fast Charger

DCB104

12V 20V 60V

SPECIFICATIONS	
Compatibility	12V MAX*, 20V MAX*, 20V/60V MAX*
Output Current	8 Amps per Port (4 Ports)
Wall Mountable	Yes
Handle	Yes
Tool Connect Tag Ready™	Yes
TOUGHSYSTEM® Compatible	Yes
USB Outlets	No
Fan Cooled	No

Combination Dual Port Charger

DCB103

12V 18 VOLT 20V 60V

SPECIFICATIONS	
Compatibility	7.2V-18V, 12V MAX*, 20V MAX*, 20V/60V MAX*
Output Current	2.5 Amps, 4 Amps
Wall Mountable	No
Handle	No
Tool Connect Tag Ready™	No
USB Outlets	No
Fan Cooled	No

20V MAX* BATTERY ACCESSORIES

18V to 20V MAX* Adapter

DCA1820

18 VOLT 20V

SPECIFICATIONS	
Voltage	18V to 20V MAX*
Not For Use With	DEWALT 18V Nailers, DEWALT Charger / Radios, DCS370 Band Saw

AVAILABLE	
DCA1820	Battery Adapter Only.
DCA2203C	Also Includes: (2) 20V MAX* Lithium Ion Batteries (2.0 Ah) and Charger

USB Power Source

DCB090

12V 20V 60V

SPECIFICATIONS	
Voltage	12V MAX*, 20V MAX*, 20V/60V MAX*
USB Ports	2
State of Charge Indicator	Yes
Tool Weight (Tool only)	0.5 lbs

STANLEY_SUPPLY.indd 208-209

METAL CARBIDE/CERMET

Blade Diameter in	Blade Diameter mm	Arbor	Applications	Teeth	Max RPM	Model	Part	Machines
8	203	⅝ K.O.	Steel	48	5,800	CSM848FSC	102704	Milwaukee 6370-20; 6370-21; 2982-20/21 Skillsaw SPT78MMC-01; SPT78MMC-22
		⅝ K.O.	Aluminum and Non Ferrous	56	5,800	CSM856FNFC	102728	
		⅝ K.O.	Stainless Steel	56	5,800	CSM856FSSC	102711	
9	229	1	Steel	48	3,200	CSM948FSC	102735	Morse CSM9MB; CSM9NXTB Evolution Steel Saw 5; EVOSAW230 Jancy MCSL09; MCSLO0-2 Fein/Slugger 69908120001; MSCL09 Steelmax SM-S9 Alfra RS230 Jepsen 8230N
		1	Aluminum and Non Ferrous	64	3,200	CSM964FNFC	102759	
		1	Stainless Steel	64	3,200	CSM964FSSC	102742	
10	254	⅝	Thin Steel	52	5,200	CSM1052FTSC	102766	Bosch CM10GD Dewalt DW713 Rigid MS1065LZA RPM compatible table saws and miter saws
		⅝	Aluminum and Non Ferrous	72	5,200	CSM1072FNFC	102773	
		⅝	Thin Aluminum	92	5,200	CSM1092FTNFC	102780	
12	305	1	Steel	60	1,800	CSM1260FSC	102797	Makita LC1230 Milwaukee 6955-20 Skillsaw SPT62MTC-22 RPM compatible miter saws
		1	Aluminum and Non Ferrous	80	3,800	CSM1280FNFC	102803	
		1	Thin Aluminum	100	3,800	CSM12100FTNFC	102810	
		1	Stainless Steel and Thin Steel	90	2,000	CSM1290FSSC	102834	
14	356	1	Steel	66	1,800	CSM1466FSC	102841	Morse CSM14MB Dewalt DW872 Evolution Fury2; Rage2; Steel Saw 2; EVOSAW380 Jancy MCCS14; MCCS14-2 Milwaukee 6190-20 Ridge 614 Fein MCCS14 Unitec 9435 Steelmax SM-S-14 Alfra RD355A Jepsen 9435 Hitachi CD14F
		1	Aluminum and Non Ferrous	80	3,800	CSM1480FNFC	102865	
		1	Thin Aluminum	100	3,800	CSM14100FTNFC	102872	
		1	Stainless Steel and Thin Steel	90	1,800	CSM1490FSSC	102889	

7" - 7¼" CSM7NXTB
PART 100960

CUTTING CAPABILITIES

2⅜" Maximum Cutting Reach
¼" Maximum Thickness of Cut Mild Steel 0-45° Bevel Cut

9" CSM9NXTB
PART 100977

CUTTING CAPABILITIES

3¼" Maximum Cutting Reach
⅜" Maximum Thickness of Cut Mild Steel 0-45° Bevel Cut

14" CSM14MB
PART 101172

CUTTING CAPABILITIES

2⅜" Maximum Cutting Reach
¼" Maximum Thickness of Cut Mild Steel 0-45° Bevel Cut

6/15/24 12:52 PM

METAL CARBIDE/CERMET

METAL DEVIL METAL-CUTTING CIRCULAR SAW BLADES

Cut through steel, stainless steel, aluminum, and other tough materials faster than ever with unrivaled blade life, cutting speed, and surface finish. Premium grade materials and tooth geometries are optimized for peak performance in specific applications.

Applications

- Steel, angle iron, steel plate, channel iron, I-beams, pipe
- Thin Steel
- Steel studs
- Stainless steel plate, tubing, Unistrut
- Aluminum, thin aluminum, aluminum extrustions
- Copper, lead, zinc

Features

- **Longer** - Premium grade materials improve durability and maximize blade life
- **Faster** - A thin kerf blade creates less heat for a faster cut
- **Smoother** - Optimized tooth geometry reduces vibration for improved surface finish and virtually no rework

Blade Diameter in	Blade Diameter mm	Arbor	Applications	Teeth	Max RPM	Model	Part	Machines
5 ⅜	137	⅝	Steel	32	4,200	CSM5383258FSC	102506	DeWalt DCS512B Makita XSC01Z; XSC01T; XSC03Z Bosch CSM180B; CSM180-01 Milwaukee 2782-20; 2782-22
		10mm / 20mm / ⅝	Steel	32	4,200	CSM53832FSC	102513	DeWalt DCS512B Makita XSC01Z; XSC01T; XSC03Z Bosch CSM180B; CSM180-01 Milwaukee 2782-20; 2782-22 Makita BC550; BSS301 Panasonic EY353ONQMKW
		10mm / 20mm / ⅝	Aluminum and Non Ferrous	40	4,200	CSM53840FNFC	102520	
		10mm / 20mm / ⅝	Stainless Steel	40	4,200	CSM53840FSSC	102902	
5 ⅞	150	20mm	Steel	34	4,200	CSM5883420FSC	102537	Milwaukee 2782-20
		20mm	Aluminum and Non Ferrous	40	4,200	CSM5884020FNFC	102551	
		⅝	Steel	34	4,200	CSM5883458FSC	102544	Makita XSC02Z; XSC04Z
		⅝	Aluminum and Non Ferrous	40	4,200	CSM5884058FNFC	102568	
		10mm / 20mm / ⅝	Stainless Steel	40	4,200	CSM58840FSSC	102919	Milwaukee 2782-20 Makita XSC02Z; XSC04Z
6 ½	165	20mm	Steel	40	4,200	CSM6504020FSC	102575	Panasonic EY3552GQW Hilti SCM22-A; SCW22-A; 03490197; SC 5ML-22
		⅝	Steel	40	4,200	CSM6504058FSC	102582	Bosch CCS180B Makita BSS610 Dewalt DCS391, DCS565 Rigid R3203 Hilti SCM22-A Porter Cable PCC660B Metabo MKS18LTX; KS18LTX Milwaukee 2730-20
		20mm / ⅝	Aluminum and Non Ferrous	48	4,200	CSM6504820FNFC	102612	Bosch CCS180B Makita BSS610 Dewalt DCS391, DCS565 Rigid R3203 Hilti SCM22-A Porter Cable PCC660B Metabo MKS18LTX; KS18LTX Panasonic EY3552GQW Hilti SCM22-A; SCW22-A; 03490197; SC 5ML-22 Milwaukee 2730-20
		20mm / ⅝	Stainless Steel	48	4,200	CSM6504820FSSC	102599	
7 ¼	184	⅝ K.O.	Steel	48	5,800	CSM7254858FSC	102636	Standard 7-1/4" - 5/8" arbor circular saws
		⅝ K.O.	Aluminum and Non Ferrous	56	5,800	CSM7255658FNFC	102650	
		20mm	Steel	48	5,800	CSM7254820FSC	102643	Morse CSM7MB; CSM7NXTB Evolution EVOSAW185HD, EVOSAW180HD; S85CCSL Steelmax SM-S7 XP Fein/Slugger 6990812000 Alfra RS185
		20mm	Aluminum and Non Ferrous	56	5,800	CSM7255620FNFC	102667	
		20mm	Stainless Steel	56	5,800	CSM7255620FSSC	102698	

▼ ⅝ K.O. fits both diamond and circular arbors.

▼ Certain 5⅜, 5⅞ and 6½" blades contain special bushings.

STANLEY_SUPPLY.indd 210-211

THE M. K. MORSE COMPANY

BI-METAL

9/16 HOLE SAW ADVANCED EDGE
5/8 HOLE SAW ADVANCED EDGE
11/16 HOLE SAW ADVANCED EDGE
3/4 HOLE SAW ADVANCED EDGE
13/16 HOLE SAW ADVANCED EDGE
7/8 HOLE SAW ADVANCED EDGE
15/16 HOLE SAW ADVANCED EDGE
1" HOLE SAW ADVANCED EDGE
1 1/16 HOLE SAW ADVANCED EDGE
1 1/8 HOLE SAW ADVANCED EDGE
1 3/16 HOLE SAW ADVANCED EDGE
1 1/4 HOLE SAW ADVANCED EDGE
1 5/16 HOLE SAW ADVANCED EDGE
1 3/8 HOLE SAW ADVANCED EDGE
1 7/16 HOLE SAW ADVANCED EDGE
1 1/2 HOLE SAW ADVANCED EDGE
1 9/16 HOLE SAW ADVANCED EDGE
1 5/8 HOLE SAW ADVANCED EDGE
1 11/16 HOLE SAW ADVANCED EDGE
1 3/4 HOLE SAW ADVANCED EDGE
1 13/16 HOLE SAW ADVANCED EDGE
1-7/8 HOLE SAW ADVANCED EDGE
2"-HOLE SAW ADVANCED EDGE
2-1/16"-HOLE SAW ADVANCED EDGE
2-1/8 VARIABLE PT HOLE SAW ADVANCED EDGE
2-1/4"-HOLE SAW ADVANCED EDGE
2-5/16 VARIABLE PT HOLE SAW ADVANCED EDGE
2-3/8"-HOLE SAW ADVANCED EDGE
2-1/2 VARIABLE PT HOLESAW ADVANCED EDGE
2-9/16 VARIABLE PT HOLESAW ADVANCED EDGE
2-5/8 VARIABLE PT HOLESAW ADVANCED EDGE
2-3/4 VARIABLE PT HOLESAW ADVANCED EDGE
2-7/8 VARIABLE PT HOLESAW ADVANCED EDGE
3" VARIABLE PT HOLESAW ADVANCED EDGE
3-1/8" VARIABLE PT HOLESAW ADVANCED EDGE
3-1/4" VARIABLE PT HOLESAW ADVANCED EDGE
3-3/8" VARIABLE PT HOLESAW ADVANCED EDGE
3-1/2" VARIABLE PT HOLESAW ADVANCED EDGE
3-5/8" VARIABLE PT HOLESAW ADVANCED EDGE
3-3/4" VARIABLE PT HOLESAW ADVANCED EDGE
3-7/8" VARIABLE PT HOLESAW ADVANCED EDGE
4" VARIABLE PT HOLESAW ADVANCED EDGE
4-1/8" VARIABLE PT HOLESAW ADVANCED EDGE
4-1/4" VARIABLE PT HOLESAW ADVANCED EDGE
4-3/8" VARIABLE PT HOLESAW ADVANCED EDGE
4-1/2" VARIABLE PT HOLESAW ADVANCED EDGE
4-3/4" VARIABLE PT HOLESAW ADVANCED EDGE
5" VARIABLE PT HOLESAW ADVANCED EDGE
5-1/4" VARIABLE PT HOLESAW ADVANCED EDGE
5-1/2" VARIABLE PT HOLESAW ADVANCED EDGE
5-3/4" VARIABLE PT HOLESAW ADVANCED EDGE
6" VARIABLE PT HOLESAW ADVANCED EDGE

ADVANCED EDGE PLUMBER HOLE SAW KIT 8 PIECE (INCLUDES 3/4", 7/8", 1-1/8", 1-1/2", 1-3/4", 2-1/4")

ELECTRICAN HOLE SAW KIT 8 PIECE (INCLUDES 7/8", 1-1/8", 1-3/8", 1-3/4", 2", 2-1/2")

ADVANCED EDGE MSTR ELECT HOLE SAW KIT 13PIECE

CARBIDE TIPPED

11/16 HOLE SAW CARBIDE TIPPED
3/4" HOLE SAW CARBIDE TIPPED
13/16 HOLE SAW CARBIDE TIPPED
7/8" HOLESAW CARBIDE TIPPED
1" HOLESAW CARBIDE TIPPED
1-1/16: HOLE SAW CARBIDE TIPPED
1 1/8 HOLESAW CARBIDE TIPPED
1-3/16 HOLESAW CARBIDE TIPPED
1 1/4 HOLESAW CARBIDE TIPPED
1-5/16 HOLESAW CARBIDE TIPPED
1 3/8 HOLESAW CARBIDE TIPPED
1 1/2 HOLESAW CARBIDE TIPPED
1-9/16 HOLESAW CARBIDE TIPPED
1 5/8 HOLESAW CARBIDE TIPPED
1 3/4 HOLESAW CARBIDE TIPPED
2 HOLESAW CARBIDE TIPPED
2-1/8 HOLESAW CARBIDE TIPPED
2 1/4 HOLESAW CARBIDE TIPPED
2-5/16 HOLE SAW CARBIDE TIPPED
2 3/8 HOLESAW CARBIDE TIPPED
2 1/2 HOLESAW CARBIDE TIPPED
2-9/16 HOLESAW CARBIDE TIPPED
2 5/8 HOLESAW CARBIDE TIPPED
2-3/4 HOLESAW CARBIDE TIPPED
3 HOLESAW CARBIDE TIPPED
3-1/2" HOLESAW CARBIDE TIPPED
3-5/8" HOLESAW CARBIDE TIPPED
4" HOLESAW CARBIDE TIPPED
4-1/2" HOLESAW CARBIDE TIPPED
5" HOLESAW CARBIDE TIPPED

MAINTENANCE HOLE SAW KIT 11PIECE (INCLUDES 3/4", 7/8", 1-1/8", 1-3/8", 1-1/2", 1-3/4", 2", 2-1/4", 2-1/2")

1/4" HEX ARBOR COMPLETE W/ PILOT DRILL
3/8 HEX ARBOR COMPLETE W/ PILOT DRILL
7/16 HEX ARBOR COMPLETE W/ PILOT DRILL

RECIPROCATING SAW BLADES

7-1/4" 24T FRAMING BLADE

Ideal for High quality crosscuts and rip cuts in wood, plywood & melamine

- TiCo Hi-Density carbide specifically designed for each application to increase performance
- Perma-SHIELD® Non-stick Coating protects from heat, gumming, & corrosion
- Hardened Steel Body – warrants a longer life and sharper cutting edge
- Tri-metal shock resistant brazing allows carbide tips to withstand extreme impact for maximum durability
- Hardened Steel Body – warrants a longer life and sharper cutting edge.
- 5/8" arbor with diamond knock out

PRODUCT NO.
D0740A

7-1/4" X 40 TOOTH FINISH SAW BLADE

Ideal for High quality crosscuts and rip cuts in wood, plywood & melamine

- TiCo Hi-Density carbide specifically designed for each application to increase performance
- Perma-SHIELD Non-stick Coating protects from heat, gumming, & corrosion
- Hardened Steel Body – warrants a longer life and sharper cutting edge
- 5/8" arbor with diamond knock out

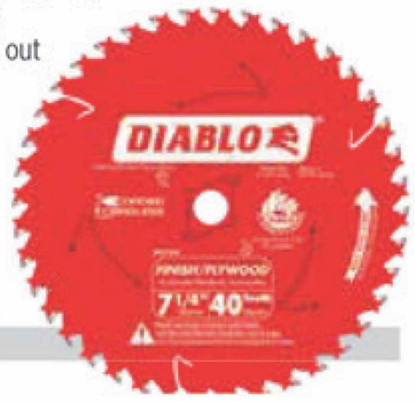

PRODUCT NO.
D0740A

7-1/4" HARDIEBLADE™ SAW BLADE

Fiber cement cutting blades

- The only blade recommended by James Hardie
- Generates up to 50% less respirable dust
- 60X life of standard blades, ideal for cutting stacked sheets

PRODUCT NO.
D0764DEIET

CARBIDE-TIPPED GENERAL PURPOSE RECIPROCATING SAW BLADES

For general purpose cutting

- Carbide teeth for cutting in wood or metal
- 50X life vs bi-metal blades
- Perma-SHIELD® non-stick coating for less heat and corrosion
- 6/9 TPI



PRODUCT NO.	LENGTH
DS129CGP3	12"
DS099CGP3	9"
DS069CGP3	6"

DEMO DEMON® GENERAL PURPOSE RECIP BLADES

For nail-embedded wood, metal, and plastics

- Patented variable tooth technology for faster cuts with less vibration
- Perma-SHIELD® non-stick coating
- 5 times the performance of standard blades

PRODUCT NO.	TPI	SIZE	PACK QTY.
DS0914BG5	8/14	9"	5
DS0614B25	8/14	6"	25
DS0914B25	8/14	9"	25

DIABLO DEMO DEMON™ RECIPROCATING SAW BLADES

For metal and metal demolition

- Thick demolition blade body for extreme durability
- Perma-SHIELD® non-stick coating protects blade from heat, gumming, and corrosion

PRODUCT NO.	TPI	SIZE	PACK QTY.
DS0908B25	8/10	9"	25
DS0608BF5	8/10	6"	5
DS0908BF5	8/10	9"	5
DS0608B25	8/10	6"	25

DEMO DEMON CARBIDE-TIPPED RECIPROCATING BLADES

For demolition, nail-embedded wood, and other extreme wood cutting

- 5-7 TPI
- Lasts 50 times longer than bi-metal blades
- PermaShield coating for cutting speed and long life

PRODUCT NO.	TPI	SIZE	PACK QTY.
DS0906CW3	5/7	9"	3
DS0606CW3	5/7	6"	3
DS1206CW3	5/7	12"	3

DEMO DEMON™ NAIL EMBEDDED WOOD RECIPROCATING BLADES

Special tooth geometry for fast cuts and durability

- Ultra-hardened bi-metal teeth
- Perma-SHIELD® friction-reducing coating
- 6/12 tpi

PRODUCT NO.	SIZE	PACK QTY.
DS0612BW5	6"	5
DS0612B25	6"	25
DS0912BW5	9"	5
DS0912B25	9"	25
DSW1212B5	12"	5
DS1212B25	12"	25

STEEL DEMON™ METAL CUTTING RECIPROCATING BLADES

Full Contact Arched Design provides more working teeth within the material for faster cuts

- Perma Shield Coating creates less heat build-up to deliver 5 times longer cutting performance

PRODUCT NO.	TPI	SIZE	PACK QTY
DS1214BF5	14/18	12"	5PK
DS1214B25	14/18	12"	25PK
DS0914BF5	14/18	9"	5PK
DS0614BF5	14/18	6"	5PK
DS091425P	14/18	9"	25PK
DS0614F25	14/18	6"	25PK
DS0920BF5	20/24	9"	5PK
DS0920B25	20/24	9"	25PK

STEEL DEMON™ CARBIDE-TIPPED RECIP BLADES

For extreme metal cutting, including high strength alloys, cast iron, and stainless steel

- Lasts 50 times longer than bi-metal blades
- PermaShield coating for cutting speed and long life
- 8 TPI: for thick metals, 10 TPI: for medium metals, 20 TPI: for thin metals

PRODUCT NO.	TPI	SIZE	PACK QTY
DS0608CF3	8	6"	3
DS0610CF3	10	6"	3
DS0620CF	20	6"	1
DS0820CF	20	8"	1
DS0910CF3	10	9"	3
DS0908CF3	8	9"	3
DS1208CF3	8	12"	3
DS1210CF3	10	12"	3

STANLEY_SUPPLY.indd 212-213

STEEL DEMON® METAL CUTTING SAW BLADES WITH CERMET II

Cermet Tooth Blade cuts both standard steels and stainless steels while providing 5x the cutting performance of standard carbide tip metal cutting blades

- High heat tolerance and increased hardness for superior wear and impact resistance
- Improved Laser Cut Stabilizer Vents trap noise and vibration for maximum stability
- Perma-SHIELD® non-stick coating for less heat and corrosion

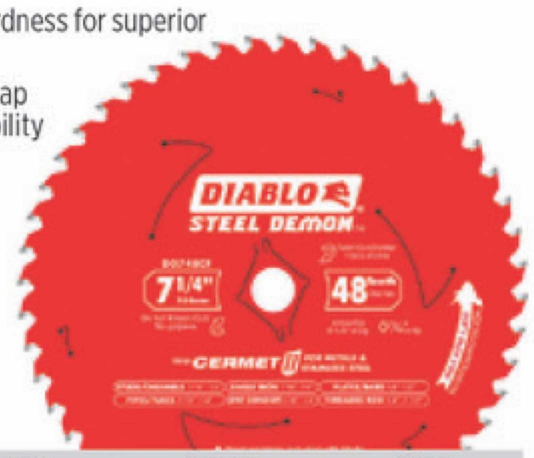

PRODUCT NO.	DIAMETER	TEETH	ARBOR	KERF
D0842CF	8"	42 TCG	5/8"	.075"
D0748CF	7-1/4"	48 TCG	5/8"	.075"
D0648CFA	6.5"	48 TCG	5/8"	.075"

6-1/2" FRAMING SAW BLADE

Ideal for fast, efficient ripping and cross cutting

- Superior cutting efficiency in cordless and corded saws by offering up to 30% more cuts per battery charge versus other blades
- Super-thin laser cut thin kerf design provides ease of feed, accuracy and maximum performance in cordless saws
- Perma-SHIELD® non-stick coating protects the blade against heat, gumming and corrosion

PRODUCT NO.
D0624A

ALUMINUM CUTTING BLADE

Diablo's next generation Aluminum saw blades are optimized for cutting thin (up to 1/8"), medium (3/32"-1/4") and thick (3/16"-7/16") aluminum metals.

- Triple Chip Grind (TCG) Tooth Geometry for maximum life, speed, and durability, giving clean, burr-free cuts
- Laser-Cut Stabilizer Vents for trapping noise and reducing vibration for accuracy and durability
- Perma-SHIELD® Non-Stick Coating for protection against heat, gumming and corrosion

PRODUCT NO.
D0756N

6-1/2" 24T ULTRA-THIN FRAMING/DEMOLITION SAW BLADE

8,000 max rpm, 5/8" arbor, 18° hook angle, .059" kerf

- Diablo made Dura-Blend™ carbide for extreme durability and up to 10x longer cutting life
- Chamber Alternate Top Bevel (ATB) tooth geometry for ultimate tracking control
- Lock-Tooth™ Technology for extreme impact resistance
- Enhanced anti-vibration design provides the ideal combination of stability and rigidity
- Perma-SHIELD® non-stick coating protects the blade against heat, gumming and corrosion

PRODUCT NO.
D0624DA

10-1/4" 40T GENERAL PURPOSE BEAM SAW BLADE

Ideal for general construction application

- Laser-cut blade cuts 5/8" arbor with diamond knockout
- Super thin laser cut kerf
- TiCo Hi-Density Carbide designed specifically for framing applications

PRODUCT NO.
D1040W

6-1/2" 40T FINISH TRIM SAW BLADE

10,000 max rpm, 5/8" arbor, 15° hook angle, .059" kerf

- TiCo Hi-Density Carbide specifically designed for each application to provide maximum performance and cutting life
- Super thin laser cut kerf gives extremely fast, durable, and clean cuts
- Laser-cut stabilizer vents trap noise and vibration keeping the blade cool and reducing blade warp
- Perma-SHIELD® non-stick coating protects the blade against heat, gumming and corrosion
- Laser-cut blade plate for true cuts 5/8" arbor with diamond knockout

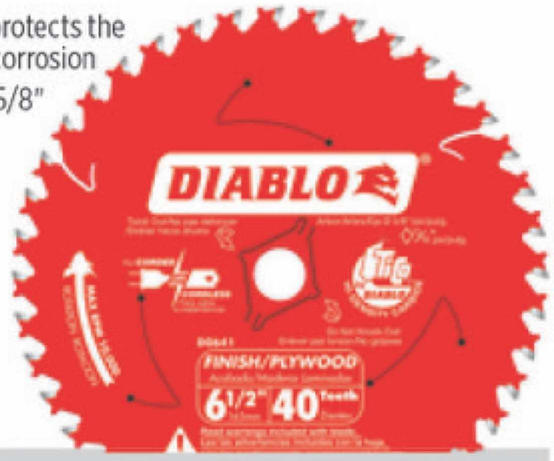

PRODUCT NO.
D0641A

DEWALT 5/6" Cutting and Tuckpointing Dust Shroud Kit

- **Includes:** DWV9000 Universal Connector, DWE4214 Grinder, DWE46152 Shroud, DWE46005 Bail Handle and Diamond Blade

PART NO.	DESCRIPTION
DWE46101	Kit

DEWALT 5" Surface Grinding Dust Shroud

- **Includes:** DWV9000 Universal Connector, DWE41214 Grinder, DWE46152 Shroud, DWE46005 Bail Handle and Diamond Blade

PART NO.	DESCRIPTION
DWE46152	Kit

DEWALT 7" & 9" 6,000 RPM 5.3 HP Angle Grinder

- 5-position side handle provides improved ergonomics for specific applications
- Epoxy coated field and armature provide long service life against abrasion from airborne debris
- Low-profile gearcase allows for work in tight areas
- Keyless adjustable guard provides tool-free guard adjustments to increase productivity
- Automatic turn-off brushes shut down the tool when brushes need to be changed
- 2-wire double insulated 'S' jacket rubber cord

SPECIFICATIONS	
Amps:	15.0
Max Watts Out:	3950 W
No Load Speed:	6000 RPM
Spindle:	5/8"-11
Use Wheels >RPM:	6600 RPM

PART NO.	DESCRIPTION
D28499X	TOOL ONLY

Milwaukee Grinder Guards & Flanges Cross Reference

PART NO.	DESCRIPTION	WHERE USED
14-32-0210	4-1/2" Type 27 Grinding Guard	6147, 6146, 6121
14-32-0215	5" Type 27 Grinding Guard	6117, 6161, 6121, 6124
14-32-0220	6" Type 27 Grinding Guard	6161, 6124

PART NO.	DESCRIPTION	WHERE USED
14-46-0406	6" Type 27 Grinding Assembly	6161, 6124
49-12-0010	7" Type 27 Grinding Guard	6088, 6089
49-12-0020	9" Type 27 Grinding Guard	6088, 6089
14-32-0225	6" Type 1 Cut-Off Guard	6161, 6124
49-12-0030	7" Type 1 Cut-Off Guard	6088, 6089
49-12-0040	9" Type 1 Cut-Off Guard	6088, 6089

GRINDING SHROUDS

DEWALT 7" Surface Grinding Dust Shroud

- Flush grinding door
- Universal vacuum hose connection

PART NO.	DESCRIPTION
DWE46170	TOOL ONLY

DEWALT 5" Surface Grinding Dust Shroud

- Flush grinding door
- Universal vacuum hose connection

PART NO.	DESCRIPTION
DWE46152	TOOL ONLY

DEWALT 5/6" Cutting & Tuckpointing Dust Shroud

- Flush grinding door
- Universal vacuum hose connection

PART NO.	DESCRIPTION
DWE46100	TOOL ONLY

Milwaukee Universal Grinding Shrouds

- Quick and easy installation
- High densisty bristles
- Clear front clip

PART NO.	DESCRIPTION
49-40-6105	Fits 7" grinders
49-40-6100	Fits 4-1/2" - 5" grinders
49-40-6190	18" Hose Adapter

STANLEY_SUPPLY.indd 214-215

DEWALT

Dust Extractor Telescope w/ Hose

- For SDS+ D-Handle & L-Shaped Rotary Hammers under 1-1/8"
- **Includes:** side handle & hose, compatible with DeWALT corded & cordless SDS Rotary Hammers other pro-brands

PART NO.	DESCRIPTION
D25301D	TOOL ONLY

DEWALT

Large Hammer Dust Extraction

- For 1-1/8" SDS+ Rotary Hammers and Dust Extraction using SDS MAX & SPLINE Rotary Hammers
- Interchangeable heads for drilling holes up to 1-1/2" and one for holes up to 2"
- Rubber seal allows for adhesion to most masonry surfaces

PART NO.	DESCRIPTION
DWH050K	TOOL ONLY

Milwaukee

Vacuum-Assisted Dust Extractor HAMMERVAC®

Universal SDS+ Rotary Hammer Solution

- Universal Handle system allows quick set-up and is compatible with major brands of SDS+ Rotary Hammers
- **Includes:** (3) Side Handle Clamping Collar Assemblies, Replacement Nozzle, Adjustable Depth Stop & Ruler

PART NO.	DESCRIPTION
5261-DE	TOOL ONLY

DEWALT

5-Piece Dust Extractor Accessory Kit

- Contains various cleanup accessories for use with DEWALT dust extractors
- AirLock adaptor is compatible with DWV012 and DWV010 extractors
- **Kit Includes:** Floor Sweeper, Rubber Squeegees for floor sweeper, Steel Extension Wands, Crevice Tool, Brush Tool and AirLock Adaptor

PART NO.	DESCRIPTION
DWV2759	Kit

LARGE HAMMER ACCESSORIES

DEWALT

Large Hammer Breaker Dust Extraction

- Compatible with D25980 & D25960 hammers. Accepts DEWALT chisels up to 1.25" wide

PART NO.	DESCRIPTION
DWH052K	TOOL ONLY

Milwaukee

SDS-MAX Dust Extraction Attachment

Sticks to Even or Uneven Surfaces

- Removable/replaceable dense brush ring allows for greater dust containment (43-31-0015)
- Capacity: 1/4" - 2-3/4"
- Easy set-up: Hooks to hose clip adapter on the 8960-20 & most Pro-Brand dust extractors
- Not recommended for use with filter cleaning modes on extractors

PART NO.	DESCRIPTION
5317-DE	TOOL ONLY

Milwaukee

SDS-MAX Chisel Boot

- Compatible with all bull point & flat chisels less than 1-1/8" wide
- Strap secures hose to rotary hammer for clear line of sight

PART NO.	DESCRIPTION
5318-DE	TOOL ONLY

SDS-MAX/ SPLINE / 3/4" HEX CHIPPING DUST SOLUTIONS

DEWALT

Large Hammer Chipping Dust Extraction

- Compatible with all DEWALT SDS Max/Hex combi-hammers, breakers and DEWALT Spline D25553K, D25651K and D25831K

PART NO.	DESCRIPTION
DWH053K	TOOL ONLY

6/15/24 12:52 PM

HEPA/RRA DUST EXTRACTORS

DEWALT

HEPA FILTRATION

Dual wet/dry HEPA filters for 99.97% efficiency at 0.3 microns

AUTO FILTER CLEANING

Dual filters pulse automatically and regularly to prevent filter blinding and maintain efficiency

ANTI-STATIC/ CRUSH-PROOF HOSE

Grounds current to eliminate static and withstands rugged jobsite conditions

TELESCOPING HANDLE

Portable and compact

VARIABLE SPEED

Allows User Versatility In Different Applications (DWV012 only)

TOOL ACTUATION

Tool & Extractor turn on at the same time from work location

LARGE REAR WHEELS

Portable and compact

AIRLOCK™ Adapter

Dual filters pulse automatically and regularly to prevent filter blinding and maintain efficiency

DWV010

DWV9330

DWV9402

- 15 amp motor delivers 150 CFM airflow
- **Includes:** (2) HEPA Filters, (1) 15 ft. 1-1/4" Anti-Static Hose, (1) Fleece Bag

DWV9400

PART NO.	DESCRIPTION
DWV012	10 Gallon Tank Extractor
DWV010	8 Gallon Tank Extractor
	ACCESSORIES
DWV9330	HEPA Filters (2/pack)
DWV9402	Fleece Bags (5/pack)
DWV9400	Plastic Bags (5/pack)

Dust Collection Vacuums with HEPA Filtration

- 99.999% HEPA filtration efficiency of particles down to 0.3 microns; automatic filter cleaning
- "Power Take Off" outlet activates the vacuum ON/OFF from the power tool switch

"Power Take Off" outlet

CS 1225 HF

Model CS 1445 H automatically "pulse" cleans filters without interrupting operation!

Optional Filter Bags

Fleece filter bags for CS 1225 and CS 1445 P/N 435305 (5-pack)

Plastic filter bags for CS 1225 and CS 1445 P/N 421742 (5-pack)

Cleaning Kit for CS 1225 and CS 1445

P/N 063201 - Includes floor cleaning tool, crevice tool, 2 tubes and handle.

HEPA Vac Specifications

	CS 1225 HF	CS 1445 H
Power	11 Amp	11 Amp
Air flow	157 CFM	157 CFM
Static Water Lift	98"	98"
Tank capacity	6.6 gal.	9 gal.
Weight	24.3 lbs.	35 lbs.
Filter P/N (2pk.)	428956	428956

Standard Vacuum Specifications

CS 1225	CS 1445
11 Amp	11 Amp
157 CFM	157 CFM
98"	98"
6.6 gal.	9 gal.
24.3 lbs.	35 lbs.
416069	416069

metabo

Auto Clean Vacuum Cleaner w/ HEPA Filter

ASR35 ACP 10.2 Amp

- 10.2 amp; 1,400W motor
- Certified HEPA filter w/ Auto-Clean filter technology
- Integrated power inlet with auto-start
- **Includes:** Auto Clean Vacuum Cleaner (US602057800) Suction Hose, PVC Collection Bag, Standard Filter, HEPA Filter

PART NO.	DESCRIPTION
482241	Tool with accessories

STANLEY_SUPPLY.indd 216-217

DIAMOND BLADES & CUP GRINDERS

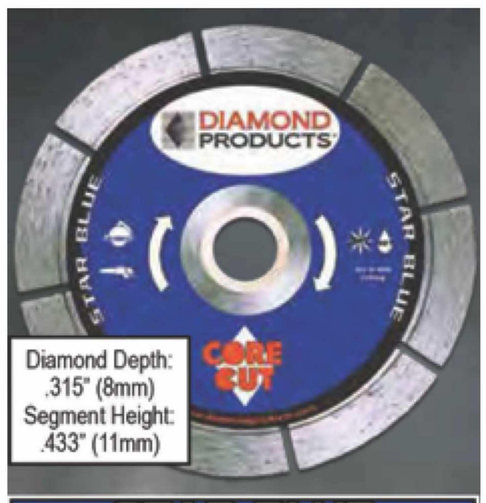

STAR BLUE
Good quality diamond and good cutting value

SIZE	E2B Cat #
4" x .070 x 7/8"	74950
4-1/2" x .070 x 7/8"	74951
5" x .080 x 7/8"	70461
6" x .080 x 7/8"	70470
7" x .080 x 7/8"	74952
8" x .080 x 7/8"	74953
9" x .080 x 7/8"	70494

STAR BLUE
Good quality diamond and good cutting value

SIZE	T7B Cat #
4" x .080 x 7/8"	74959
4-1/2" x .080 x 7/8"	74960
5" x .080 x 7/8"	80002
6" x .080 x 7/8"	80003
7" x .095 x ♦7/8"	74961
8" x .095 x 7/8"	80004
9" x .095 x 7/8"	80005
10" x .110 x 1"	80006
12" x .125 x 1"	74962
14" x .125 x 1"	74964

NED Double Row, Cup Grinders

- Basic quality diamond and economical grinding value
- 85D - General purpose concrete

PART NUMBER	SIZE
0905DRSTCWGE5811	5" x 5/8-11" Double Row
0907DRSTCWGE5811	7" x 5/8-11" Single Row"

NED Turbo Cup Grinders

- Spiral turbo for a fast grind
- TSD - General purpose concrete grinding and removal

PART NUMBER	SIZE
0905SRST5811	5" x .5/8-11"
09GH07SRSTTCW5811	7" x .5/8-11"

SEGMENTED BLADE G-5 SERIES VALUE

- Tuck Point
- General Purpose
- Segment Height .400" (10mm)
- Diamond Depth .335" (8.5mm)
-

Size	Part No.
4" x .250" x 7/8-5/8"	1005G040978
4.5" x .250" x 7/8-5/8"	1005G0450978
5" x .250" x 7/8-5/8"	1005G050978
7" x .250" x 7/8-5/8"	1005G070978

SANDWICH BLADE DOUBLE TUCK

- Tuck Point
- General Purpose
- Segment Height .400" (10mm)

Size	Part No.
4" x .250" x 7/8-5/8"	1005GPD040578
4.5" x .250" x 7/8-5/8"	1005GPD045078
5" x .250" x 7/8-5/8"	1005GPD050578

Heavy-Duty Orange

- High quality diamond and long cutting life
- TI7H - Dry/wet cutting for porcelain

TI7H CAT #	SIZE
57855	7" x 060" x 7/8"
12352	8" x 060" x 7/8"
12359	10" x 060" x 7/8"

M-4 Drill Rig

- Complete rigs include:
- Combo anchor/vacuum/angle base, mast, carriage, vacuum, pump motor mount plate and your choice of motor
- 6" bit capacity (3" handheld)
- 600/1200 RPM
- Slip clutch safety override

PART NO.	DESCRIPTION
4240045	Complete Rig - **Bit Not Included**

Premium Black - Wet *12" Length*

- High diamond concentration gives maximum footage and drilling speed
- Designed for all types of wet drilling
- Good in moderate to high steel applications
- Lowest total drilling cost
- Specifications: P33P – hard aggregate, POL – general purpose fast cutting and P64L – asphalt/block, long life

PART NO.	SIZE
DIA05826	1/2"
DIA44524	3/4"
DIA60633	7/8"
DIA05293	1"
DIA05333	1-1/8"
DIA05376	1-1/4"
DIA05404	1-3/8"
DIA05441	1-1/2"
DIA05472	1-5/8"
DIA05483	1-3/4"
DIA05509	1-7/8"

PART NO.	SIZE
DIA05529	2"
DIA05571	2-1/4"
DIA05607	2-1/2"
DIA05629	2-3/4"
DIA05661	3"
DIA05688	3-1/4"
DIA05709	3-1/2"
DIA05761	4"
DIA05782	4-1/4"
DIA05805	4-1/2"
DIA05843	5"

PART NO.	SIZE
DIA05867	5-1/2"
DIA05892	6"
DIA05927	6-1/2"
DIA05945	7"
DIA05984	8"
DIA06013	9"
DIA05306	10"
DIA34416	12"
DIA05417	14"
DIA05462	16"
DIA05498	18"

Heavy Duty Orange - Dry-Cut
9" Length

- High diamond concentration for excellent footage and cutting speed
- For all types of wet drilling in applications with light to moderate steel
- Specifications: H33F - hard aggregate, HOL - general purpose, fast cutting and H64L - asphalt/block, long life

PART NO.	SIZE
DIA04706	1"
DIA04711	1-1/4"
DIA04717	1-1/2"
DIA04720	1-3/4"
DIA00011	2"
DIA04727	2-1/4"
DIA00012	2-1/2"

PART NO.	SIZE
DIA00013	3"
DIA56918	3-1/4"
DIA00014	3-1/2"
DIA04745	4"
DIA04751	4-1/2"
DIA04756	5"
DIA04764	6"

Premium Black Precast

PART NO.	SIZE
DIA41226	1"
DIA41227	1-1/4"
DIA41228	1-1/2"
DIA41229	1-3/4"
DIA41230	2"
DIA41231	2-1/2"
DIA41232	3"
DIA41233	3-1/2"
DIA41234	4"

PART NO.	SIZE
DIA41235	4-1/2"
DIA41236	5"
DIA41237	6"
DIA41238	7"
DIA41239	8"
DIA41240	9"
DIA41241	10"

STANLEY_SUPPLY.indd 218-219

Milwaukee

Shear Pin and Clutch Models

- Two speed Dymodrill Motors for use with Vac-U-Rig and Dymorig Diamond Core Rigs
- Triple reduction gearing on all models
- Built-in water swivel on all models
- All ball and roller bearings
- Shear Pin Protection protects gears and motor against overload; Shear pins easily replaced; Extra pins included with each unit
- Clutch Protection protects gears and motor against overload; Set to specifications at factory, no adjustment necessary

15 AMP MODELS

PART NO.	AMP	SPINDLE	RPM	SUGGESTED DIA./MED. AGGREGATE	TYPE
4090	15	1-1/4-7	375-750	5" - 8" / 2-1/2 "- 5"	Shear Pin
4092-20	15	1-1/4-7	375-750	5" - 8" / 2-1/2" - 5"	Clutch
4097-20	15	1-1/4-7	500-1000	3" - 5" / 1-1/4" - 3"	Clutch

20 AMP MODELS

PART NO.	AMP	SPINDLE	RPM	SUGGESTED DIA./MED. AGGREGATE	TYPE
4079	20	1-1/4-7	300-600	7" - 14" / 4" - 7"	Shear Pin
4004-20	20	1-1/4-7	300-600	7" - 14" / 4" - 7"	Clutch
4094	20	1-1/4-7	450-900	6" - 10" / 2 "- 6"	Shear Pin
4005	20	1-1/4-7	600-1200	4" - 7" / 3/4" - 4"	Clutch

Milwaukee

Contractor Series Drilling Rig Base Stands

- Cast aluminum base with four leveling screws for fast accurate leveling adjustment
- Durable precision-ground 2-1/2 in. steel column, 43-1/2 in. high
- Rear mounted rack and pinion feed
- Jackscrew for ceiling and backwall bracing

PART NO.	DESCRIPTION
4115	Diamond Coring Small Base Stand
4120	Diamond Coring Large Base Stand
4120-22	Diamond Coring Rig with Large Base Stand, Vac-U-Rig® Kit, Meter Box and Diamond Coring Motor
4115-22	Diamond Coring Rig with Small Base Stand, Vac-U-Rig® Kit, Meter Box and Diamond Coring Motor

Milwaukee

Diamond Coring Rig w/ Large Base Stand, Vac-U-Rig® Kit & Meter Box

- Cast aluminum base with four leveling screws for fast accurate leveling adjustment
- Adjustable, tilting 2-7/8" × 43-1/2" steel column
- Four speed wheel feed control
- Motor mount cradle, bubble level and jackscrew

PART NO.	DESC.	COLUMN HT.	NET WT.	SHIP WT.
4136	Rig	47"	106 lb.	129 lb.
4130	Stand	47"	82.5 lb.	103.5 lb.

DIAMOND PRODUCTS

CB733 3-Speed Motor Core Rig

- 115/20 amp electric motor with on/off switch (no need for control panel)
- Up to 16" bit capacity (when mounted on M-2, M-5 or M-5 PRO)
- Extra high efficiency 3000W motor in aluminum housing for better cooling and durability
- LED light lets the operator easily know that the motor is near overload conditions
- 1.250"-7 threaded spindle with anti-seize ring to keep Core Bore® bits from getting stuck

PART NO.	DESCRIPTION
M1C	TOOL ONLY

DIAMOND PRODUCTS

M-2 Core Drilling Rig

- Complete rigs include: Dual switch/outlet control panel and amp meter
- 4 spoke handle, 6" wheels
- 2-1/2" square column
- 10" bit capacity, 14" with one spacer, accepts bits 22" overall
- 20 amp Milwaukee motor: 600/1200 RPM, slip clutch safety overide

PART NO.	DESCRIPTION
4241049	TOOL ONLY

ACCESSORIES

Meter Boxes

- Supplied with No. 4136
- Amp meter and power switch on front panel receptacle for motor's plug
- One outlet also located on back of unit

PART NO.	DESCRIPTION
48-51-0100	30 Amp 120 Volt Meter Box
48-51-0120	20 Amp 120 Volt Meter Box

Water Tank

- 3-1/2 gallon poly tank
- For use when regular tap water is not available

PART NO.	DESCRIPTION
49-76-0055	Water Tank

Water Hose - 8 ft.

- 5/8" I.D. x 8 ft. Standard brass male and female hose fittings

PART NO.	DESCRIPTION
49-18-0055	Water Hose , 5/8" I.D. x 8'

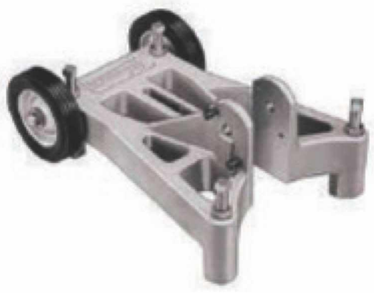

Large Base Assembly

- Included with Dymo-Rig 4130 and Vac-U-Rig® 4136
- May be used with 4125 for greater support
- Includes two wheels and four leveling screws
- Dimensions (without wheels) 13-1/4" x 17-1/8"

PART NO.	DESCRIPTION
48-10-0090	13 ." x 17 1/8" (less wheels)

Small Base Assembly

- Included with Dymo-Rig 4125
- May be used with 4130 and 4136 for work in restricted areas
- Includes two wheels and four leveling screws
- Dimensions (without wheels) 7-1/4" x 13"

PART NO.	DESCRIPTION
48-10-0080	7-1/4" x 13" (less wheels)

Vacuum Pump Assembly

- 1/3 max HP
- Can be be mounted to base of unit
- Recommended for use with 49-22-7100 pad only

PART NO.	DESCRIPTION
49-50-0200	115 V Assembly

Vacuum Pad Assembly

- For use with Diamond Coring Rigs with detachable vacuum pads
- Approximately 1800 pounds of holding force

PART NO.	DESCRIPTION
49-22-7100	Single Pad Assembly

STANLEY_SUPPLY.indd 220-221

SDS-PLUS Rotary Hammer Drills

Part #	Size	X	OAL	Drilling	Head	Qty.	List
715S41064	5/32"	X	4-1/4"	2"	4-PLUS	1	$6.39
715S61064	5/32"	X	6-1/4"	4"	4-PLUS	1	$7.29
715S61064-B	5/32"	X	6-1/4"	4"	4-PLUS	25	$173.06
715S41264	3/16"	X	4-1/4"	2"	4-PLUS	1	$6.39
715S41264-B	3/16"	X	4-1/4"	2"	4-PLUS	25	$151.71
715S61264	3/16"	X	6-1/4"	4"	4-PLUS	1	$7.29
715S61264-B	3/16"	X	6-1/4"	4"	4-PLUS	25	$173.06
715S81264	3/16"	X	8-1/4"	6"	4-PLUS	1	$10.08
715S81264-B	3/16"	X	8-1/4"	6"	4-PLUS	25	$239.39
715S10316	3/16"	X	10-1/4"	8"	4-PLUS	1	$13.38
715S12316	3/16"	X	12-1/4"	10"	4-PLUS	1	$16.59
715S14316	3/16"	X	14"	12"	4-PLUS	1	$24.17
715S16316	3/16"	X	16"	14"	4-PLUS	1	$31.74
715S20316	3/16"	X	20"	18"	4-PLUS	1	$58.00
715S24316	3/16"	X	24"	22"	4-PLUS	1	$64.71
715S41464	7/32"	X	4-1/4"	2"	4-PLUS	1	$7.48
715S61464	7/32"	X	6-1/4"	4"	4-PLUS	1	$7.73
715S81464	7/32"	X	8-1/4"	6"	4-PLUS	1	$9.60
715S10732	7/32"	X	10-1/4"	8"	4-PLUS	1	$17.34
715S14732	7/32"	X	14"	12"	4-PLUS	1	$24.21
715S16732	7/32"	X	16"	14"	4-PLUS	1	$30.18
715S20732	7/32"	X	20"	18"	4-PLUS	1	$59.20
715S24732	7/32"	X	24"	22"	4-PLUS	1	$78.00
715S41664	1/4"	X	4-1/4"	2"	4-PLUS	1	$6.39
715S41664-B	1/4"	X	4-1/4"	2"	4-PLUS	25	$151.71
715S61664	1/4"	X	6-1/4"	4"	4-PLUS	1	$6.69
715S61664-B	1/4"	X	6-1/4"	4"	4-PLUS	25	$158.83
715S81664	1/4"	X	8-1/4"	6"	4-PLUS	1	$9.60
715S81664-B	1/4"	X	8-1/4"	6"	4-PLUS	25	$227.95
715S10014	1/4"	X	10-1/4"	8"	4-PLUS	1	$12.25
715S14014	1/4"	X	14"	12"	4-PLUS	1	$24.02
715S16014	1/4"	X	16"	14"	4-PLUS	1	$28.06
715S20014	1/4"	X	20"	18"	4-PLUS	1	$39.59
715S24014	1/4"	X	24"	22"	4-PLUS	1	$54.62
715S62064	5/16"	X	6-1/4"	4"	4-PLUS	1	$8.89
715S62064-B	5/16"	X	6-1/4"	4"	4-PLUS	25	$211.18
715S82064	5/16"	X	8-1/4"	6"	4-PLUS	1	$11.79
715S12516	5/16"	X	12-1/4"	10"	4-PLUS	1	$22.20
715S62464	3/8"	X	6-1/4"	4"	4-PLUS	1	$9.66
715S62464-B	3/8"	X	6-1/4"	4"	4-PLUS	25	$229.47
715S82464	3/8"	X	8-1/4"	6"	4-PLUS	1	$12.50
715S10038	3/8"	X	10-1/4"	8"	4-PLUS	1	$15.63
715S12038	3/8"	X	12-1/4"	10"	4-PLUS	1	$19.83
715S12038-B	3/8"	X	12-1/4"	10"	4-PLUS	10	$188.36
715S18038	3/8"	X	18"	16"	4-PLUS	1	$32.27
715S24038	3/8"	X	24"	22"	4-PLUS	1	$40.88
715S62864	7/16"	X	6-1/4"	4"	4-PLUS	1	$14.11
715S10716	7/16"	X	10-1/4"	8"	4-PLUS	1	$19.92
715S12716	7/16"	X	12-1/4"	10"	4-PLUS	1	$23.32
715S18716	7/16"	X	18"	16"	4-PLUS	1	$35.53

SDS-PLUS Rotary Hammer Drills

Part #	Size	X	OAL	Drilling	Head	Qty.	List
715S63264	1/2"	X	6-1/4"	4"	4-PLUS	1	$11.12
715S63264-B	1/2"	X	6-1/4"	4"	4-PLUS	25	$264.04
715S10012	1/2"	X	10-1/4"	8"	4-PLUS	1	$19.19
715S12012	1/2"	X	12-1/4"	10"	4-PLUS	1	$23.07
715S12012-B	1/2"	X	12-1/4"	10"	4-PLUS	10	$198.83
715S12018	1/2"	X	18"	16"	4-PLUS	1	$33.73
715S12024	1/2"	X	24"	22"	4-PLUS	1	$52.92
715S63664	9/16"	X	6-1/4"	4"	4-PLUS	1	$17.23
715S10916	9/16"	X	10-1/4"	8"	4-PLUS	1	$23.32
715S12916	9/16"	X	12-1/4"	10"	4-PLUS	1	$26.90
715S18916	9/16"	X	18"	16"	4-PLUS	1	$34.88
715S64064	5/8"	X	6-1/4"	4"	4-PLUS	1	$16.09
715S84064	5/8"	X	8-1/4"	6"	4-PLUS	1	$21.69
715S84064-B	5/8"	X	8-1/4"	6"	4-PLUS	10	$206.08
715S12058	5/8"	X	12-1/4"	10"	4-PLUS	1	$31.45
715S18058	5/8"	X	18"	16"	4-PLUS	1	$47.20
715S24058	5/8"	X	24"	22"	4-PLUS	1	$58.34
715S14464	11/16"	X	12"	10"	4-PLUS	1	$46.79
715S84864	3/4"	X	8"	6"	4-PLUS	1	$27.98
715S84864-B	3/4"	X	8"	6"	4-PLUS	10	$251.82
715S10034	3/4"	X	10"	8"	4-PLUS	1	$33.10
715S12034	3/4"	X	12"	10"	4-PLUS	1	$38.88
715S12034-B	3/4"	X	12"	10"	4-PLUS	5	$184.70
715S18034	3/4"	X	18"	16"	4-PLUS	1	$49.59
715S24034	3/4"	X	24"	22"	4-PLUS	1	$64.92
715S85664	7/8"	X	8"	6"	4-PLUS	1	$44.50
715S85664-B	7/8"	X	8"	6"	4-PLUS	5	$211.38
715S10078	7/8"	X	10"	8"	4-PLUS	1	$47.59
715S12078	7/8"	X	12"	10"	4-PLUS	1	$58.82
715S12078-B	7/8"	X	12"	10"	4-PLUS	5	$264.69
715S18078	7/8"	X	18"	16"	4-PLUS	1	$67.42
715S86464	1"	X	8"	6"	4-PLUS	1	$54.13
715S10001	1"	X	10"	8"	4-PLUS	1	$61.08
715S10001-B	1"	X	10"	8"	4-PLUS	5	$274.86
715S12001	1"	X	12"	10"	4-PLUS	1	$71.87
715S18001	1"	X	18"	16"	4-PLUS	1	$82.39

SDS-PLUS Rotary Hammer - Extra Long

Part #	Size	X	OAL	Drilling	Head	Qty.	List
715FL3614	1/4"	X	36"	34"	4-PLUS	1	$68.00
715FL3638	3/8"	X	36"	34"	4-PLUS	1	$75.00
715FL3632	1/2"	X	36"	34"	4-PLUS	1	$82.50
715FL3658	5/8"	X	36"	34"	4-PLUS	1	$96.25
715FL3634	3/4"	X	36"	34"	4-PLUS	1	$126.56

SDS-PLUS Chisels - MINI

MINI - Bull Point

MINI - Flat Chisel

MINI - Scaling Chisel

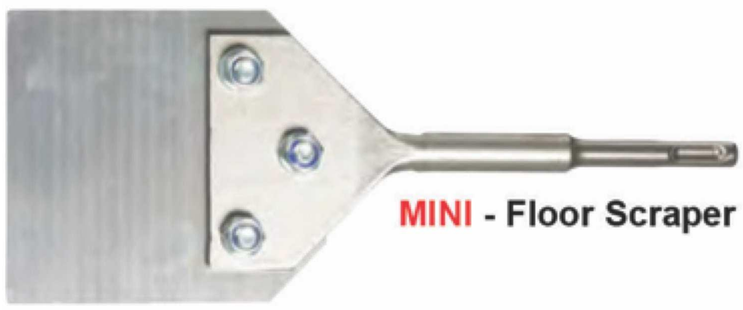
MINI - Floor Scraper

Size	Description
5-1/2"	MINI - Bull Point
3/4" x 5-1/2"	MINI - Flat Chisel
1-1/4" x 5-1/2"	MINI - Scaling Chisel
4" x 10"	MINI - Floor Scraper
	MINI - Replacement Blade (Floor Scraper)
	MINI - Replacement Nuts & Bolts (Floor Scraper)

SDS-PLUS Chisels

Bull Point

Flat Chisel

Scaling Chisel

Gouge Chisel

Ground Rod Driver

Tile

Size	Description
10"	Bull Point
3/4" x 10"	Flat Chisel
1-1/2" x 10"	Scaling Chisel
7/8" x 10"	Gouge Chisel
5/8" x 10"	Ground Rod Driver
3" x 6-1/2"	Tile Chisel

STANLEY_SUPPLY.indd 222-223

- Rotary Hammer Drill
- Industrial Quality
- Special Tungsten Carbide Tip
- Copper / Silver Brazing
- Fastest Dust Removal
- Fastest Drilling Speeds
- Heat Treated Body
- Clean Round Holes
- Less Vibration
- Polished Finish
- ANSI Specification

XCUTTER DRILLS REINFORCED CONCRETE!

SDS-MAX® Rotary Hammer Drills

Part #	Size	X	OAL	Drilling	Head	List
SMTE1338	3/8"	X	13"	8"	X-CUTTER	$53.90
SMTE1312	1/2"	X	13"	8"	X-CUTTER	$54.12
SMTE1712	1/2"	X	17"	12"	X-CUTTER	$65.25
SMTE2212	1/2"	X	21"	16"	X-CUTTER	$68.85
SMTE1391	9/16"	X	13"	8"	X-CUTTER	$73.53
SMTE2192	9/16"	X	21"	16"	X-CUTTER	$95.99
SMTE1358	5/8"	X	13"	8"	X-CUTTER	$62.89
SMTE1758	5/8"	X	17"	12"	X-CUTTER	$71.56
SMTE2258	5/8"	X	21"	16"	X-CUTTER	$76.05
SMTE3658	5/8"	X	36"	31"	X-CUTTER	$149.58
SMTE2111	11/16"	X	21"	16"	X-CUTTER	$104.96
SMTE1334	3/4"	X	13"	8"	X-CUTTER	$65.21
SMTE1734	3/4"	X	17"	12"	X-CUTTER	$77.25
SMTE2234	3/4"	X	21"	16"	X-CUTTER	$85.03
SMTE3634	3/4"	X	36"	31"	X-CUTTER	$163.30
SMTE2113	13/16"	X	21"	16"	X-CUTTER	$111.55
SMTE1378	7/8"	X	13"	8"	X-CUTTER	$76.78
SMTE1778	7/8"	X	17"	12"	X-CUTTER	$88.00
SMTE2278	7/8"	X	21"	16"	X-CUTTER	$92.80
SMTE3678	7/8"	X	36"	31"	X-CUTTER	$226.45
SMTE1301	1"	X	13"	8"	X-CUTTER	$84.00
SMTE1701	1"	X	17"	12"	X-CUTTER	$97.03
SMTE2201	1"	X	21"	16"	X-CUTTER	$101.99
SMTE3601	1"	X	36"	31"	X-CUTTER	$229.17
SMTE2311	1-1/16"	X	23"	18"	X-CUTTER	$144.80
SMTE1718	1-1/8"	X	17"	12"	X-CUTTER	$122.10
SMTE2218	1-1/8"	X	21"	16"	X-CUTTER	$131.74
SMTE3618	1-1/8"	X	36"	31"	X-CUTTER	$259.69
SMTE1714	1-1/4"	X	15"	10"	X-CUTTER	$136.73
SMTE2214	1-1/4"	X	23"	18"	X-CUTTER	$154.53
SMTE3614	1-1/4"	X	36"	31"	X-CUTTER	$274.57
SMTE1738	1-3/8"	X	17"	12"	X-CUTTER	$177.10
SMTE2238	1-3/8"	X	23"	18"	X-CUTTER	$186.68
SMTE3638	1-3/8"	X	36"	31"	X-CUTTER	$310.11
SMTE1721	1-1/2"	X	17"	12"	X-CUTTER	$199.42
SMTE2221	1-1/2"	X	23"	18"	X-CUTTER	$230.03
SMTE3621	1-1/2"	X	36"	31"	X-CUTTER	$410.13
SMTE2334	1-3/4"	X	23"	18"	X-CUTTER	$341.72
SMTE3613	1-3/4"	X	36"	31"	X-CUTTER	$507.94
SMTE2202	2"	X	23"	18"	X-CUTTER	$378.92

Bosch® License

SDS-MAX® Rotary Hammer - Extra Long

Part #	Size	X	OAL	Drilling	Head	List
SMTE5258	5/8"	X	52"	47"	CROSS HEAD	$218.07
SMTE5234	3/4"	X	52"	47"	CROSS HEAD	$231.78
SMTE5201	1"	X	52"	47"	CROSS HEAD	$295.04
SMTE5214	1-1/4"	X	52"	47"	CROSS HEAD	$312.44
SMTE5212	1-1/2"	X	52"	47"	CROSS HEAD	$629.70

Metal Cutting - Drills

* 135° Self-Centering Split Point
** 118° Self-Centering Split Point

Twist Drills

XL5 Heavy Duty Jobber*
Sizes - 1/16 to 1/2", Letters & Numbers
Drill Stainless Steel & Tough Alloys

XL28 Heavy Duty Mechanics Length*
3 Flatted Reduced Shank - Sizes - 1/16 to 1/2"
Drill Stainless Steel and Tough Alloys

705C Cobalt Jobber*
Sizes - 1/64 to 1/2", Letters & Numbers
Drill Stainless Steel In Drill Press

700T TiN Coated Jobber*
Sizes - 1/16 to 1/2"
For High Production CNC Drilling

XG0 BlackGold Jobber*
Sizes - 1/16 to 1/2", Letters & Numbers
Drill Medium to Hard Alloys

705SP Split Point Jobber*
Sizes - 3/64 to 1/2", Letters & Numbers
Drill Low to Medium Alloys

705 General Purpose Jobber
Sizes - 1/64 to 11/16", Letters & Numbers
Drill Low to Medium Alloys

USHD Split Point Jobber*
Sizes - 1/16 to 1/2", Letters & Numbers
Drill Low to Medium Alloys

US5 General Purpose Jobber
Sizes - 1/16 to 1/2", Letters & Numbers
Drill Low to Medium Alloys

Hex Shank Drills

HEX28 Hex Shank Drills*
Sizes - 1/16 to 1/2", Drill Low to Medium Alloys
¼" Hex Shank For Use In Impact Driver

Metric Drills

XL8 Metric Jobber-Heavy Duty*
Sizes - 1.0 to 13.0mm
Drill Stainless Steel & Tough Alloys

708 Metric Jobber-General Purpose
Sizes - 0.25 to 17.5mm
Drill Low to Medium Alloys

Silver & Deming 1/2" Shank Drills

XL12 Heavy Duty S&D**
3 Flatted Shank- Sizes - 33/64 to 1-1/2"
Drill Stainless Steel & Tough Alloys

712CO Cobalt S&D**
Sizes - 17/32 to 1-1/2"
Drill Stainless Steel in Drill Press

XG12 BlackGold® S&D**
3 Flatted Shank-Sizes- 33/64 to 1-1/2"
Drill Medium to Hard Alloys

712 General Purpose S&D
Sizes - 33/64 to 1-1/2"
Drill Low to Medium Alloys

US12 General Purpose S&D
Sizes - 33/64 to 1-1/2"
Drill Low to Medium Alloys

Extra Long Drills

1800 18" Longboy Drills
Sizes - 3/16 to 1"
13" Usable Flute Length

1200 12" Longboy Drills
Sizes - 1/8 to 3/4"
9" Usable Flute Length

Extra Long Drills cont.

1212 12" Longboy 1/2" Shank
Sizes - 17/32 to 1"
9" Usable Flute Length

7012 12" Aircraft Extension*
Sizes - 3/64 to 1/2", Numbers
For Precision Drilling

7006 6" Aircraft Extension*
Sizes - 3/64 to 3/8", Numbers & Letters
For Precision Drilling

CS12X 12" Aircraft Extension*
Sizes - 1/8 to 1/2", Numbers
For Construction & Maintenance Drilling

CS6X 6" Aircraft Extension*
Sizes - 1/16 to 1/2", Numbers
For Construction & Maintenance Drilling

Screw Machine "Stub" Drills

1705C Cobalt Screw Machine*
Sizes - 3/64 to 1/2", Numbers & Letters
Drill Stainless Steel & Tough Alloys

1705 Screw Machine*
Sizes - 3/64 to 1/2", Numbers & Letters
Drill Low to Medium Alloys

Reduced Shank Drills

XM28 Heavy Duty Mechanics Length*
3 Flatted Shank - Sizes - 25/64 to 1/2"
Drill Stainless Steel & Tough Alloys

XL38 Heavy Duty 3/8" Shank*
Sizes - 25/64 to 1/2"
Drill Medium To Hard Alloys

XG38 BlackGold 3/8" Shank*
Sizes - 25/64 to 1/2"
Drill Medium To Hard Alloys

738 3/8" Shank
Sizes - 25/64 to 11/16"
Drill Low to Medium Alloys

Taper Shank / Taper Length Drills

702 Taper Shank Drills
Sizes - 1/2 to 1"

704 Taper Length Drills
Sizes - 1/2"

Left Hand Twist Drills

XL5LH Heavy Duty Left Hand Drills*
Sizes - 5/64, 7/64, 5/32, 1/4 & 19/64"

705LH Left Hand Drills
Sizes - 1/32 to 1/2"

Screw Extractors

X1 Spiral Flute Screw Extractors
Sizes - 1 to 12 (sets available)

X2 Straight Flute Screw Extractors
Sizes - 1 to 7 (sets available)

STANLEY_SUPPLY.indd 224-225

Metal Cutting - Threading

* Specify Taper, Plug, Bottom, or Set
** Specify Plug or Bottom

Power Tapper

BRUTE PLATINUM

XLT Tapper
High Production, Fast Tapping
Auto Reverse & Controlled Speeds
Pivoting Tap Collet Reduces Tap Breakage

Ideal For Use With XL22 Spiral Point Taps & BruteLube Fluid
For HSS Standard Square Shank Taps
Aluminum: #10 to 5/8"
Steel: #10 to 9/16"

High Speed Steel Taps

BRUTE PLATINUM **XL22 Heavy Duty Spiral Point Taps**
Sizes - 4-40 to 3/4-16

BRUTE PLATINUM **XL46 Heavy Duty Spiral Flute Taps****
Sizes - 6-32 to 1/2-20

CHAMPION **321 Spiral Point Taps**
Sizes - 0-80 to 3/4-16

CHAMPION **308 Hand Taps***
Sizes - 0-80 to 1-1/2-12

Titanium Nitride Coated Taps

BRUTE PLATINUM **XL22T Heavy Duty Spiral Point Taps**
Sizes - 4-40 to 3/4-16

CHAMPION **321T Spiral Point Taps**
Sizes - 6-32 to 3/4-10

Metric Taps (HSS)

BRUTE PLATINUM **XL22M Heavy Duty Spiral Point Taps**
Sizes - 2.5x.45 to 16x2

CHAMPION **321M Spiral Point Taps**
Sizes - 1.6x.35 to 24x3

CHAMPION **308M Hand Taps***
Sizes - 1.6x.35 to 56x5.5

Left Hand Taps (HSS)

CHAMPION **308LH Hand Taps***
Sizes - 10-32 to 1-14

Carbon Hand Taps

CHAMPION **302 Taps***
Sizes - 4-40 to 1-1/2-12

CHAMPION **302M Metric Hand Taps**
Sizes - 3x.6 to 18x2.5

Pulley Taps

CHAMPION **3006 Pulley Taps**
Sizes - 1/4-20 to 5/8-11, 6" OAL

Pipe Taps (HSS)

CHAMPION **324 Taper Pipe Taps**
Regular, NPT
Sizes - 1/16-27 to 2-11-1/2

CHAMPION **325 Straight Pipe Taps**
Sizes - 1/8-27 to 1-11-1/2, NPS

CHAMPION **304 Carbon Steel Taper Pipe Taps**
Sizes - 1/8-27 to 3-8, NPT

Tap Wrenches

CHAMPION **2002/3002 'T' Handle Tap Wrenches**
Ratchet Style Available

CHAMPION **3001 Bar Handle Tap Wrenches**

Drill & Tap Combinations

CHAMPION **DT22HEX Combined Drill & Tap**
Hex Shank- For Use In Impact Driver
Sizes - Fractions & Metric

CHAMPION **DT22 Combined Drill & Tap**
Square Shank
Sizes - Fractions

Hexagon Rethreading Dies

CHAMPION **330 Dies**
Sizes - 6-32 to 2-1/2-12, 1/8 to 1 NPT

CHAMPION **CS30 Dies**
Carbon Steel Sizes - 4-40 to 1-14

Metric Hexagon Rethreading Dies

CHAMPION **330M Dies**
Sizes - 3x.5 to 27x3

CHAMPION **CS30M Dies**
Carbon Steel Sizes - 3x.5 to 18x2.5

Left Hand Hexagon Rethreading Dies

CHAMPION **330LH**
Sizes - 1/4-20 to 1-14

Die Stocks

CHAMPION **3291/3292 Round/Hex Die Stocks**
Sizes - 13/16 to 2"

Metal Cutting - Drills, Saws, Cutters & Reamers

Step Drills

CHAMPION **MSD-HEX Hex Shank Step Drills***
¼" Hex Shank For Use In Impact Driver
2 Flute - TiN Coated - Split Point
4 Sizes Available

CHAMPION **MSD Step Drills***
Straight Shank - 2 Flute - Split Point
12 Sizes Available

Quick Change Drivers

CHAMPION **QCD Quick Change Driver**
For 1/4" and 3/8" hex shank tools

CHAMPION **QCD-EXT Extensions**
For 1/4" hex shank tools
6, 12 & 24" Lengths

Carbide Drills

CHAMPION **705CT Carbide Tipped Jobber**
Sizes - 1/8 to 1/2"
Drill Abrasive & Non-Ferrous Materials

CHAMPION **105 Solid Carbide Drills**
Sizes - 1/64 to 1/2"
Drill Abrasive & Non-Ferrous Materials

CHAMPION **CT505 Glass & Tile Spear Point**
Sizes - 1/8 to 5/8"
Drill Glass & Ceramic Tile

CHAMPION **CT605 Carbide Tipped Die Drill**
Sizes - 3/16 to 3/4"
Precision Drilling: Hardened Steel & Armor Plate

Other Drills & Accessories

CHAMPION **1805 Double End Sheeter Drills***
Sizes - 7/64 to 1/4", #30
Drill Sheet Metal

CHAMPION **705-Pilot Drill For Hole Saws**
¼" Diameter, 4" OAL, 118° Split Point
Triple Slab Shank- Fits Most Hole Saw Arbors

CHAMPION **Gauge Plates**
Fractional, Metric, Letters & Numbers



Carbide Tipped Hole Cutters

CHAMPION **CT3 Carbide Tipped Hole Cutters**
1/8" Depth Of Cut
Sizes - 5/8 to 1-3/8"
¼" Hex Shank- For Use In Impact Driver

CHAMPION **CT5 Carbide Tipped Hole Cutters**
3/16" Depth Of Cut
Sizes - 9/16 to 5"
Ideal For Electrical Work, Construction

CHAMPION **CT7 Carbide Tipped Hole Cutters**
1" Depth Of Cut
Sizes - 9/16 to 4-1/2"- Heavy Duty
Ideal For Construction, Steel Fabrication, MRO

CHAMPION **CT9 Carbide Tipped Hole Cutters**
2" Depth Of Cut
Sizes - 1-1/2 & 2-1/8"- Heavy Duty
Drill Through Steel Doors

Sheet Metal Cutters

CHAMPION **SMC Sheet Metal Cutters**
¼" Depth of Cut or ½" Depth of Cut
Sizes- ¼ to 1-1/2" Diameter

Step Reamers

BRUTE PLATINUM **XSR Heavy Duty Step Reamers**
Sizes - 5/16-9/16, 9/16-13/16, 13/16-1-1/16"
5 Drill Sizes Per Reamer

Car Reamers

BRUTE PLATINUM **SA80 Heavy Duty Car Reamers**
Sizes - 5/16 to 1-1/2"
Flatted Straight Shank

CHAMPION **HX82 Hex Shank Car Reamers**
Sizes - 11/16 to 1-3/16" (Spiral Flute)

CHAMPION **HX82M Hex Shank Magnetic Car Reamers**
Sizes - 11/16 to 1-3/16" (Spiral Flute)

CHAMPION **HX80 Hex Shank Car Reamers**
Sizes - 11/16 to 1-3/16" (Straight Flute)

Bridge Reamers

BRUTE PLATINUM **XL86 Heavy Duty Hex Shank Bridge Reamers**
Sizes - 11/16 to 1-5/8"

BRUTE PLATINUM **XL86M Heavy Duty Magnetic Hex Shank Bridge Reamers**
Sizes - 11/16 to 1-3/16"

CHAMPION **980 Taper Shank Bridge Reamers**
Sizes - 7/16 to 1-5/16" (Straight Flute)

CHAMPION **982 Taper Shank Bridge Reamers**
Sizes - 7/16 to 1-5/8" (Spiral Flute)

STANLEY_SUPPLY.indd 226-227

Metal Cutting - Countersinks, Burs, Tool Bits

Single / Multi Flute Countersinks

XL801 Single Flute Countersinks
Sizes - 1/4 to 2" - 60 / 82 / 90 / 100 & 120°
Countersink Stainless Steel & Tough Alloys
Use In Portable Drill, Drill Press, or Bridgeport Machine

800 Four Flute Countersinks
Sizes - 1/2 to 1" - 60 / 82 & 90°
Countersink/Chamfer Many Steels & Alloys
Use In Screw Machines & Turret Lathes

799 Three Flute Countersinks
Sizes - 1/4 to 1" - 60 / 82 / 90 / 100 & 120°
Countersink/Chamfer Many Steels & Alloys
Use In Portable Drills & Drill Presses

799L Large Four Flute Countersinks
Sizes - 1-1/4 to 2" - 60 / 82 & 90°
Countersink/Chamfer Many Steels & Alloys
Use In Portable Drills & Drill Presses

Carbide Burs - Ferrous Metals

Carbide Burs - Double Cut
Titanium Nitride Coated
Shapes - SA to SN / Sizes - 1/8 to 1"

Carbide Burs - Double Cut
Uncoated, Standard OAL & 6" Length
Shapes - SA to SN/ Sizes 1/8 to 3/4"

Radius Burs - Double Cut
SB5RA / SC5RA / SF5RA
Sizes - 1/2"

Carbide Burs - Miniature
Double Cut, 1-1/2" OAL
Shapes - SA to SN / Sizes 1/16 to 1/4"

Zero Flute Weldon® Countersinks

CSK Zero Flute Countersinks
82° Piloted or Pilotless
De-Bur Metal, Plastic, Wood, Aluminum
Use In Portable Drills & Drill Presses

CSK-SH Hex Shank Zero Flute Countersinks
82° Pilotless, 1/4" Hex Shank
De-Bur Metal, Plastic, Wood, Aluminum
Use In Impact Drivers

CSKA/DBK Zero Flute Countersinks
100°/90°
De-Bur Metal, Plastic, Wood, Aluminum
Use in Portable Drills & Drill Presses

Carbide Burs - Non Ferrous Metals

Carbide Burs - Non Ferrous
Single Flute
Shapes - SA to SL / Sizes - 1/4 to 3/4"

Fiberglass Routers

Carbide Fiberglass Routers
Sizes - FGR-1 to FGR-9

Combined Drill & Countersinks

798 Combined Drill & Countersinks
HSS / Plain Style / 60° Included Angle
Commonly Called "Center Drills"
Drill Center Holes In Material Turned On Lathes

198 Combined Drill & Countersinks
Solid Carbide/Plain Style/60° Included Angle
Commonly Called "Center Drills"
Drill Center Holes In Material Turned On Lathes



Tool Bits & Turning Tools

Brazed Carbide Turning Tools
Styles - AL/AR/BL/BR/C/D/E
883 (C2) for Non-Ferrous Applications
370 (C6) for Steel

Metal Cutting - End Mills

* Aluminum Chromium Nitride
** Titanium Nitride

High Speed Steel End Mills

600T TiN Coated HSS End Mills**
2 Flute / Single End / Right Hand Helix
Sizes - 1/8 to 2"

600 HSS End Mills
2 Flute / Single End / Right Hand Helix
General Purpose Milling
Sizes - 1/8 to 2"

601 HSS End Mills
Multi Flute / Single End / Right Hand Helix
General Purpose Milling
Sizes - 1/8 to 2"

602 HSS End Mills
2 Flute / Double End / Right Hand Helix
General Purpose Milling
Sizes - 1/8 to 1"

603 HSS End Mills
4 Flute / Double End / Right Hand Helix
Economic Profiling & Milling Of Slots
Sizes - 1/8 to 1"

606 HSS End Mills
4 Flute / Single End / Right Hand Helix
Plunge Cutting & Fine Finish Required
Sizes - 1/8 to 1-1/2"

607 HSS End Mills
4 Flute / Double End / Right Hand Helix
Plunge Cutting & Fine Finish Required
Sizes - 1/8 to 1"

Carbide End Mills

XLVC AlCrN Coated End Mills*
Four Flute / Single End / Right Hand Helix
High Performance, Multi-Purpose
Sizes - 1/4 to 1"

106 Solid Carbide End Mills
2 Flute / Single End / Right Hand Helix
Sizes - 1/32 to 1"

166 Solid Carbide End Mills
4 Flute / Single End / Right Hand Helix
1/16 to 1"

Carbon Steel Hand Taps - MACHINE SCREW

PART # TAPER	PLUG	BOTTOM	Machine Screw Thread	No. Of Flutes	Ground Thread Limit	OAL	Use Thread Length	Drill Size	Drill Size
C62NC0004	C63NC0004	C64NC0004	4-40 NC	3	H2	1-7/8"	9/16"	43	43
C62NF0004	C63NF0004	C64NF0004	4-48 NF	3	H2	1-7/8"	9/16"	42	42
C62NC0005	C63NC0005	C64NC0005	5-40 NC	3	H2	1-15/16"	7/8"	38	38
C62NF0005	C63NF0005	C64NF0005	5-44 NF	3	H2	1-15/16"	7/8"	37	37
C62NC0006	C63NC0006	C64NC0006	6-32 NC	3	H2	2"	11/16"	35	35
C62NF0006	C63NF0006	C64NF0006	6-40 NF	3	H2	2"	11/16"	33	33
C62NC0008	C63NC0008	C64NC0008	8-32 NC	4	H3	2-1/8"	3/4"	29	14
C62NF0008	C63NF0008	C64NF0008	8-36 NF	4	H3	2-1/8"	3/4"	29	
C62NC0010	C63NC0010	C64NC0010	10-24 NC	4	H3	2-3/8"	7/8"	25	25
C62NF0010	C63NF0010	C64NF0010	10-32 NF	4	H3	2-3/8"	7/8"	21	21
C62NC0012	C63NC0012	C64NC0012	12-24 NC	4	H3	2-3/8"	15/16"	16	16
C62NF0012	C63NF0012	C64NF0012	12-28 NF	4	H3	2-3/8"	15/16"	14	14

Carbon Steel Hand Taps - FRACTIONAL

PART # TAPER	PLUG	BOTTOM	Machine Screw Thread	No. Of Flutes	Ground Thread Limit	OAL	Use Thread Length	Drill Size	List
C65NC0310	C66NC0310	C67NC0310	1/4"-20 NC	4	H3	2-1/2"	1"	7	$3.17
C65NF0312	C66NF0312	C67NF0312	1/4"-28 NF	4	H3	2-1/2"	1"	3	$3.17
C65NC0315	C66NC0315	C67NC0315	5/16"-18 NC	4	H3	2-23/32"	1-1/8"	F	$4.40
C65NF0316	C66NF0316	C67NF0316	5/16"-24 NF	4	H3	2-23/32"	1-1/8"	I	$4.40
C65NC0318	C66NC0318	C67NC0318	3/8"-16 NC	4	H3	2-15/16"	1-1/4"	5/16"	$5.04
C65NF0319	C66NF0319	C67NF0319	3/8"-24 NF	4	H3	2-15/16"	1-1/4"	Q	$5.04
C65NC0320	C66NC0320	C67NC0320	7/16"-14 NC	4	H3	3-5/32"	1-7/16"	U	$6.05
C65NF0321	C66NF0321	C67NF0321	7/16"-20 NF	4	H3	3-5/32"	1-7/16"	25/64"	$6.05
C65NC0322	C66NC0322	C67NC0322	1/2"-13 NC	4	H3	3-3/8"	1-21/32"	27/64"	$8.08
C65NF0323	C66NF0323	C67NF0323	1/2"-20 NF	4	H3	3-3/8"	1-21/32"	29/64"	$8.08
C65NC0325	C66NC0325	C67NC0325	9/16"-12 NC	4	H3	3-19/32"	1-21/32"	31/64"	$10.20
C65NF0326	C66NF0326	C67NF0326	9/16"-18 NF	4	H3	3-19/32"	1-21/32"	33/64"	$10.20
C65NC0327	C66NC0327	C67NC0327	5/8"-11 NC	4	H3	3-13/16"	1-13/16"	17/32"	$12.52
C65NF0328	C66NF0328	C67NF0328	5/8"-18 NF	4	H3	3-13/16"	1-13/16"	37/64"	$12.52
C65NC0331	C66NC0331	C67NC0331	3/4"-10 NC	4	H3	4-1/4"	2"	21/32"	$14.47
C65NF0332	C66NF0332	C67NF0332	3/4"-16 NF	4	H3	4-1/4"	2"	11/16"	$14.47
C65NC0333	C66NC0333	C67NC0333	7/8"-9 NC	4	H4	4-11/16"	2-7/32"	49/64"	$22.08
C65NF0334	C66NF0334	C67NF0334	7/8"-14 NF	4	H4	4-11/16"	2-7/32"	13/16"	$22.08
C65NC0335	C66NC0335	C67NC0335	1"-8 NC	4	H4	5-1/8"	2-1/2"	7/8"	$27.88
C65NF0336	C66NF0336	C67NF0336	1"-12 NF	4	H4	5-1/8"	2-1/2"	59/64"	$27.88
C65NS0337	C66NS0337	C67NS0337	1"-14 NS	4	H4	5-1/8"	2-1/2"	15/16"	$27.88
C65NC0338	C66NC0338	C67NC0338	1-1/8"- 7 NC	4	H4	5-7/16"	2-9/16"	63/64"	$49.46

3 in 1 Combo Drill Taps - M2 HSS

Part #	Thread Size	Drill Size	Thread Length	OAL	List
HDT-0632	6-32	0.0787	9/64"	2-1/4"	$21.08
HDT-0832	8-32	0.0984	5/32"	2-1/4"	$21.62
HDT-1024	10-24	0.1181	13/64"	2-1/4"	$22.34
HDT-1032	10-32	0.1181	5/32"	2-23/64"	$22.34
HDT-1224	12-24	0.1181	13/64"	2-23/64"	$23.48
HDT-1420	1/4"-20	0.1574	1/4"	2-37/64"	$26.10
HDT-5618	5/16"-18	0.1574	29/64"	3"	$36.49
HDT-3816	3/8"-16	0.1968	15/32"	3-3/16"	$36.49
HDT-1213	1/2"-13	0.3419	27/64"	3-13/32"	$51.22

- 1/4" Hex Impact Shank
- M2 HSS
- Ground Thread
- Fast Spiral Flute
- Tri-Point Tip
- Retail Packaging
- Sold Individually

STANLEY_SUPPLY.indd 228-229

TYPE 27 DEPRESSED CENTER WHEELS - .045"

A60S - General Purpose

- So unique it has a patent
- Thin .045 width
- Special aluminum oxide grain
- Hard bond for extremely long life
- Fast, burr-free cutting

METAL Ferrous and/or non-ferrous metals (iron, steel, welds, etc.

A46N - Aluminum
(Non-Ferrous Metals)

- Aluminum oxide grain
- Thin .045 width
- Soft bond for aggressive cutting without loading

ALUMINUM Non-ferrous metals (aluminum, copper, brass, etc.)

SaitZtech™

Z-Tech High Performance

- Thin .045 width
- Special zirconium grain
- Hard bond for extremely long life
- Fast, burr-free cutting

METAL Ferrous and/or nonferrous metals (iron, steel, welds,etc.)

STAINLESS Stainless steel, high tensile alloys



SIZE (IN.)			MAX RPM	GRADES AVAILABLE PART NO.			QTY/ BOX	QTY/ CTN	LB./ BOX
A DIA.	B WIDTH	C BORE		A60S	A46N	Z-TECH™			
4	.045	5/8	19,000	**22011**	-	-	50	200	4
4-1/2	.045	7/8	13,300	**22021**	**22345**	**23334**	50	200	4
4-1/2	.045	5/8-11	13,300	**23318**	**23320**	**23322**	10	40	2
5	.045	7/8	12,200	**22071**	**22350**	**23335**	50	200	6
5	.045	5/8-11	12,200	**23305**	**23307**	**23309**	10	-	2
6	.045	7/8	10,200	**22047**	**22360**	**23336**	50	200	8
7	.045	7/8	8,500	**22053**	**22370**	**23337**	50	200	14

TECH INFO

- Type 1 / Type 41 shape for square, burr-free cutting
- Externally reinforced with fiberglass layers to provide ultimate safety in a thin wheel
- Wide range of sizes available to fit both angle grinders and circular saws

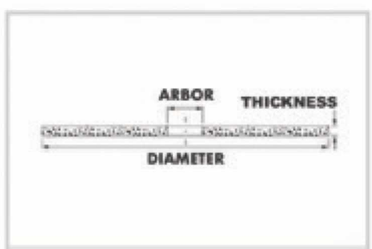

Type 1 / Type 41

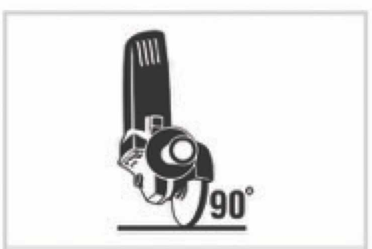

Angle Grinder

Circular Saw

6/15/24 12:52 PM

FAST CUTTING

EZ-CHOP ATTACKER®

- Aluminum oxide grain
- General purpose economy cutting
- Fast cutting on thin metals

METAL Metal studding, thin rebar, light gauge and medium metals

BURR FREE

EZ-CHOP®

- Aluminum oxide grain
- General purpose cool cutting on thin metals
- Burr-free finish
- Externally reinforced with the highest quality fiberglass to withstand the toughest applications

METAL Metal studding, thin rebar, light gauge and heavy metals

GENERAL PURPOSE

IRON WORKER™

- Aluminum oxide grain
- Fast cutting
- Excellent for use on angle iron, channel iron, heavy rebar, and other ferrous metals

METAL Structural metal applications

DIA	THICKNESS	ARBOR	MAX RPM	QTY	EZ-CHOP ATTACKER®	EZ-CHOP®	IRON WORKER™
12"	3/32"	1"	5,100	10	–	24034	24031
14"	3/32"	1"	4,400	10	24500	24039	24051
16"	3/32"	1"	3,700	10	–	–	24011

TECH INFO

- Use EZ-Chop® or EZ-Chop Attacker® as an economical alternative for general purpose cutting
- All blades are constructed using the highest quality fiberglass to withstand the toughest applications
- Specially formulated for use on low horsepower chop saw machines for fast cutting with minimal pressure

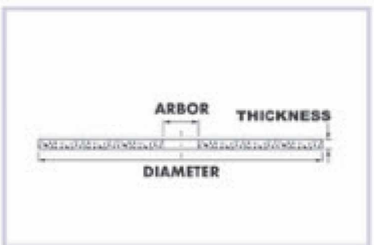

Type 1 / Type 41

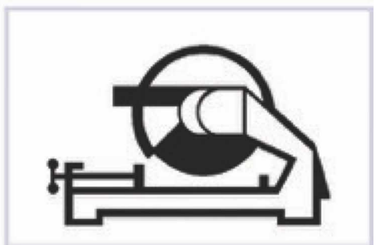

Chop Saw

STANLEY_SUPPLY.indd 230-231

TYPE 1 THIN HIGH SPEED CUT-OFF - .045"

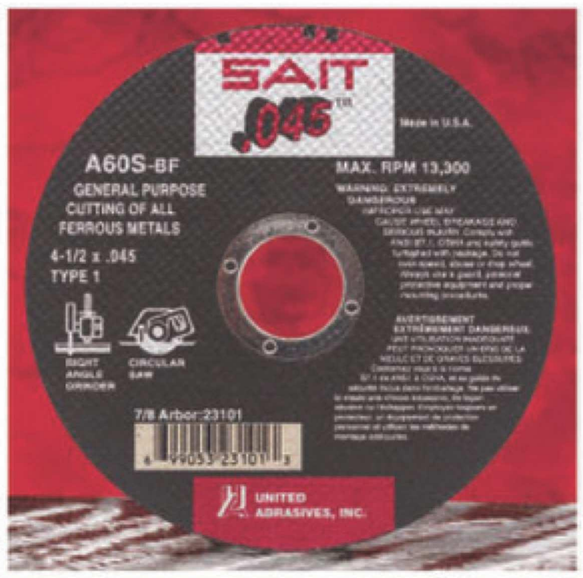

A60S
General Purpose

- Thin .045 width
- Use with reusable 5/8-11 adaptor to fit angle grinders
- Extremely fast cutting with long life

METAL Ferrous and/or non-ferrous metals (iron, steel, welds, etc.)

StackPack

SAIT.M.X.™ *(Ferrous Metals)*

- Special bond for cutting sheet metal and other thin gauge metals
- Fast, burr-free cutting

METAL Ferrous metals (carbon steel, etc.)

STAINLESS Stainless steel



A46N - Aluminum
(Non-Ferrous Metals)

- Aluminum oxide grain
- Soft bond for aggressive cutting without loading
- Use with reusable 5/8-11 adaptor to fit angle grinders

ALUMINUM Non-ferrous metals (aluminum, copper, brass, etc.)

XA46R

- Specially formulated for nuclear and food processing plants
- Free of iron, chlorine and sulphur compounds (Fe + Cl + S < 0.1%)
- All wheels are 1/16" thick

STAINLESS Stainless steel and other high tensile alloys

SIZE (IN.) A DIA.	B WID.	C BORE	MAX RPM	GRADES AVAILABLE PART NO. A60S	SAIT. M.X.	A46N	QTY/ BOX	QTY/ CTN	LB./ BOX
4	.045	5/8	19,000	**23099**	-	-	50	200	4
4-1/2	.045	7/8	13,300	**23101**	**23604**	**23314**	50	200	4
5	.045	7/8	12,200	**23103**	**23605**	-	50	200	6
6	.045	5/8	10,200	**23105**	-	-	50	200	8
6	.045	7/8	10,200	**23106**	**23606**	**23316**	50	200	8
7	.045	5/8	8,500	**23107**	-	-	50	200	14

Note: Reusable 5/8-11 adaptor for use on Type 1 and Type 27 reinforced wheels with a 7/8 arbor, a max. diameter of 5" and a wheel thickness of .045 to 1/8"

SIZE (IN.) A DIA.	B WID.	C BORE	MAX RPM	PART NO. XA46R	QTY/ BOX	QTY/ CTN	LB./ BOX
4-1/2	1/16	7/8	13,300	**24251**	50	200	7
5	1/16	7/8	12,200	**24252**	50	200	7
6	1/16	7/8	10,200	**24253**	50	200	14
7	1/16	7/8	8,500	**24254**	50	200	14

TECH INFO

- Thin cutting wheel in a Type 27 / Type 42 shape makes this perfect for your angle grinder
- Designed to provide very long life for fewer wheel changes and less downtime
- All sizes reinforced with the highest quality fiberglass for maximum safety and performance

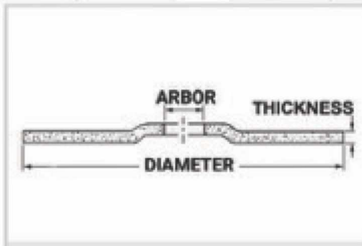

Type 27 / Type 42



5/8-11 Hub

Angle Grinder

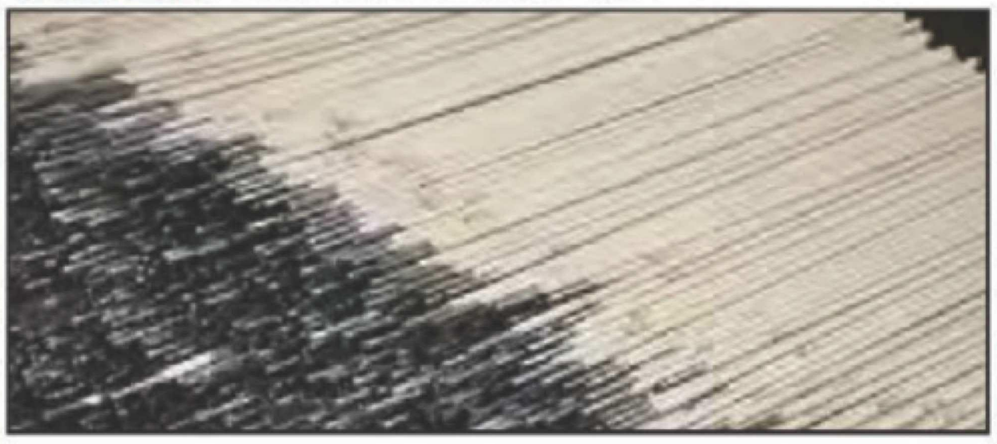

LINCOLN ELECTRIC

AC/DC
Eliminates Arc Blows
Runs On Low Amps

Fleetweld® 180

Fast Freeze, Out-of-Position Mild Steel Stick Electrodes

Got a small AC welder? Here's your electrode! Excellent arc stability for excellent performance with power sources as low as 50V open-circuit voltage (OCV). A great stick electrode with the ability to start easily on low open circuit voltage welders.

Model	AWS Class	Recommended Polarity	Dia. Inches	Package Wt. Lb.
ED033496	E6011	AC, DC+	3/32"	5 lb. Plastic Tube
ED032449	E6011	AC, DC+	1/8"	5 lb. Plastic Tube

LINCOLN ELECTRIC

Great For Spot Welds

Fleetweld® 22

Fast Freeze, Out-of-Position Mild Steel Stick Electrodes

Developed specifically for floor decking and other applications where burn-through spot welding on sheet metal is required. Great for galvanized or plated sheet steel, as well as on steel that is painted or dry.

Model	AWS Class	Recommended Polarity	Dia. Inches	Package Wt. Lb.
ED021896	E6022	DC+, AC	1/8"	50 lb. Box
ED021895	E6022	DC+, AC	5/32"	50 lb. Box

LINCOLN ELECTRIC

Industry Standard For Root Pass Pipe

Fleetweld® 5P+

Fill Freeze, Out-of-Position Pipe Welding Mild Steel & Low Alloy, Steel Stick Electrodes

Ideal for steel that's less than clean. Great for pipe welding and vertical-up and overhead plate welding. A favorite for operators who handle cross-country and in-plant pipe welding.

Model	AWS Class	Recommended Polarity	Dia. Inches	Package Wt. Lb.
ED032565	E6010	DC+	1/8"	10 lb. Can
ED010278	E6010	DC+	1/8"	50 lb. Can

LINCOLN ELECTRIC

Junkyard Rod

Fleetweld® 5P

Fill Freeze, Out-of-Position Pipe Welding Mild Steel & Low Alloy, Steel Stick Electrodes

Great choice for welding on dirty, rusty, greasy or painted steel - especially in vertical or overhead applications.

Model	AWS Class	Recommended Polarity	Dia. Inches	Package Wt. Lb.
ED010211	E6010	DC+	3/32"	50 lb. Can
ED010203	E6010	DC+	1/8"	50 lb. Can
ED010216	E6010	DC+	5/32"	50 lb. Can
ED010207	E6010	DC+	3/16"	50 lb. Can

LINCOLN ELECTRIC

Weathering Steel
Low Temp Welds

Excalibur® 8018-C1 MR

Low Hydrogen, Low Alloy Steel Stick Electrodes

The ideal moisture resistant electrode for welding on equipment and pipe that transports liquid ammonia, propane and other gases. An excellent all position electrode for applications requiring a nominal 2-1/4% nickel deposit.

Item	Model	AWS Class	Recommended Polarity	Dia. Inches	Package Wt. Lb.
	ED030876	E8018-C1 H4R	DC+, AC	3/32"	50 lb. Can
	ED030877	E8018-C1 H4R	DC+, AC	1/8"	50 lb. Can
	ED030879	E8018-C1 H4R	DC+, AC	3/16"	50 lb. Can

LINCOLN ELECTRIC

Great For Shipbuilding

Excalibur® 8018-C3 MR

Low Hydrogen, Low Alloy Steel Stick Electrodes

All position, moisture resistant, low hydrogen, low alloy electrode.

Model	AWS Class	Recommended Polarity	Dia. Inches	Package Wt. Lb.
ED030894	E8018-C3 H4R	DC+, AC	5/32"	50 lb. Can

LINCOLN ELECTRIC

Made For High Strength Steel Welds

Excalibur® 9018M MR

Low Hydrogen, Low Alloy Steel Stick Electrodes

Intended for welding high strength steels of 90,000 psi (620 MPa) tensile strength and higher.

Model	AWS Class	Recommended Polarity	Dia. Inches	Package Wt. Lb.
ED030868	E9018-M H4R	DC+	3/32"	50 lb. Can
ED030869	E9018-M H4R	DC+	1/8"	50 lb. Can
ED030871	E9018-M H4R	DC+	3/16"	50 lb. Can

STANLEY_SUPPLY.indd 232-233

LINCOLN ELECTRIC

Excalibur® 7018 MR

Low Hydrogen, Mild Steel Stick Electrodes

Operators love this for the clean puddle, the square coating burnoff, the easy all-position handling and the excellent wash-in characteristics. Great choice for jobs that involve steel with poor weldability.

Model	AWS Class	Recommended Polarity	Dia. Inches	Package Wt. Lb.
ED032086	E7018 H4R	DC+, AC	3/32"	1 lb. Tube
ED032588	E7018 H4R	DC+, AC	3/32"	10 lb. Can
ED028280	E7018 H4R	DC+, AC	3/32"	50 lb. Can
ED031468	E7018 H4R	DC+, AC	1/8"	1 lb. Tube
ED032589	E7018 H4R	DC+, AC	1/8"	10 lb. Can
ED028281	E7018 H4R	DC+, AC	1/8"	50 lb. Can
ED028282	E7018 H4R	DC+, AC	5/32"	50 lb. Can
ED028283	E7018 H4R	DC+, AC	3/16"	50 lb. Can

Extreme Bendability & Improved Coating

60% Less Moisture Pickup vs. The Competition

Improved Impact Results

LINCOLN ELECTRIC

Excalibur® 7018-1 MR

Low Hydrogen, Mild Steel Stick Electrodes

Designed for welding mild steel, low alloy steels and steels of poor weldability. Capable of x-ray quality welds. All-position welding of mild steels, and some high strength, low alloy steels.

Model	AWS Class	Recommended Polarity	Dia. Inches	Package Wt. Lb.
ED028700	E7018-1 H4R	DC+, AC	3/32"	50 lb. Can
ED018702	E7018-1 H4R	DC+, AC	1/8"	50 lb. Can
ED028704	E7018-1 H4R	DC+, AC	5/32"	50 lb. Can

6/15/24 12:52 PM

OXY-ACETYLENE

FORNEY® SHOP FLAME™ VICTOR® COMPATIBLE MEDIUM-DUTY OXY-ACETYLENE WCH OUTFIT

ITEM# 1705

VICTOR® compatible medium-duty oxy-acetylene WCH kit. Welds up to 3/8" and cuts up to 6". Provided with built-in flashback arrestors & check valves for safety. Ideal for maintenance, fabrication, plumbing and do-it-yourselfers.

Kit Includes:

- Oxygen Regulator: ITEM# 87090
- Acetylene Regulator: ITEM# 87091
- Torch Handle: ITEM# 87093
- Cutting Attachment: ITEM# 87092
- Goggles: ITEM# 55311
- Flint Lighter: ITEM# 86102
- 1/4" x 15' T-Grade Hose
- Cutting Tip #0-3-101: ITEM# 60447
- Welding Tip #W-1-0: ITEM# 87822
- Flashback Arrestors & Check Valves

FORNEY® DELUXE VICTOR® COMPATIBLE MEDIUM-DUTY OXY-ACETYLENE WCH OUTFIT

ITEM# 1707

VICTOR® compatible medium-duty oxy-acetylene WCH kit. Welds up to 3/8" and cuts up to 6". Provided with check valves for safety. Ideal for maintenance, fabrication, plumbing and DIY. Provides high performance at an economical rate.

Kit Includes:

- Oxygen Regulator: 250 Series CGA-540: ITEM# 87090
- Acetylene Regulator ; 250 Series CGA-510: ITEM# 87091
- Torch Handle: 100/WM260 Series: ITEM# 87093
- Cutting Attachment: CA 350 / CA 250 Series: ITEM# 87092
- Goggles: Shade 5, 50mm round: ITEM# 55311
- Flint Lighter: Single flint lighter: ITEM# 86102
- T-Grade Twin Hose: 1/4" x 15'
- Cutting Tip #0: Series 3, Type 101: ITEM# 60447
- Welding Tip #0: Type W-1: ITEM# 87822
- Welding Tip #2: Type W-1: ITEM# 87824
- Welding Tip #4: Type W-1: ITEM# 87826
- Rosebud Tip #6: Type W-1: ITEM# 87790
- Check Valves: Regulator-to-hose: ITEM# 100003
- Tip Cleaner: Extra-long, Series 6-26: ITEM# 86119
- Flashback Arrestors & Check Valves

FORNEY® MEDIUM/HEAVY-DUTY BASIC WCH OUTFIT

ITEM# 1710

Kit Includes:

- Oxygen Regulator: 350-Series (100452)
- Acetylene Regulator: 350-Series (100449)
- Torch Handle: 315FC-Series (87102)
- Cutting Attachment: 2450-Series (87104)
- Cutting Tip: 1-1-101 (60463)
- Heating Nozzle: MFA-8 (87791)
- Hose: 1/4" (6.35 mm) x 15' (4.57 m) Twin
- Check Valves and Flashback Arrestors: Built-in
- Goggles: 50 mm (1.97") Cup Style Shade #5 (55311)
- Spark Lighter: Single Flint (86102)
- Tip Cleaner: 13-piece (86119)
- Packaging: Stainless Steel Carry Case

STANLEY_SUPPLY.indd 234-235

FORNEY® SHOP FLAME™ VICTOR® COMPATIBLE MEDIUM-DUTY OXY-ACETYLENE WCH OUTFIT

ITEM# 1705

VICTOR® compatible medium-duty oxy-acetylene WCH kit. Welds up to 3/8" and cuts up to 6". Provided with built-in flashback arrestors & check valves for safety. Ideal for maintenance, fabrication, plumbing and do-it-yourselfers.

Kit Includes:

- Oxygen Regulator: ITEM# 87090
- Acetylene Regulator: ITEM# 87091
- Torch Handle: ITEM# 87093
- Cutting Attachment: ITEM# 87092
- Goggles: ITEM# 55311
- Flint Lighter: ITEM# 86102
- 1/4" x 15' T-Grade Hose
- Cutting Tip #0-3-101: ITEM# 60447
- Welding Tip #W-1-0: ITEM# 87822
- Flashback Arrestors & Check Valves

FORNEY® DELUXE VICTOR® COMPATIBLE MEDIUM-DUTY OXY-ACETYLENE WCH OUTFIT

ITEM# 1707

VICTOR® compatible medium-duty oxy-acetylene WCH kit. Welds up to 3/8" and cuts up to 6". Provided with check valves for safety. Ideal for maintenance, fabrication, plumbing and DIY. Provides high performance at an economical rate.

Kit Includes:

- Oxygen Regulator: 250 Series CGA-540: ITEM# 87090
- Acetylene Regulator ; 250 Series CGA-510: ITEM# 87091
- Torch Handle: 100/WM260 Series: ITEM# 87093
- Cutting Attachment: CA 350 / CA 250 Series: ITEM# 87092
- Goggles: Shade 5, 50mm round: ITEM# 55311
- Flint Lighter: Single flint lighter: ITEM# 86102
- T-Grade Twin Hose: 1/4" x 15'
- Cutting Tip #0: Series 3, Type 101: ITEM# 60447
- Welding Tip #0: Type W-1: ITEM# 87822
- Welding Tip #2: Type W-1: ITEM# 87824
- Welding Tip #4: Type W-1: ITEM# 87826
- Rosebud Tip #6: Type W-1: ITEM# 87790
- Check Valves: Regulator-to-hose: ITEM# 100003
- Tip Cleaner: Extra-long, Series 6-26: ITEM# 86119
- Flashback Arrestors & Check Valves

FORNEY® MEDIUM/HEAVY-DUTY BASIC WCH OUTFIT

ITEM# 1710

Kit Includes:

- Oxygen Regulator: 350-Series (100452)
- Acetylene Regulator: 350-Series (100449)
- Torch Handle: 315FC-Series (87102)
- Cutting Attachment: 2450-Series (87104)
- Cutting Tip: 1-1-101 (60463)
- Heating Nozzle: MFA-8 (87791)
- Hose: 1/4" (6.35 mm) x 15' (4.57 m) Twin
- Check Valves and Flashback Arrestors: Built-in
- Goggles: 50 mm (1.97") Cup Style Shade #5 (55311)
- Spark Lighter: Single Flint (86102)
- Tip Cleaner: 13-piece (86119)
- Packaging: Stainless Steel Carry Case

6/15/24 12:52 PM

EASY WELD

Forney auto-darkening

- Two optical arc sensors to protect against arc flash
- 5.97 sq. in. (3-3/5" x 1-7/11") viewing area
- 1/1/1/2 optical clarity rating
- DIN 9-13 variable shade selections
- 1/25,000 per second switching speed
- Cheater/magnifying lens compatible

PART NO.	
55731	BLACK MATTE

SCORCH

Forney auto-darkening

- Two optical arc sensors to protect against arc flash
- 5.97 sq. in. (3-3/5" x 1-7/11") viewing area
- DIN 9-13 variable shade selections
- 1/25,000 per second switching speed
- Cheater/magnifying lens compatible

PART NO.	MODEL
55859	SCORCH

BANDIT III WELDING HELMET,

- Lightweight, tough and durable welding helmet
- Meets ANSI Z87.1 safety standards
- Includes ratcheting-type headgear, lift front 5-1/4" x 4-1/2"
- heat treated shade #10 lens and clear glass protective lens

PART NO.
55672

BANDIT I WELDING HELMET

- Lightweight, tough and durable welding helmet
- Meets ANSI Z87.1 safety standards
- UV/IR protection
- Includes ratcheting type headgear, lift front 2" x
- 4-1/4" heat
- treated #10 shade lens and clear glass protective lens

PART NO.
55666

Forney® PRO

- 10.44 sq. in. (3.94" x 2.65") expanded viewing area
- High-grade, heat resistant material
- DIN 5-9 and DIN 9-13 variable shade selections
- 1/25,000 per second switching speed with functional user controls
- Cheater/magnifying lens compatible

PART NO.	MODEL
55936	CAMO

FIBRE-METAL

Tigerhood Classic

- Protects throat while blocking fumes and smoke from the face
- Molded-in color eliminates chipping, peeling, and fading
- Smooth shell deflects sparks & spatter, reducing burn through

PART NO.	SHADE
HON906BK	10

Shade Filter Plates

PART NO.	SHADE	SIZE
57010	10	2" x 4.25"
57052	10	4.5" x 5.25"
56808	Clear.	2" x 4.25"
56802	Clear	4.5" x 5.25"

Solar Automatic Darkening Lens

PART NO.	SHADE	SIZE
5570	Auto	5.25 x 4 4.5
55695	Auto	2" x 4.25"

BRACKETS & FACESHIELDS

Faceshield Bracket

- Lightweight design for maximum comfort
- Meets ANSI Z87.1 safety standards

PART NO.	DESC.
HGB	
F500-H5	w/ Fibre-Metal 3-C headgear

FIBRE-METAL

Dielectric Plastic Faceshield Bracket

- Pivot without removing cap

PART NO.	FOR
HONFM70	E2 & P2 Caps
HONFM71	Full Brim

Aluminum Faceshield Bracket

- Fits cap style hard hats

PART NO.
HHAA

Faceshield Window

- Injection molded from propionate
- Thick for extra protection

PART NO.	SHADE
S1020	Clear
4178IRUV3	IR/UV 3
4178IRUV5	IR/UV 5

OXY-ACETYLENE/BRAZING GOGGLES

- OXY-ACETYLENE/BRAZING GOGGLES, 2"
- X 4-1/4" LIFT FRONT, SHADE #5 LENS

PART NO.	DESC.
S55320	5.0 Dark Goggles

STANLEY_SUPPLY.indd 236-237

PREMIUM HEAVY-DUTY WELDING GLOVES

5" gauntlet cuff for added protection
Reinforced thumb crotch and palm Synthetic thread is a blend of high performance material which is inherently stronger than cotton thread providing additional cut, abrasion, high heat and strength resistance

PART NO.	SIZES
53423	Large & X Large

SPLIT LEATHER WELDING GLOVES

Split leather palm and back, extended gauntlet safety cuff and self-hemmed welted seams for protection and durability. Cotton lining provides excellent moisture absorption.

PART NO.	SIZES
53433	Medium - X-Large

GOATSKIN LEATHER TIG/ STICK WELDING GLOVES

- Goatskin leather for maximum dexterity
- Unlined palm and long leather cuff
- Synthetic thread is a blend of high performance material which is inherently stronger than cotton thread providing additional cut, abrasion, high heat and strength resistance

PART NO.	SIZES
55210	Large - X-Large

FallTech 7039 WeldTech Premium Grade Full Body Harness

- Features Nomex® webbing with Kevlar® fiber core throughout shoulders, torso and legs for pliable user-comfort
- Nomex®/Kevlar® blend webbing delivers excellent burn and spatter resistance common in hot-work welding applications.
- Friction roller torso adjusters provide simple upper-body adjustment
- D-rings, mating buckle chest, and quick-connect leg closures are all durably finished with plated alloy steel construction
- Quick-connect buckles feature visual indicators showing positive connection

PART NO.	SIZE AVAILABLE
7039	Large / 2X-Large

Welding FR HARNESS 5PT., QCB CHESTND LEGS, BACK D-RING, AND SIDE D-RINGS

Para-Aramid/Aramid webbing, Para-Aramid stitching thread, Aramid label cover, Steel hardware, QCB steel chest, H style QCB Steel buckle leg straps, Back D-ring , Side D-rings, SRL Back Plate.
Meets or Exceeds ANSI Z359.11-2014. A10.32-2012

PART NO.	SIZES
H225101005	120-420 LBS.

- 9 oz., 30"
- Flame-retardant
- Sleeves sewn with Kevlar®

PART NO.	SIZE
64055163	X-Large
64055164	2X-Large

TruGuard™ 200 FR Cotton Welding Jacket

- **With its traditional look and fit, our classic 9 oz. FR cotton welding jacket offers reliable protection for light welding applications. 30"length.**

PART NO.	SIZE
F9-30	S - 6XL

SPOTLIGHT ON...



MORE COLORS. MORE STOCK.

The TruGuard™ 200 FR Cotton Welding Jacket is part of our "MORE INVENTORY" commitment. We have more inventory of more colors ready for immediate delivery. We're here when you need us.

Welding Sleeves

- Protects from sudden flame exposure, light duty welding and sparks
- 9 oz., 18" cotton sleeves
- Standard internal elastic at both ends

PART NO.
F9-18S

Medium Duty Welding Blanket

- 24 oz. gold fiberglass
- Gold 24 oz. acrylic coated fiberglass
- 1,000oF melting temperature
- .039" thick

PART NO.	COATING	SIZE
REV-NFG24	Acrylic	6' x 8'
REV-NFG24	Acrylic	6" x 8"
REV-NFG24	Acrylic	10' x 10'

Welding Screen

- 6' x 8', 14 mil.
- Flame-retardant vinyl
- Formulated to disperse arc image and allow light back into work area
- CFM approved

PART NO.	DESC
64-5198	FR Translucent Vinyl

QuickFrame™ Screen & Frame Combos

Durable black powder-coated ¾" ROUND tube framing.
Snap-fit design for quick and easy assembly without tools. Saf-Vu™ 14 mil translucent vinyl screen.
Meets requirements of NFPA 701 & California Fire Marshal (CFM).

PART NO.	
64-7168	Frame Only

6/15/24 12:52 PM

400A HEAVY-DUTY ELECTRODE HOLDER, BERNARD® 40B SHORT STUB™ COMPATIBLE

ITEM# 56205

- This electrode holder is a screw-type, 400A, heavy-duty 8.5" (215.9mm) long electrode holder
- Accepts up to #2/0 welding cable and up to 1/4" electrodes
- Features a brass body, no slip easy grip handle, vulcanized fiber insulators, and oval point screw for positive contact of cable and handle
- A quick turn of the handle locks the jaws tight on the rod

200A ELECTRODE HOLDER, LENCO® AF-2 COMPATIBLE

ITEM# 56000

- This electrode holder is 200A, 8.5" long brass body with fiberglass cover and trigger
- Accepts up to #1/0 welding cable and 5/32" electrodes
- Provides excellent conductivity and durability. Insulated for safety and maximum operator protection
- Grooved jaws allow electrodes to be used at different angles for greater comfort and efficiency

300A ELECTRODE HOLDER, LENCO® AF-25 COMPATIBLE

ITEM# 56200

- This electrode holder is 300A, 8.5" long brass body with fiberglass cover and trigger
- Accepts up to #2/0 welding cable and 3/16" electrodes
- Provides excellent conductivity and durability. Insulated for safety and maximum operator protection
- Grooved jaws allow electrodes to be used at different angles for greater comfort and efficiency

150A LENCO® STYLE ELECTRODE HOLDER WITH 15 FT. CABLE

ITEM# 85669

- 150 Amp, electrode holder with 15' cable.
- Size 25 dinse connector
- For use on 200 Amp or lower machines with 25 dinse connections
- For Forney® ITEM#'s 298, 314, 322 & 324

250A LENCO® STYLE ELECTRODE HOLDER WITH 15 FT. CABLE

ITEM# 85670

- 250 Amp, electrode holder with 15' cable
- Size 50 dinse connector
- For use on 200 Amp or higher machines with 50 dinse connections
- For Forney® ITEM#'s 325 & 326

Capstone® Shield ANSI • CE •

Fully adjustable elastic band // Fits over most prescription glasses // Goggles pass D3: Droplet and Splash Test // Goggles pass D4: Dust Test // Removable vent caps // Goggle combined with removable shield provides full face protection

Lens and Shield | 2 Variations

- GG504TSHIELDIR3 •• 3.0 IR Filter H2X AF
- GG504TSHIELDIR5 •• 5.0 IR Filter H2X AF

Capstone 500 ANSI • CE •

Fits over most prescription glasses // Removable vent caps // Passes D3: Droplet and Splash Test // Passes D4: Dust Test

Gray Body with Quick Release Strap | 2 Variations

- GG504TIR3 •• 3.0 IR Filter H2X AF
- GG504TIR5 •• 5.0 IR Filter H2X AF

V2G® ANSI •

Flame resistant foam padding // Vented lens and frame // Interchangeable temples and strap included // Strap and temples feature ratchet adjustment with quick-fit retainer // Custom imprinting available

Black Frame | 2 Variations

- GB1850SFT • 5.0 IR Filter H2X AF
- GB1860SFT • 3.0 IR Filter H2X AF

Emerge® ANSI • CSA •

Soft nosepiece provides comfort for extended use // Custom imprinting available

Black Frame | 2 Variations

- SB7950SF •• 5.0 IR Filter
- SB7960SF •• 3.0 IR Filter

Ever-Lite® ANSI •

Soft nosepiece for snug fit // Slim co-injected temples // Lightweight spectacle – 22 gm // Custom imprinting available

Black Frame | 2 Variations

- SB8650SF • 5.0 IR Filter
- SB8660SF • 3.0 IR Filter

Venture II® ANSI • CE • CSA •

Temples adjust to four different lengths // Rubber nosepiece secures the glass and prevents slipping // Custom imprinting available

Black Frame | 2 Variations

- SB1850SF •• 5.0 IR Filter
- SB1860SF ••• 3.0 IR Filter

STANLEY_SUPPLY.indd 238-239

STRAIGHT HEAD CHIPPING HAMMER, 10-1/2″

ITEM# 70600

- High carbon steel
- Tempered chisel on one end and point on the other
- Black
- Durable
- All-purpose for fast and easy slag removal with ergonomic handle
- Shockproof handle with loop for belt hook
- 10-1/2″ overall length (OAL)

CROSS-PEEN CHIPPING HAMMER, 10-1/2″

ITEM# 70601

- High carbon steel
- Tempered chisel on one end and point on the other
- Black
- Durable
- All-purpose for fast and easy slag removal with ergonomic handle
- Shockproof handle with loop for belt hook
- 10-1/2″ overall length (OAL)

CHIPPING HAMMER WITH WIRE BRUSH, 12″

ITEM# 70500

- Chipping hammer with wire brush tempered steel chisel to resist dulling during heavy-duty all-purpose usage
- Impact resistant handle
- Removable and replaceable brush (Forney® ITEM# 70501) for cleaning
- 12″ overall length (OAL)

WOOD HANDLE CARBON STEEL WIRE BRUSH

ITEM# 70501

- Replacement carbon steel wire brush for Forney® ITEM# 70500 chipping hammer
- Sturdy, high quality, carbon steel wire brush set in hardwood with hang hole
- 4-3/4″ (120.65mm) overall length (OAL) x 7/8″ block x .014″ carbon steel wire in 3 x 15 rows

1/4″ X 50′ T-GRADE ALTERNATIVE FUEL GAS HOSE WITH B-TO-B FITTINGS

ITEM# 86165

•

OXY-ACETELENE TIP CLEANER KIT

ITEM# 86120

- Tip cleaner kit provides as many as 60 or more cleaning edges per inch of cleaner
- Fits all tip sizes
- Light and easy to use
- Contains 11 sizes - 6 through 26
- Aluminum case includes dressing tool

15′ GAS HOSE FOR REGULATORS & FLOWMETERS

ITEM# 85663

Gas Hose 15′ with 5/8″ Male Connections. Long gas hose for use on standard MIG and TIG regulators and flowmeters.

Compatible With:

- ITEM# 298 - Forney Easy Weld® 100 ST
- ITEM# 309 - 140 MIG Welder
- ITEM# 311 - 210 MIG Welder
- ITEM# 319 - 270 MIG Welder
- ITEM# 322 - 140 MP Welder
- ITEM# 324 - 190 MP Welder
- ITEM# 327 - 242 Dual MIG Welder

SINGLE-FLINT STRIKER

ITEM# 86102

- Our most popular model
- Features a square hood and round file with a patented assembly
- Used for lighting torch kits, BBQ grills, weedburners, etc

REPLACEMENT FLINTS

ITEM# 86122

- Replacement flints for Forney® ITEM# 86102
- Single flint sticker starter pack
- 5-pack

SAFE-LIGHT® GAS TORCH IGNITER

ITEM# 86111

- Ergonomically designed, the long-life Safe-Lite® gas torch igniter's comfortable, non-slip grip ensures the correct amount of leverage for proper and accurate sparking - each and every time
- The safest, easiest, most reliable way of igniting a gas torch
- Works with all gas torches

THREE-FLINT STRIKER

ITEM# 86103

- Quality tool with a rugged frame and three (3) large flints
- Long lasting round file and bright plated finish
- Dependable ignition under all working conditions
- Release slotted screw to rotate fresh flint into position
- Great for use on torch kits, BBQ's, weed burners, etc.

FOUR-TRIANGLE (12 FLINTS) REPLACEMENT FLINTS

ITEM# 86104

- Includes four (4) replacement triangles for a total of 12 flints
- For 86103

6/15/24 12:52 PM

CROWN®

PREMIUM GALVANIZE COATINGS

7007 COLD GALVANIZE COATING 93% ZINC RICH

The leader in the industry in corrosion prevention. Can be easily sprayed, brushed, or dipped onto any metal surface. Its zinc-rich formula is designed for permanent protection.

- 93% pure zinc in dry film
- Meets performance requirements of MIL-P-46105(MR), MIL-P-21035B, and DOD-P-21035A
- Withstands 2000 hours of 5% salt spray testing (ASTM B-117)
- Light gray, matte finish
- Zinc sacrifices itself to protect the base metal surface
- Provides protection equal to or better than hot-dipped galvanizing
- Outstanding weld-through primer

Uses: Industrial type applications such as aviation, marine, manufacturing, etc.

CAN SIZE (NET)	WEIGHT	CASE PACK
16-oz. Aerosol (13 oz.)	14 lbs.	12 Cans
Quart Can	26 lbs.	4 Quarts
Gallon Can	25 lbs.	1 Gallon

7008 BRITE GALVANIZE COATING 65% ZINC RICH

A restorative coating fortified with zinc for preventing rust and corrosion on ferrous metal surfaces with one coat application.

- A glistening coating with 65% pure zinc in dry film
- Stops rust and corrosion on any iron or steel surface for protection equal to or better than hot-dipped galvanizing
- Restores galvanized surfaces to the bright look of hot-dipped galvanizing
- Meets performance requirements of ASTM A-780-93A
- Withstands 500 hours 5% salt spray (ASTM B-117)

Uses: Repair of welds, handrails, rims, guardrails, metal chain fences, pipes, corrugated metal buildings, or anywhere the bright look of hot-dipped surfaces is desired.

CAN SIZE (NET)	WEIGHT	CASE PACK
16-oz. Aerosol (13 oz.)	14 lbs.	12 Cans
Quart Can	13 lbs.	4 Quarts
Gallon Can	13 lbs.	1 Gallon

LOW VOC FORMULAS MEET CALIFORNIA, CONNECTICUT AND OTHER STATE REQUIREMENTS.

7007VG LOW VOC COLD GALVANIZE COATING 93% ZINC RICH

A low VOC version of our Cold Galvanize Coating with a VOC content of less than 100 g/l. Contains 97% pure zinc that yields 93% zinc in a dry film.

- Meets multiple performance requirements of ASTM, MIL, and DOD specifications (see product data sheet for details)
- Performs at temperatures up to 150°F (65°C)
- Withstands up to 2,000 hours salt spray exposure

CAN SIZE (NET)	WEIGHT	CASE PACK
Gallon Can	20 lbs.	1 Gallon

7008VG LOW VOC BRITE GALVANIZE 65% ZINC RICH

A low VOC version of our Brite Galvanize Coating with a VOC content of less than 250 g/l.

- Meets performance requirements of ASTM A-780-93A
- Withstands 500 hours 5% salt spray (ASTM B-117)

CAN SIZE (NET)	WEIGHT	CASE PACK
Gallon Can	20 lbs.	1 Gallon

Propane

•Disposable Fuel Cylinder

Item#	Description	Pack
PRO100P	14.1 oz. Propane	12

High Temp Fuel

•Disposable Fuel Cylinder

Item#	Description	Pack
PRO100M	14.1 oz. MAPP	12

Standard Self-Igniting Torch Head

•For Use with Propane

Item#	Description	Pack
PROMT521C	Carded	6

Self Igniting Mapp Head with Mapp Canister

•Self Igniting Kit•Clamshell

Item#	Description	Pack
PROMT551CK	Kit	2

Torch Kit

•Brass Construction Pencil Tip Burner Head & Disposable Propane Cylinder

Item#	Description	Pack
PRO200	Propane Torch Kit - 2 Pc.	6

Self Igniting Torch Kit

•Standard Self-Igniting Torch Head With One Canister of Propane

Item#	Description	Pack
PROMT521	2pc Propane Torch Kit	6

Swirling Turbo Self-Igniting Torch Head

•For Use with Propane or Mapp

Item#	Description	Pack
PROMT551C	Carded	6

Striker

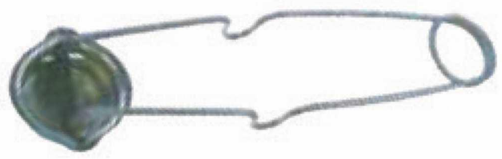

•Carded

Item#	Description	Pack
PROST	Striker	6

Multi Purpose Butane

•Multi Purpose•Carded

Item#	Description	Pack
PROMT750	Refillable	12

Pencil Flame Propane Torch Head

•Carded

Item#	Description	Pack
PROTH	Torch Head	6

Self-Igniting Regulated Torches

•Highest Quality & Consistent Flame While Operating The Tourch At Any Angle

Item#	Description	Pack
PROMT535C	Tourch	6
PROMT535CK	Tourch W/Tank	6

16" Brick Tongs

•Adjustable - Heavy Duty

Item#	Description	Pack
KFTBC380	Holds 6 - 10 Bricks	12

Magnesium Floats with Beveled Ends

•Both Ends Beveled with Rounded Corners•With Wood Handle or ProFrom Handle

Item#	Size	Handle	Pack
KFTCF012	12" x 3-1/4"	Wood	6
KFTCF012PF	12" x 3-1/4"	ProForm	6
KFTCF016	16" x 3-1/4"	Wood	6
KFTCF016PF	16" x 3-1/4"	ProForm	6

Redwood Float

Item#	Description	Pack
KFTSL529	3/4" x 5" x 12"	6

Wood Line Blocks

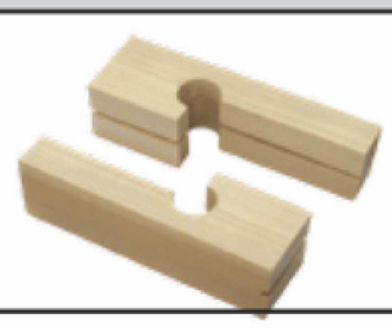

Item#	Description	Pack
KFTSLLB2	Wood Line Blocks	6

All Purpose Plastic Tub

•1.3 Cubic Feet Capacity
•9 Gallons
•Holds 1 - 80# Bag of Premix

Item#	Description	Pack
MACAT2606	26" x 20" x 6"	12

Super Plastic Tub

•3.2 Cubic Feet Capacity
•23 Gallons
•Holds 4 - 80# Bags Of Premix

Item#	Description	Pack
MACST3608	36" x 24" x 8"	6

Mortar Box

•9.4 Cubic Feet Capacity
•71 Gallons
•Holds 13 - 80lb Bags Of Premix

Item#	Description	Pack
MACMB6012	60" x 36" x 12"	3

Scaffold Mortar Box

•1.5 Cubic Feet Capacity
•11 Gallons
•Holds 1 - 80# Bag of Premix

Item#	Description	Pack
MACMB2906	29" x 23" x 6"	6

Mortar Pan

•1.4 Cubic Feet Capacity
•11 Gallons
•Holds 1 - 80# Bag Of Premix

Item#	Description	Pack
MACMP3007	29" x 29" x 6"	6

Mortar Box

•4.5 Cubic Feet Capacity
•34 Gallons
•Holds 6 - 80# Bags Of Premix

Item#	Description	Pack
MACMB5608	55" x 33" x 7"	3

STANLEY_SUPPLY.indd 242-243

11" x 4½" Wood Handle

•Smooth Edge

Item#	Description	Pack
MAT360	11" X 4-1/2"	6

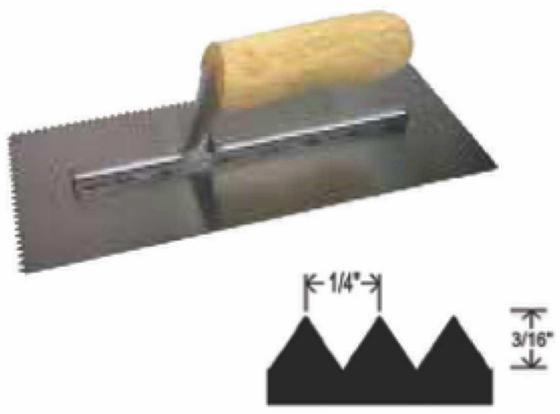

•V-Notched

Item#	Description	Pack
MATTF131	1/4" x 3/16" V	6

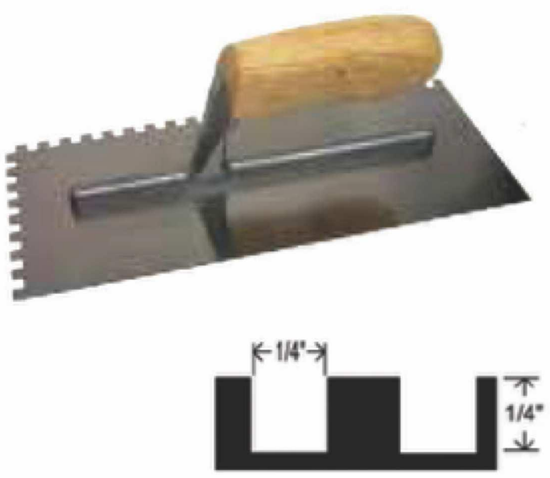

•Square Notched

Item#	Description	Pack
MATTF132	1/4" x 1/4" Square	6

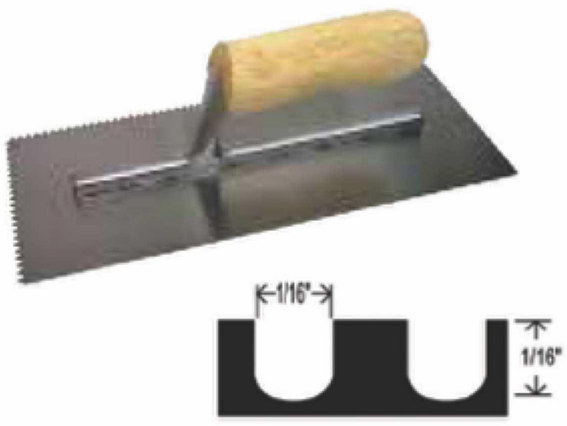

•U-Notched

Item#	Description	Pack
MATTF133	1/16" x 1/16" U	6

9" x 4" Plastic Molded Handle

•Smooth Edge

Item#	Description	Pack
MATTF105	9" X 4"	12

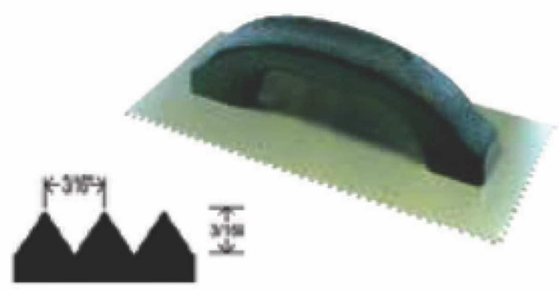

•V-Notched

Item#	Description	Pack
MATTF104	3/16" V	12

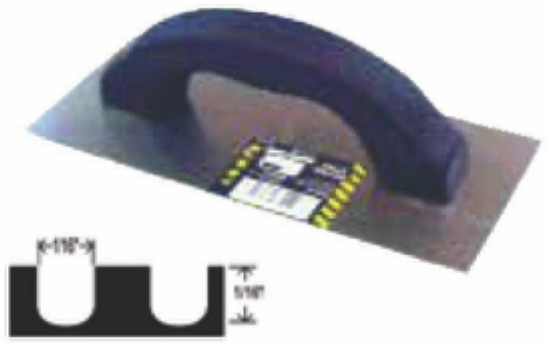

•U-Notched

Item#	Description	Pack
MATTF108	1/16" U	12

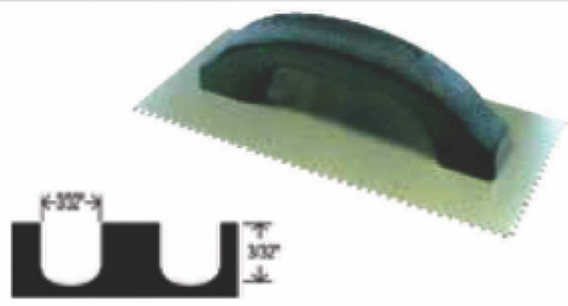

•U-Notched

Item#	Description	Pack
MATTF109	3/32" U	12

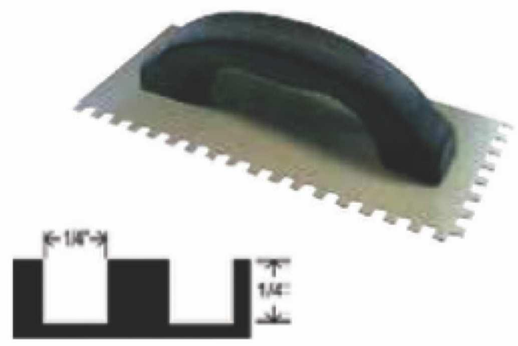

•Square Notched

Item#	Description	Pack
MATTF110	1/4" Square	12

9" x 4" Plastic Molded Handle

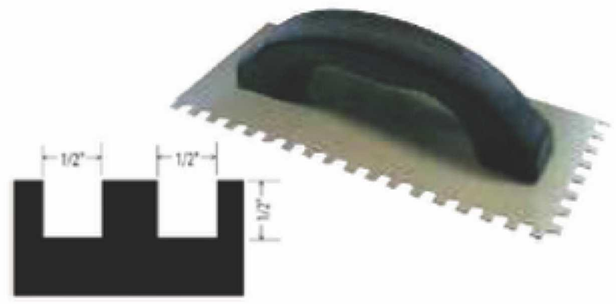

•Square Notch

Item#	Description	Pack
MATTF111	1/2"x1/2"	12

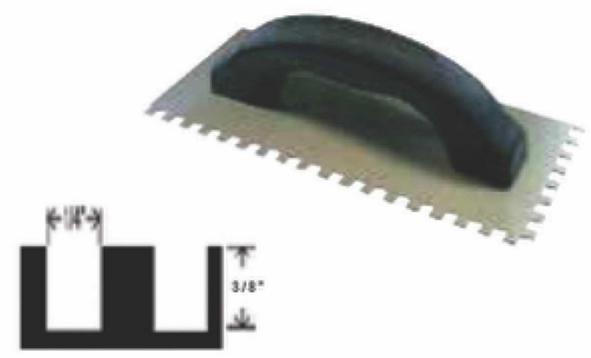

•Square Notch

Item#	Description	Pack
MATTF112	1/4"x3/8"	12

Cement Trowel

•Wood Handle

Item#	Description	Pack
MAT361	14" x 4"	6

Aluminum Hawks

•Wood Handle

Item#	Description	Pack
MAT170	8" x 8"	4
MAT172	10" x 10"	4
MAT174	13" x 13"	4

6/15/24 12:52 PM

Pointing Trowels

•Wood Handle

Item#	Description	Pack
MAT5PT	5”	12
MAT6PT	6”	12
MAT7PT	7”	12
MAT10PT	10”	6

Margin Trowels

•Wood Handle

Item#	Description	Pack
MAT15MT	1-1/2”	12
MAT2MT	2”	12

Gauging Trowel

•Wood Handle

Item#	Description	Pack
MAT7GT	7”	6

Tile Setting Trowel

•Wood Handle

Item#	Description	Pack
MAT7TS	7”	6

Brick Jointers

•All Steel

Item#	Description	Pack
MATBJS	Small - 3/8”x1/2”	12
MATBJL	Large - 5/8”x3/4”	12

Tuck Pointers

•Wood Handle

Item#	Description	Pack
MATSTPT	3/8”	12
MATTPT	1/2”	12
MATLTPT	5/8”	12

Metal Mortar Pan

•Painted•1.5 Cu. Ft.•12 Gal. Capacity

Item#	Description	Pack
MAT91190	29¾” x 29¾” x 6¾”	4

Mortar Pan Stand

Item#	Description	Pack
MAT91191	Mortar Pan Stand	1

Rubber Floats

•Wood Handle

Item#	Description	Pack
MAT161	White Skin Bottom	6
MAT162	Hard Rubber	6

Red Sponge Float

•Wood Handle

Item#	Description	Pack
MAT163	8” x 4” x3/4”	6

Redwood Float

•Redwood Float

Item#	Description	Pack
MAT160	3/4” x 5” x 12”	6

Foam Float

Item#	Description	Pack
MAT165	11”x5½”	6
MAT167	16”x5½”	6

STANLEY_SUPPLY.indd 244-245

Gauging Trowel

•Rubber Grip

Item#	Description	Pack
TSP54121	5 1/2"	6

Ergo Grip Trowels

•Rubber Grip Trowels With 7" Blades

Item#	Description	Pack
TSP54125	Tile Setter's Trowel	6
TSP54126	Gauging Trowel	6

Ergo Grip Pointing Trowels

•Rubber Grip•Forged Blade

Item#	Blade Size	Pack
TSP54122	5"	6
TSP54123	6"	6
TSP54124	7"	6
TSP54127	10"	6

Ergo Grip Notched Spreading Trowels

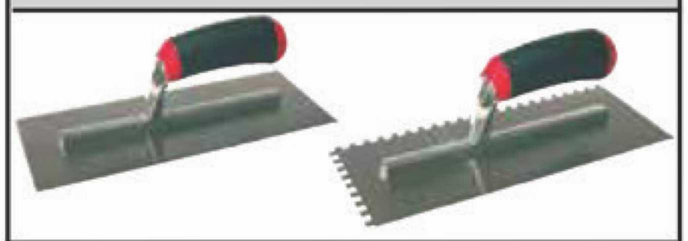

•11" x 4-1/2" Rubber Grip Application Trowels

Item#	Notch Size	Style	Pack
TSP54142	1/16"	U	6
TSP54143	3/16"	V	6
TSP54144	1/4"	Square	6
TSP54145	1/2"	Square	6
TSP54146	1/4"	V	6

Ergo Grip Finishing Trowels

•Rubber Grip Finishing Trowels

Item#	Size	Use For	Pack
TSP54141	11" x 4-1/2"	Plastering	6
TSP54151	14" x 4"	Cement	4
TSP54161	16" x 4"	Finishing	4

Ergo Grip Swimming Pool Trowels Fully Rounded

•Rubber Grip Pool Trowels

Item#	Description	Pack
TSP54152	14" x 4"	4
TSP54162	16" x 4"	4

Ergo Grip Swimming Pool Trowels Front Rounded

•Rubber Grip Pool Trowels

Item#	Description	Pack
TSP54153	14" x 4"	4
TSP54163	16" X 4"	4

Magnesium Float

•Rubber Grip Handle

Item#	Description	Pack
TSP54165	16" x 3¼"	4

Ergo Grip Margin Trowels

•Rubber Grip•Forged Blade

Item#	Description	Pack
TSP54111	1-1/2" Margin Trowel	6
TSP54112	2" Margin Trowel	6

Ergo Grip Edgers and Groovers

54302

54303

•Rubber Grip Edging And Grooving Tools•6" x 3" Carbon Steel Blades

Item#	Description	Pack
TSP54302	1/4" Radius Edger	6
TSP54303	1/2" Cut Groover	6

Grout Slicker

•Wood Handle

Item#	Description	Pack
TSP54339	Stainless Steel	6

6/15/24 12:52 PM

Concave Jointers

•Concave Jointer

Item#	Size	Pack
TSP54316	5/8"x3/4"	12
TSP54317	3/4"x7/8"	12

Brick Jointers

•Double Ended Brick Jointers

Item#	Size	Pack
TSP54313	3/8" x 1/2"	12
TSP54311	1/2" x 5/8"	12
TSP54312	3/4" x 7/8"	12

Slickers

•Double Ended Flat-Blade Slickers

Item#	Description	Pack
TSP54331	1/4" x 3/8"	12
TSP54334	1/2" x 3/8"	12
TSP54332	1/2" x 5/8"	12
TSP54333	3/4" x 7/8"	12

Silicon Trowel & Scraper Kit

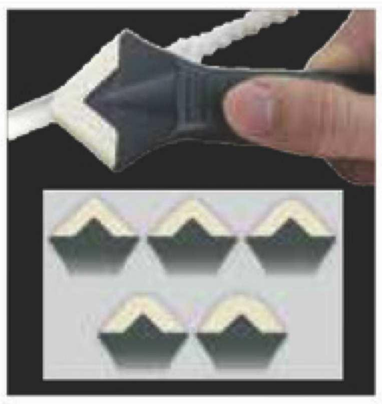

•Silicon Trowel & Scraper

Item#	Description	Pack
TSP54590	Kit	6

Tri-Angle Scraper

•Stainless•Wood Handle

Item#	Description	Pack
TSP54538	Heavy Duty	6

Fiberglass Handle Axe

•36" Epoxy Bonded With Hardened Head

Item#	Description	Pack
TSP52562	3-1/2 Lb.	2

Hickory Handle Axe

•36" USA Hickory Handle

Item#	Description	Pack
TSP52552	3-1/2 Lb.	2

Ergo Handled Plasterer's Hawks

•Aluminum Hawks With Rubber Grip

Item#	Description	Pack
TSP54211	8" x 8"	4
TSP54212	10" x 10"	4
TSP54214	13" x 13"	4

Hickory Handle Hatchet

Item#	Description	Pack
TSP52551	1-1/2 Lb.	6

Fiberglass Handle Hatchet

Item#	Description	Pack
TSP52561	1-1/2lb.	6

Railroad Pick

Item#	Description	Pack
TSP52523	6 Lb.	6

Pick-Mattock

Item#	Description	Pack
TSP52521	5 Lb.	6

Cutter-Mattock

Item#	Description	Pack
TSP52522	5 Lb.	6

STANLEY_SUPPLY.indd 246-247