STEEL DEMON® METAL CUTTING SAW BLADES WITH CERMET II

Cermet Tooth Blade cuts both standard steels and stainless steels while providing 5x the cutting performance of standard carbide tip metal cutting blades

- High heat tolerance and increased hardness for superior wear and impact resistance
- Improved Laser Cut Stabilizer Vents trap noise and vibration for maximum stability
- Perma-SHIELD® non-stick coating for less heat and corrosion

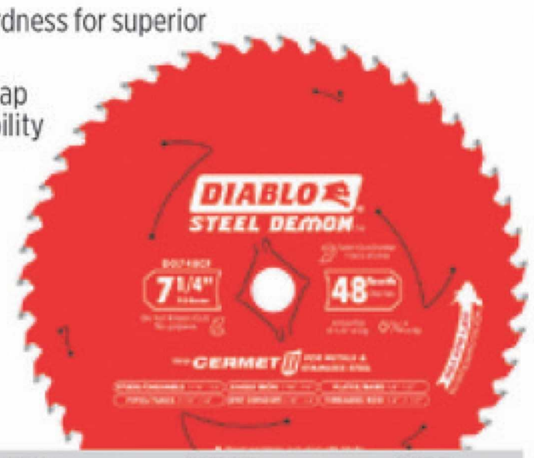

PRODUCT NO.	DIAMETER	TEETH	ARBOR	KERF
D0842CF	8"	42 TCG	5/8"	.075"
D0748CF	7-1/4"	48 TCG	5/8"	.075"
D0648CFA	6.5"	48 TCG	5/8"	.075"

6-1/2" FRAMING SAW BLADE

Ideal for fast, efficient ripping and cross cutting

- Superior cutting efficiency in cordless and corded saws by offering up to 30% more cuts per battery charge versus other blades
- Super-thin laser cut thin kerf design provides ease of feed, accuracy and maximum performance in cordless saws
- Perma-SHIELD® non-stick coating protects the blade against heat, gumming and corrosion

PRODUCT NO.
D0624A

ALUMINUM CUTTING BLADE

Diablo's next generation Aluminum saw blades are optimized for cutting thin (up to 1/8"), medium (3/32"-1/4") and thick (3/16"-7/16") aluminum metals.

- Triple Chip Grind (TCG) Tooth Geometry for maximum life, speed, and durability, giving clean, burr-free cuts
- Laser-Cut Stabilizer Vents for trapping noise and reducing vibration for accuracy and durability
- Perma-SHIELD® Non-Stick Coating for protection against heat, gumming and corrosion

PRODUCT NO.
D0756N

6-1/2" 24T ULTRA-THIN FRAMING/DEMOLITION SAW BLADE

8,000 max rpm, 5/8" arbor, 18° hook angle, .059" kerf

- Diablo made Dura-Blend™ carbide for extreme durability and up to 10x longer cutting life
- Chamber Alternate Top Bevel (ATB) tooth geometry for ultimate tracking control
- Lock-Tooth™ Technology for extreme impact resistance
- Enhanced anti-vibration design provides the ideal combination of stability and rigidity
- Perma-SHIELD® non-stick coating protects the blade against heat, gumming and corrosion

PRODUCT NO.
D0624DA

10-1/4" 40T GENERAL PURPOSE BEAM SAW BLADE

Ideal for general construction application

- Laser-cut blade cuts 5/8" arbor with diamond knockout
- Super thin laser cut kerf
- TiCo Hi-Density Carbide designed specifically for framing applications

PRODUCT NO.
D1040W

6-1/2" 40T FINISH TRIM SAW BLADE

10,000 max rpm, 5/8" arbor, 15° hook angle, .059" kerf

- TiCo Hi-Density Carbide specifically designed for each application to provide maximum performance and cutting life
- Super thin laser cut kerf gives extremely fast, durable, and clean cuts
- Laser-cut stabilizer vents trap noise and vibration keeping the blade cool and reducing blade warp
- Perma-SHIELD® non-stick coating protects the blade against heat, gumming and corrosion
- Laser-cut blade plate for true cuts 5/8" arbor with diamond knockout

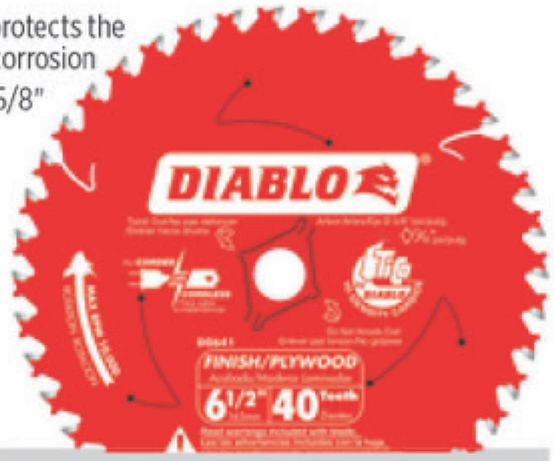

PRODUCT NO.
D0641A