



# **NRC7394 Standalone SDK**

## **Release Note**

**(v1.2)**

**Ultra-low power & Long-range Wi-Fi**

**Ver 1.2**  
**Nov. 30, 2023**

**NEWRACOM, Inc.**

## **NRC7394 Standalone SDK Release Note (v1.2)**

### **Ultra-low power & Long-range Wi-Fi**

**© 2023 NEWRACOM, Inc.**

All right reserved. No part of this document may be reproduced in any form without written permission from Newracom.

Newracom reserves the right to change in its products or product specification to improve function or design at any time without notice.

#### **Office**

Newracom, Inc.

505 Technology Drive, Irvine, CA 92618 USA

<http://www.newracom.com>

# Contents

<b>1</b>	<b>Overview.....</b>	<b>6</b>
<b>2</b>	<b>Contents of software release package .....</b>	<b>6</b>
<b>3</b>	<b>Standalone SDK Package .....</b>	<b>8</b>
3.1	General guide .....	8
3.2	Supported 3 <sup>rd</sup> party libraries.....	8
<b>4</b>	<b>SW Release Package .....</b>	<b>9</b>
4.1	Features.....	9
4.2	Resolved issues .....	10
4.3	Changed items .....	11
4.4	Known issues.....	12

# List of Tables

Table 2.1	Contents of NRC7394 standalone SDK package .....	7
Table 4.1	Resolved issues .....	10
Table 4.2	Changed items .....	11
Table 4.3	Known issues.....	12

# List of Figures

Figure 2.1    NRC7394 standalone SDK package directory ..... 6


# 1 Overview

The IEEE 802.11ah is a new Wi-Fi standard created to fulfill the requirements of a variety of IoT applications. Newracom's NRC7394 chip provides two modes of operation: host mode and standalone mode. Host mode necessitates an external host device, like the Raspberry Pi4 included in Newracom's EVK, to supply 11ah Wi-Fi connectivity. On the other hand, standalone mode enables users to develop their own applications using the APIs provided in the standalone package, compile binaries with the SDK, and execute them on the NRC7394. In standalone mode, users can use the NRC7394's various peripheral interfaces to collect sensor data and transmit it to the server over the 11ah network. Furthermore, the NRC7394 offers an AT commands application in standalone mode, allowing users to utilize the 11ah Wi-Fi network.

This document outlines the NRC7394 software package for standalone mode.

## 2 Contents of software release package

The software release package encompasses all the necessary components for utilizing the most recent features, including firmware libraries, header files, APIs, sample codes, downloader tool, makefile, and documentation. Figure 2.1 illustrates the directory structure of the package, while Table 2.1 presents a summary of its contents.

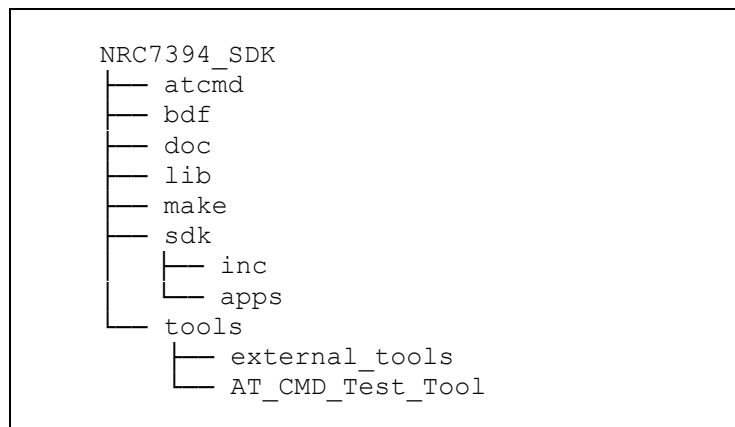

**Figure 2.1** NRC7394 standalone SDK package directory

**Table 2.1 Contents of NRC7394 standalone SDK package**

Directory	Description
doc	Documents for standalone guide document and SDK API lists
lib	NRC7394 modem library and 3 <sup>rd</sup> party libraries.
make	makefiles and configuration files
sdk/inc	SDK API header files and SDK common header files.
sdk/apps	Several kinds of reference sample applications.
atcmd	ATCMD binaries and reference codes for the host platform
bdf	A Board Data File (BDF) contains power tables based on a country, channel, target hardware version, MCS (Modulation Coding Scheme).
tools/AT_CMD_Test_Tool	AT command test tool for UART interface
tools/external_tools	The FirmwareFlashTool is a firmware uploader.

The information of the library released in this package is as follows.

- Library (including 3<sup>rd</sup> party)
  - Name : libModem.a (MD5: a9b4ea1866e34c8679b1a08c2bf3ff50)
  - Location : lib/modem
  - Version : 1.2
  - Build date : Nov. 30, 2023

## 3 Standalone SDK Package

### 3.1 General guide

To gain a broad understanding of the software package, developers can refer to the 'UG-7394-004-Standalone SDK.pdf' document. This resource offers instructions on configuring the software build environment, compiling standalone binaries, and downloading binary and sample applications. Furthermore, developers can utilize the 'UG-7394-005-Standalone SDK API.docx' document, which provides a list of supported APIs that can be used in conjunction with the NRC7394. These APIs enable users to implement services connected to Wi-Fi connections and peripherals. For additional assistance, the 'UG-7394-006-AT\_Command.pdf' document offers a guide to AT commands.

### 3.2 Supported 3<sup>rd</sup> party libraries

The standalone SDK package for the NRC7394 contains numerous third-party libraries, which are detailed in the 'UG-7394-005-Standalone SDK API.docx' document along with their corresponding URLs. FreeRTOS, LwIP, and Mbed TLS are among these libraries, and they are essential for the standalone SDK to function properly.

- **FreeRTOS**
- **LwIP**
- **Mbed TLS**
- **MQTT**
- **cJSON**
- **Mini-XML**
- **AWS (Amazon web service)**
- **NVS (Non-volatile storage)**
- **Device libraries**
  - **BME680 (Gas, humidity, pressure, and temperature sensor)**
  - **SSD1306 (OLED/PLED controller)**
  - **SGP30 (Air quality sensor)**
  - **SHT30 (Temperature and humidity sensor)**
  - **w5500 (Ethernet controller)**



## 4 SW Release Package

### 4.1 Features

The NRC7394 software release package contains the following features.

- **AT-CMD features**
  - WPA3-SAE (v1.0)
  - OWE (v1.0)
  - FOTA (v1.0)
  - SoftAP (v1.0)
  - Power save TIM mode (v1.0)
  - Power save non-TIM mode (v1.0)
  - Continuous TX (v1.1)
- **Regulation features**
  - Duty cycle (v1.0)
- **System features**
  - Power save – deep sleep (v1.0)
  - WDT/Recovery (v1.0)
  - UART/UART-HFC/HSPI interface (v1.0)
  - RSSI-based rate adaptation (v1.2)
- **Sample applications**
  - Refer to UG-7394-004-Standalone SDK document (v1.0)
    - Wi-Fi: Wi-Fi state, WPS-PBC, Ethernet bridge, SoftAP, FOTA
    - Protocol: TCP/UDP
    - Power save
    - Peripheral: GPIO, UART, ADC, NVS, PWM, sensors, etc.
    - Middleware: XML, JSON, AWS, MQTT, HTTP
    - Scenario: PS schedule, UART data handling

## 4.2 Resolved issues

**Table 4.1 Resolved issues**

Version	Description
v1.1	<b>Bug fix for following issues</b> (1) Intermittent scan failure on TW channel (2) AP's association grant for STA with listen interval exceeding BSS max idle period (3) CCA type of JP 2/4MHz channels (4) Inability to return to doze state in deep sleep mode for STA with static IP address (5) Scan failure on K2 channel (6) Incorrect peer MAC address copy at 4-address enabled W5500 device
v1.2	<b>Bug fix for following issues</b> (1) Prevent manipulating source MAC address when 4 address is used for W5500 sample (2) TX power setting failure when changing from FIXED mode to AUTO mode (AT-CMD) (3) TX power in LIMIT mode not limited to the set value (AT-CMD) (4) Fix the recovery of the listen interval setting upon waking from deep sleep (5) Remove echo check code from lwip (6) TCP client socket was closed when enabling TCP keep-alive (7) Invalid secondary CCA on JP 2/4MHz channels (8) NDP CTS compliance for RTS with response indication (RI) 1 on AP (9) Set an invalid AID in the AID response element when sending an association response (10) AT-CMD lwip keepalive issue: TCP client socket would close when TCP keep-alive was enabled (11) Handling exceptions for the invalid temperature value of 0 (12) Invalid AID issue when forwarding a frame in the SoftAP (13) Delayed reconnection issue for the STA without deauthentication (14) Failure in setting the limit type for 'nrc_wifi_set_tx_power' (15) PN order mismatch during the packet retransmission

## 4.3 Changed items

**Table 4.2** Changed items

Version	Description
v1.1	Enhanced RSSI accuracy of <code>system_api_get_rssi()</code>
v1.2	Update SDK APIs: refer to UG-7394-005-Standalone SDK API document
	Update AT-CMD APIs: refer to UG-7394-006-AT_Command document
	Update supported baudrate up to 2Mbps on UART without RTS/CTS (AT-CMD)
	Update samples
	o sample_sntp: Retrieve NTP(Network Time Protocol) data
	o sample_w5500_eth
	- Change the default address mode to 3 address
	- Incorrect peer MAC address copy at 4-address enabled W5500 device
	o sample_wifi_relay : Runs softap and sta for relay operation
	o sample_vendor_ie : Receive vendor IE from beacon
	Update AUXADC compensation
	Duty cycle 2.8% support only for EU STA
	Check traveling pilot support field of S1G capabilities element
	Set the default listen interval to 0 for wifi_config
	1/2MHz STA support at 4MHz SoftAP
	Add auto guard interval control
	Add auto RX gain control
	SoftAP's disable/enable sequence support
	Add API for setting max station number in SoftAP
	Hidden SSID support in SoftAP
	Support for floating-point values in the ping interval of the ping operation
	Add serial flash support: FM25W32A/GD25LQ16C/GD25WQ128E/W25Q16FW/XT25Q08B
	Set country code from RF CAL data (AT-CMD)

	<b>Update Firmware Flash Tool v6.3.0 (Multi v7.2.0)</b> o Dynamic XIP boot erase size + max size check
--	---

## 4.4 Known issues

**Table 4.3 Known issues**

Category	Description
PMF	The issue of deauthentication frame delivery failure can occur between PMF-enabled NRC7394 and PMF-enabled NRC7292 devices.
TCP/IP	During deep sleep, TCP connections are not maintained. Upon waking up, a new TCP connection must be established.
AT-CMD	The AT-CMD throughput over HSPI interface is slightly lower than NRC7292 device due to CPU clock speed variation.