STEAMERS—ANTUNES® UNDER COUNTER

DAILY/QUARTERLY

SUPPLIES:



KAY-5® Sanitizer/ Cleaner



KAY® Rapid Multi Surface Disinfectant Cleaner Solution



ReadyDose™ KAY® Delimer Tablets




Heat Resistant Gloves




Clean, Sanitizer-Soaked Towels

Other supplies needed:
Scraper
1/8" Cleaning Tool
Large Hot Beverage Cup


DAILY CLEANING AT CLOSE

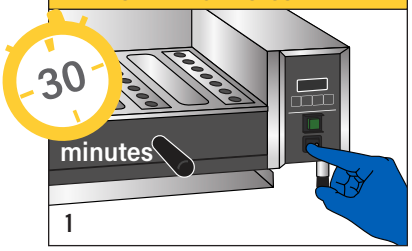


- Turn unit **OFF**
- Allow to **COOL** at least 30 minutes
  CAUTION: Equipment may be **hot**; use heat-resistant gloves

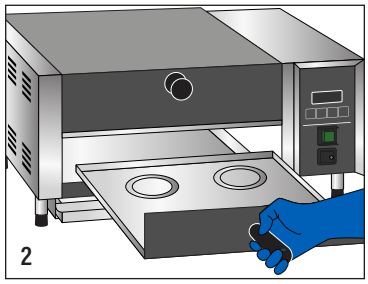


- Pull out spatula, drip tray insert and spatula liner

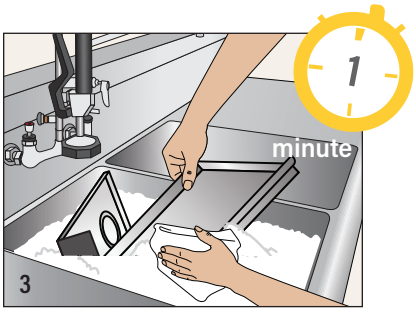

- Bring spatula, drip tray insert and spatula liner to 3-compartment sink to wash, rinse and sanitize for 1 minute
- Allow to air dry

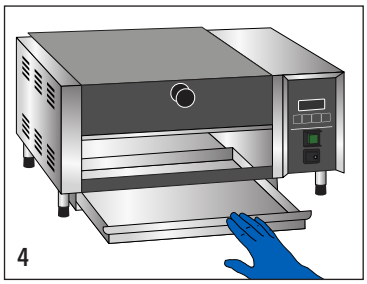


- Reinstall clean spatula liner, spatula, drip tray and drip tray insert

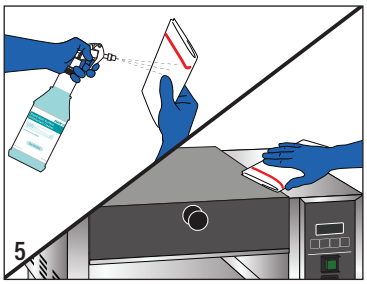


- Spray a clean, sanitizer-soaked towel with Rapid MSDC Solution and clean exterior

QUARTERLY (as needed)—DELIMING AT CLOSE

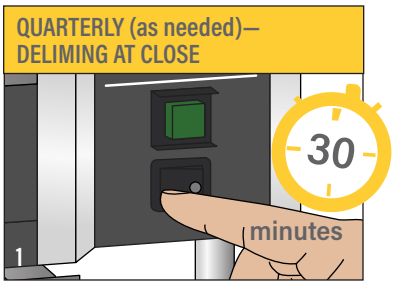


- Turn unit **OFF**; display will alternate OFF and HOT as it cools down
- Allow to **COOL** at least 30 minutes
- Unplug unit when complete

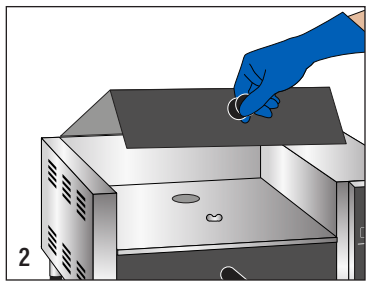

CAUTION: Equipment may be hot; use heat-resistant gloves

- Remove top cover

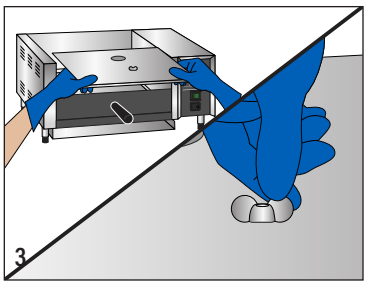

- Remove support channel cover
- Unscrew wing nut

ECOLAB®
Kay Chemical Company
8300 Capital Drive
Greensboro, NC 27409-9790, USA


CUSTOMER SERVICE 800.529.5458

56920.02 MCD US 56920/80102/1025 ©2025 Ecolab USA Inc. All rights reserved.


STEAMERS—ANTUNES® UNDER COUNTER (CONTINUED)

DAILY/QUARTERLY


QUARTERLY (as needed)—DELIMING AT CLOSE (continued)

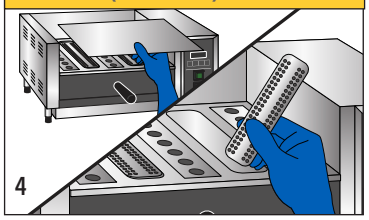


- Remove generator cover assembly, generator gasket and diffusers

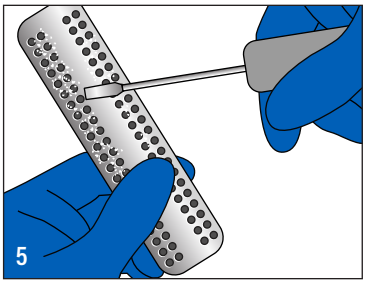


- Examine generator orifices (holes); if mineral deposits have formed, use 1/8" cleaning tool to remove
- Scrape openings clean using a twisting motion

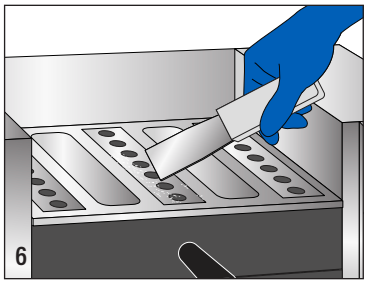


- Clean generator using scraper and brush if needed

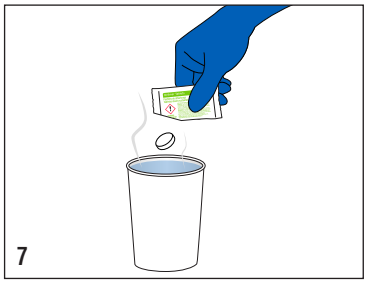

- Prepare Delimer Solution: dissolve one Delimer Tablet in 20 oz **hot** (110-120° F) water using large hot beverage cup

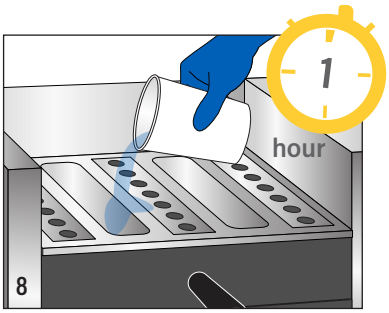


- Pour Delimer Solution onto steam generator; allow to soak for 1 hour

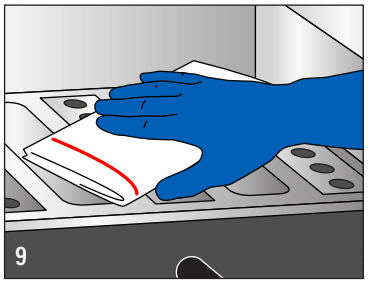

- Rinse Delimer Solution using a clean, sanitizer-soaked towel


ONLY PERFORM THESE STEPS IF GENERATOR REQUIRES SEASONING—IF NOT, SKIP TO STEP 14

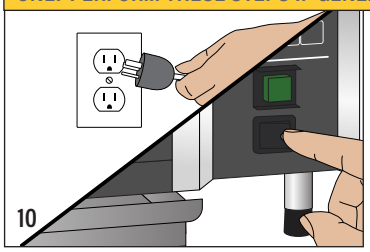

- Plug in power cord and turn **ON**




- Put on heat-resistant gloves
- Fill clean beverage cup with tap water

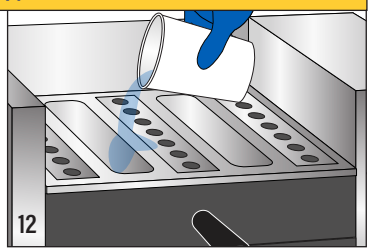


- Pour a small amount of water from cup onto steam generator; allow to boil off
- Repeat three times


ONLY PERFORM THIS STEP IF GENERATOR REQUIRES SEASONING —IF NOT, SKIP TO STEP 14

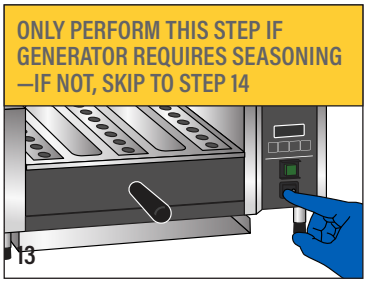

- Turn off unit when there is no more water on steam generators

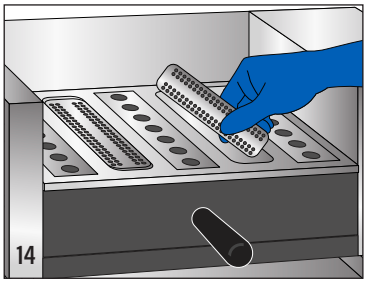

- Reassemble unit
- Place diffusers in steam generator

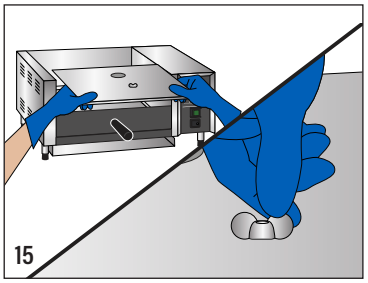

- Replace generator cover and support channel
- Tighten wing nut


ECOLAB®
Kay Chemical Company
8300 Capital Drive
Greensboro, NC 27409-9790, USA
CUSTOMER SERVICE 800.529.5458

58920.02 MCD US 58920/8002/1025 ©2025 Ecolab USA Inc. All rights reserved.


STEAMERS—ANTUNES® UNDER COUNTER (CONTINUED)

DAILY/QUARTERLY

QUARTERLY (as needed)—DELIMING AT CLOSE (continued)

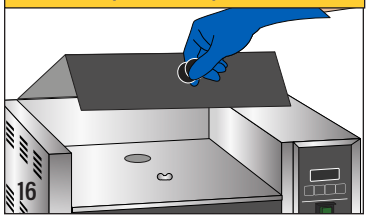

- Reinstall top cover

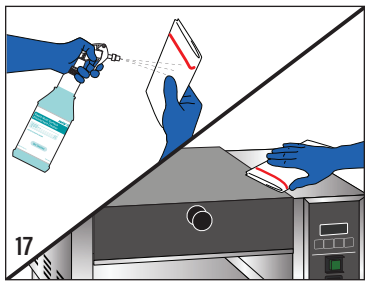

- Using Heat-Resistant Gloves, wipe down entire surface with clean, sanitizer-soaked towel sprayed with Rapid MSDC Solution
- Air Dry



- Check unit for proper function; return unit to service

56920.02 MCD US 56920/8002/1025 ©2025 Ecolab USA Inc. All rights reserved.