

by Flyingdeuk Click for Update

VER. 23.8.2

 $CJU \leftrightarrow KWJ \quad CJU \leftrightarrow PEK$ 

 $CJU \leftrightarrow CJJ$ 

 $CJU \longleftrightarrow TAE$ 

 $CJU \longleftrightarrow PUS$ 

 $PUS \longleftrightarrow NRT$ 

 $ICN \leftrightarrow PUS$  $ICN \longleftrightarrow NKG$ 

 $ICN \leftrightarrow KIX$  $ICN \leftrightarrow TAO$ 

 $ICN \longleftrightarrow NRT$  $ICN \longleftrightarrow PFK$ 

 $ICN \longleftrightarrow CTS$  $ICN \longleftrightarrow SHE$ 

 $ICN \longleftrightarrow HND$  $ICN \longleftrightarrow PVG$  $ICN \leftrightarrow NGO$  $ICN \leftrightarrow YNJ$ 

Welcome PA

Meter/Feet Conversion In Each China Page

**Cold Temp Correction** 

**Cold Wx Operation** 

ENG ON

**ENG OFF** Deicing Deicing

### 손님 여러분, 안녕하십니까? 저는 기장 입니다. 저희 대한항공을 이용해 주셔서 대단히 감사한니다 (국제)공항까지 비행시간은 시간 분 으로 예상됩니다. 비행 중에는 항공기가 갑자기 흔들릴 수도 있으니, 자리에 않아 계실 때에는 항상 좌석벨트를 매주시기 바랍니다.

다하겠습니다. 감사한니다. Good morning (afternoon /evening), ladies and

저는 여러분을 안전하게 모시기 위해 최선을

gentlemen. This is captain last name speaking. Welcome aboard Korean Air.

This flight is bound for (international) airport and our flight time is hours(s) and minutes.

For your safety, keep your seatbelts fastened
while you are seated.
Thank you for choosing Koreanair.
Please enjoy the flight.

while you are seated.										
Thank you for choosing Koreanair. Please enjoy the flight.										
RKSS	서울/김포국제	RJBB	오사카/간사이							

서울/인천국제 **RJTT** 

RKSI RKPC 제주국제

RKTU

RKJJ RKTN

WELCOME 방송

도쿄/하네다 **RJAA** 도쿄/나리타

부산/김해국제 RKPK

**RJGG** 

청주국제 광주

> 대구국제 ZSNJ 7BAA

> > ome

**ZSPD** 

ZYYJ 예지

삿포로/신(뉴) 치토세

나고야/주부(센트레아)


상하이/홍차오

난징/루커우 칭다오/자오동

베이징/소우뚜(캐피털) 선양/탸오쎈

상하이/푸동

### RKSS(GMP) 59ft RKPC(CJU) 119ft KE GMP 131.15 **KF CIU 129.4** DCL -15분 가능 TOBT 5분 차이 시 CTC Comm Rwv 32R Takeoff (06:00L~0900L / 12:00L~15:00L /18:00L~21:00L) GMP: SID (NADP 1) BUILTI xT 324 324 5000 324 32L/R 324 5000 324 (BULTI xO) 324 BULTI xU 144 144 6000 144 14L/R (BULTI xZ) 144 144 6000 144 KIP 32L 32R 14L 14R 113.6 108.3 110.7 109.9 108.7 32L/R: KIP324/5, R220 14L/R: KIP144/4, R220 YIU R271 P73 /2 32L(41') 14R(34') 10499 HUD 32R(42') 11811' 14L(38') APRON(130.875) -> GND(121.9) -> TWR (All by ATC)



Home

CJU: STAR

DOTOL xP YUMIN **DOTOL 160** 

ILS Z 07

DOTOL xT DUKAL DOTOL/-10 160


ILS Z 25

25(76') HUD 07(87') 10433'

07: P6(5176'), P5(5882'), P4(6840'-ATC HIRO)

25: P7(5219'), P8(5882'), P10(7524'-ATC HIRO)

Entering Rapid TWY CTC GND 121.675 (STOP x) HST 40KTS

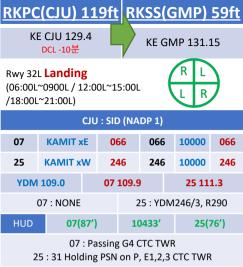

YONGDAM



Home

JEJUKorea	
RKPC	
CRS-290 D3 YDM	
U3 YUW	

**GMP: STAR** ILS 32L/R OLMEN xT BUMSI

ILS 14R OLMEN xU

DOKDO 32L(41') 10499'

OLMEN 160 OLMEN 160

HUD

14R(34')

14R: C1(6578')

FAF: Final Flap

32R(42') 11811' KIP /8(RWY 32), YJU R271, P73 /2

32L: D3(6532'), E2(9117'), 32R: E1(6614')

32L/R: 8 KIP L/G, 14R: LOC CAPT L/G

TWR -> GND -> APRON (All by ATC) Except RWY14R Landing (Until R)

14L(38')

### RKSS(GMP) 59ft RKPK(PUS) 13ft KE GMP 131.15 KE Gimhae 129.2 DCL -15분 가능 TOBT 5분 차이 시 CTC Comm Rwv 32R Takeoff (06:00L~0900L / 12:00L~15:00L /18:00L~21:00L) GMP: SID (NADP 1) **OSPOT xT** 324 324 5000 324 32L/R (OSPOT xQ) 324 324 5000 324 OSPOT xU 144 144 6000 144 14L/R (OSPOT xZ) 144 144 6000 144 **KIP** 32L 32R 14L 14R 109.9 113.6 108.3 110.7 108.7 14L/R: KIP144/4, R220 32L/R: KIP324/5, R220 YIU R271 P73 /2 32L(41') 10499' 14R(34') HUD 32R(42') 11811' 14L(38') APRON(130.875) -> GND(121.9) -> TWR (All by ATC) Home PUS: STAR (Tail Wind 36R 136000lbs F40) **ILS 36** KFVOX x MASTA 9DME LG. 8DME FLAP

**VOR 18** 

HUD

GAYHA x

36L(13') 10499'

36R(8') 8999'

36: IKMA/IKHE /9. /8

MASTA


36L : C4 (6299'), C2(7795') / 36R : E3(5866'), E2(7339') 18R : C6(5770'), C7 (6824') / 18L : E4(5882'), E5(8792') Vacate C3,C4 by ATC only. Max Taxi SPD 20KTS C2 HOLD SHORT 가까움(Vacate TaxiSPD)

18 Circling Click!!

18R(13') 8530'

18L(13') 8999'

18: KMH R283, R280

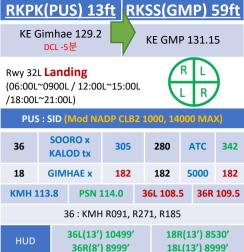





# MH R-271 **GMP: STAR**

**GUKDO xT** ILS 32L/R BUMSI **GUKDO 160** 

ILS 14R

GUKDO xU DOKDO 32L(41') 10499'

**GUKDO 160** 

HUD

14R(34')

11811' 14L(38')

32R(42')

KIP /8(RWY 32), YJU R271, P73 /2

32L: D3(6532'), E2(9117'), 32R: E1(6614')

14R: C1(6578')

32L/R: 8 KIP L/G, 14R: LOC CAPT L/G FAF: Final Flap

TWR -> GND -> APRON (All by ATC)

Except RWY14R Landing (Until R)

**KF CIU 129.4** KF KWI 129 4 DCL -10분 CJU: SID (NADP 1) 07 KAMIT xE 066 066 10000 066 25 KAMIT xW 246 246 10000 246 YDM 109.0 07 109.9 25 111.3 07: NONE 25: YDM246/3, R290 HUD 07(87') 10433' 25(76') 07: Passing G4 CTC TWR 25: 31 Holding PSN on P, E1,2,3 CTC TWR 109.0 YDM RKPC CRS-290

RKPC(CJU) 119ft RKJJ(KWJ) 48ft



## lome

KWJ: NO STAR (TL 140확인) - STAR RNP app Only!! nο SAMUL/-15 ILS 04R CI04R

KOTTY

LOC 22L SAMUL D058Q No PAR 3.3도

**SAMUL** D058Q

Offset 3.29도

VOR 22L/R

04R(46') 9301' 22L(48')

HUD

04L(46') 9301' 22R(48')

04R: SAMUL(CLR Limit)


End of RWY Vacating 9301'

LOC 22L, VOR 22L/R -> LOC/VOR LNAV 지시고도 유지후

Final Establish 이후 강하 (TERR!!)

TAXI MAX 15 kts (Max 30kts by ATC)

PAR 04L/R, 22R 가능 : 강하각 3도 (6NM, 3도)

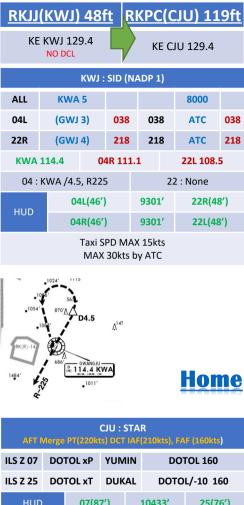

HUD 10433'


07(87')

25(76')

07: P6(5176'), P5(5882'), P4(6840'-ATC HIRO)

25: P7(5219'), P8(5882'), P10(7524'-ATC HIRO) Entering Rapid TWY CTC GND 121.675 (STOP x)

HST 40KTS

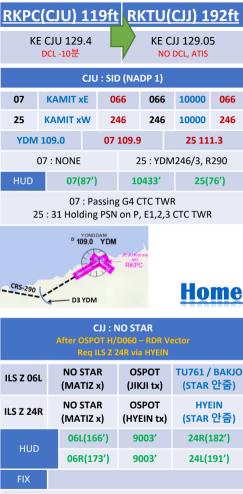

06L: B3 (6443'), A3 (8786') 24R: C3 (6230'), D3 (8825')

GS fluc' - A/P Dis' - Back to Normal - A/P Reengage

Reg full length Landing (Vacate End of RWY) 180 BACK LINE 지나 Taxi Line 있음 Entering TWY A3, B3, B4, C3, D3 change GND freq





# Home

### CJU: STAR

AFT Merge PT(220kts) DCT IAF(210kts), FAF (160kts)

DOTOL xP YUMIN **DOTOL 160** 

ILS Z 07

DUKAL **ILS Z 25** DOTOL xT DOTOL/-10 160


HUD 07(87') 10433' 25(76')

07: P6(5176'), P5(5882'), P4(6840'-ATC HIRO)

25: P7(5219'), P8(5882'), P10(7524'-ATC HIRO)

Entering Rapid TWY CTC GND 121.675 (STOP x)

HST 40KTS



RKPC(CJU) 119ft RKTN(TAE) 120ft



RKPC

		+		1
TAE : NO	STAR (TL 1	.40 확인	)	

ILS 31L CF31L222/7 TGU/-10 ILS 13R TGU/-10 YAWAN

31L(118') HUD 31R(120')

CF31L

8999'

9039'


13R(111') 3.3

13L(112')

31L: D1(8848'), 13R: A1(8772')

13R ILS 3.3도 PAPI 3.3도 (산악지형 주의)

TAXI MAX 20kts (do not reg) 최소 2000ft 간격

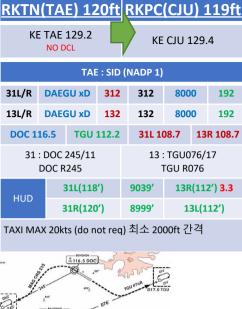



# Home

# CJU: STAR

AFT Merge PT(220kts) DCT IAF(210kts), FAF (160kts)

**ILS Z 07** UPGOS xP YUMIN **ILS Z 25 UPGOS xT** DUKAL

HUD 07(87') 10433' 25(76')

07: P6(5176'), P5(5882'), P4(6840'-ATC HIRO)

25: P7(5219'), P8(5882'), P10(7524'-ATC HIRO)

Entering Rapid TWY CTC GND 121.675, STOP X HST 40KTS



RKPC(CJU) 119ft RKPK(PUS) 13ft



D3 YDM

CRS-290

**KF CIU 129.4** 



	Home

**ILS 36** KEVOX x ANROD 9DME LG, 8DME FLAP GAYHA x ANROD

**VOR 18** 18 Circling Click!! 36L(13') 10499' 18R(13') 8530'

HUD 36R(8') 8999' 18L(13') 8999'


36: IKMA/IKHE /9, /8 18: KMH R283, R280

36L : C4 (6299'), C2(7795') / 36R : E3(5866'), E2(7339')

18R: C6(5770'), C7 (6824') / 18L: E4(5882'), E5(8792')

Vacate C3,C4 by ATC only. Max Taxi SPD 20KTS

C2 HOLD SHORT 가까움(Vacate TaxiSPD)



RKPK(PUS) 13ft RKPC(CJU) 119ft

**KF CILI 129 4** 

36L 108.5

36: KMH R091, R271, R185 36L(13') 10499' HUD 36R(8') 8999'

**PSN 114.0** 

KF Gimhae 129.2

DCL -5분

**KMH 113.8** 

HUD

RWY36 400ft Man L/H turn, Max Taxi SPD 20KTS KMH R-091 KMH R-271



25(76')

36R 109.5

18R(13') 8530'

18L(13') 8999'

		ome
	-	

CJU: STAR AFT Merge PT(220kts) DCT IAF(210kts), FAF (160kts)

10433'

GIMHAE 113.8 KMH

### **ILS Z 07 UPGOS xP** YUMIN **ILS Z 25 UPGOS xT** DUKAL

07: P6(5176'), P5(5882'), P4(6840'-ATC HIRO)

07(87')

25: P7(5219'), P8(5882'), P10(7524'-ATC HIRO)

Entering Rapid TWY CTC GND 121.675, STOP X

HST 40KTS



RJAA(NRT) 135ft RKPK(PUS) 13ft KE Tokyo 131.70 KF Gimhae 129 2 DCL -15분 NRT: SID - ENPAR tx (NADP 1) 16L/R 157 157 **ATC** 157 TFTRA x ENPAR tx 34L/R 337 337 7000/ATC 337 NRF 16L 16R 34L **34R** 111.9 117.9 110.7 111.5 110.9 16L(135') 8202' 34R(141') HUD 16R (130') 13123 34L (139') 34R: CLB 220/10000, A4R21/22/23 220KTS 확인 Verity ENPAR tx TETRA 12000A APU Start, TAXI RTE 1, 2, 3, 4 RWY 별 DEP RTE **DEP 124.2** TKO 120.5 - 133.45 - 133.02 - 133.8 FUK 133.15 TGU 125.37 APP 125.5 Home PUS: STAR (Tail Wind 36R 136000lbs F40) 9DME LG. 8DME FLAP ILS 36 PEDLO x KALFK **VOR 18 GAYHA** x **PSN** 18 Circling Click!! 36L(13') 10499' 18R(13') 8530' HUD 36R(8') 8999' 18L(13') 8999' 36: IKMA/IKHE /9, /8 18: KMH R283, R280

36L : C4 (6299'), C2(7795') / 36R : E3(5866'), E2(7339')

18R: C6(5770'), C7 (6824') / 18L: E4(5882'), E5(8792')

Vacate C3,C4 by ATC only. Max Taxi SPD 20KTS C2 HOLD SHORT 가까움(Vacate TaxiSPD)

RKSI(ICN) 23ft RKPK(PUS) 13ft									
KE ICN 131.5 DCL -10분 TOBT 5분 차이시 CTC Comm									
ı	CN : SI	) (33/	34 N.	ADP 1	., 15	/16	NADP	2)	
33L/R	OSPOT xE/A		3	333		33	5500 ATC	•	333
34L/R	OSPO	T xY	3	33	3	33	ATC		333
15L/R	OSPO	T xC	1	53	1	53	5000		153
16L/R	OSPO	POT xH		53	53 1		5000		153
NC 113		33 109		33R 108.9		15L 111.9		15R 109.1	
WN 112		34 109	_	34R 108.1		_	6L 0.35	1	16R 108.55
-	: NC05L YJU R27		42	34L,	/R :		333/4 R271	1.6	, R242
<u> </u>	33L/R	34L(2	3′)	1230	3′	15L,	/R 16F	₹(2	23')
HUD 34R (23')				1312	3′	16L	(23')		
Parallel TWY 10KTS 이상(R17 MAX 15kts)									
							H	D	me

PUS: STAR (Tail Wind 36R 136000lbs F40) 9DME LG. 8DME FLAP **ILS 36** KEVOX x MASTA

**MASTA** 

36L(13') 10499'

36R(8') 8999'

36: IKMA/IKHE /9, /8

18 Circling Click!!

18R(13') 8530'

18L(13') 8999'

18: KMH R283, R280

**VOR 18** 

HUD

GAYHA x

36L: C4 (6299'), C2(7795') / 36R: E3(5866'), E2(7339')

18R: C6(5770'), C7 (6824') / 18L: E4(5882'), E5(8792')

Vacate C3,C4 by ATC only, Max Taxi SPD 20KTS C2 HOLD SHORT 가까움(Vacate TaxiSPD)

KF Gimhae 129.2 **KE ICN 131.5** DCL -5분 PUS: SID (Mod NADP CLB2 1000, 14000 MAX) SOORO x 36 305 280 ATC 342 **KALOD** tx 18 GIMHAF x 182 182 5000 182 **PSN 114.0** 36L 108.5 36R 109.5 **KMH 113.8** 36: KMH R091, R271, R185 36L(13') 10499' 18R(13') 8530' HUD 36R(8') 8999' 18L(13') 8999'

RKPK(PUS) 13ft RKSI(ICN) 23ft

RWY 36 400ft Man L/H turn, Max Taxi SPD 20KTS

ENPIL **GUKDO 180** 

**GUKDO xE** 

ILS 33/34

ILS 15/16 **GUKDO xH** MUNAN **GUKDO 180** 

15L/R

33L/R 34L(23') 12303'

16R(23')

HUD

34R(23') 13123' 16L(23')

RWY /8, /5, YJU R271

33R : C4(7529'), C5(8513'), 33L : B5('), B6(')

15L: C2(7522'), C1(8536'), 15R: B3('), B2(')

34L: P7(5600'), P8(6578'), 34R: N4(6876'), N5(8507')

16R: P6(5597'), P5(6574'), 16L: N3(7043'), N2(8444')

8NM 180kts, 5NM 160kts, Parr TAXI 10kts이상, HIRO

RKSI(ICN) 23ft RJBB(KIX) 17ft									
KE ICN 131.5 DCL-10분 TOBT 5분 차이시 CTC Comm									
	CN : SII	) (33/	34 N	ADP 1	l, 15	/16	NADP	2)	
33L/R	EGO xE/		3	33	3	33	5500 ATO	•	333
34L/R	EGOB	A xY	3	33	3	33	ATC	2	333
15L/R	EGOB	АхС	1	53	1	53	500	0	153
16L/R	EGOB	A xH	1	53	1	53	500	0	153
NC 113		33 109		33 108			5L 1.9		15R 109.1
WN 112		34 109	_	34 108			6L 0.35		
33L/R	: NC05L YJU R2:		.42	34L,	/R :		333/4 R271	1.6	, R242
11115	33L/R	34L(23') 1230			303' 15L/R 16R(23')				
HUD	34R (2	3′)		13123′ 16L (2			(23')		
DEP 12	Parallel							ts)	
KIX RDI									me
KIX API	120.2	5_					#	_	
	KIX:	STAR	(SAE	KI 170	), R/	ANDY	150)		
061	-	ALIS	A B		BER	RY	II	LS	Y 06L
06F	2	ALIS	A A		ALL	AN	Ш	S	Y 06R
24L/	'R	ALIS	A C	1	MAY	/AH	ILS	6 Z	24L/R
HUI	)		<b>06L</b> (1	L5')	131	23′	24R(2	23'	)
			06R(!	5′)	114	83'	<b>24L</b> (1	<b>12</b> ′	)
	06L: B8(5160'), B6(6751'), 24R: B7(5318'), B9(6751') 06R: A7(5137'), A6(6938'), 24L: A8(5269'), A9(6976')								

06R: A7(5137'), A6(6938'), 24L: A8(5269'), A9(6976')

RWY06: After 2500ft L/G DN, After 1500ft L/D FLAP TAXI RTE 1, 2

RJBB(KIX) 17ft RKSI(ICN) 23ft KF KIX 130.95 **KF ICN 131 5** DCL -15분 KIX: SID - SOUJA tx (NADP 1) **ATC** 06L/R 058 058 058 (9000)HFLFN x - SOUIA tx **ATC** 24L/R 238 238 238 (9000)KIE 06L 06R 24L 24R 110.7 111.6 108.7 108.1 108.5 06L(15') 13123' 24R(23') HUD 06R (5') 24L (12') 13123' APU Start, TAXI RTE 1, 2 **DEP 119.2** TKO 132.7 - 133.8 TGU 120.57 APP 119.75 Home ICN: STAR ILS 33/34 GUKDO xF **FNPIL GUKDO 180** ILS 15/16 GUKDO xH MUNAN **GUKDO 180** 15L/R 33L/R 34L(23') 12303'

HUD

34R(23')

FIX RWY /8, /5 , YJU R271

33R : C4(7529'), C5(8513'), 33L : B5('), B6(')

15L : C2(7522'), C1(8536'), 15R : B3('), B2(')

34L: P7(5600'), P8(6578'), 34R: N4(6876'), N5(8507') 16R: P6(5597'), P5(6574'), 16L: N3(7043'), N2(8444') 8NM 180kts, 5NM 160kts, Parr TAXI 10kts이상, HIRO

16R(23')

16L(23')

13123'

RKSI(ICN) 23ft RJAA(NRT) 135ft										
KE ICN 131.5 DCL -10분 TOBT 5분 차이시 CTC Comm										
1	ICN : S	ID (33/	34 N.	ADP 1	, 15	/16	NADP	2)		
33L/R		OBA E/A	3	33	3	33	5500 ATC	333		
34L/R	EGO	BA xY	3	33	3	33	ATC	333		
15L/R	EGO	ВА хС	1	53	1	.53	500	0 153		
16L/R	EGO	ВА хН	1	53	1	.53	500	0 153		
NC		33		331			5L	15R		
113 WN		109 34		108 34I			1.9 6L	109.1 16R		
112		109	_	108	-	_	).35	108.55		
	: NC05 YJU R2	L/R, R2 271	.42	34L/	/R :		333/4 R271	1.6, R242		
	33L/I	R 34L(2	3′)	12303' 15L/R			'R 16I	16R(23')		
HUD	34R (	23')		1312	13123' 16L (23')					
F	Paralle	l TWY 1	OKTS	이상	(R1	7 MA	X 15k	ts)		
DEP 125	i.15 – T	GU 134	.17 –	TKO 1	33.8	3 <del>-</del> 13	3.02			
TKO 132	.45 -1	24.1 <u>–</u> 12	28.2 -	- TKO	APP	124.4	H	ome	•	
NRT : F	IAKKA	330,Y <i>A</i>	AGAN	l 240,	LIVE	ET 21	o,sw	AMP 150		
34L/	'R	SWAI (SWAI			ELG TYL		ILS	34L/R(Z	:)	
16L/	'R	SWAN (SWAN			GEN NOR	/IN :MA)	ILS	S Z 16L/R	ł	
		16L(1	35′)		820	)2'	34	4R(141')		
HUD		16R(1	L <b>30</b> ′)		131	23'	3	4L(139')		
FIX 16L: ITM 4 / 34R: ITJ 14, 4 (DME) 16R: IKF 4 / 34L: IYQ 12, 4 (DME)										
16L : B6(6433'), B7(7017'), 34R : B4(5849'), B2(6778') 16R : A6(6076'), A7(7624'), 34L : A5(6167'), A4(7641')										
•	L/D DOWN before 14/12 DME, L/D FLAP 4 DME Arrival Taxi RTE in Jeppesen (No Numbering)									

RJAA(NRT) 135ft RKSI(ICN) 23ft KE Tokvo 131.70 KF ICN 131 5 DCL -15분 NRT : SID - ENPAR tx (NADP 1) 16L/R 157 157 ATC 157 TFTRA x ENPAR tx 34L/R 337 337 7000/ATC 337 **NRE** 16L 16R 34L 34R 117.9 110.7 111.5 111.9 110.9 16L(135') 8202' 34R(141') HUD 16R (130') 13123 34L (139') 34R: CLB 220/10000, A4R21/22/23 220KTS 확인 Verity ENPAR tx TETRA 12000A APU Start, TAXI RTE 1, 2, 3, 4 RWY 별 DEP RTE **DEP 124.2** TKO 120.5 - 133.45 - 133.02 - 133.8 TGU 120.57 APP 119.75 ome **ICN: STAR** ILS 33/34 **GUKDO xE ENPIL GUKDO 180** ILS 15/16 GUKDO xH MUNAN **GUKDO 180** 15L/R 33L/R 34L(23') 12303 16R(23') HUD 34R(23') 13123' 16L(23') RWY /8, /5, YJU R271 33R : C4(7529'), C5(8513'), 33L : B5('), B6(') 15L: C2(7522'), C1(8536'), 15R: B3('), B2(')

34L: P7(5600'), P8(6578'), 34R: N4(6876'), N5(8507')

16R: P6(5597'), P5(6574'), 16L: N3(7043'), N2(8444')

8NM 180kts, 5NM 160kts, Parr TAXI 10kts이상, HIRO

RKSI(ICN) 23ft RJCC(CTS) 70ft									
KE ICN 131.5 DCL-10분 TOBT 5분 차이시 CTC Comm									
	CN : SI	D (33/	34 N.	ADP 1	, 15	/16 [	NADP	2)	
33L/R	EGC xE		3	33	3	33	5500 ATO	•	333
34L/R	EGOE	BA xY	3	33	3	33	ATO	2	333
15L/R	EGOE	ВА хС	1	53	1	.53	500	0	153
16L/R	EGOE	BA xH	1	53	1	.53	500	0	153
NC 113		33 109	_	33 108			5L 1.9		15R 109.1
WN 112		34 109	-	34R 16 108.1 110.					
	33L/R : NC05L/R, R242 YJU R271 34L/R : WNG333/4.6, R242 YJU R271								
HUD	33L/R	34L(2	3′)	1230	12303' 15L/R			₹(2	23')
מטח	34R (2	23')		1312	3'	16L	(23')		
F	Parallel	TWY 1	LOKTS	이싱	(R1	7 MA	X 15k	ts)	ı
DEP 125			.17 -	TKO	133.	8 – 13	33.45 -	- 1	32.3
SPR 133		1.3					H	D	me
	(	CTS : S	TAR (	(19R f	or C	AT II	)		
01R		TEI SC UKII W					ILS	Y,	/Z 01R
19L	YU	AVER( NEY SO KAOR)	OUTH	KAORY H YUNEY (KAORY)			II	LS	Z 19L
HUD		01R(5 01L(6			984	13′			.(77') R(82')
01R : B4	1(5278	), B3(7	7047	), 19L	: B8	3(517	7′), B	9(7	7119')

01L: A5(5538'), A4(6961'), 19R: A7(5390'), A8(6873')

Do not Cross 01L/19R After L/D (No TWY) TAXI to Gate Via D(J) or G

Chitose Oper 132.05 KF ICN 131 5 NO DCL -5분 CTS: SID (NADP 1) **DAIRIX** 002 002 ATC 002 ALL SLIVIT x 182 182 **ATC** SOSHU x 182 19L CHF 01R 01L 19R 111.5 116.9 110.75 109.35 110.9 19L(77') 01R(57') HUD 9843' 01L(62') 19R(82') APU. Deicing at the Gate R/H turn DCT to HWE -> Confirm R/H Turn ND

**DEP 124.7** SPR 119.3 - TKO 132.3 - 132.45 - 133.8 TGU 120.57

APP 119.75

RJCC(CTS) 70ft

# Home

RKSI(ICN) 23ft

## ICN: STAR

ILS 33/34 GUKDO xF **FNPIL GUKDO 180** 

GUKDO xH MUNAN

ILS 15/16 **GUKDO 180** 

15L/R

33L/R 34L(23') 12303

16R(23')

HUD

34R(23') 13123' 16L(23')

RWY /8, /5, YJU R271

33R: C4(7529'), C5(8513'), 33L: B5('), B6(')

15L: C2(7522'), C1(8536'), 15R: B3('), B2(')

34L: P7(5600'), P8(6578'), 34R: N4(6876'), N5(8507')

16R: P6(5597'), P5(6574'), 16L: N3(7043'), N2(8444')

8NM 180kts, 5NM 160kts, Parr TAXI 10kts이상, HIRO

RKSI(ICN) 23ft RJTT(HND) 21ft										
KE ICN 131.5 DCL -10분 TOBT 5분 차이시 CTC Comm										
	CN : SII	) (33/	34 N	ADP 1	, 15	/16	NADP	2)		
33L/R	EGO xE/		333		3	5500 ATC		•	333	
34L/R	EGOB	A xY	333 3		3	33	ATC		333	
15L/R	EGOB	АхС	<b>153</b> 1		1	.53	5000		153	
16L/R	EGOB	A xH	1	.53 153		500	0	153		
NC 113		33 109	_	33 108		15L 111.9			15R 109.1	
	WNG 112.9		IL 34 .95 108			16L 110.35		1	16R 108.55	
33L/R : NC05L/R, R242 YJU R271 34L/R : WNG333/4.6, R242 YJU R271				, R242						
	33L/R 34L(23')			12303′ 15L		/R 16R(23')				
HUD	34R (23')			13123' 16L		(23')				
Parallel TWY 10KTS 이상(R17 MAX 15kts)										
DEP 125		3U 134	.17 -	- TKO	133.	8 – 13	33.55	- 1	<u>23.9</u>	
TKO 133.35 TKO APP 119.1 – 119.65										
HND: SPENS 220 (Primary STAR, APP)										
34L	OSHI	MA xŀ	(	KAIH	0	ILS X	(			
22	OSHI	MA xE	3	васо	N	LDA W(RNVW 22)		W 22)		
16R	OSH	IMA R		NATT	Υ	RNP (R16RT)		)		
23		-	ı	DANO	N	LDA W(RNVW 23)			W 23)	
	34L(18') 9843			43'		16R(77') 8268'				
HUD	34R(21') 9843'				16L(19') 9744'					
	22/22// 2224				22/55/) 0205/					

22(35') 8202' 23(55') 8202'

34L: L12(6515'), L13(7165'), 22: B4(6207'), B3(6830')

16R: L5(5147'), L3(6361'), 23: D5(5072'), D3(6391')

180kts, 160kts limit APP Chart, GND Freq 차트 있음

RJTT(HND) 21ft RKSI(ICN) 23ft Delta Oper 132.075 KF ICN 131 5 DCL -15분 HND: SID - NADP 1 **RFKI A x RWY** RWY RWY ALL ATC **ΟΡΡΔR x** H/D CRS H/D **HMF** 341 16R **34R** 161 22 23 112.2 111.7 111.55 108.9 111.95 108.1 110.5 34L(18') 9843' 16R(77') 8268' HUD 34R(21') 9843' 16L(19') 9744' 22(35') 8202' 23(55') 8202' 34L: HME 351/1.1, R095, 34R: HME R080, R095, 22: HME /2.2 R185 34R BEKLA: KAIJI 230kts, TORAM Flap5 SPD 16L: BEKLA: PLUTO 230kts CRS 09 **DEP 120.8** TKO 120.5 - 132.45 - 133.02 - 133.8 TGU 120.57 APP 119,75 Home ICN: STAR ILS 33/34 **GUKDO xE ENPIL GUKDO 180** ILS 15/16 GUKDO xH MUNAN **GUKDO 180** 15L/R 33L/R 34L(23') 12303' 16R(23') HUD 34R(23') 13123' 16L(23')

RWY /8, /5, YJU R271

33R : C4(7529'), C5(8513'), 33L : B5('), B6(')

15L: C2(7522'), C1(8536'), 15R: B3('), B2(')

34L: P7(5600'), P8(6578'), 34R: N4(6876'), N5(8507') 16R: P6(5597'), P5(6574'), 16L: N3(7043'), N2(8444') 8NM 180kts, 5NM 160kts, Parr TAXI 10kts이상, HIRO

RKSI(ICN) 23ft RJGG(NGO) 12ft **KE ICN 131.5** SWISSPORT DCL -10분 TOBT 5분 차이시 OPERATION 132 05 CTC Comm ICN: SID (33/34 NADP 1, 15/16 NADP 2) **FGORA** 5500/ 33L/R 333 333 333 xE/A ATC **FGOBA xY** 333 34L/R 333 ATC 333 15L/R EGOBA xC 153 153 5000 153 16L/R EGOBA xH 153 153 5000 153 **NCN** 33L 33R 15L 15R 113.8 109.3 108.9 111.9 109.1 WNG 34L 34R 16L 16R 112.9 109.95 108.1 110.35 108.55 33L/R: NC05L/R, R242 34L/R: WNG333/4.6, R242 **YJU R271** YJU R271 33L/R 34L(23') 15L/R 16R(23') 12303' HUD 34R (23') 13123' 16L (23') Parallel TWY 10KTS 이상(R17 MAX 15kts) **DEP 125.15** TGU 134.17 - TKO 133.8 - 133.02 Home 센트레아 APP - 121.05 NGO: STAR (SAMON 290, MARIA 130)

CHESS(CARDS)

SOUTH
CHESS(CARDS)

NORTH

36: A6(5213'), A7(6525'), A8(7837') 18: A5(5393'), A4(6528'), A3(7841')

36(15')

RWY36: After 1500ft L/D FLAP RWY 18: After 3000ft L/G DN & L/D FLAP Caution Stop line, Yellow Ramp line, VDGS!!!

PROBE

QUEST

11483'

ILS Z 36

**ILS Z 18** 

18(15')

36

18

HUD

SWISSPORT OPERATION **KF ICN 131.5** 132.05 DCL-15분 NGO: SID - TANGO tx (NADP 1) **ATC** 36 356 356 356 (7000)**OUMI x** TANGO tx **ATC** 18 176 176 176 (7000)**CBF 117.8** 36 109.7 18 111.9 HUD 36(15') 11483' 18(15') APU Start 30min, Prepare Intersection T/O **DEP 120.0** TKO 133.55 - 133.8 - TGU 120.52 APP - 119.75 Home ICN: STAR ILS 33/34 **GUKDO xE ENPIL GUKDO 180** ILS 15/16 GUKDO xH MUNAN **GUKDO 180** 15L/R

33L/R 34L(23')

34R(23')

FIX RWY /8, /5 , YJU R271

33R : C4(7529'), C5(8513'), 33L : B5('), B6(')

15L : C2(7522'), C1(8536'), 15R : B3('), B2(')

34L: P7(5600'), P8(6578'), 34R: N4(6876'), N5(8507') 16R: P6(5597'), P5(6574'), 16L: N3(7043'), N2(8444') 8NM 180kts, 5NM 160kts, Parr TAXI 10kts이상, HIRO

HUD

12303'

13123'

16R(23')

16L(23')

RJGG(NGO) 12ft RKSI(ICN) 23ft

RKSS(GMP) 59ft ZSSS(SHA) 10ft KE GMP 131.15 China Eastern 131.5 DCL -15분 가능 TOBT 5분 차이 시 CTC Comm Rwv 32R Takeoff (06:00L~0900L / 12:00L~15:00L /18:00L~21:00L) GMP: SID (NADP 1) BULTI xT 324 324 5000 324 32L/R 324 324 5000 324 (BULTI xO) **BULTI xU** 144 144 6000 144 14L/R (BULTI xZ) 144 144 6000 144 KIP 32L 32R 14L 14R 113.6 108.3 110.7 109.9 108.7 14L/R: KIP144/4, R220 32L/R: KIP324/5, R220 YIU R271 P73 /2 32L(41') 10499' 14R(34') HUD 14L(38') 32R(42') 11811' APRON(130.875) -> GND(121.9) -> TWR (All by ATC) CJU 124.52 Home SHA 120.95 SHA APP - 125.625 - 125.4 - 126.65 SHA: STAR ILS Z 18L **PUD 61A** SS204 above 2960ft PUD ORH Below 2960ft SHA QRH ILS Z 36R **PUD 71A** SS405

HUD 18L(6') 10499' 36R(9')

18L: A3(6555'), A4(7578') 36R: A2(5738'), A1(7089')

Traffic PTN West of RWY, Landing East RWY Normally Des 550m (1800ft)

L08. L09 not available B737 Shall CTC Apron Before Entering

### ☐ China, Mongolia & North Korea

■ FL Conversion

west	ouna		Eastbound		
(180° ~	359°)		(360° ~	- 179°)	
			13700 M	44900 FT	
13100 M	43000 FT		12500 M	41100 FT	
12200 M	40100 FT		11900 M	39100 FT	
11600 M	38100 FT		11300 M	37100 FT	
11000 M	36100 FT		10700 M	35100 FT	
10400 M	34100 FT		10700 101	3310011	
			10100 M	33100 FT	
9800 M	32100 FT		9500 M	31100 FT	
9200 M	30100 FT		8900 M	29100 FT	
8400 M	27600 FT		8100 M	26600 FT	
7800 M	25600 FT		7500 M	24600 FT	
7200 M	23600 FT				
2222 11	04700 57		6900 M	22600 FT	
6600 M	21700 FT		6300 M	20700 FT	
6000 M	19700 FT		5700 M	18700 FT	
5400 M	17700 FT		5100 M	16700 FT	
4800 M	15700 FT		5100 W	16/00 F1	
			4500 M	14800 FT	
4200 M	13800 FT		3900 M	12800 FT	
3600 M	11800 FT	TL	3300 M	10800 FT	
3000 M	9800 FT	TΑ	2700 M	8900 FT	

Meter/Feet Conversion Table

1200 M 3900 FT ALT / HEIGHT Conversion

7900 FT

5900 FT

Feet

3300 FT

3000 FT

2600 FT

2300 FT

2400 M

1800 M

Meter

1000 M

900 M

800 M

700 M

1500 M 4900 FT

6900 FT

1800ft

Feet

1600FT

1500FT

1300 FT

1100 FT

1000 FT

2100 M

550M

Meter

500M

450M

400 M

350 M

		000
600 M	2000 FT	300 M
600 M	2000 F1	300 IVI





32L/R: 8 KIP L/G, 14R: LOC CAPT L/G

TWR -> GND -> APRON (All by ATC) Except RWY14R Landing (Until R)

FAF: Final Flap

### RKSS(GMP) 59ft RJBB(KIX) 17ft KE GMP 131.15 DCL -15분 가능 TOBT 5분 차이 KF KIX 130 95 시 CTC Comm Rwv 32R Takeoff (06:00L~0900L / 12:00L~15:00L /18:00L~21:00L) GMP: SID (NADP 1) FGOBA xT 324 324 5000 324 32L/R (EGOBA xQ) 324 324 5000 324 14L/R EGOBA xU 144 144 6000 144 KIP 321 141 14R 32R 113.6 108.3 110.7 109.9 108.7 32L/R: KIP324/5, R220 14L/R: KIP144/4, R220 P73 /2 **YJU R271** 32L(41') 10499' 14R(34') HUD 32R(42') 11811' 14L(38') APRON(130.875) -> GND(121.9) -> TWR (All by ATC) DEP 125.15 - TGU 134.17 - TKO 133.8 KIX APP 120.25 KIX: STAR (SAEKI 170, RANDY 150) 061 ALISA B RFRRY ILS Y 06L 06R ALISA A ALLAN ILS Y 06R 24L/R ALISA C ILS Z 24L/R MAYAH 06L(15') 13123' 24R(23') HUD 06R(5') 11483' 24L(12') 06L: B8(5160'), B6(6751'), 24R: B7(5318'), B9(6751') 06R: A7(5137'), A6(6938'), 24L: A8(5269'), A9(6976') RWY06: After 2500ft L/G DN, After 1500ft L/D FLAP

TAXI RTE 1. 2

RJBB(KIX) 17ft | RKSS(GMP) 59ft KF KIX 130 95 KE GMP 131.15 DCL -15분 **Rwy 32L Landing** (06:00L~0900L / 12:00L~15:00L /18:00L~21:00L) KIX: SID - SOUJA tx (NADP 1) ATC 06L/R 058 058 058 (9000)HFI FN x - SOUIA tx ATC 24L/R 238 238 238 (9000)KIF 061 06R 241 24R 111.6 108.7 108.1 110.7 108.5 06L(15') 24R(23') 13123' HUD 06R (5') 24L (12') 13123' APU Start, TAXI RTE 1, 2 **DEP 119.2** TKO 132.7 - 133.8 TGU 120.57 Home APP 119.75 **GMP: STAR** 

ILS 32L/R

ILS 14R

HUD

14R: C1(6578')

FAF: Final Flap

**GUKDO xT** 

GUKDO xU

32L(41')

32R(42')

32L: D3(6532'), E2(9117'), 32R: E1(6614')

32L/R: 8 KIP L/G, 14R: LOC CAPT L/G

TWR -> GND -> APRON (All by ATC) Except RWY14R Landing (Until R)

BUMSI

DOKDO

10499'

11811'

KIP /8(RWY 32), YJU R271, P73 /2

**OLMFN 160** 

**OLMEN 160** 

14R(34')

14L(38')



01(84') 12467' 19(94') 3.2도 HUD 36L(107') 10499' 18R(115')

FIX: RWxx /8(180kts), /6(160kts) TMA Max 280kts 01: Q5(5223'), Q6(7024'), 19: Q4(5298'), Q3(7103')

36L: P6(6276'), P7(7719'), 18R: P3(6223'), P2(7552') APU off Procedure (GND Air Cond' & GPU)

Standard TAXI RTE in Jeppesen Chart

### ☐ China, Mongolia & North Korea

■ FL Conversion

west	ouna		Eastbound		
(180° ~	359°)		(360° ~	- 179°)	
			13700 M	44900 FT	
13100 M	43000 FT		12500 M	41100 FT	
12200 M	40100 FT		11900 M	39100 FT	
11600 M	38100 FT		11300 M	37100 FT	
11000 M	36100 FT		10700 M	35100 FT	
10400 M	34100 FT		10700 101	3310011	
			10100 M	33100 FT	
9800 M	32100 FT		9500 M	31100 FT	
9200 M	30100 FT		8900 M	29100 FT	
8400 M	27600 FT		8100 M	26600 FT	
7800 M	25600 FT		7500 M	24600 FT	
7200 M	23600 FT				
2222 11	04700 57		6900 M	22600 FT	
6600 M	21700 FT		6300 M	20700 FT	
6000 M	19700 FT		5700 M	18700 FT	
5400 M	17700 FT		5100 M	16700 FT	
4800 M	15700 FT		5100 W	16/00 F1	
			4500 M	14800 FT	
4200 M	13800 FT		3900 M	12800 FT	
3600 M	11800 FT	TL	3300 M	10800 FT	
3000 M	9800 FT	TΑ	2700 M	8900 FT	

Meter/Feet Conversion Table

1200 M 3900 FT ALT / HEIGHT Conversion

7900 FT

5900 FT

Feet

3300 FT

3000 FT

2600 FT

2300 FT

2400 M

1800 M

Meter

1000 M

900 M

800 M

700 M

1500 M 4900 FT

6900 FT

1800ft

Feet

1600FT

1500FT

1300 FT

1100 FT

1000 FT

2100 M

550M

Meter

500M


450M

400 M

350 M

		000
600 M	2000 FT	300 M
600 M	2000 F1	300 IVI



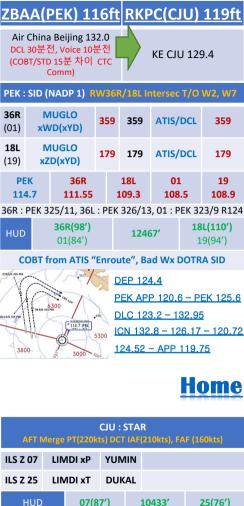

07: P6(5176'), P5(5882'), P4(6840'-ATC HIRO)
25: P7(5219'), P8(5882'), P10(7524'-ATC HIRO)
Entering Rapid TWY CTC GND 121.675 (STOP x)
HST 40KTS

RKSI(ICN) 23ft ZSNJ(NKG) 49ft **KE ICN 131.5** None DCL -10분 TOBT 5분 차이시 CTC Comm ICN: SID (33/34 NADP 1, 15/16 NADP 2) 33L/R **BOPTA XA** 333 333 ATC 333 34L/R ROPTA xY 333 333 ATC 333 15L/R **BOPTA xC** 153 153 5000 153 16L/R **BOPTA xH** 153 153 5000 153 33L 33R 15L 15**R NCN** 113.8 109.3 108.9 111.9 109.1 WNG 34L 34R 16L 16R 112.9 109.95 108.1 110.35 108.55 33L/R: NC05L/R, R242 34L/R: WNG333/4.6. R242 **YJU R271** YJU R271 33L/R 34L(23') 12303' 15L/R 16R(23') HUD 16L (23') 34R (23') 13123' Parallel TWY 10KTS 이상(R17 MAX 15kts) DEP 125.15 - TGU 126.17 - 120.72 - 124.52(125.72) SHA 120.95 - 120.55 - 125.95 - 119.075 NKG APP 126.55 - 119.25 NKG: STAR ('D' N31 34.0 E118 42.1 - R101, R289) ESB 71F/21A **ILS Z 07** 07 SNQ (06)(ESB 61F/11A) (ILS Z 06) 25 ESB 52F/22A ILS Z 25 NJ210 (ILS Z 24) (24)(ESB 42F/12A) 07(41') 11811' 25(39') HUD 06(43') 11811' 24(38') 07: D5(6499'), D6(7582'), 25: D2(6505'), D1(7582') 06: A5(6614'), A6(7860'), 24: A3(6637'), A9(7864') IAF, Missed App SPD APP: 210kts or 205kts

Follow Me Car on C 13, APU off Procedure

■ FL Conversion Westbound

(180° ~	359°)		(360°	~ 179°)
			13700 M	44900 FT
13100 M	43000 FT		12500 M	41100 FT
12200 M	40100 FT		11900 M	39100 FT
11600 M	38100 FT		11300 M	37100 FT
11000 M	36100 FT		10700 M	35100 FT
10400 M	34100 FT		10100 M	33100 FT
9800 M	32100 FT			
9200 M	30100 FT		9500 M	31100 FT
			8900 M	29100 FT
8400 M	27600 FT		8100 M	26600 FT
7800 M	25600 FT		7500 M	24600 FT
7200 M	23600 FT		6900 M	22600 FT
6600 M	21700 FT		6300 M	20700 FT
6000 M	19700 FT		5700 M	18700 FT
5400 M	17700 FT		5100 M	
4800 M	15700 FT		5100 M	16700 FT
			4500 M	14800 FT
4200 M	13800 FT		3900 M	12800 FT
3600 M	11800 FT	TL	3300 M	10800 FT
3000 M	9800 FT	TΑ	2700 M	8900 FT
2400 M	7900 FT		2100 M	6900 FT
		1		3000.

Eastbound

### 1200 M 3900 FT ■ ALT / HEIGHT Conversion

5900 FT

Feet

3300 FT

3000 FT

2600 FT

1800 M

Meter

1000 M

900 M

800 M

1500 M

550M

Meter

500M

450M

400 M

4900 FT 1800ft

Feet

1600FT

700 M	2300 FT	350 M
600 M	2000 FT	300 M

1500FT 1300 FT 1100 FT 1000 FT

ZSNJ(NKG) 49ft RKSI(ICN) 23ft None **KF ICN 131 5** DCL 가능. READ BACK! NKG: SID (NADP 1) 06 ESB 61X/11D 3000 064 064 064 (ESB 71X/21D) (900m) (07)24 ESB 42X/12D 3000 244 244 244 (25)(ESB 52X/22D) (900m) 25 06 24 07 **NJL 113.6** 111.3 108.7 110.3 110.9 06(43') 24(38') HUD 11811' 07(41') 25(39') APU Start, TUG Connect After Beacon L/T ON **DEP 119.25** NKG APP 126.55 SHA 119.075 - 125.95 - 120.55 - 120.95 ICN 125.725(124.52) - 120.72 - 126.17 APP - 119.75 Home **ICN: STAR ENPIL OLMEN 180** 

OLMEN xE

ILS 33/34 ILS 15/16

OLMFN xH HUD

33L/R 34L(23')

34R(23')

RWY /8, /5, YJU R271

MUNAN

12303'

13123' 33R : C4(7529'), C5(8513'), 33L : B5('), B6(')

16R(23') 16L(23')

**OLMFN 180** 15L/R

15L: C2(7522'), C1(8536'), 15R: B3('), B2(') 34L: P7(5600'), P8(6578'), 34R: N4(6876'), N5(8507') 16R: P6(5597'), P5(6574'), 16L: N3(7043'), N2(8444') 8NM 180kts, 5NM 160kts, Parr TAXI 10kts이상, HIRO

RKSI(ICN) 23ft ZSQD(TAO) 30ft **KE ICN 131.5** None DCL -10분 TOBT 5분 차이시 CTC Comm ICN: SID (33/34 NADP 1, 15/16 NADP 2) 33L/R NOPIK xA 333 333 ATC 333 34L/R NOPIK xY 333 333 ATC 333 BINIL xC 15L/R 153 153 5000 153 16L/R BINII xH 153 153 5000 153 **NCN** 33L 33R 15L 15R 113.8 109.3 108.9 111.9 109.1 34L WNG 34R 16L 16R 112.9 109.95 108.1 110.35 108.55 33L/R: NC05L/R, R242 34L/R: WNG333/4.6, R242 P518 R068, R278 P518 R068, R278 33L/R 34L(23') 12303' 15L/R 16R(23') HUD 34R (23') 13123' 16L (23') Parallel TWY 10KTS 이상(R17 MAX 15kts) DEP 125.15 - TGU 132.8 - DLC 132.95 TAO 134.85 - 133.72 - 134.85 Home TAO APP 124.6 - 119.4 TAO: STAR (AVBIK R014 - LAROP R159 동쪽 금지)

LAT 91A/01A

LAT 81A/11A

FIX : AVBIK R014, LAROP R159 (두점 연결)
35 : S2(5255'), S4(6624'), 17 : S1(5282'), S3(6604')
34 : R2(5278'), R4(6650'), 16 : R1(5318'), R3(6706')
위 Vacate Point 불가시 TWR 보고
Follow Me Car on Lxx, APU off Procedure

35(27')

34(27')

JD405

ID305

11811'

11811'

ILS Z 35(34)

ILS Z 17(16)

17(29')

16(27')

**35**(34)

**17**(16)

HUD

■ FL Conversion Westbound

(180° ~	359°)		(360°	~ 179°)
			13700 M	44900 FT
13100 M	43000 FT		12500 M	41100 FT
12200 M	40100 FT		11900 M	39100 FT
11600 M	38100 FT		11300 M	37100 FT
11000 M	36100 FT		10700 M	35100 FT
10400 M	34100 FT		10100 M	33100 FT
9800 M	32100 FT			
9200 M	30100 FT		9500 M	31100 FT
			8900 M	29100 FT
8400 M	27600 FT		8100 M	26600 FT
7800 M	25600 FT		7500 M	24600 FT
7200 M	23600 FT		6900 M	22600 FT
6600 M	21700 FT		6300 M	20700 FT
6000 M	19700 FT		5700 M	18700 FT
5400 M	17700 FT		5100 M	
4800 M	15700 FT		5100 M	16700 FT
			4500 M	14800 FT
4200 M	13800 FT		3900 M	12800 FT
3600 M	11800 FT	TL	3300 M	10800 FT
3000 M	9800 FT	TΑ	2700 M	8900 FT
2400 M	7900 FT		2100 M	6900 FT
		1		3000.

Eastbound

### 1200 M 3900 FT ■ ALT / HEIGHT Conversion

5900 FT

Feet

3300 FT

3000 FT

2600 FT

1800 M

Meter

1000 M

900 M

800 M

1500 M

550M

Meter

500M

450M

400 M

4900 FT 1800ft

Feet

1600FT

700 M	2300 FT	350 M
600 M	2000 FT	300 M

1500FT 1300 FT 1100 FT 1000 FT

ZSC	D(	TAO) 3	01	f <u>t</u>	RK	SI(IC	CN)	23ft
	L 가능	None 5, READ BAC 10분전 부터				KE ICI	N 13:	1.5
		TAC	) : S	ID	(NADP	1)		
<b>34</b> (35)	LAT	91D/01D	35	0	350	ATC 3 (900		350
<b>16</b> (17)	LAT	81D/11D	17	0	170	ATC 3 (900		170
JD 114	_	17 110.15			35 )9.75	16 111		34 108.55
HUD		<b>34(27')</b> 35(27')			1181	11'		. <b>6(27')</b> .7(29')
Не	- eadin	g 190, Join	W	209	-> DC	T LATU	JX CR	S 147
TAO TAO	134.	4 124.6 85 – 133.7 3 – APP 11			_C 132	2.9 <u>5</u>	He	<u>ome</u>
			ICI	N:	STAR			
ILS 33	3/34	REBIT	xΑ		P/	AMBI	RE	BIT 170
ILS 15	/16	REBIT	хН		MU	JNAN	RE	BIT 170
HU	D	33L/R 34	L(2	3′)	12	2303′		15L/R 6R(23')
		34R(2	3')		13	3123′	1	.6L(23')
FD	K	RWY /8, /	5 , F	251	8 R068	8, R278		
		529'), C5(8 522'), C1(8		•				
341 .	D7/5/	500') P8(6	57º	ኅ :	24R · N	14(6874	') N	5(85074)

34L: P7(5600'), P8(6578'), 34R: N4(6876'), N5(8507')

16R: P6(5597'), P5(6574'), 16L: N3(7043'), N2(8444')

8NM 180kts, 5NM 160kts, Parr TAXI 10kts이상, HIRO

RKSI(ICN) 23ft ZBAA(PEK) 116ft **KF ICN 131 5** Air China Beijing DCL -10분 TOBT 5분 차이시 132.0 CTC Comm ICN: SID (33/34 NADP 1, 15/16 NADP 2) NOPIK xA 33L/R 333 333 ATC 333 34L/R NOPIK xY 333 222 ATC 333 15L/R BINIL xC 153 153 5000 153 16L/R BINIL xH 153 153 5000 153 NCN 33L 33R 15L 15R 113.8 109.3 108.9 111.9 109.1 WNG 34L 34R 16L 16R 112.9 109.95 108.1 110.35 108.55 33L/R: NC05L/R, R242 34L/R: WNG333/4.6, R242 P518 R068, R278 P518 R068, R278 33L/R 34L(23') 15L/R 16R(23') 12303' HUD 13123' 34R (23') 16L (23') Parallel TWY 10KTS 이상(R17 MAX 15kts) DEP 125.15 - TGU 132.8 - DLC 132.95 TAO 133.72 - 128.15 - PEK 125.6 Home PEK APP 120.6 - Final 119.0 PEK: STAR (RW01/19 main (RW36L/18R)) 01(36L) **AA421** ILS Z 01(Y 36L) DUMAP xZA 19(18R)) DUMAP xZA **AA521** ILS Z 19(Y 18R) 19(94') 3.2도 01(84') 12467' HUD 36L(107') 10499' 18R(115') FIX: RWxx /8(180kts), /6(160kts) TMA Max 280kts 01: Q5(5223'), Q6(7024'), 19: Q4(5298'), Q3(7103') 36L: P6(6276'), P7(7719'), 18R: P3(6223'), P2(7552')

> APU off Procedure (GND Air Cond' & GPU) Standard TAXI RTE in Jeppesen Chart

■ FL Conversion Westbound

(180° ~	359°)		(360°	~ 179°)
			13700 M	44900 FT
13100 M	43000 FT		12500 M	41100 FT
12200 M	40100 FT		11900 M	39100 FT
11600 M	38100 FT		11300 M	37100 FT
11000 M	36100 FT		10700 M	35100 FT
10400 M	34100 FT		10100 M	33100 FT
9800 M	32100 FT			
9200 M	30100 FT		9500 M	31100 FT
			8900 M	29100 FT
8400 M	27600 FT		8100 M	26600 FT
7800 M	25600 FT		7500 M	24600 FT
7200 M	23600 FT		6900 M	22600 FT
6600 M	21700 FT		6300 M	20700 FT
6000 M	19700 FT		5700 M	18700 FT
5400 M	17700 FT		5100 M	
4800 M	15700 FT		5100 M	16700 FT
			4500 M	14800 FT
4200 M	13800 FT		3900 M	12800 FT
3600 M	11800 FT	TL	3300 M	10800 FT
3000 M	9800 FT	TΑ	2700 M	8900 FT
2400 M	7900 FT		2100 M	6900 FT
		1		3000.

Eastbound

### 1200 M 3900 FT ■ ALT / HEIGHT Conversion

5900 FT

Feet

3300 FT

3000 FT

2600 FT

1800 M

Meter

1000 M

900 M

800 M

1500 M

550M

Meter

500M

450M

400 M

4900 FT 1800ft

Feet

1600FT

700 M	2300 FT	350 M
600 M	2000 FT	300 M

1500FT 1300 FT 1100 FT 1000 FT

ZBA	A(I	PEK) 1:	16 <sup>-</sup>	ft	RK	SI(IC	N)	23ft	
Air DCL	China 30분? 3T/STI	a Beijing 13 전, Voice 10 ) 15분 차이 Comm)	32.0 분전	Ę		KE ICN			
PEK:	SID (	NADP 1) R	W3	6R/	18L lr	ntersec	T/O	W2, W7	
<b>36R</b> (01)		/IUGLO VD(xYD)	35	9	359	ATIS/	DCL	359	
<b>18L</b> (19)		/IUGLO !D(xYD)	17	9	179	ATIS/	DCL	179	
PE 114	1.7	36R 111.55	· DI	10	8L 19.3	01 108	.5	19 108.9	
HUD		36R(98') 01(84')	: Pi	:K 5	1246		18	23/9 R124 8 <b>L(110')</b> .9(94')	
D13678-326 PEX	COBT from ATIS "Enroute", Bad Wx DOTRA SID  DEP 124.4  PEK APP 120.6 – PEK 125.6  DLC 123.2 – 132.95  ICN 132.8 – APP 119.75  HOME								
			ICI	N : S	TAR				
ILS 33	3/34	REBIT	хА		PA	AMBI	RE	BIT 170	
ILS 15	5/16	REBIT	хН		MU	JNAN	RE	BIT 170	
HU	JD	33L/R 34	L(2	3′)	12	2303'		15L/R 6R(23')	
		34R(2	3')		13	<b>13123</b> ′ 1		6L(23')	
FD	X	RWY /8, /	5 , F	'518	R068	8, R278			
33R : C4(7529'), C5(8513'), 33L : B5('), B6(') 15L : C2(7522'), C1(8536'), 15R : B3('), B2(')									
		600'), P8(69 597'), P5(6		-					
0	8NM 180kts, 5NM 160kts, Parr TAXI 10kts이상, HIRO								

RKS	I(ICN	J) 2:	3ft	Z	YT)	K(S	HE)	1	<u>98ft</u>
KE ICN 131.5 DCL -10분 TOBT 5분 차이시 CTC Comm 131.5									
ı	ICN : SIE	) (33/	34 N	ADP 1	1, 15	/16	NADP	2)	
33L/R	NOPII	КхА	3	33	3	33	ATO		333
34L/R	NOPI	K xY	3	33	3	33	ATC	:	333
15L/R	BINIL	L xC	1	.53	1	53	500	0	153
16L/R	BINIL	.xH	1	.53	1	53	500	0	153
NC 113		33 109	-	33 108			5L .1.9	:	15R 109.1
WN 112		34 109	_	34 108		_	6L 0.35	1	16R 108.55
*	: NC05L .8 R068,			34L,	•		333/4 068, R		, R242 8
HUD	33L/R	34L(2	3')	1230	)3 <b>'</b>	15L,	/R 16I	R(2	3')
НОБ	34R (2	3')		1312	23'	16L	(23')		
F	Parallel <sup>*</sup>	TWY 1	LOKTS	s 이싱	<sup>l</sup> (R1	7 MA	X 15k	ts)	
DEP 12	5.15 -	TGU 1	132.8	3 – DL	C 1	32.9	<u>5 – 13</u>	35.	<u>65</u>
DLC 13									
SHE AP	'P 125.	<u>55 – 1</u>	9.82	<u>'5- T\</u>	<b>W</b> R	118.	H	D	me
	STAR (								
06		SID 62	•		TX5			5 Z	
24	TOS	SID 72.			TX6			S Z	
HUD		06(17			0499		24(1		•
	TOSID								
06 : D(6	•	•	**			•			
Ut	5: HP06	ı(03), <sub>4</sub>	24 : ⊦	1P06(1	03) t	ollo	w Me	Ca	r

APU off Procedure (GND Air Cond' & GPU)

Confirm Chocks in Place then Parking Brake Release!!

■ FL Conversion Westbound

(180° ~	359°)		(360°	~ 179°)
			13700 M	44900 FT
13100 M	43000 FT		12500 M	41100 FT
12200 M	40100 FT		11900 M	39100 FT
11600 M	38100 FT		11300 M	37100 FT
11000 M	36100 FT		10700 M	35100 FT
10400 M	34100 FT		10100 M	33100 FT
9800 M	32100 FT			
9200 M	30100 FT		9500 M	31100 FT
			8900 M	29100 FT
8400 M	27600 FT		8100 M	26600 FT
7800 M	25600 FT		7500 M	24600 FT
7200 M	23600 FT		6900 M	22600 FT
6600 M	21700 FT		6300 M	20700 FT
6000 M	19700 FT		5700 M	18700 FT
5400 M	17700 FT		5100 M	
4800 M	15700 FT		5100 M	16700 FT
			4500 M	14800 FT
4200 M	13800 FT		3900 M	12800 FT
3600 M	11800 FT	TL	3300 M	10800 FT
3000 M	9800 FT	TΑ	2700 M	8900 FT
2400 M	7900 FT		2100 M	6900 FT
		1		3000.

Eastbound

### 1200 M 3900 FT ■ ALT / HEIGHT Conversion

5900 FT

Feet

3300 FT

3000 FT

2600 FT

1800 M

Meter

1000 M

900 M

800 M

1500 M

550M

Meter

500M

450M

400 M

4900 FT 1800ft

Feet

1600FT

700 M	2300 FT	350 M
600 M	2000 FT	300 M

1500FT 1300 FT 1100 FT 1000 FT

ZYTX(SHE) 198ft RKSI(ICN) 23ft China Southern Dispatch 131.5 **KE ICN 131.5** DCL 가능, 5분전 READ BACK! (Voice 10분전) SHE: SID (NADP 1) A2, A8 Intersec T/O by ATC **TOSID 61,62D** ATC/DCL 06 056 056 056 24 **TOSID 71.72D** 236 236 ATIS/DCL 236 **SEY 114.1** 06 110.5 24 110.3 06(170') HUD 10499' 24(198') Follow FollowMe Car Until HPxx Be Careful "Hold short CAT I Hold line" Maintain Present TRK/HDG Join A588(CRS 217) Offset R3 → Active Fix DCT and EXE again!! CTC APP without TWR Instruction APP 119.825 - 125.55 DLC 134.325 - 135.65 DLC 132.95 ICN 132.8 - APP 119.75 Home **ICN: STAR** ILS 33/34 REBIT xA PAMBI REBIT 170 ILS 15/16 RFBIT xH MUNAN RFBIT 170 15L/R 33L/R 34L(23') 12303' 16R(23') HUD 34R(23') 13123' 16L(23') RWY /8, /5, P518 R068, R278 33R : C4(7529'), C5(8513'), 33L : B5('), B6(') 15L: C2(7522'), C1(8536'), 15R: B3('), B2(') 34L: P7(5600'), P8(6578'), 34R: N4(6876'), N5(8507')

16R: P6(5597'), P5(6574'), 16L: N3(7043'), N2(8444') 8NM 180kts, 5NM 160kts, Parr TAXI 10kts이상. HIRO

RKS	I(ICN	1) 23	3ft	ZS	SP	D(P	vG	<u>) 13ft</u>
	E ICN 1 0분 TOBT CTC Con	5분 차(	기시	7	C		East 30.5	ern
	ICN : SIE	) (33/	34 N	ADP 1	, 15	/16 [	NADP	2)
33L/R	ВОРТ	АхА	3	33	3	33	ATC	333
34L/R	ВОРТ	A xY	3	33	3	33	ATC	333
15L/R	ВОРТ	A xC	1	53	1	53	5000	0 153
16L/R	ВОРТ	A xH	1	53	1	53	5000	0 153
NC 113		33 109	_	33F 108.	-	_	5L 1.9	15R 109.1
WN 112		34 109	-	34F 108.	-	_	6L 0.35	16R 108.55
•	: NC05L YJU R27		.42	34L/	'R : '		333/4 R271	1.6, R242
HUD	33L/R	34L(2	3')	1230	3′	15L,	/R 16F	R(23')
- חטט	34R (2	3')		13123' 16L (23')				
F	Parallel <sup>*</sup>	TWY 1	OKTS	이상	(R1	7 MA	X 15k	ts)
DEP 12	<u>5.15 – 1</u>	rgu 1	26.1	7 – 12	20.7	72 – 1	124.5	2(125.72)
SHA 12			105				H	ome
SHA AP					<b>5</b> / 1	2.27/	-	
	: STAR							
34R(L)/	, ,			1/92A		MP2		ILS Z xx
16L(R)/	17R(L)			1/82A		MP1		ILS Z xx
	10	34K/	•					R(12'/11')
HU	ID			(10') 12')		3123′ 155′	17R	L10')
	•	•	6896	'), 16L	: G	3(55	77'), G	62(6909') 92(6942')
Follow	Me Car		•	DUME AXI L/				Procedure

■ FL Conversion Westbound

(180° ~ 359° )			(360°	~ 179°)
			13700 M	44900 FT
13100 M	43000 FT		12500 M	41100 FT
12200 M	40100 FT		11900 M	39100 FT
11600 M	38100 FT		11300 M	37100 FT
11000 M	36100 FT		10700 M	35100 FT
10400 M	34100 FT		10100 M	33100 FT
9800 M	32100 FT			
9200 M	30100 FT		9500 M	31100 FT
			8900 M	29100 FT
8400 M	27600 FT		8100 M	26600 FT
7800 M	25600 FT		7500 M	24600 FT
7200 M	23600 FT		6900 M	22600 FT
6600 M	21700 FT		6300 M	20700 FT
6000 M	19700 FT		5700 M	18700 FT
5400 M	17700 FT		5100 M	
4800 M	15700 FT		5100 M	16700 FT
			4500 M	14800 FT
4200 M	13800 FT		3900 M	12800 FT
3600 M	11800 FT	TL	3300 M	10800 FT
3000 M	9800 FT	TΑ	2700 M	8900 FT
2400 M	7900 FT		2100 M	6900 FT
		1	210011	330011

Eastbound

### 1200 M 3900 FT ■ ALT / HEIGHT Conversion

5900 FT

Feet

3300 FT

3000 FT

2600 FT

1800 M

Meter

1000 M

900 M

800 M

1500 M

550M

Meter

500M

450M

400 M

4900 FT 1800ft

Feet

1600FT

700 M	2300 FT	350 M
600 M	2000 FT	300 M

1500FT 1300 FT 1100 FT 1000 FT

ZSPD(PVG) 13ft RKSI(ICN) 23ft China Fastern 130 5 **KF ICN 131 5** DCL 20분전, No READ BACK! PVG: SID (NADP 1) 34L/R **IAM 92D ATC** 348 348 348 35R/L (LAM 91D) (900m) 16R/L **LAM 82D** ATC 168 168 168 17L/R (LAM 81D) (900m) 34R 34L 35R 35L 108.1 108.9 108.3 111.9 **PUD 116.9** 16L 16R 17L 17R 111.5 111.1 108.7 110.7 34R/L(11'/12') 12467' 16L/R(12'/11') HUD 35R(10') 13123 17L(10') 35L(12') 11155' 17R(12') APU Start, TUG Connect After Beacon L/T ON Ready for Intersection T/O SHA APP 125.24 (Without Instruction) SHA APP 119.975 SHA 120.95

ICN 125.725(124.52) - 120.72 - 126.17 APP - 119.75

OLMEN xE

OLMFN xH

33L/R 34L(23')

34R(23')

RWY /8, /5, YJU R271 33R : C4(7529'), C5(8513'), 33L : B5('), B6(') 15L: C2(7522'), C1(8536'), 15R: B3('), B2(')

ILS 33/34

ILS 15/16

HUD

**ICN: STAR** 

**ENPIL** 

MUNAN

12303'

13123'

**OLMEN 180** 15L/R

**OLMFN 180** 

16R(23')

16L(23')

34L: P7(5600'), P8(6578'), 34R: N4(6876'), N5(8507') 16R: P6(5597'), P5(6574'), 16L: N3(7043'), N2(8444') 8NM 180kts, 5NM 160kts, Parr TAXI 10kts이상, HIRO

ZYYJ(YNJ) 624ft RKSI(ICN) 23ft **KE ICN 131.5** None DCL -10분 TOBT 5분 차이시 CTC Comm ICN: SID (33/34 NADP 1, 15/16 NADP 2) NOPIK xA 33L/R 333 333 ATC 333 34L/R NOPIK xY 222 222 ATC 333 15L/R BINIL xC 153 153 5000 153 16L/R BINIL xH 153 153 5000 153 NCN 33L 33R 15L 15R 113.8 109.3 108.9 111.9 109.1 16L WNG 34L 34R 16R 112.9 109.95 108.1 110.35 108.55 33L/R: NC05L/R, R242 34L/R: WNG333/4.6, R242 P518 R068, R278 P518 R068, R278 33L/R 34L(23') 15L/R 16R(23') 12303' HUD 13123' 16L (23') 34R (23') Parallel TWY 10KTS 이상(R17 MAX 15kts) DEP 125.15 - TGU 132.8 - DLC 132.95 - 135.65 128.77 - SHE 119.3 - 118.9 ome YNJ TWR 118.75 YNJ: RNP STAR (RW09 main for L/D) CHK NAV DATA for Holding Area(Expect Hold Mil Train) KANVU 09A Y1504 09 **ILS Z 09** (OMBAD 09A) Report KANVU 19(18,17)A YJ604 **ILS Z 27** 27 (OMBAD 19(18)A) Report HUD 27(597') 3.3도 09(621') 8530' FIX: DPRKK(N43 01.6/E129 52.0) R100, R200 RWY27 /12 (Do not overshoot 12DME ARC) 09: 180 BACK(8530'). 27 : B(7400'), A (8350') Expect Hold Due to Military Training Time(ADD FUEL) PAX Window must closed Between APP and DEP.

### Meter/Feet Conversion Table □ China, Mongolia & North Korea FL Conversion Westbound

359°

13100 M 43000 FT

(180°

13100 M	43000 FT		12500 M			
12200 M	40100 FT		11900 M			
11600 M	38100 FT		11300 M			
11000 M	36100 FT		10700 M			
10400 M	34100 FT		10100 M			
9800 M	32100 FT		9500 M			
9200 M	30100 FT		8900 M			
8400 M	27600 FT		8100 M			
7800 M	25600 FT		7500 M			
7200 M	23600 FT		6900 M			
6600 M	21700 FT					
			6300 M			
6000 M	19700 FT		5700 M			
5400 M	17700 FT		5100 M			
4800 M	15700 FT		4500 M			
4200 M	13800 FT		3900 M			
3600 M	11800 FT	TL	3300 M			
3000 M	9800 FT	ĪΤΑ	2700 M			
2400 M	7900 FT					
1800 M	5900 FT		2100 M			
			1500 M			
1200 M	3900 FT					
■ ALT / HEIGHT Conversion 550M						

10700 M	35100 FT
10100 M	33100 FT
9500 M	31100 FT
8900 M	29100 FT

Eastbound

179°)

44900 FT

41100 FT

39100 FT 37100 FT

26600 FT

4900 FT

1800ft

Feet

1600FT 1500FT

1300 FT

(360°

13700 M

7500 M	24600 FT
6900 M	22600 FT
6300 M	20700 FT
5700 M	18700 FT
5100 M	16700 FT
4500 M	14800 F7
3900 M	12800 FT
3300 M	10800 F7
2700 M	8900 FT
2100 M	6900 FT

#### 3000 FT 800 M 2600 FT 700 M 2300 FT

Feet

3300 FT

2000 FT

Meter

1000 M

900 M

600 M

ome

350 M 1100 FT 300 M 1000 FT

Meter

500M

450M

400 M

**QFE Next Page** 

YNJ Altitude / Height Conversion Table						
xxxx meters on STD 이후 적용 xxxx meters on QFE xxxx -> REQ QNH -> QNH xxx SET후 Conversion Table 사용 YNJ A/P Elevation : 623ft = 22.5hPa						
Height based on QFE (instructed by ATC)						
xxx m on QFE	xxx m plus Elevation Set					
3000 m	10500 ft					
2700 m	9500 ft					
2400 m	8500 ft					
2100 m 7500 ft						
1800 m	6500 ft					
1500 m	5600 ft					
1200 m	4600 ft					
1100 m	4200 ft					
1000 m	3900 ft					
850 m	3400 ft					
800 m	3200 ft					
750 m	3100 ft					
550 m	2400 ft					
515 m	2300 ft					
500 m	2300 ft					
425 m	2000 ft					
355 m	1800 ft					
200 m	1300 ft					
100 m	1000 ft					
0 m	623 ft					

ZYYJ(YNJ) <mark>624ft | RKSI(ICN) 23ft</mark> None **KF ICN 131 5** TWR 118.75 By Voice YNJ: RNP SID (NADP 1) RW27 Main CTOT from GND Staff due to Mil Train Consider Improve C/B & NO Bleed T/O (in Summer) **KANVU 09D** 271 27 271 ATC 271 (01D) **KANVU 19D ATC** 09 179 179 179 (11D) SPD 200kts VNI 113.1 09 108.7 27 109.3 27: YNJ 271/3.6, YNJ 073/10 (MAX 162kts) 09: YNJ 091/4.5, YNJ 287/11 (MAX 162kts) HUD 27(597') 3.3도 8530° 09(621') RWY 27 180 Back(Clockwise) YNJ 118.75 SHE 132.35 - 119.3 DLC 128.77 - 135.65 \*332 14 132.95 - ICN 132.8 **ICN: STAR** ILS 33/34 REBIT xA PAMBI REBIT 170 ILS 15/16 RFBIT xH MUNAN RFBIT 170 15L/R 33L/R 34L(23') 12303' 16R(23') HUD 34R(23') 13123' 16L(23')

FIX RWY /8, /5 , P518 R068, R278 33R : C4(7529'), C5(8513'), 33L : B5('), B6(') 15L : C2(7522'), C1(8536'), 15R : B3('), B2(')

34L: P7(5600'), P8(6578'), 34R: N4(6876'), N5(8507') 16R: P6(5597'), P5(6574'), 16L: N3(7043'), N2(8444') 8NM 180kts, 5NM 160kts, Parr TAXI 10kts이상, HIRO

COLI	COLD TEIVIP CORRECTION 1/2						
Min 은 반드시 수정 (중간 고도 CORRECTION은 PIC 결정) Missed App 고도는 ATC 협조 필요							
	GMP 32L (261') / 32R (262') / 14R (254')						
32L/R	8000	5500	4000	2800	2300	2000	4000
0	8450	5810	4230	2970	2440	2120	4230
-5	8620	5930	4310	3030	2490	2160	4310

0	8450	5810	4230	2970
-5	8620	5930	4310	3030
-10	8780	6040	4390	3080
R14	4000	2800	1400	
0	4220	2070	1400	

ICN, KWJ, PUS next page

CJJ 06L (387') / 24R (296')

CJU 07 (307') / 25 (296')

-5

-10

-5

-10

06L

-5

-10

24R

-5

-10

COLD TEMP CORRECTION 2/2							
		ICN	ALL R	NY (24	3′)		
33/34	7000	6000	5000	3600	2600	1600	
0	7400	6340	5290	3810	2760	1700	
-5	7520	6460	5390	3880	2810	1730	
-10	7680	6580	5490	3950	2860	1760	
15/16	3000	2600	1600		4000		3000
0	3170	2760	1700		4230		3170
-5	3230	2810	1730		4310		3230
-10	3290	2860	1760		4390		3290
	KWJ	04R(26	6'),04L	.(610')	/ <b>22</b> L(6	10′)	
04L/R	4000	3000	2000				7000
0	4230	3170	2120				<b>7500</b>
-5	4310	3230	2160		lon	ma	7590
-10	4390	3290	2200	-			7680
22L	5000	4100	3500	2900	2200		4000
0	4230	3170	2120	3070	2340		4230
-5	4310	3230	2160	3130	2430		4310
-10	4390	3290	2200	3190	2420		4390
PL	JS 36L(	233'),3	6R(228	') / 18L	/R (see	below	<i>ı</i> )
36L/R	6000	5000	3300	2100		6000	
0	6340	5290	3490	2210		6340	
-5	6460	5390	3560	2250		6460	
-10	6580	5490	3620	2290		6580	
18L/R	6000	5000	4000	2600	1700		6000
0	6340	<b>5290</b>	4230	2760	1800		6340
-5	6460	5390	4310	2810	1830		6460

-10 6580 5490 4390 2860 1870

6580

# COLD Wx 1/2

OAT (GND) / TAT (TAT) is 10°C (50°F) or below: visible moisture (clouds, fog with VIS 1SM (1600 m) or rain, snow, sleet, ice crystals...) · ice, snow, slush and standing water is present

on the ramps, taxiways, or runways,

- PROBE HEAT switches . . . . . . ON

**ENGINE START** 

PREFLIGHT

(-35도 TH변경전 2분간 IDLE) (Min Oil Press 까지 IDLE 유지 (수분간)) (Oil Temp - Nor 후 Oil Press High시 ShutDown)

# FNGINE ANTI-ICE

- ENGINE START switches . . . . . . . . . . . CONT

(COWL V/V OPEN 지속 Bright시 APU Bleed OFF. ISO V/V AUTO. TH 서서히 Max 30%)

# WING ANTI-ICE

(Type II or IV Deicing안할 거면 사용하라)

### AFTER START - GENERATOR 1 and 2 switches....ON

- FLIGHT controls . . . . . . . . . . . . Check (Deicing 할거면 Deicing 하고 한다.) - FLAPS . . . . . Check (Full Travel UP - 40 - UP, FLAP UP 고려)

(IDG 1분이내 안정, 5분이내 Steady Power)

### TAXI OUT

10분간격) -8: 없음

(OAT 3도 이하 RUN UP: Behind CLR, 70% 허락 하는한, 30초, 30분 간격) -8: (50%-IDLE, 60분간 격) (Ice Shedding: freezing rain, freezing

drizzle, freezing fog or heavy snow - 70%, 1초,

ome

### COLD Wx 2/2 **BEFORE T/O Takeoff Signal - FLAPS 5** - FLAPS SFT TAKEOFF (-8: Oil Temp 31도 이상) - THRUST ... (min 70%(50%), 30초(5초))RUNUP (ENG ANTI-ICE + OAT 3도이하) NO RUNUP(OAT 3도이상) NG 70%, -8:50% 5초 **FNGINE ANTI-ICE** - ENGINE START switches . . . . . . . . CONT - ENGINE ANTI-ICE switches . . . . . . . . . . . . . ON (-40도 이하 금지, 강하중 가능) (COWL V/V OPEN 지속 Bright시 APU Bleed OFF, ISO V/V AUTO, TH 서서히 Max 30%) FAN ICE REMOVAL (Moderate Severe 가능하면 회피하라 아니면..) - ENGINE START switches (both) ........FLT - Autothrottle (if engaged) . . .. . . . . Disengage - THRUST . . . . . . . (min 80%, 1 초) Increase (15초이내 Vib 4.0이하 안정화 15분 간격 반복) - Autothrottle (if needed) . . . . . . . . . Engage (4.0 보다 크면 Engine High Vibration Check List!!!) WING ANTI-ICE (Icing 보이면 Deicer로 사용, Anti-icer도 사용가능) (FL350이상 사용금지 -> Emer Descend) (Icing 지역 Holding - Flap 사용금지) APPROACH L/D (FLAP 15 필수 조건일 경우만 VREF ICE 사용) AFTER L/D, SHUTDOWN

# **Home**

**ENG ON Deicing in ICI** ICN Deicing "Deicing Required ENG On Deicing" ICN Apron "Req Pushback Deicing Zone xxx" Tx 2000 -> Pad Control -> Ice Man PARKING BRAKE ----- SET Report Parking Brake SET - > Ice Man B737-8 BROADBAND SYS s/w ----- OFF FLAPS ----THRUST LEVERS -----IDLE **ENGINE BLEED AIR SWITCHES ---- OFF** APU BLEED air switch ----- OFF START DE/ANTI-ICING REQ DCL 항공기이동 및 Configuration 변경 금지

AFTER DE/ANTI-ICING IS COMPLETED (TIME CHECK 1분) 용액과 마지막 용액 뿌린 시간 받고 적는다.

Holdover Time 결정!!! TIME CHECK 1분후

APU BLEED air switch ----- As needed Engine BLEED air switches ----- ON FLAP LEVER ----- Set for takeoff or UP ice, snow, slush or standing water, 강수 지속시 -

FLAP UP고려 Flight controls ----- Check, as needed After Start Cheklist

TAXI OUT

(OAT 3도 이하 RUN UP: Behind CLR. 70% 허락 하는한, 30초, 30분 간격) -8: (50%-IDLE, 60분간격)

BEFORE TAKEOFF TAKEOFF SIGNAL -> FLAPS 5 FLAPS ----- Set(for takeoff)

TAKEOFF (-8: Oil Temp 31도 이상) - THRUST ... (min 70%(50%), 30초(5초))RUNUP (ENG ANTI-ICE + OAT 3도이하)

NO RUNUP(OAT 3도이상) NG 70%, -8:50% 5초 DECISION TREE next page





**ENG OFF Deicing in GN** KE GMP "Deicing Information" REQ DCL Apron "Reg Pushback Deicing Required PADxxx" PARKING BRAKE ----- SET Establish communications with GND personnel. B737-8 BROADBAND SYS s/w ----- OFF FLAPS ------ UP
THRUST LEVERS -----IDLE **ENGINE BLEED AIR SWITCHES ---- OFF** APU BLEED air switch ----- OFF APU. APU GENERATOR bus switches ----- ON ENGINE ANTI-ICE switches----- OFF Engine Start levers ----- CUTOFF SHUTDOWN CHECKLIST START DF/ANTI-ICING 항공기이동 및 Configuration 변경 금지 AFTER DE/ANTI-ICING IS COMPLETED (TIME CHECK 1분) 용액과 마지막 용액 뿌린 시간 받고 적는다. Holdover Time 결정!!!
TIME CHECK 1분후 Home APU BLEED air switch ----- ON PREFLT CHKlist -> Reg STARTUP -> CHKlist

AFTER BOTH ENGINES ARE STARTED

**ENGINE ANTI-ICE switches----As needed** B737-8 BROADBAND SYS s/w ----- ON APU----- As needed

Engine BLEED air switches ----- ON FLAP LEVER ----- Set for takeoff or UP

ice, snow, slush or standing water, 강수 지속시 -FLAP UP고려

Flight controls ----- Check, as needed

**AFTER START CHKlist (ATC CLR Confirm)** 

TAXI, BEFORE TAKEOFF, TAKEOFF cold wx 참조!!! DECISION TREE next page





#### RKPK ARRIVALS 1/1 RUNHAYS <SEL>18R STARS RUNWAYS STARS RTE VOR18R<SEL> VOR18L/R TRANS GAYHA<SEL> TRANS. KMH22 Vref+wind **GAYHA (Modify Required)**

FIX: KMH 280(Base Turn), 283(Missed App) THE RESERVE OF THE PERSON NAMED IN

**PUS VOR 18L/R** 

18L/R



# **Missed App**

Base Turn 이전 : L/H Turn KMH 283 OUTBD (SEL HDG SEL - INT H/D - VOR/LOC Engage)

Base Turn 이후: Continue R/H Turn KMH 283 OUTBD (SEL HDG SEL - INT H/D - VOR/LOC Engage)

**LOC 36 Circling Home Next Page** 

#### PUS LOC 36L/R Circling 18L/R RKPK ARRIVALS STARS RUNWAYS STARS RIE 36L18R<SEL> 36L18L/R 18L/R TRANS GEOJE<SEL> TRANS, KMH22 Vref+wind RWY EXT **GEOJE** (Modify Required) CI36L(CF36R) 3500 FI36L(FF36R) 2100 FIX: KMH 280(Base Turn), 310(Missed App) (MH35 KMH32 KMH34 (18R) H/D 182 500'전 KMH R280 090-1000ft A/P Off tart Turn FD Off -On **KMH30** H/D110 KMH30-1NM Start Des KMH22 VOR SET CRS 310 L/D FLAP Before L/D CHK **KMH18** Complete Before FAF L/G **DN FLAP15** 1700ft L/O 6000ft SET

# **Missed App**

Base Turn 이전 : L/H Turn **KMH 310** OUTBD (SEL HDG SEL – INT H/D - VOR/LOC Engage)

Base Turn 이후 : Continue R/H Turn KMH 310 OUTBD (SEL HDG SEL – INT H/D - VOR/LOC Engage)

lome

GS KTS	KM	MILES
300	560	350
310	570	360
320	590	370
330	610	380
340	630	390
350	650	400
360	670	410
370	690	430
380	710	440
390	720	450
400	740	460
410	760	470
420	780	480
430	800	500
440	820	510
450	830	520
460	850	530
470	870	540
480	890	550
490	910	560
500	930	580
510	950	590
520	960	600
530 540	980 1000	610 620
550 560	1020 1040	630 650
570	1040	660
580	1070	670
590	1070	680
600	1110	690
610	1130	700
620	1150	710
630	1170	730
640	1190	740
650	1200	750
660	1220	760
670	1240	770
680	1260	780
690	1280	800
700	1300	810

