


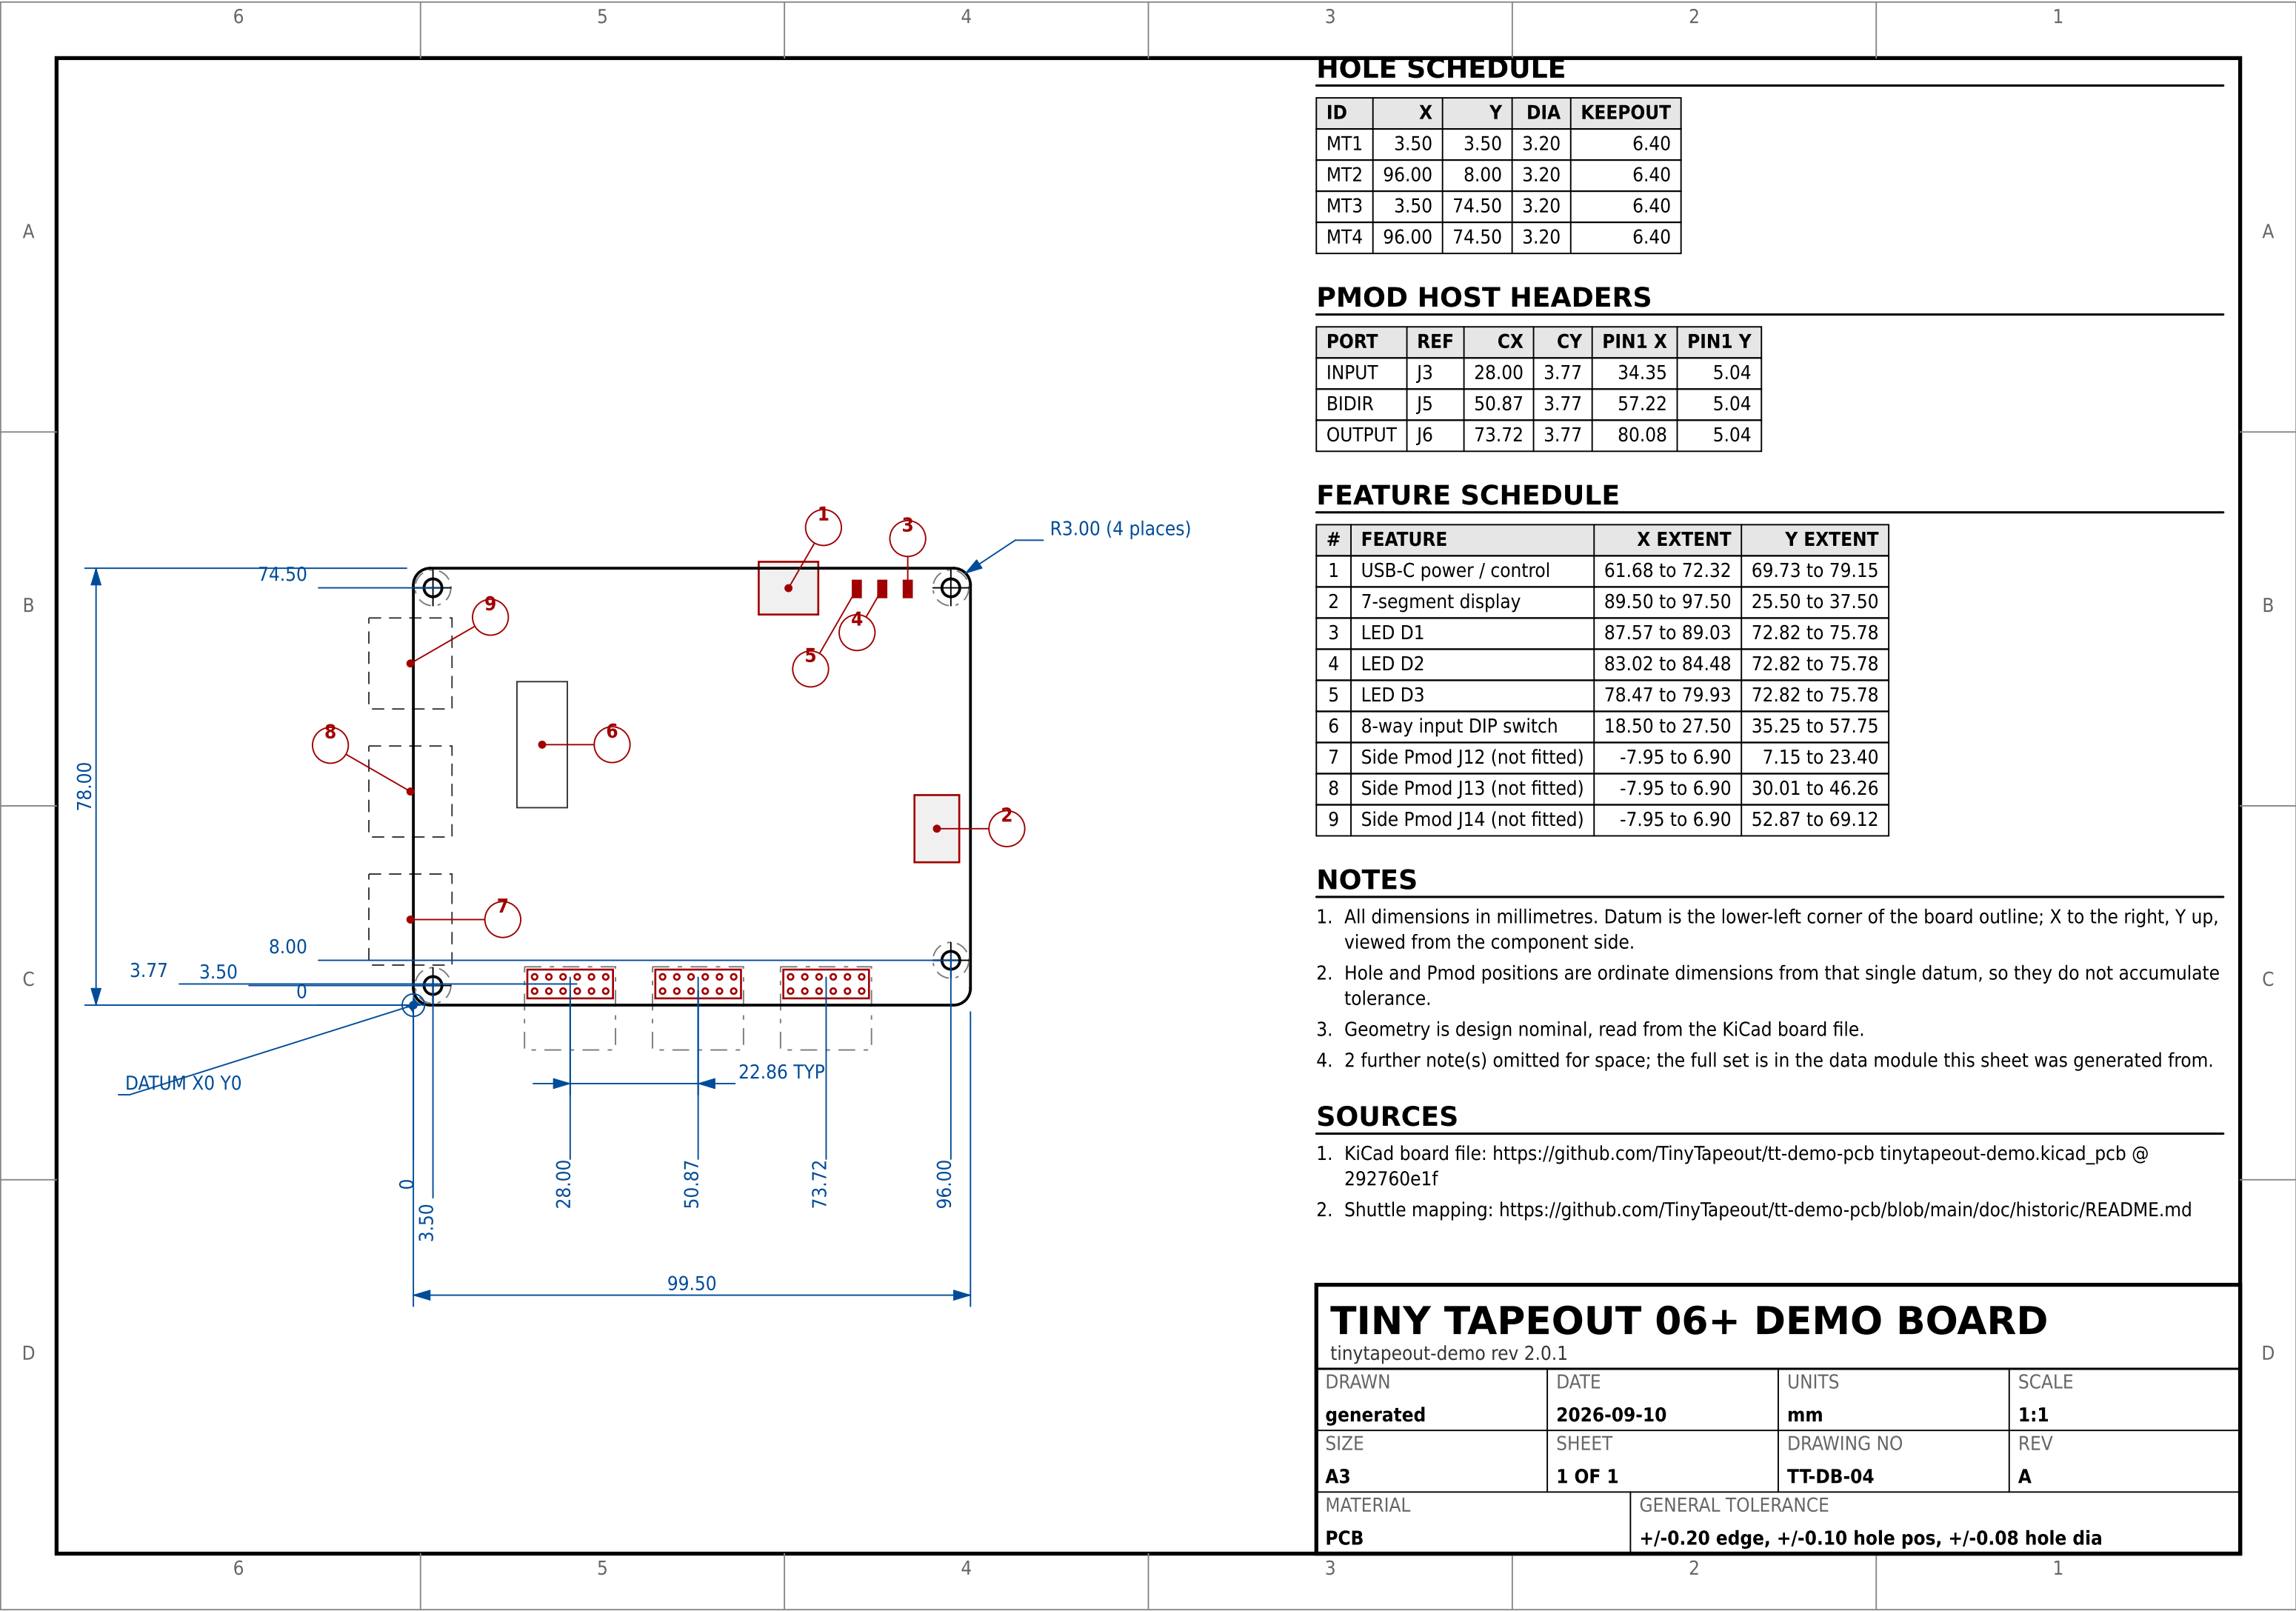

HOLE SCHEDULE

ID	X	Y	DIA	KEEPOUT
MT1	3.50	3.50	3.20	6.40
MT2	96.00	8.00	3.20	6.40
MT3	3.50	74.50	3.20	6.40
MT4	96.00	74.50	3.20	6.40

PMOD HOST HEADERS

PORT	REF	CX	CY	PIN1 X	PIN1 Y
INPUT	J3	28.00	3.77	34.35	5.04
BIDIR	J5	50.87	3.77	57.22	5.04
OUTPUT	J6	73.72	3.77	80.08	5.04

FEATURE SCHEDULE

#	FEATURE	X EXTENT	Y EXTENT
1	USB-C power / control	61.68 to 72.32	69.73 to 79.15
2	7-segment display	89.50 to 97.50	25.50 to 37.50
3	LED D1	87.57 to 89.03	72.82 to 75.78
4	LED D2	83.02 to 84.48	72.82 to 75.78
5	LED D3	78.47 to 79.93	72.82 to 75.78
6	8-way input DIP switch	18.50 to 27.50	35.25 to 57.75
7	Side Pmod J12 (not fitted)	-7.95 to 6.90	7.15 to 23.40
8	Side Pmod J13 (not fitted)	-7.95 to 6.90	30.01 to 46.26
9	Side Pmod J14 (not fitted)	-7.95 to 6.90	52.87 to 69.12

NOTES

- All dimensions in millimetres. Datum is the lower-left corner of the board outline; X to the right, Y up, viewed from the component side.
- Hole and Pmod positions are ordinate dimensions from that single datum, so they do not accumulate tolerance.
- Geometry is design nominal, read from the KiCad board file.
- 2 further note(s) omitted for space; the full set is in the data module this sheet was generated from.

SOURCES

- KiCad board file: <https://github.com/TinyTapeout/tt-demo-pcb> tinytapeout-demo.kicad_pcb @ 292760e1f
- Shuttle mapping: <https://github.com/TinyTapeout/tt-demo-pcb/blob/main/doc/historic/README.md>

TINY TAPEOUT 06+ DEMO BOARD

tinytapeout-demo rev 2.0.1			
DRAWN generated	DATE 2026-09-10	UNITS mm	SCALE 1:1
SIZE A3	SHEET 1 OF 1	DRAWING NO TT-DB-04	REV A
MATERIAL PCB		GENERAL TOLERANCE +/-0.20 edge, +/-0.10 hole pos, +/-0.08 hole dia	