


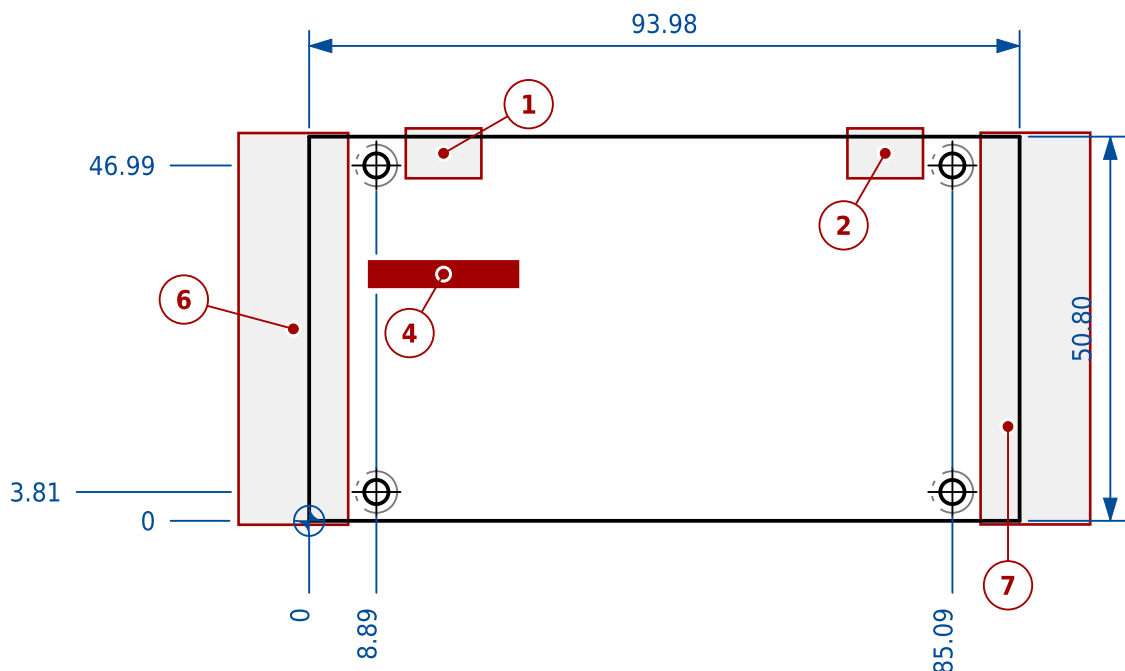

HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
H1	8.89	3.81	3.20	5.50
H2	85.09	3.81	3.20	5.50
H3	85.09	46.99	3.20	5.50
H4	8.89	46.99	3.20	5.50

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	micro-USB US1, FTDI programming and console	12.78 to 22.78	45.30 to 51.90
2	micro-USB US2, USB host / OTG	71.20 to 81.20	45.30 to 51.90
3	Ethernet RJ45 - not on this board	-	-
4	LEDs D0-D7, 8 on 2.54 mm pitch	7.94 to 27.62	30.94 to 34.30
5	User LEDs, tri-colour - not on this board	-	-
6	GPIO header J1, 2x20	-9.34 to 5.16	-0.52 to 51.28
7	GPIO header J2, 2x20	88.82 to 103.32	-0.48 to 51.32
8	Expansion connector, third - not on this board	-	-
9	Third USB port - not on this board	-	-
10	Fourth USB port - not on this board	-	-
11	Status LEDs, debug controller - not on this board	-	-

LEGEND

- Board outline
- Component body, scheduled
- Hole keep-out
- Dimension, extension and leader

NOTES

- Viewed from the component side.
- Hole IDs are the KiCad reference designators.
- No Pmod host. J1 and J2 are right-angle 2x20 sockets on 2.54 mm whose pinout is Pmod compatible, per the maker; pin 1 of each is given in the schedule note.
- No Ethernet jack.
- Assembled envelope, connector overhang included: 112.66 x 52.42 mm.

SOURCES

- KiCad board file: [https://github.com/emard/ulx3s/ulx3s.kicad_pcb @ 300a361b](https://github.com/emard/ulx3s/ulx3s.kicad_pcb@300a361b) (tag v3.0.3) - Radiona / emard
- KiCad board file: [https://github.com/emard/ulx3s/ulx3s.kicad_pcb @ d518b2ce](https://github.com/emard/ulx3s/ulx3s.kicad_pcb@d518b2ce) (tag v3.0.7) - Radiona / emard

SOURCES (continued)

- KiCad board file: [https://github.com/emard/ulx3s/ulx3s.kicad_pcb @ 9908a1f8](https://github.com/emard/ulx3s/ulx3s.kicad_pcb@9908a1f8) (tag v3.0.8) - Radiona / emard
- KiCad board file: [https://github.com/emard/ulx3s/ulx3s.kicad_pcb @ cc1817d2](https://github.com/emard/ulx3s/ulx3s.kicad_pcb@cc1817d2) (tag v3.1.7) - Radiona / emard
- Board versions: <https://github.com/emard/ulx3s/blob/master/doc/MANUAL.md> - section "Board Versions": v3.0.3, v3.0.7, v3.0.8 and v3.1.7 are the rows marked "for sale"; the four board files are read and agree on everything drawn here.
- Board size: <https://github.com/emard/ulx3s/blob/master/README.md> - quoted: "This is a small (94x51 mm) standalone FPGA board"; the board file gives 93.98 x 50.80, which is 37 x 20 tenths of an inch.

ULX3S

v3.0.3, v3.0.7, v3.0.8 and v3.1.7

DRAWN generated		VERSION v0.0-400-g80d77dd		UNITS mm		SCALE 1:1	
SIZE A3	SHEET 1 OF 1		DRAWING NO FPGA-ULX3S				REV A
MATERIAL PCB, 1.6 nominal			GENERAL TOLERANCE edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08				