


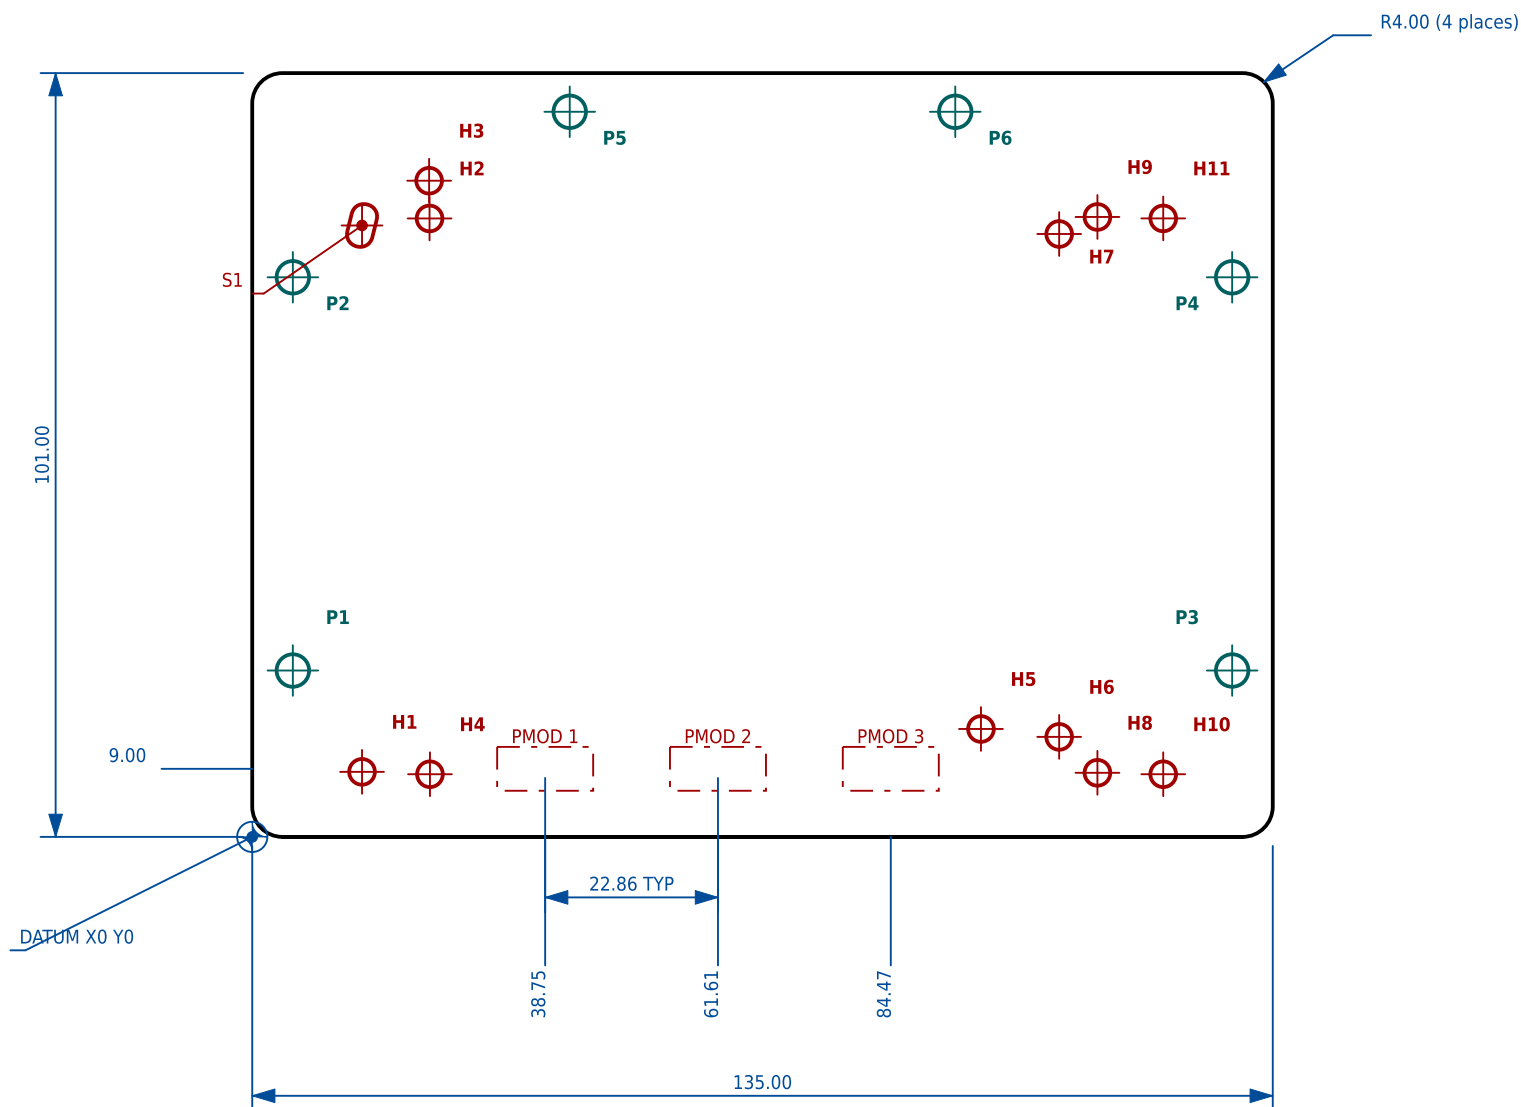

BOARD MOUNTING HOLES

ID	X	Y	SIZE	USED BY
H1	14.525	8.600	3.40	TT04-05:MT1, TT06-08:MT1
H2	23.455	81.778	3.40	TT01-03:MT3, v3.2:MT1
H3	23.400	86.770	3.40	v3.3:MT1
H4	23.510	8.285	3.40	TT01-03:MT1
H5	96.400	14.270	3.40	v3.2:MT2, v3.3:MT2
H6	106.745	13.225	3.40	TT06-08:MT2
H7	106.745	79.725	3.40	TT06-08:MT4
H8	111.805	8.475	3.40	TT04-05:MT2
H9	111.805	81.975	3.40	TT04-05:MT4
H10	120.510	8.285	3.40	TT01-03:MT2
H11	120.510	81.785	3.40	TT01-03:MT4
S1	14.245 / 14.805	79.725 / 81.975	3.40 slot	TT04-05:MT3, TT06-08:MT3

PLATE FIXING HOLES

ID	X	Y	DIA
P1	5.373	22.000	4.30
P2	5.373	74.000	4.30
P3	129.630	22.000	4.30
P4	129.630	74.000	4.30
P5	42.000	95.885	4.30
P6	93.000	95.885	4.30

NOTES

1. All dimensions in millimetres. Datum is the lower-left corner of the plate; X right, Y up, viewed from the side the demo board mounts on.
2. Hole positions are tabulated rather than dimensioned individually: there are too many to put on the view without it becoming unreadable.
3. The three PMOD envelopes are not machined features. They mark where the Pmod host pin fields end up, which is the same place for every board revision. That is the point of the plate.
4. Fit the board on standoffs. Each hole or slot is labelled with the board revisions that use it; a given board uses only its own.
5. Holes are 3.4 mm, a close clearance fit on M3. Slots are the same width and span two revisions whose holes are too close together to drill separately.
6. The Pmod host connector bodies overhang the plate's front edge by 2.78 mm, so a peripheral module plugs into clear air.
7. Plate fixing holes are 4.3 mm, a clearance fit on M4.
8. Fit the plate to its chassis before fitting a demo board: the plate fixings sit in the border, but the board overhangs part of it.
9. Suggested material 3 mm acrylic or 1.6 mm FR4. Least material between any two features is about 1.6 mm, between H2 and H3.
10. Tolerance: +/-0.20 on the outline, +/-0.10 on hole position, +/-0.08 on hole diameter.

SOURCES

1. Derived from: `data/tinytapeout_boards.py` - Board outlines, mounting holes and Pmod host positions for every Tiny Tapeout demo board revision, extracted from the upstream KiCad files.
2. Pmod host pitch: https://digilent.com/reference/_media/reference/pmod/pmod-interface-specification-1_2_0.pdf - Digilent mandate .90 in (22.86 mm) between adjacent host ports on a board edge, which is why one plate can serve every revision.

TINY TAPEOUT GENERIC MOUNTING PLATE

Accepts every demo board revision, Pmod hosts fixed in place

DRAWN	DATE	UNITS	SCALE
generated	2026-09-10	mm	1:1
SIZE	SHEET	DRAWING NO	REV
A3	1 OF 1	TT-MP-01	A