


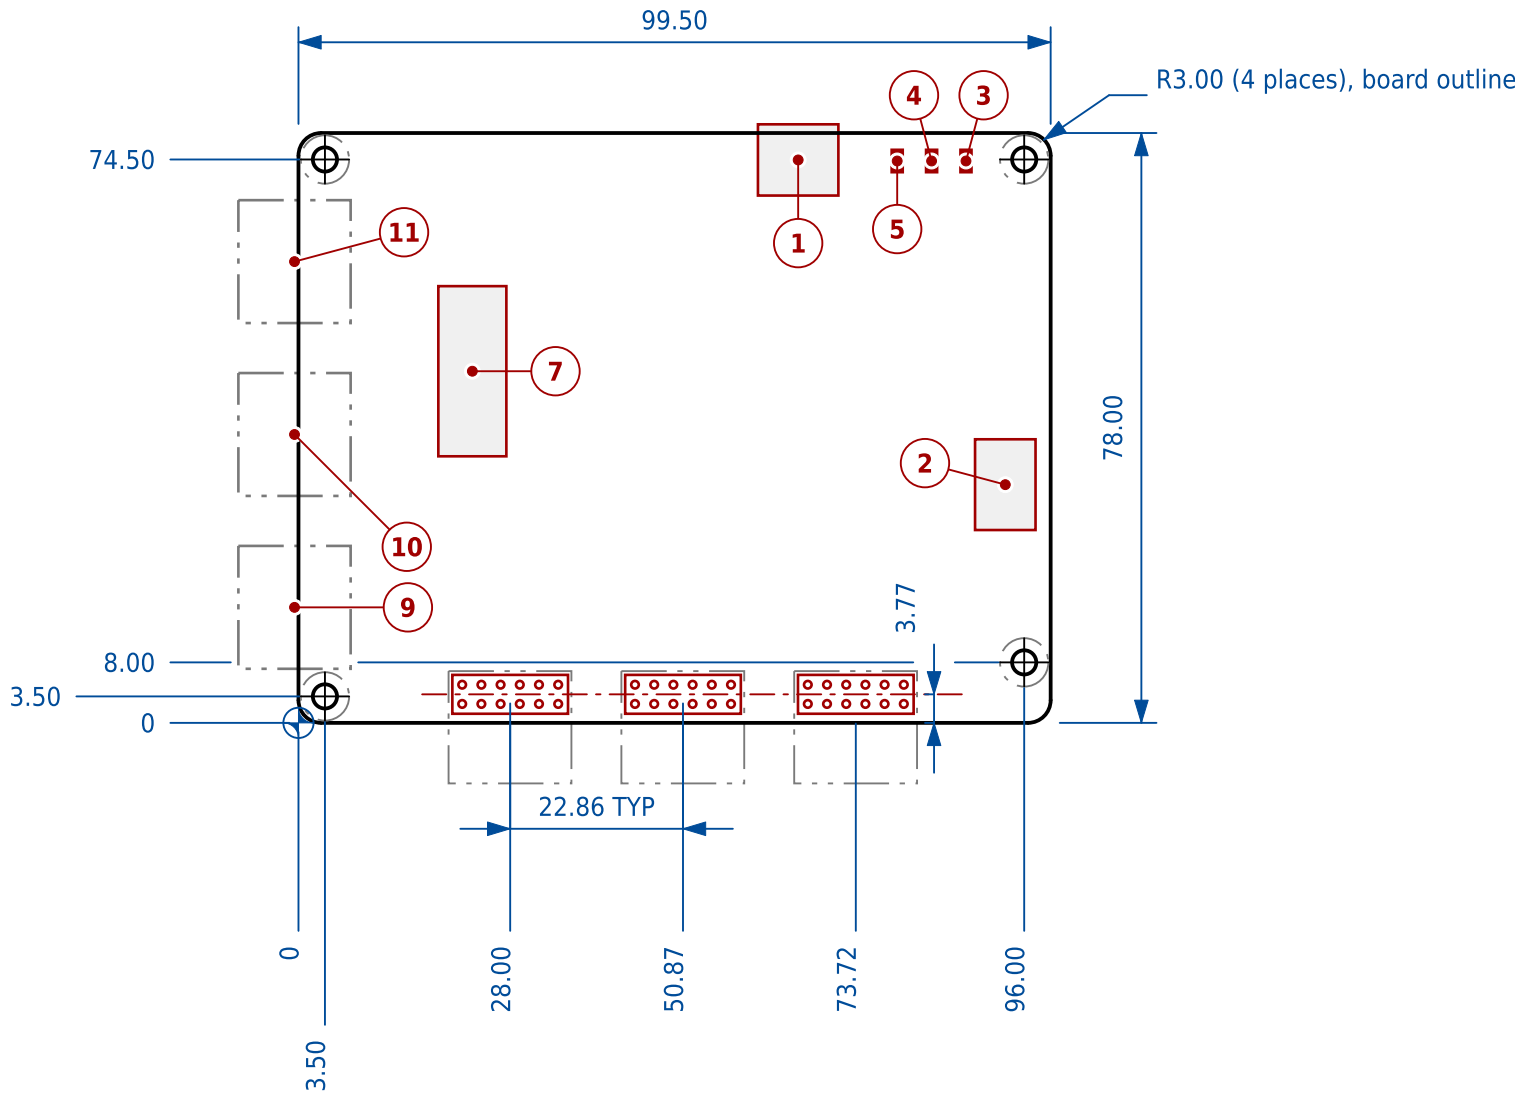

## NOTES

- Viewed from the component side.
- Ships in TT08 Dev Kit and TT08 Dev Kit - CoB edition.
- Hole IDs are the KiCad reference designators.
- Pmod host pitch, 22.86 mm (0.9 in), is the Digilent Pmod Interface Specification 1.2.0 figure and is the same on every revision; the mounting plate, TT-MP, registers against it.
- Assembled envelope, connector overhang included: 99.50 x 79.15 mm.

## SOURCES

- KiCad board file: <https://github.com/TinyTapeout/tt-demo-pcb>  
tinytapeout-demo.kicad\_pcb @ 028a51b1e - title block:  
TinyTapeout 06+ Demoboard rev 2.1.2, dated 2025-02-11
- Shuttle mapping: <https://mith.ro/tt-demoboards/> - row "DB 06+ v2.1.2", Used by: TT08.

## HOLE SCHEDULE

| ID  | X mm  | Y mm  | DIA mm | KEEPOUT mm |
|-----|-------|-------|--------|------------|
| MT1 | 3.50  | 3.50  | 3.20   | 6.40       |
| MT2 | 96.00 | 8.00  | 3.20   | 6.40       |
| MT3 | 3.50  | 74.50 | 3.20   | 6.40       |
| MT4 | 96.00 | 74.50 | 3.20   | 6.40       |

## PMOD HOST HEADERS

| PORT   | REF | EDGE   | CX mm  | CY mm | PIN1 X mm | PIN1 Y mm |
|--------|-----|--------|--------|-------|-----------|-----------|
| INPUT  | J3  | bottom | 28.005 | 3.775 | 34.355    | 5.045     |
| BIDIR  | J5  | bottom | 50.865 | 3.775 | 57.215    | 5.045     |
| OUTPUT | J6  | bottom | 73.725 | 3.775 | 80.075    | 5.045     |

## FEATURE SCHEDULE

| #  | FEATURE                                  | X EXTENT mm    | Y EXTENT mm    |
|----|------------------------------------------|----------------|----------------|
| 1  | USB-C power / control                    | 60.78 to 71.42 | 69.73 to 79.15 |
| 2  | 7-segment display                        | 89.50 to 97.50 | 25.50 to 37.50 |
| 3  | LED D1                                   | 87.57 to 89.03 | 72.82 to 75.78 |
| 4  | LED D2                                   | 83.02 to 84.48 | 72.82 to 75.78 |
| 5  | LED D3                                   | 78.47 to 79.93 | 72.82 to 75.78 |
| 6  | Fourth indicator LED - not on this board | -              | -              |
| 7  | 8-way input DIP switch                   | 18.50 to 27.50 | 35.25 to 57.75 |
| 8  | Second DIP switch - not on this board    | -              | -              |
| 9  | Side Pmod J12 (not fitted)               | -7.95 to 6.90  | 7.15 to 23.40  |
| 10 | Side Pmod J13 (not fitted)               | -7.95 to 6.90  | 30.01 to 46.26 |
| 11 | Side Pmod J14 (not fitted)               | -7.95 to 6.90  | 52.87 to 69.12 |

## LEGEND

- Board outline
- Component body, scheduled
- Position not fitted on this revision
- Pmod connector body, hole keep-out
- Dimension, extension and leader

## DB 06+ V2.1.2

tinytapeout-demo rev 2.1.2

|                                     |                        |                                     |                                                                            |                    |  |                     |                 |
|-------------------------------------|------------------------|-------------------------------------|----------------------------------------------------------------------------|--------------------|--|---------------------|-----------------|
| DRAWN<br><b>generated</b>           |                        | VERSION<br><b>v0.0-152-ga582448</b> |                                                                            | UNITS<br><b>mm</b> |  | SCALE<br><b>1:1</b> |                 |
| SIZE<br><b>A3</b>                   | SHEET<br><b>1 OF 1</b> |                                     | DRAWING NO<br><b>TT-DB-V2P1P2</b>                                          |                    |  |                     | REV<br><b>A</b> |
| MATERIAL<br><b>PCB, 1.6 nominal</b> |                        |                                     | GENERAL TOLERANCE<br><b>edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08</b> |                    |  |                     |                 |