

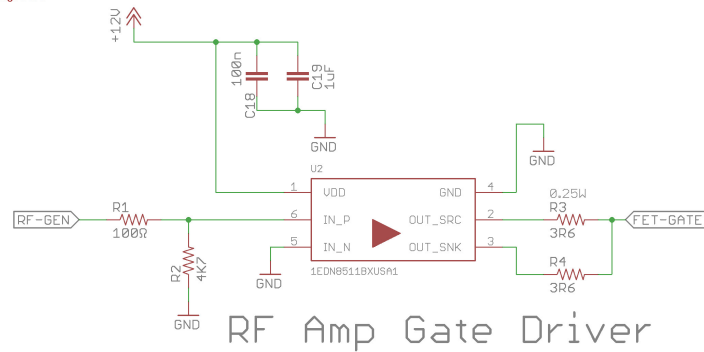


RF Class-E Amp and Matching

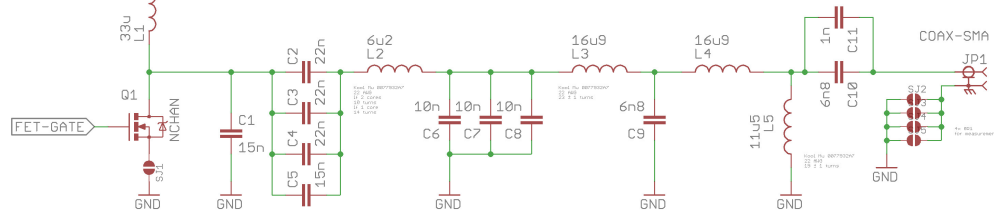


RF Amp Gate Driver

Microcontroller

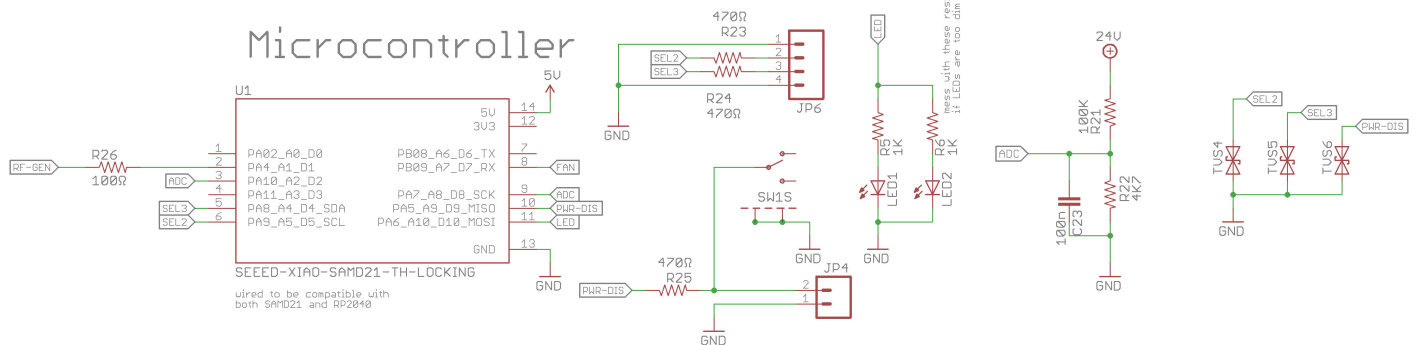


Secondary Power

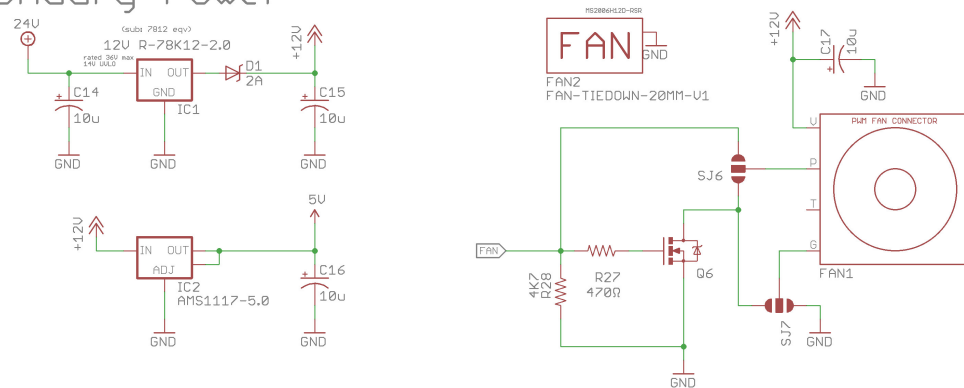

XT-30 DC Input

theoretically handles 8S
practically should keep it 6S
XT-CONNECTOR-XT30PW
JP3

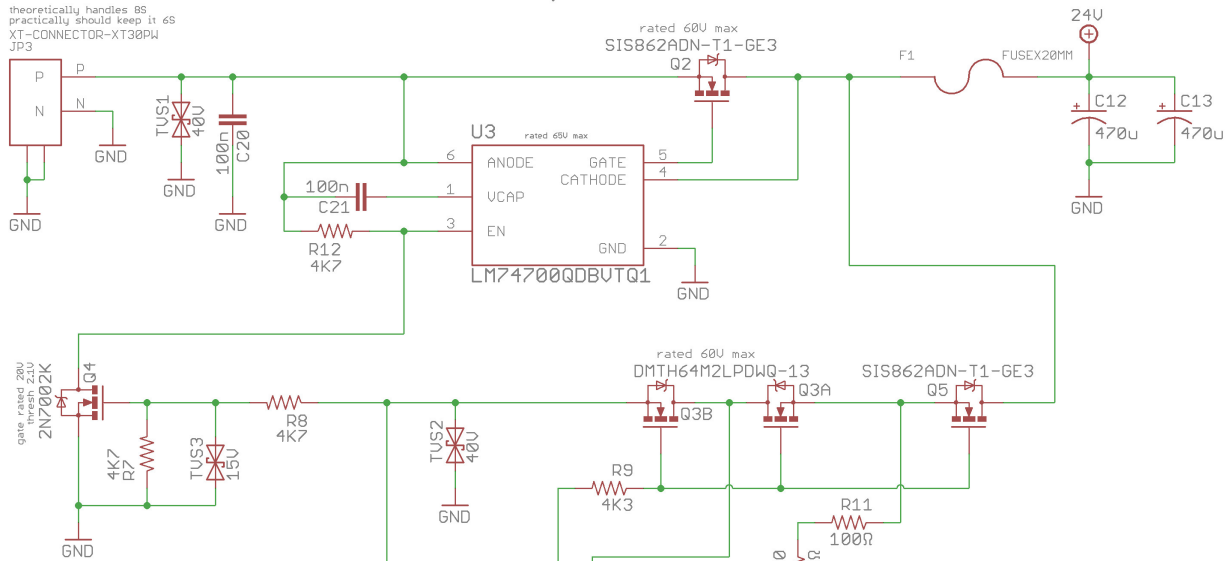

USB-PD Input

