Q Lever handle set for framed doors DG 58.ER.SSWK PZ 92

greenteQ lever handles for framed PVC-entrance-doors

Properties:

Q


The greenteQ lever handle set for framed doors DG 58.ER.SSWK PZ 92 is made of stainless steel and has a plate of 35 mm width. The lever handle set is PZ perforated with a distance of 92 mm. The cranked knob fixed on the outer plate is mountable. The lever handle on the inner plate is fixed/pivoted and have a spring mechanism. The greenteQ lever handle set for framed doors DG

58.ER.SSWK PZ 92 is prepared with an 8 mm square spindle. The outer lever handle has lugs on the backplate and the fixing is made by means of invisible screw connection which needs a separate set of accessories (3 screws M6, 1 square spindle 8 mm).

Product picture and technical drawing:





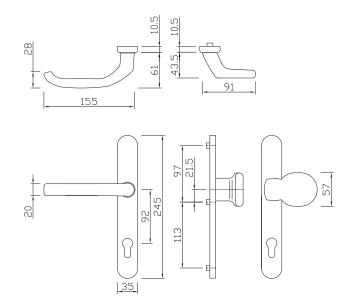

Technical data:



Material	Stainless steel (steel number 1.4301)
Bearing	fixed or pivoted with spring mechanism
For square spindle	8 mm
Plate	35 x 245 mm
Height of edge	10.5 mm
Distance	92 mm PZ
Packaging unit	1 set (without set of accessories)

Surface	VBH Item Number
matt brushed	396.261 / 6500
Set of accessories (3 screws M6, 1 square spindle 8 mm)	VBH Item Number
Door thickness 59 - 65 mm	396.264 / 5965
Door thickness 64 - 70 mm	396.264 / 6470
Door thickness 69 - 75 mm	396.264 / 6975
Door thickness 74 – 80 mm	396.264 / 7480
Door thickness 79 - 85 mm	396.264 / 7985

PRODUCT DATA SHEET

