


規制番号 名称	26-0068 藤田沖	(UD-TTR)	運用	2025年2月20日	製造番号	K0000001
管制番号 名称	260068 藤田沖	1012号「版6」	開始日時	0時53分 ~	製造年月	2024年11月
					メーカー	日本信号

EC6680S+34001001
EC6680S-25371
PD1220A V4.03


付加機能
リコール (半感応)
ギャップ感応
ステータス機能
S3: 閃光

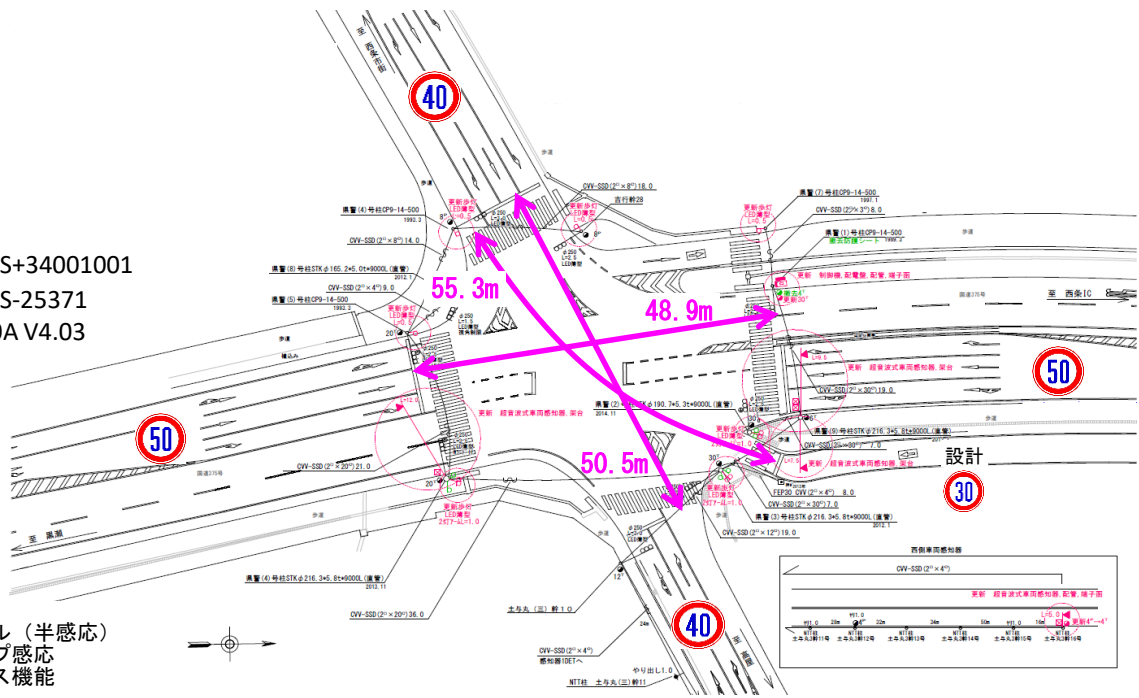

ステップ番号	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ステップ名称	1PG	1PW	1 G	1 Y	1 A	1 Y	1 R	2PG	2PW	2 G	2 Y	2 R	3 G	3 Y	3 R					
流動図																				
1 P [1P]																				
1 [1V]																				
1 右矢 [1A]																				
2 P [2P]																				
2 [2V]																				
3 P [3P]																				
3 [3V]																				
1 P [1P]																				
1 [1V]																				
1 右矢 [1A]																				
2 P [2P]																				
2 [2V]																				
3 P [3P]																				
3 [3V]																				
P U	109				109			109					109							
P L (89秒)	15	5	2	3	5	2	4	21	9	2	3	4	7	3	4					
ギャップ感応 (終日)	補正				感応			補正					禁止	(短縮:5秒, 延長:5秒, 単位青:4秒)						
保安秒時 (130秒)	37	5	2	3	11	2	4	34	9	2	3	4	7	3	4					
最長時間 (秒)	110	110	110	10	110	10	10	110	110	110	10	10	110	10	10					
最短時間 (秒)	6	0.95	0.95	0.95	0.95	0.95	0.95	6	0.95	0.95	0.95	0.95	0.95	0.95	0.95					
A B連動出力																				

規制番号 名称	26-0068 藤田沖	運 用	2012年3月10日	製造番号	Y7874603
管制番号 名称	240068 藤田沖	(U形) 開始日時	23時55分 ~	製造年月	2003年1月

『感知有時』

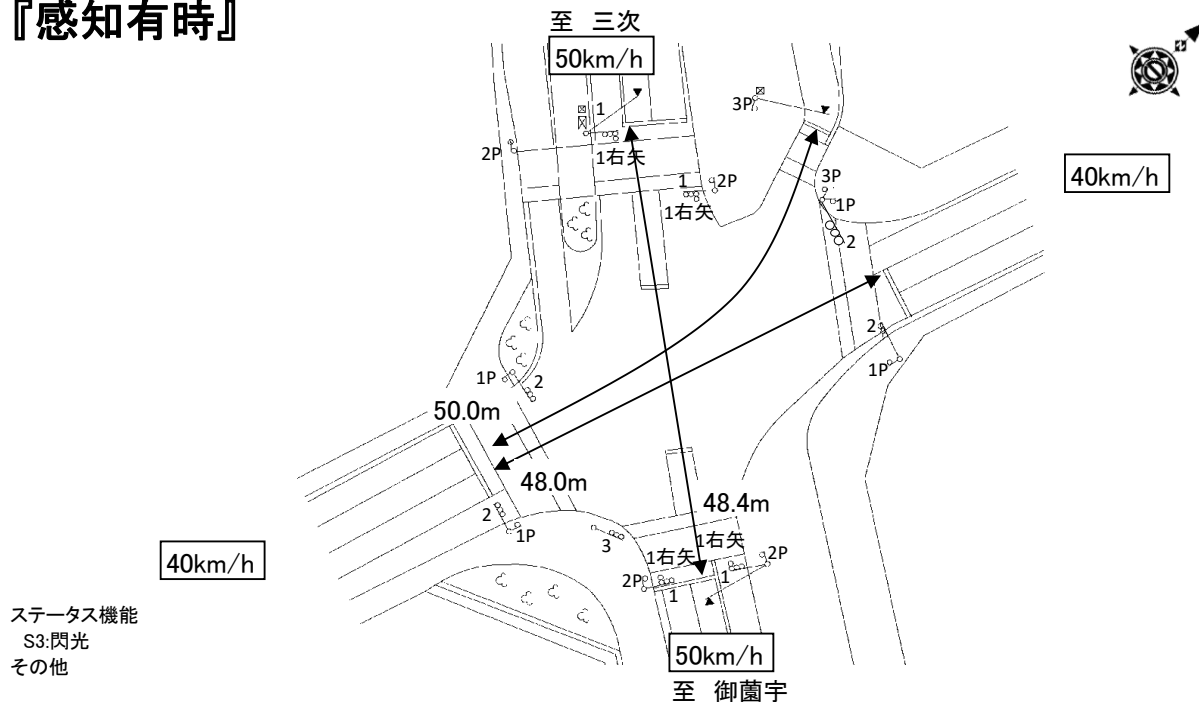

ステップ番号	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ステップ名称	1PG	1PG	1PW	1 G	1 Y	1 A	1 Y	1 R	2PG	2PW	2 G	2 Y	2 R	3 G	3 Y	3 R				
流動図																				
1P [1P]																				
1 [1V]																				
1右矢 [1A]																				
2P [2P]																				
2 [2V]																				
3P [3P]																				
3 [3V]																				
ギャップ						●														
最終指定					○			○								○				
可変指定		○				○			○								スプリット数: 3			
保安秒時(120秒)	10	23	6	4	3	6	2	3	31	7	4	3	4	7	3	4				
最長時間(秒)	110	110	110	110	10	110	10	10	110	110	110	10	10	110	10	10				
最短時間(秒)	6	0.95	0.95	0.95	0.95	0.95	0.95	0.95	6	0.95	0.95	0.95	0.95	0.95	0.95	0.95				
AB連動出力	A	A	B	B	B	B	B	B	B	A	A	A	A	A	A	A				