Report of Entropy estimates based on NIST SP 800-90B non-IID track

2023-Jan-02 23:17:39.082286

1 Identification information

1.1 Identification of acquisition data from entropy source

Table 1 Identification information of acquisition data from entropy source

URL of the acquisition data	`https://github.com/usnistgov/SP800-90B_EntropyAssessment/blob/master/bin/truerand_1bit.bin`

- Brief explanation of the acquisition data (or entropy source) :

1.2 Identification of analysis environment

Table 2 Identification information of analysis environment

Analysis tool	Name	Another entropy estimation tool with extensions
	Versioning information	1.0.37
Analysis environment	Hostname	■■■■■
	CPU information	AMD Ryzen ■■■■■■■■■
	Physical memory size	■■■ MB
	OS information	Windows 10 or greater
	Username	■■■

1.3 Identification of analysis conditions

Table 3 Identification information of analysis conditions

Number of samples	1000000
Bits per sample	1

1.4 Identification of analysis method

NIST SP 800-90B [1] 6.3 with corrections [2] is applied

2 Executive summary

2.1 Numerical results of min-entropy estimates based on non-IID track

Table 4 Numerical results

Estimator	$H_{\text{bitstring}}$ [a]
	(/ 1 - bit)
The Most Common Value Estimate	0.995043
The Collision Estimate	0.900935
The Markov Estimate	0.998486
The Compression Estimate	0.829677
The t-Tuple Estimate	0.914226
The Longest Repeated Substring (LRS) Estimate	0.985818
Multi Most Common in Window Prediction Estimate	0.996972
The Lag Prediction Estimate	0.998292
The MultiMMC Prediction Estimate	0.99666
The LZ78Y Prediction Estimate	0.99705
The intial entropy source estimate (/ 1-bit) $H_I = H_{\text{bitstring}}$	0.829677
[a] Entropy estimate of the sequential dataset [source: NIST SP 800-90B [1] 3.1.3]	

2.2 Visual comparison of min-entropy estimates from binary samples
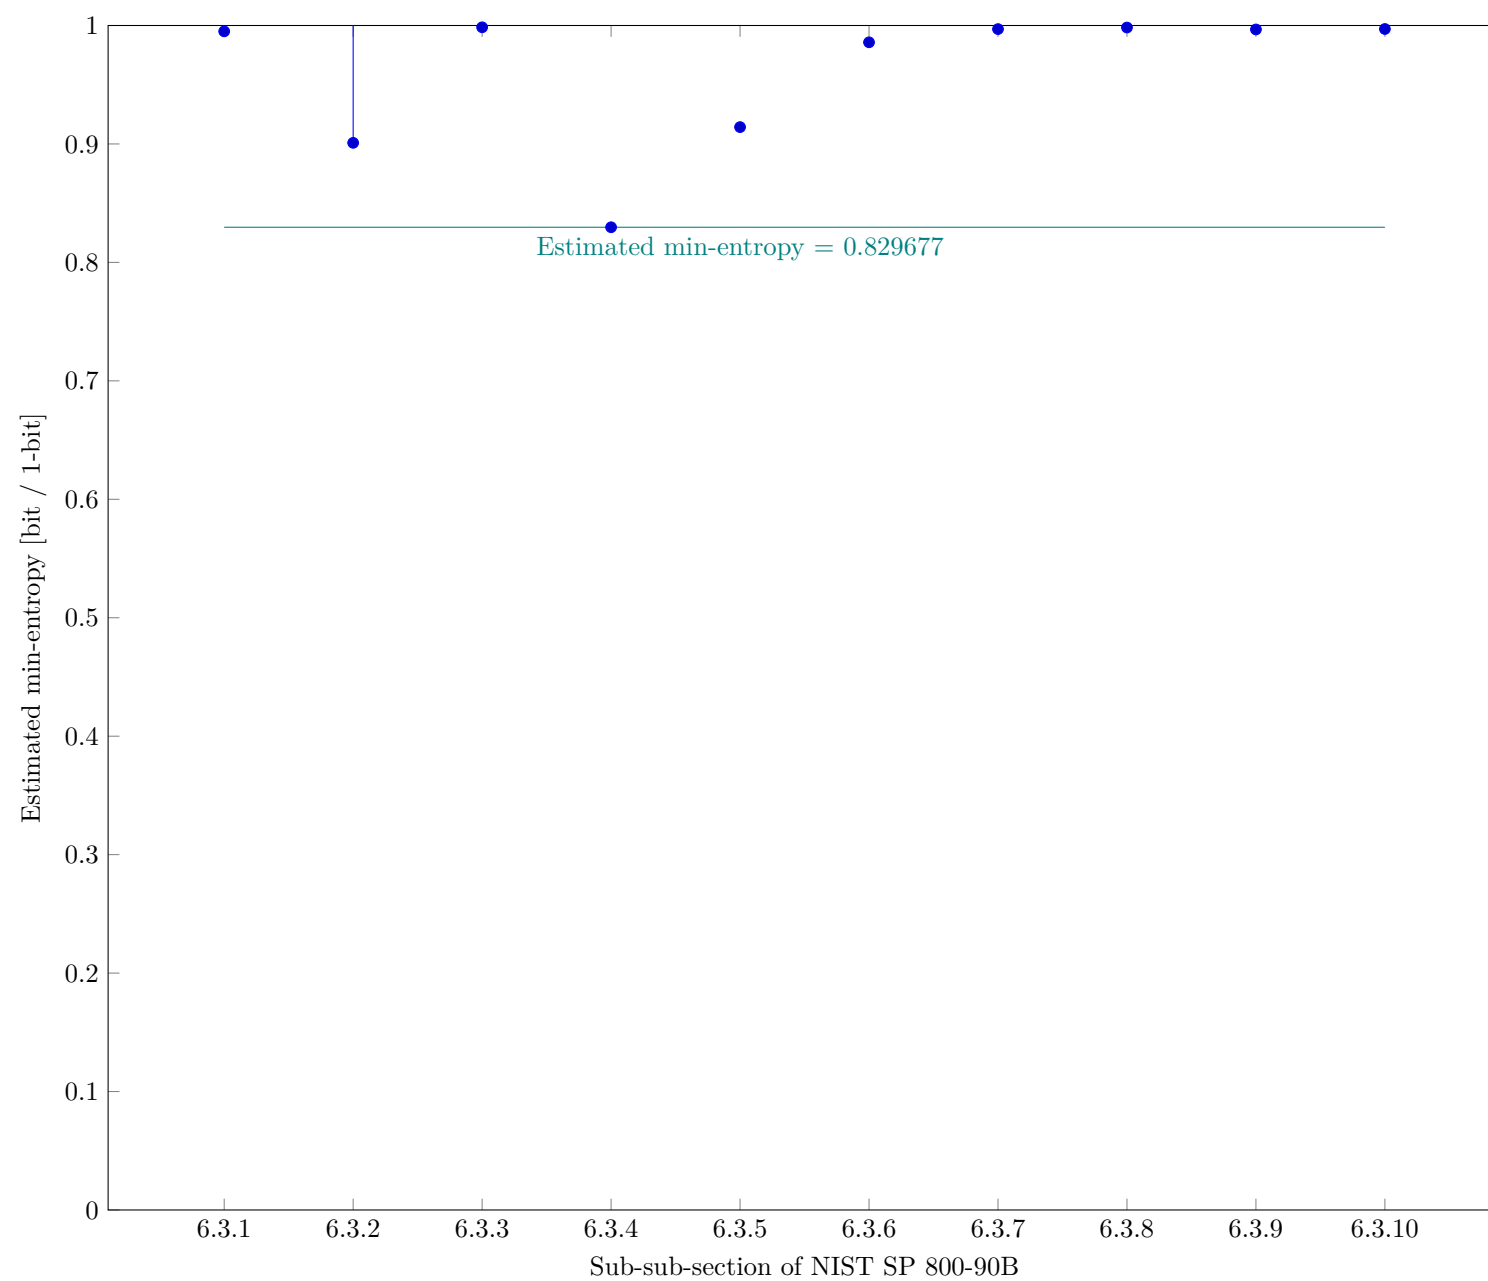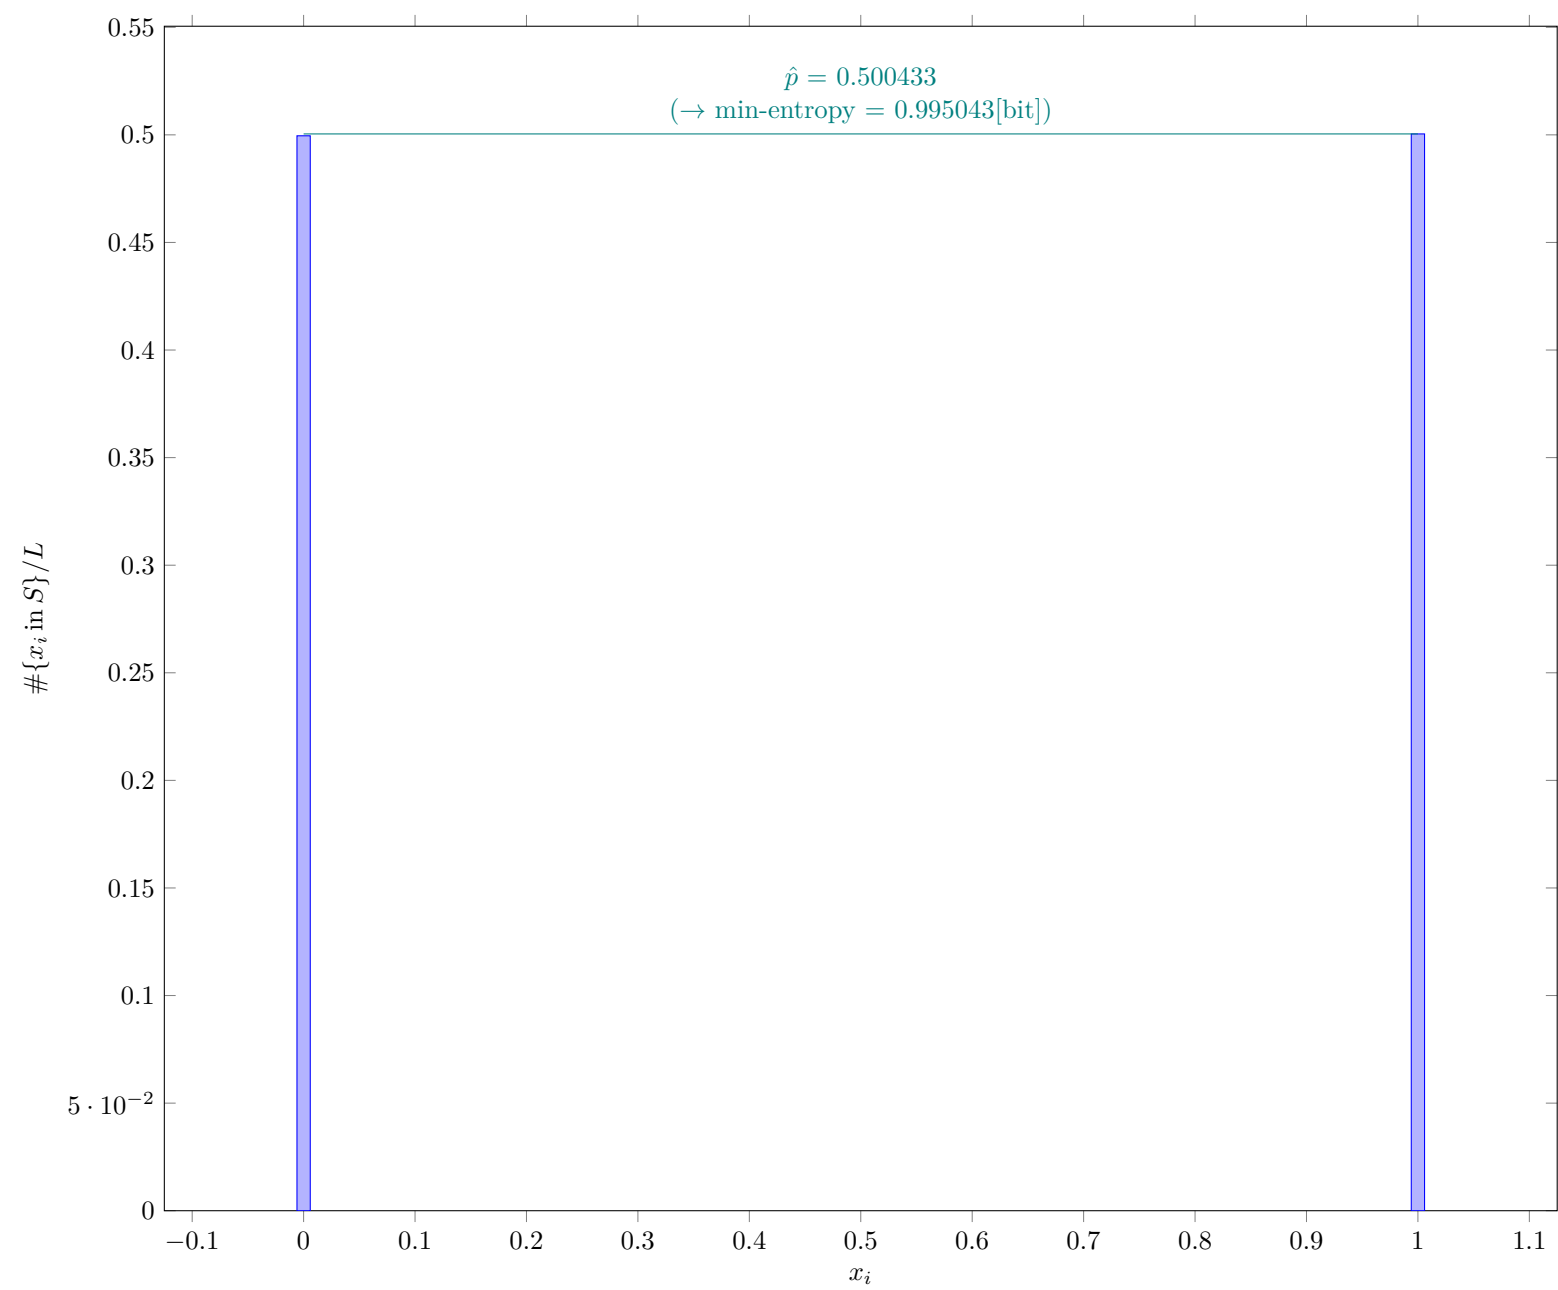

Fig. 1   Estimated Min-Entropy using §6.3 of NIST SP 800-90B

3 Detailed results of analysis from original samples

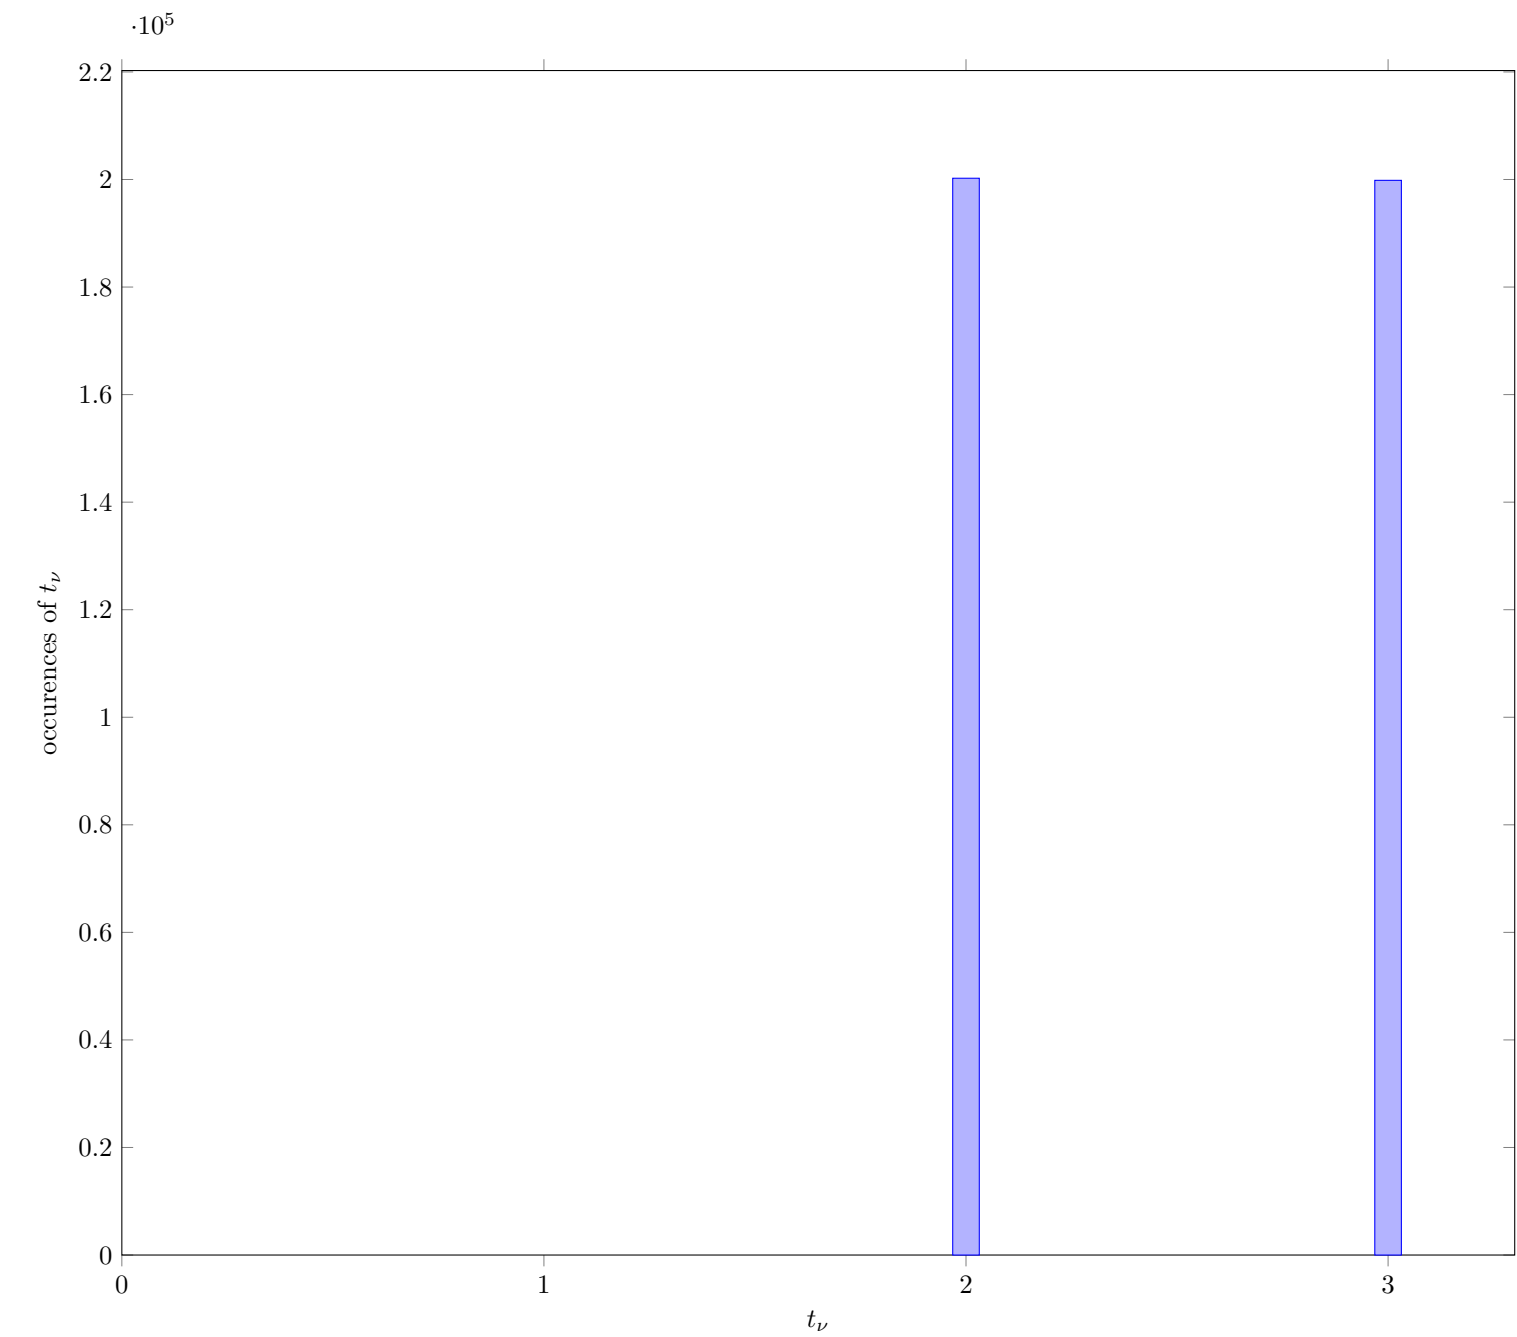## 3.1 The Most Common Value Estimate (NIST SP 800-90B Section 6.3.1)

3.1.1 Supplemental information for traceability

Table 5 Supplemental information for traceability (NIST SP 800-90B Section 6.3.1)

Symbol	Value
mode	500433
$\hat{p}$	0.500433
p_u	0.501721

3.2 The Collision Estimate (NIST SP 800-90B Section 6.3.2)

3.2.1 Supplemental information for traceability

Table 6   Supplemental information for traceability (NIST SP 800-90B Section 6.3.2)

Symbol	Value
p	0.53554
$\bar{X}$	2.49951
$\bar{X}'$	2.49747

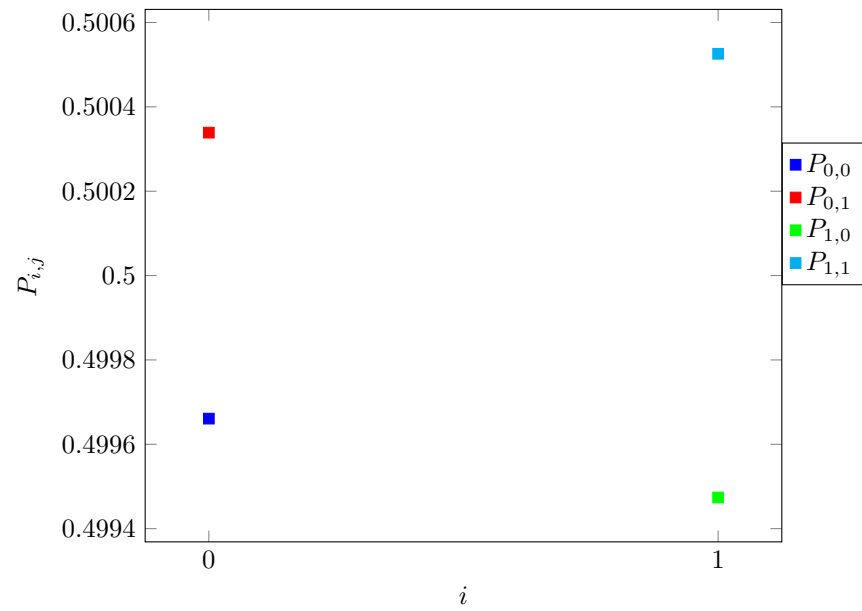## 3.3 The Markov Estimate (NIST SP 800-90B Section 6.3.3)

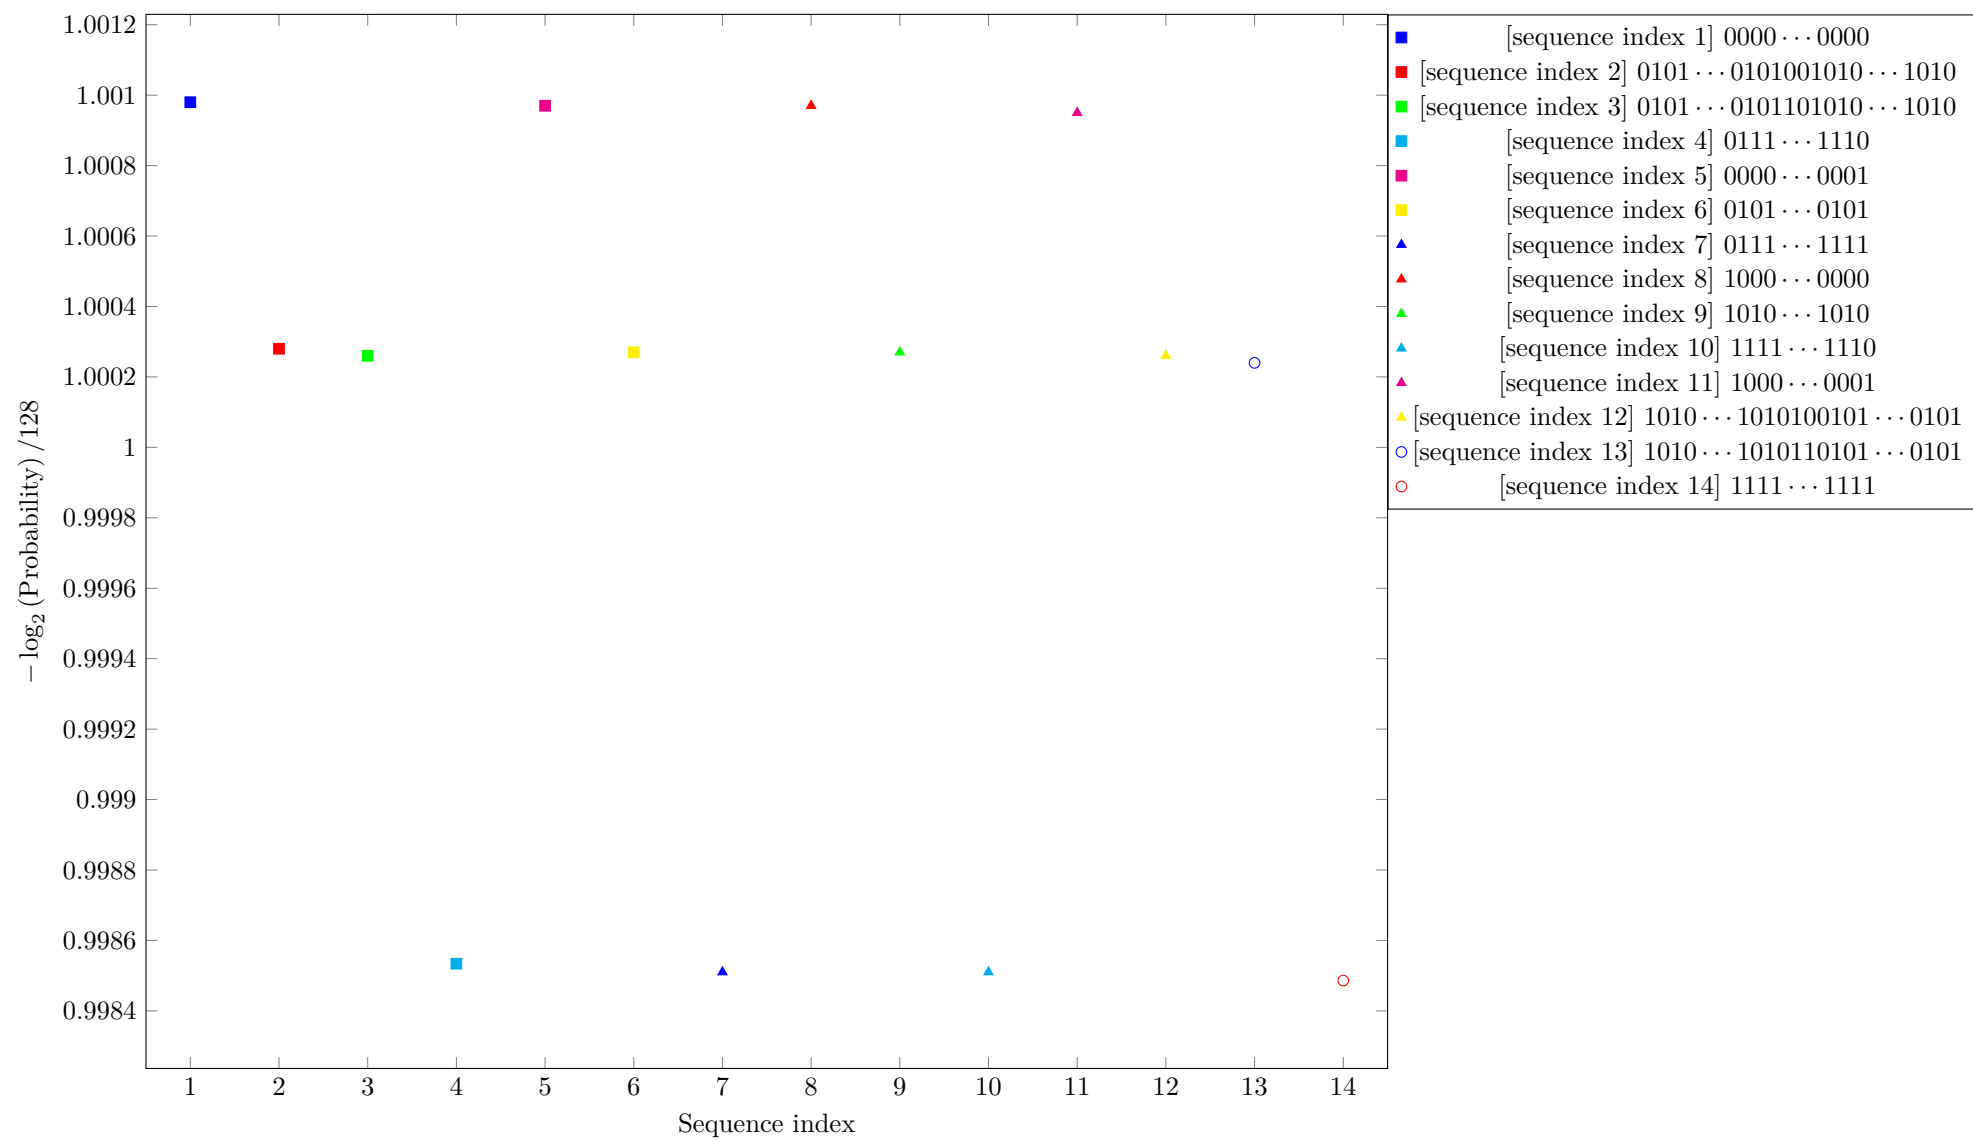Fig. 2 Transition probability $P_{i,j}$ of §6.3.3 of NIST SP 800-90B
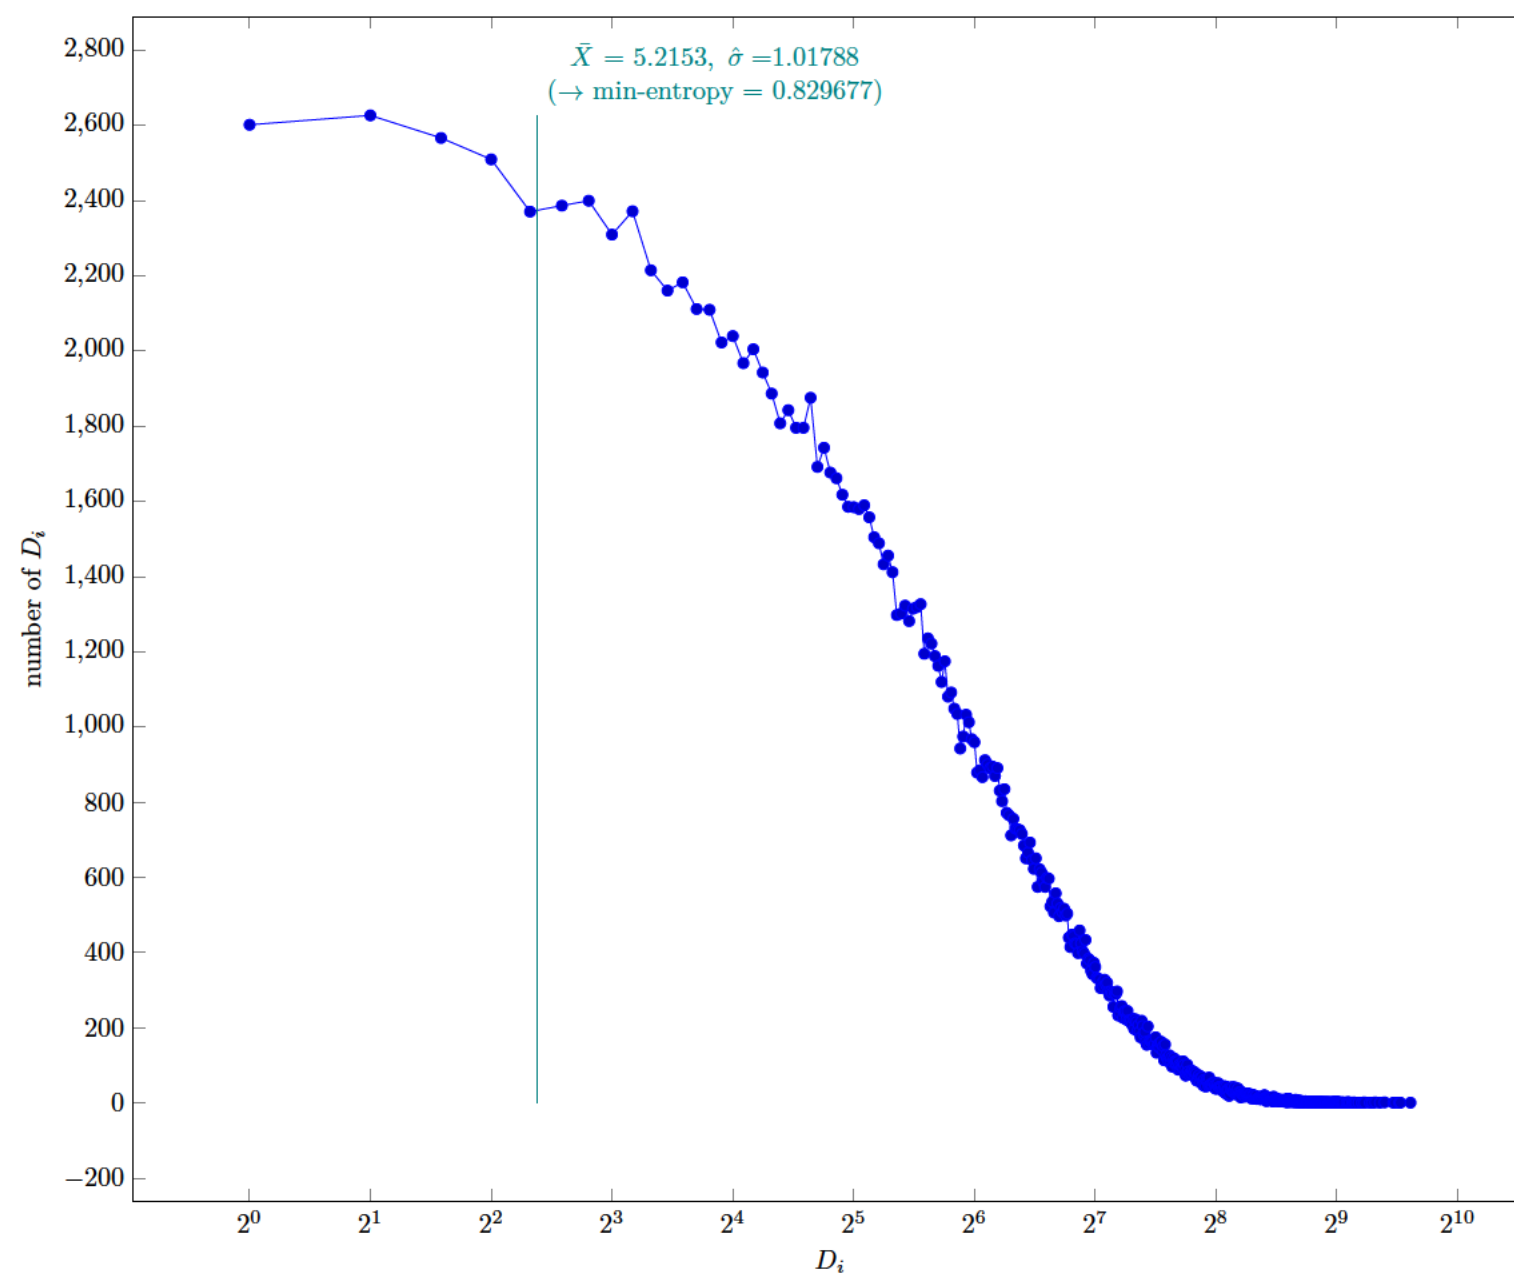

Fig. 3 Estimated Min-Entropy using §6.3.3 of NIST SP 800-90B

3.4 The Compression Estimate (NIST SP 800-90B Section 6.3.4)

3.4.1 Supplemental information for traceability

Table 7   Supplemental information for traceability (NIST SP 800-90B Section 6.3.4)

Symbol	Value
p	0.0317288
$\bar{X}$	5.2153
$\hat{\sigma}$	1.01788
$\bar{X}'$	5.20886

Table 7   Supplemental information for traceability (NIST SP 800-90B Section 6.3.4)

Symbol	Value
p	0.0317288
$\bar{X}$	5.2153
$\hat{\sigma}$	

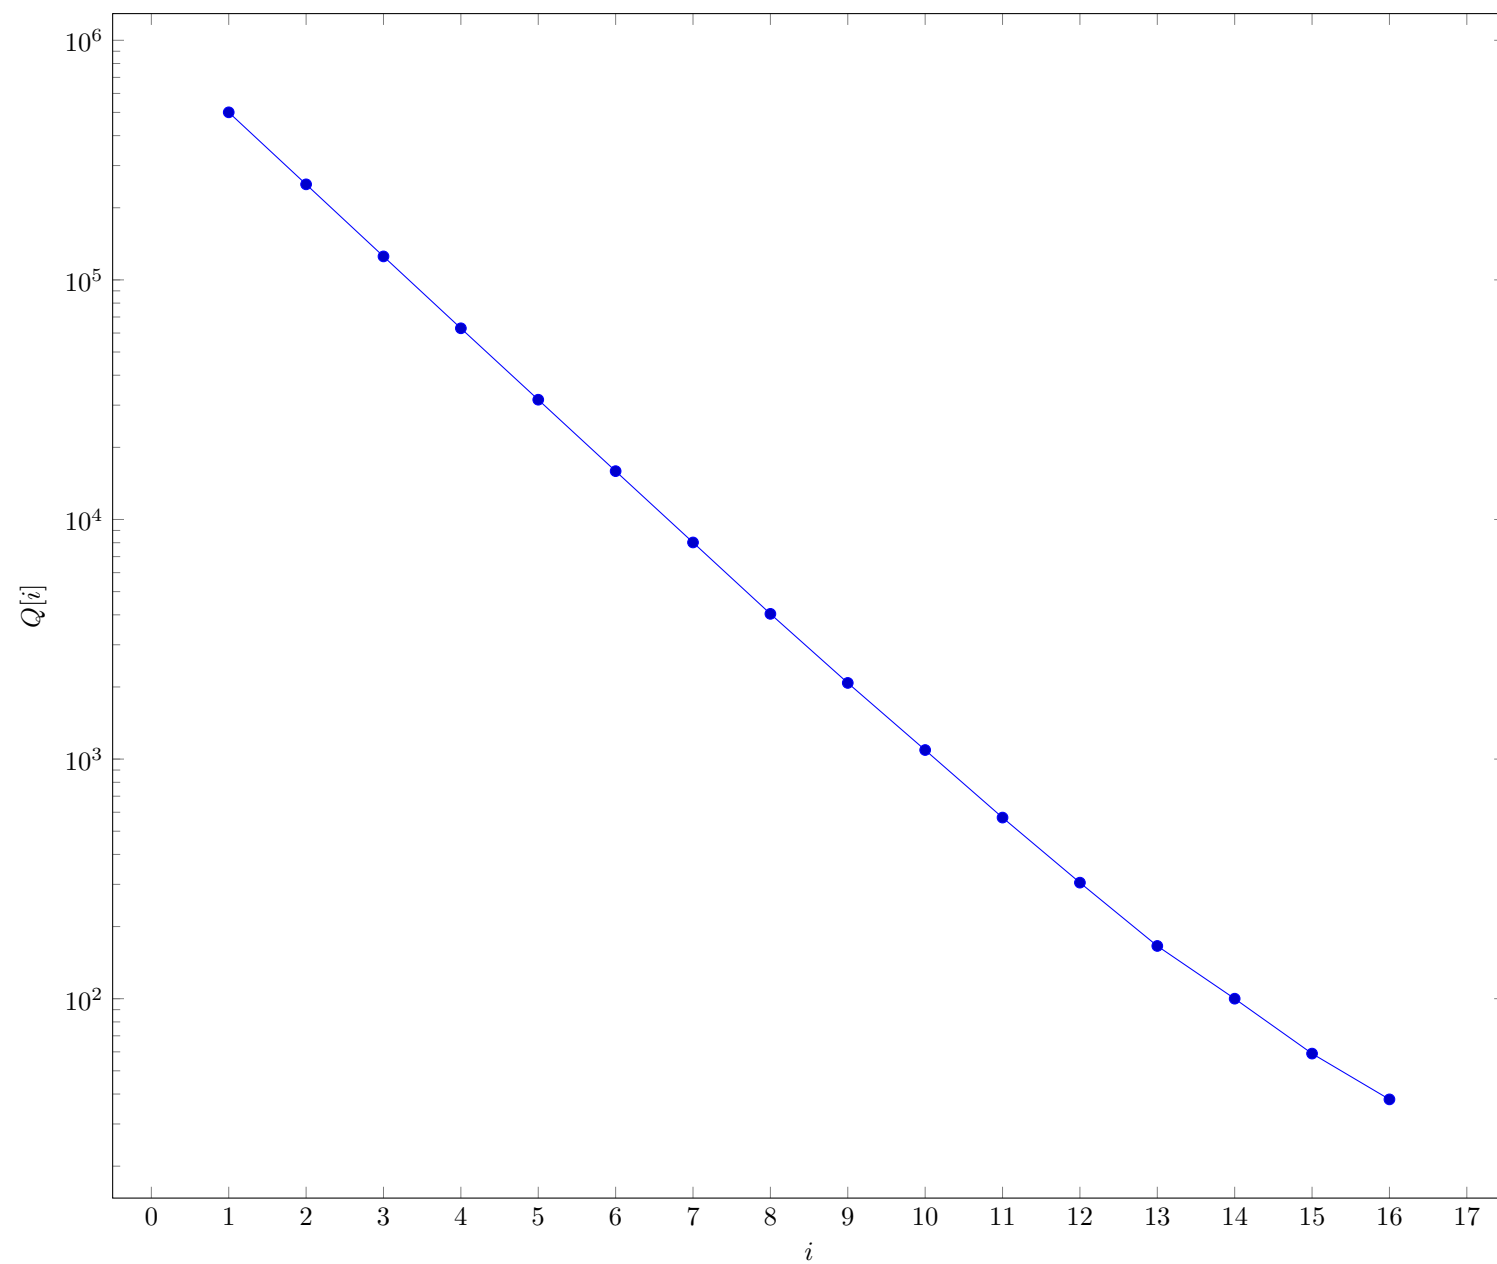## 3.5 The t-tuple Estimate (NIST SP 800-90B Section 6.3.5)

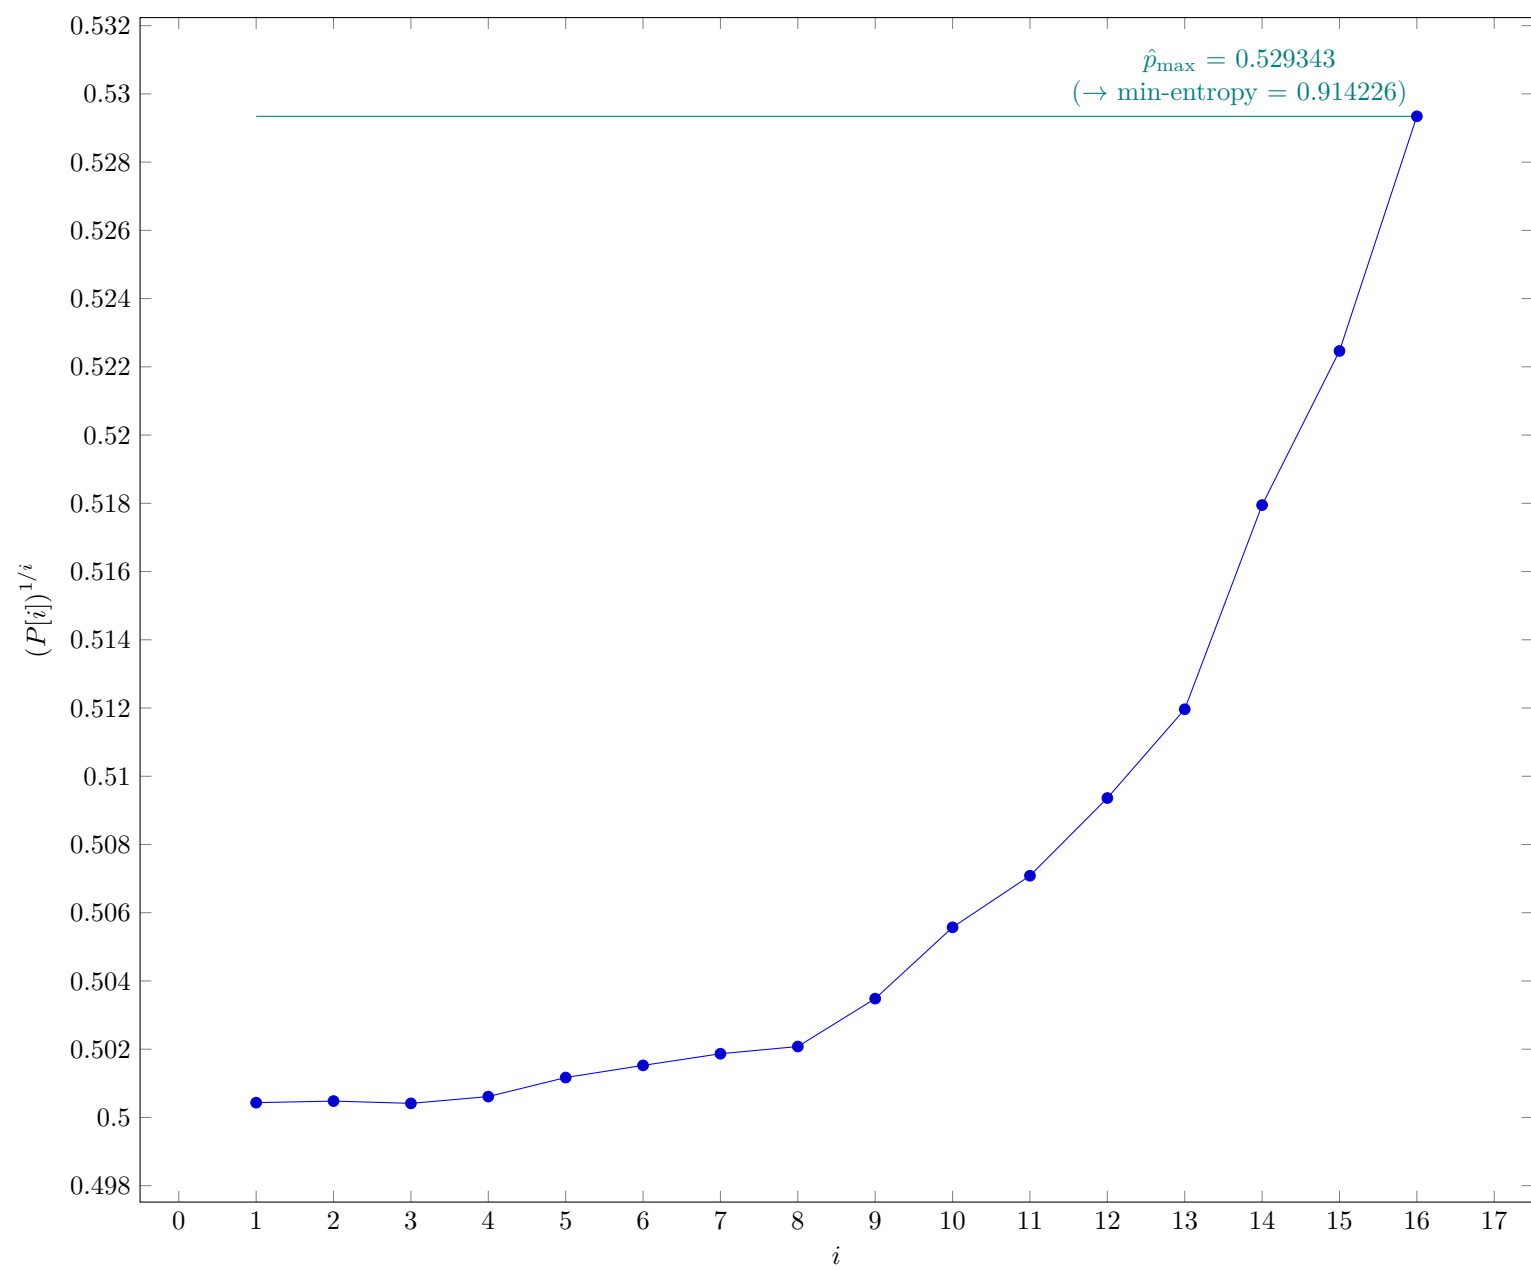Fig. 4 Intermediate value $Q[i]$ in §6.3.5 of NIST SP 800-90B

Fig. 5 $P[i]^{1/i}$ in §6.3.5 of NIST SP 800-90B

13

3.5.1 Supplemental information for traceability

Table 8 Supplemental information for traceability (NIST SP 800-90B Section 6.3.5)

Symbol	Value
t	16
$\hat{p}_{\max}$	0.529343
p_u	0.530628

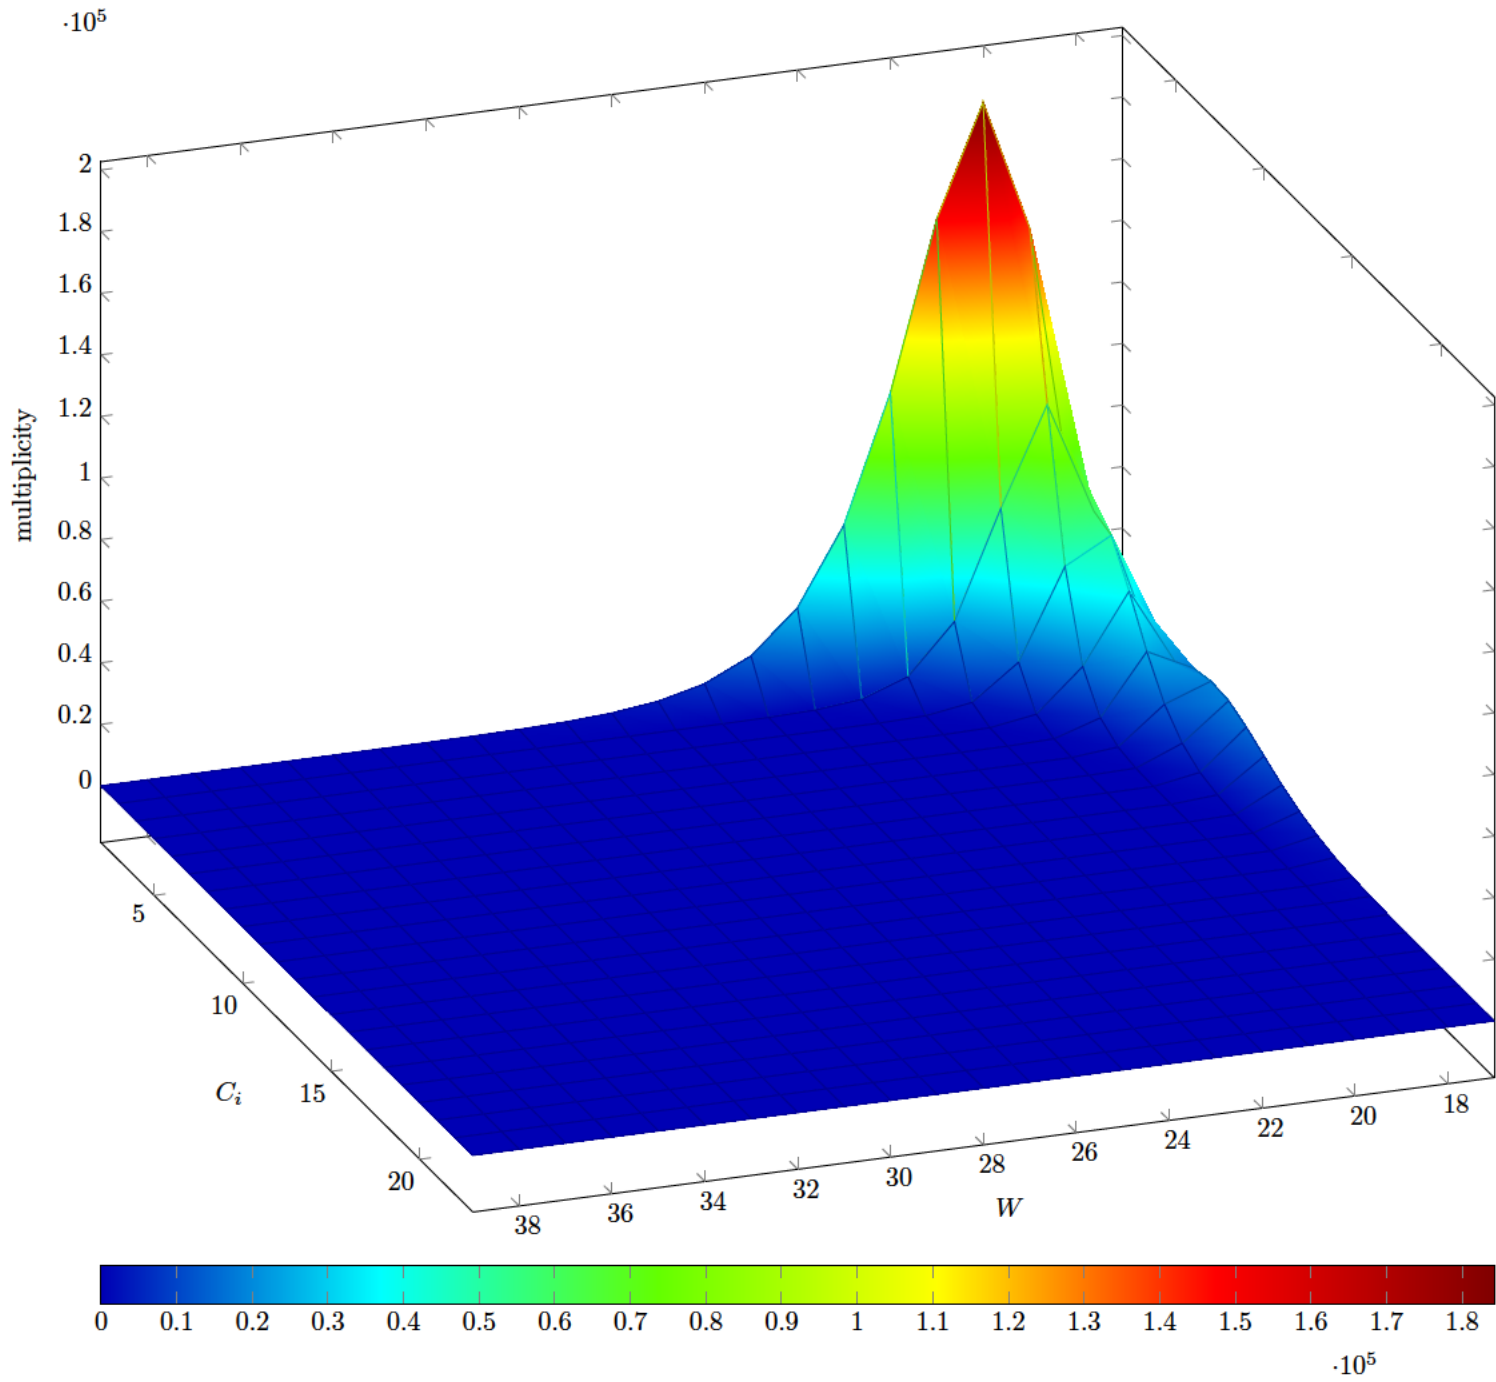## 3.6 The LRS Estimate (NIST SP 800-90B Section 6.3.6)

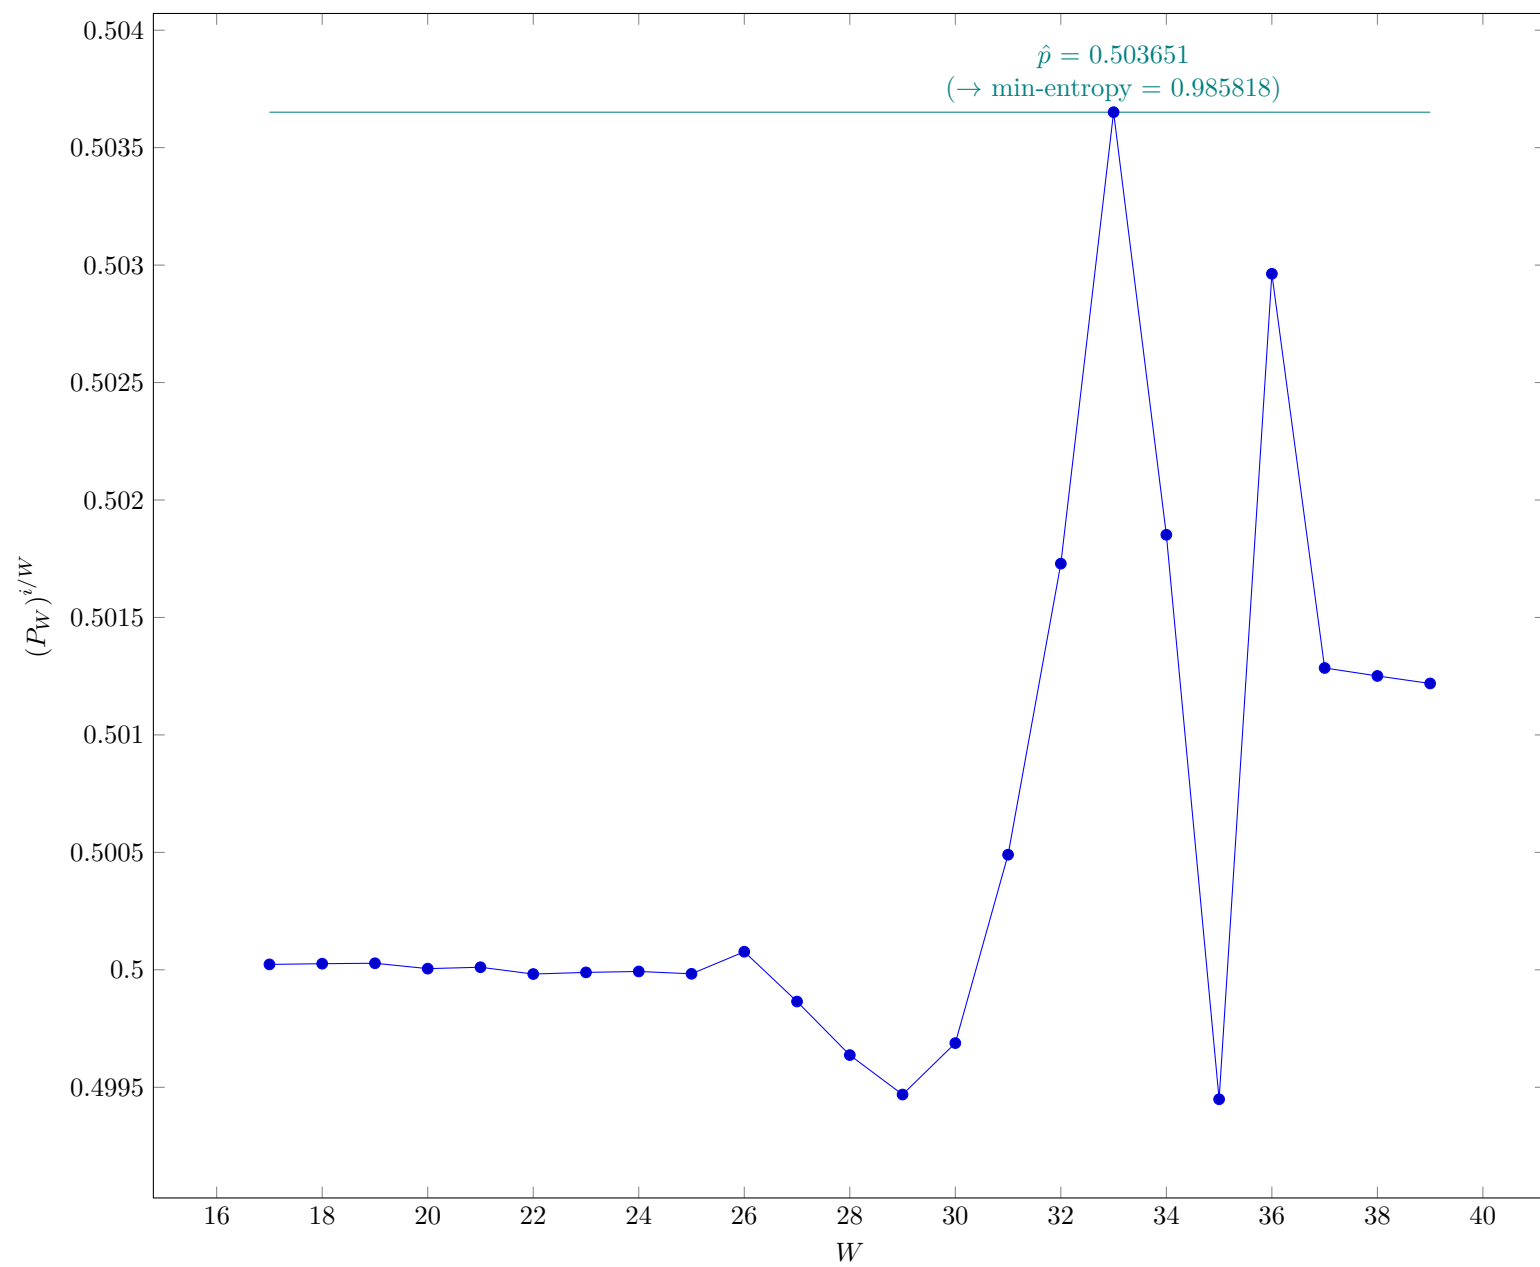Fig. 6   Estimated W-tuple collision probability in Step 3 of §6.3.6 of NIST SP 800-90B

Fig. 7 Estimated average collision probability per string symbol in Step 3 of §6.3.6 of NIST SP 800-90B

3.6.1 Supplemental information for traceability

Table 9 Supplemental information for traceability (NIST SP 800-90B Section 6.3.6)

Symbol	Value
u	17
v	39
$\hat{p}$	0.503651
p_u	0.504939

Table 9 Supplemental information for traceability (NIST SP 800-90B Section 6.3.6)

Symbol	Value
u	17
v	39
$\hat{p}$	

3.7 Multi Most Common in Window Prediction Estimate (NIST SP 800-90B Section 6.3.7)

Fig. 8 Distribution of *correct*

3.7.1 Supplemental information for traceability

Table 10 Supplemental information for traceability (NIST SP 800-90B Section 6.3.7)

Symbol	Value
N	999937
C	499731
P_{global}	0.499762
P'_{global}	0.50105
r	20
P_{local}	0.408813

3.8 Lag Prediction Estimate (NIST SP 800-90B Section 6.3.8)
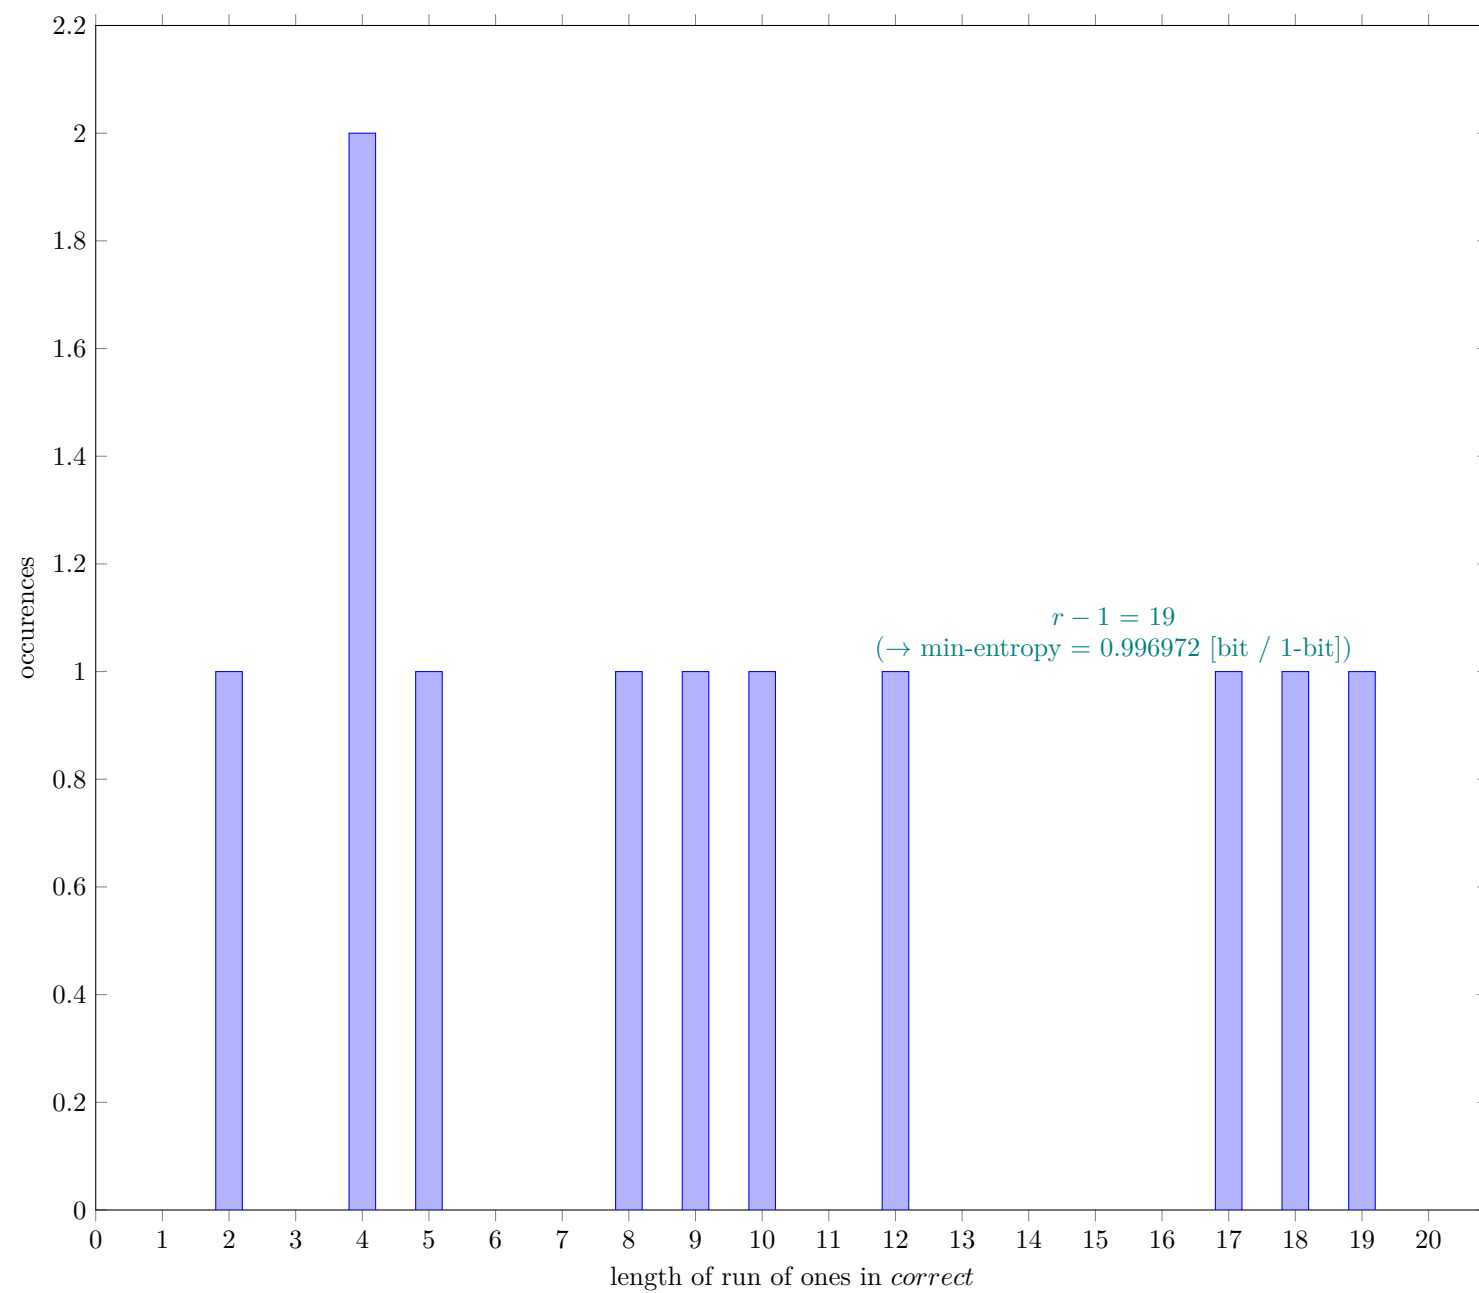

Fig. 9 Distribution of *correct*

3.8.1 Supplemental information for traceability

Table 11   Supplemental information for traceability (NIST SP 800-90B Section 6.3.8)

Symbol	Value
N	999999
C	499304
P_{global}	0.499304
P'_{global}	0.500592
r	23
P_{local}	0.461263

Table 11   Supplemental information for traceability (NIST SP 800-90B Section 6.3.8)

Symbol	Value
N	999999
C	499304
P_{global}	

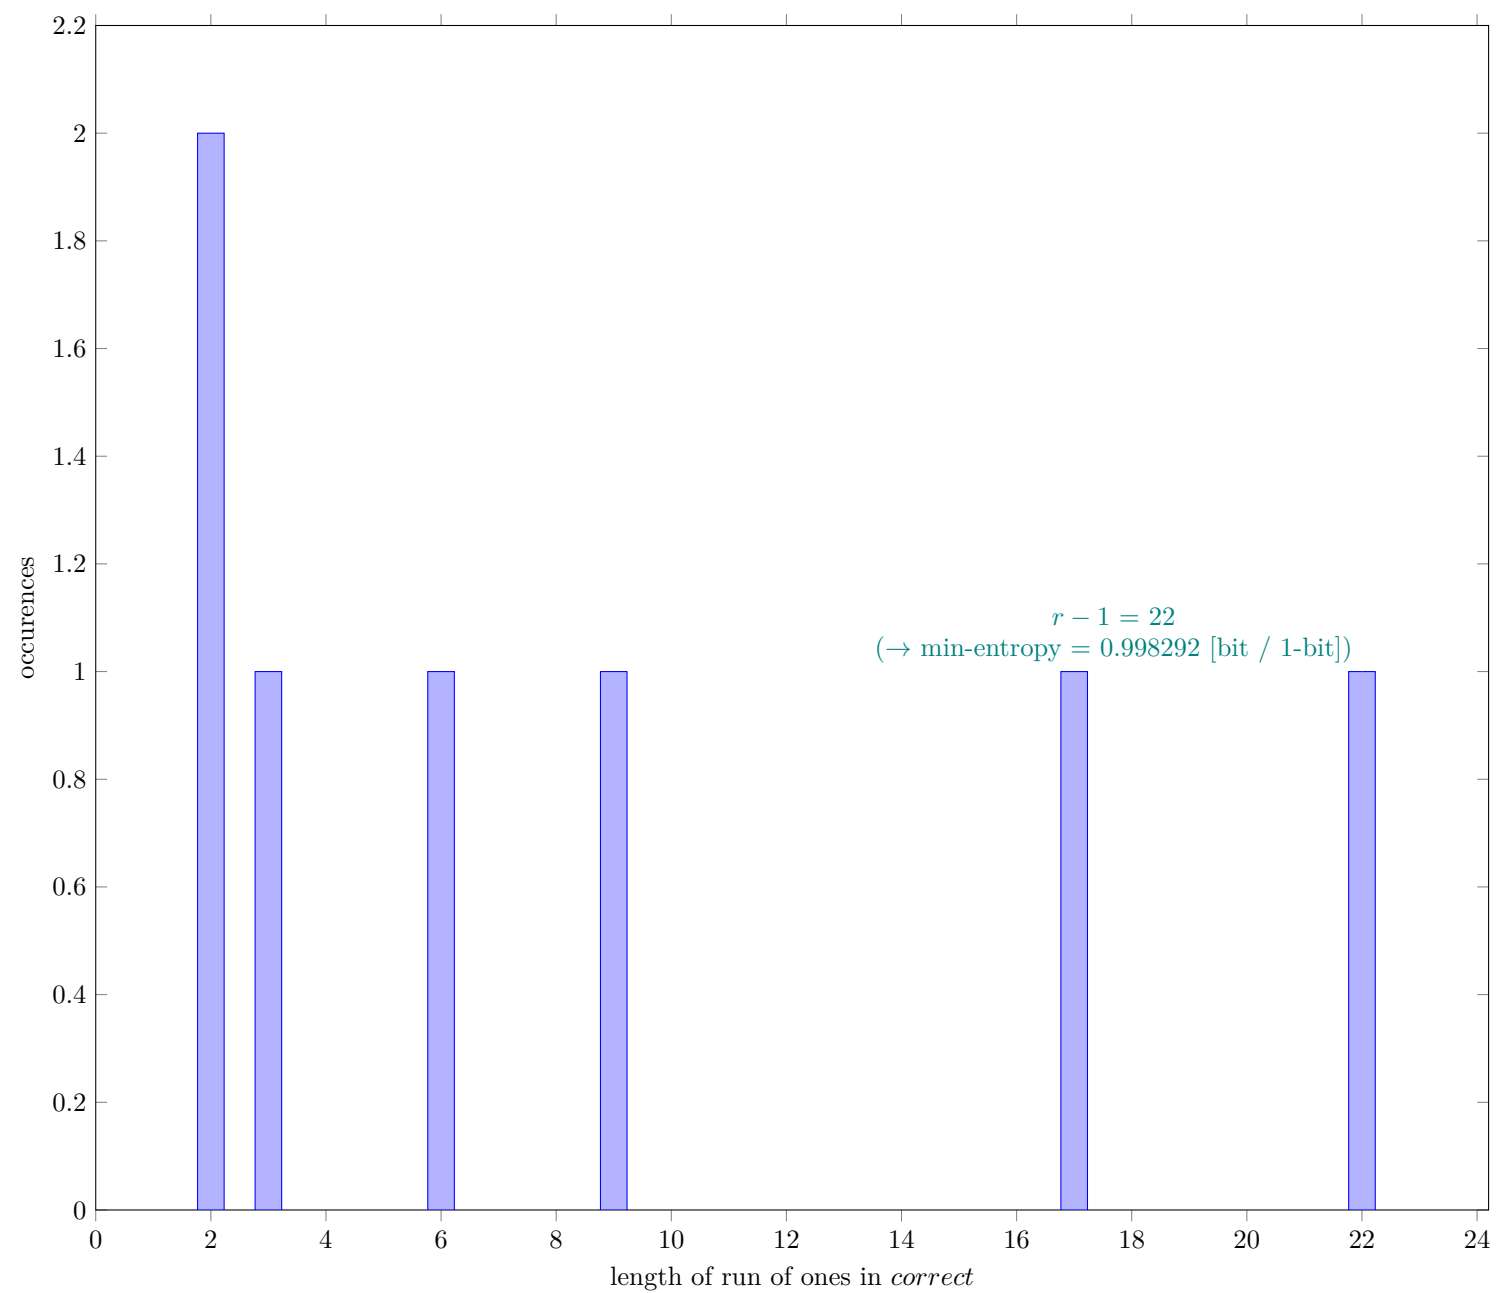## 3.9 The MultiMMC Prediction Estimate (NIST SP 800-90B Section 6.3.9)
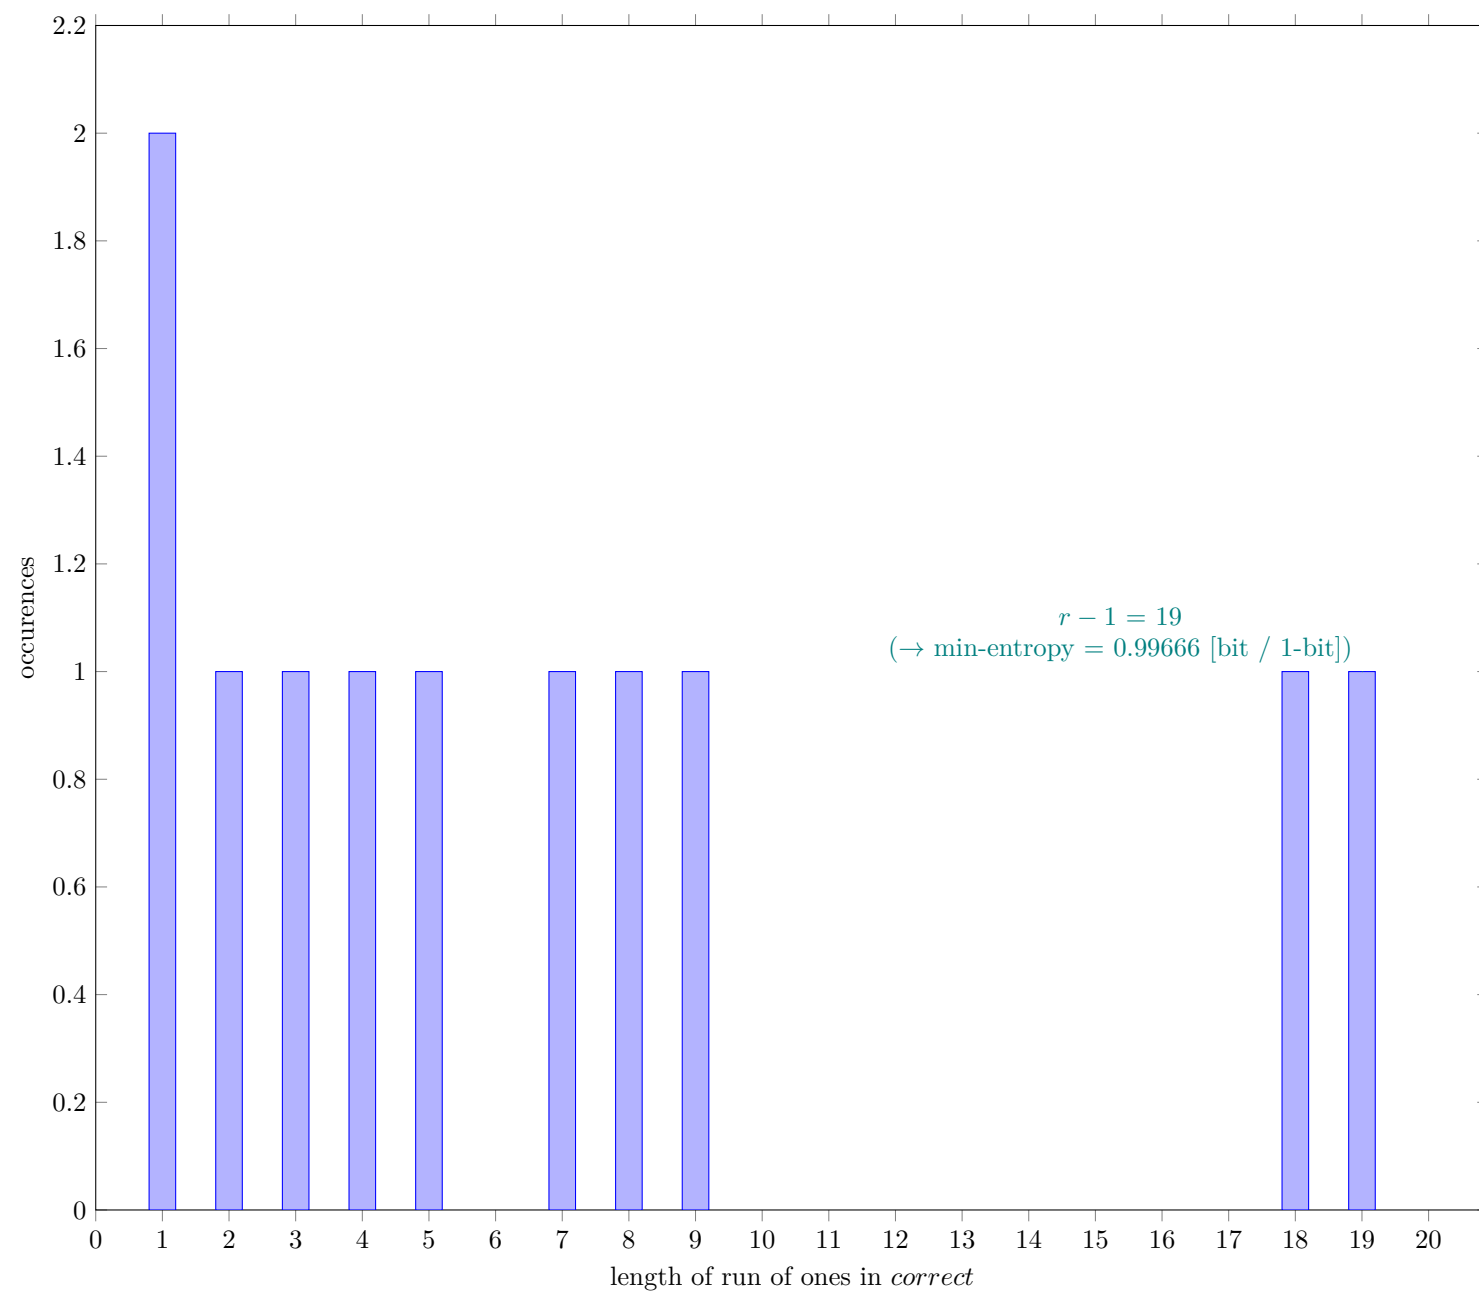

Fig. 10   Distribution of *correct*

3.9.1 Supplemental information for traceability

Table 12 Supplemental information for traceability (NIST SP 800-90B Section 6.3.9)

Symbol	Value
N	999998
C	499870
P_{global}	0.499871
P'_{global}	0.501159
r	20
P_{local}	0.408812

Table 12 Supplemental information for traceability (NIST SP 800-90B Section 6.3.9)

Symbol	Value
N	999998
C	499870
P_{global}	

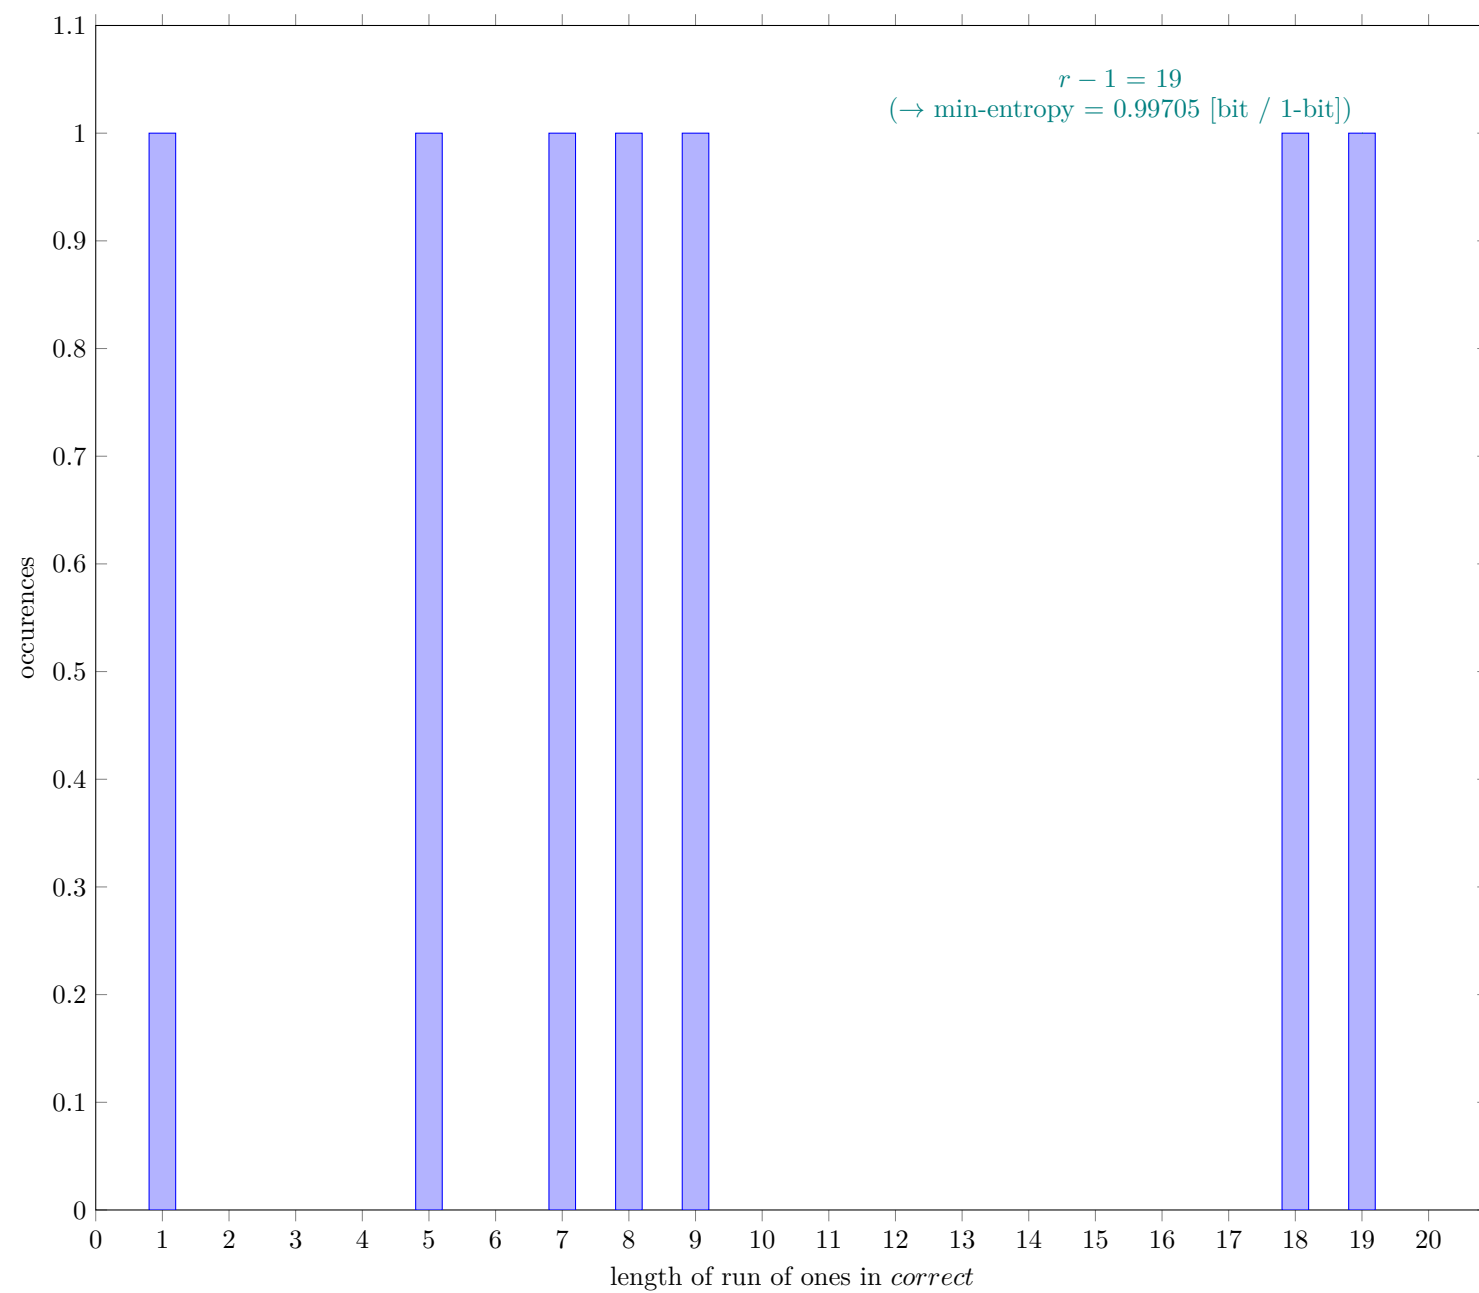## 3.10 The LZ78Y Prediction Estimate (NIST SP 800-90B Section 6.3.10)

Fig. 11 Distribution of *correct*

3.10.1 Supplemental information for traceability

Table 13 Supplemental information for traceability (NIST SP 800-90B Section 6.3.10)

Symbol	Value
N	999983
C	499727
P_{global}	0.499735
P'_{global}	0.501023
r	20
P_{local}	0.408812

References

[1] Meltem Sönmez Turan, Elaine Barker, John Kelsey, Kerry A. McKay, Mary L. Baish, Mike Boyle *Recommendation for the Entropy Sources Used for Random Bit Generation*, NIST Special Publication 800-90B, Jan. 2018

[2] G. Sakurai, *Proposed list of corrections for NIST SP 800-90B 6.3 Estimators*, Dec. 2022 `https://github.com/g-g-sakura/AnotherEntropyEstimationTool/blob/main/documentation/ProposedListOfCorrections_SP800-90B.pdf`