Report of Entropy estimates based on NIST SP 800-90B non-IID track

2023-Aug-20 11:33:01.226056

1 Identification information

1.1 Identification of acquisition data from entropy source

Table 1 $\,$ Identification information of acquisition data from entropy source

| URL of the acquisition data | https://github.com/usnistgov/SP800-90B_EntropyAssessment/blob/master/bin/rand1_short.bin |
|--|--|
| SHA-256 hash value of the acqui- sition data [hex] | 38144044 97a3b912 f8d3db6b c05a9933 8f0986cd 75fe54af 2a5f1bdb 0a12a583 |

- Name of the submitter of the acquisition data :
- Brief explanation of the acquisition data (or entropy source) :

1.2 Identification of analysis environment

 ${\it Table 2} \quad {\it Identification information of analysis environment}$

| Analysis tool | Name | Another entropy estimation tool with extensions |
|----------------------|------------------------|---|
| | Versioning information | 1.0.50 |
| | built as | 64-bit application |
| | built by | Intel C++ Compiler (INTEL_LLVM_COMPILER: 20230200) |
| | linked libraries | Boost C++ 1.83.0 |
| Analysis environment | Hostname | |
| | CPU information | AMD Ryzen |
| | Physical memory size | MiB |
| | OS information | Windows 10 or greater 64-bit |
| | Username | |

1.3 Identification of analysis conditions

Table 3 $\,$ Identification information of analysis conditions

| Number of samples | 10000 |
|-------------------|-------|
| Bits per sample | 1 |

1.4 Identification of analysis method

NIST SP 800-90B [1] 6.3 with corrections [2] is applied

2.1 Numerical results of min-entropy estimates based on non-IID track

Table 4 Numerical results

| Estimator | $H_{ m bitstring}{}^{ m a}$ | Notes to $H_{\text{bitstring}}$ |
|---|-----------------------------|---------------------------------|
| | [bit / 1 - bit] | |
| The Most Common Value Estimate | 0.961059 | see 3.1 |
| The Collision Estimate | 0.691464 | see 3.2 |
| The Markov Estimate | 0.987596 | see 3.3 |
| The Compression Estimate | 0.611716 | see 3.4 |
| The t-Tuple Estimate | 0.867624 | see 3.5 |
| The Longest Repeated Substring (LRS) Estimate | 0.962626 | see 3.6 |
| Multi Most Common in Window Prediction Estimate | 0.952618 | see 3.7 |
| The Lag Prediction Estimate | 0.943334 | see 3.8 |
| The MultiMMC Prediction Estimate | 0.961617 | see 3.9 |
| The LZ78Y Prediction Estimate | 0.961446 | see 3.10 |
| The intial entropy source estimate [bit / 1 -bit] | 0. | 611716 |
| $H_I = H_{ m bitstring}$ | | |
| ^a Entropy estimate of the sequential dataset [source: NIST SP 800-90B [1] 3.1.3] | | |

2.2 Visual comparison of min-entropy estimates from binary samples

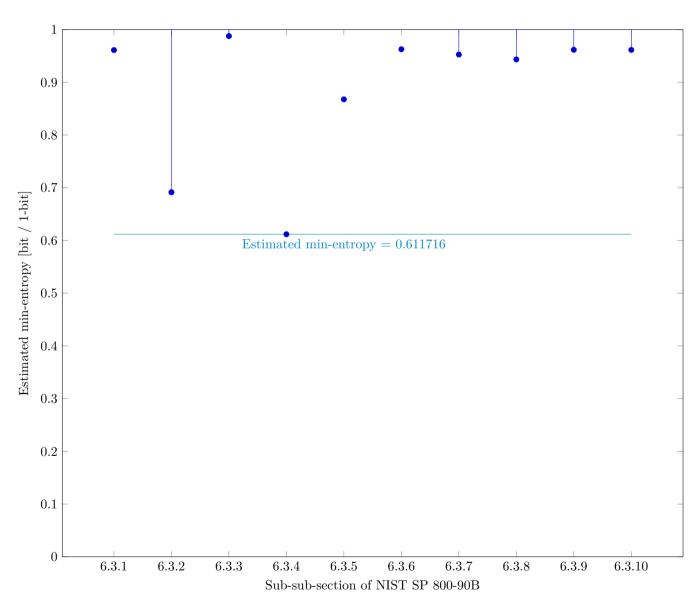


Fig. 1 $\,$ Estimated Min-Entropy using $\S 6.3$ of NIST SP 800-90B $\,$

3 Detailed results of analysis from original samples

3.1 The Most Common Value Estimate (NIST SP 800-90B Section 6.3.1)



Fig. 2 Distribution of x_i

3.1.1 Supplemental information for traceability

Table 5 Supplemental information for traceability (NIST SP 800-90B Section 6.3.1)

| Symbol | Value |
|-----------|---------|
| mode | 5008 |
| \hat{p} | 0.5008 |
| p_u | 0.51368 |

3.2 The Collision Estimate (NIST SP 800-90B Section 6.3.2)

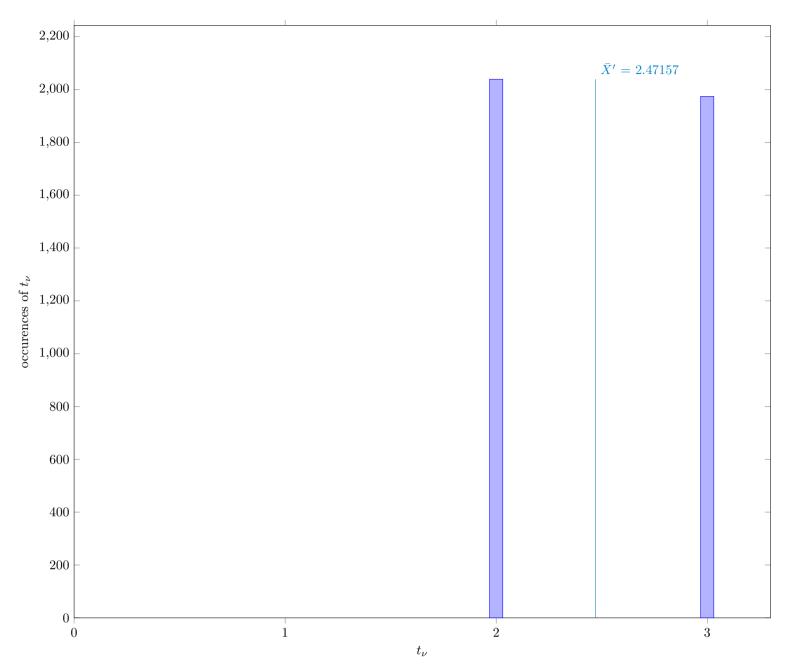


Fig. 3 Distribution of intermediate value t_{ν}



Fig. 4 Solution to the equation in step 7

3.2.1 Supplemental information for traceability

Table 6 Supplemental information for traceability (NIST SP 800-90B Section 6.3.2)

| Symbol | Value |
|----------------|----------|
| p | 0.619225 |
| \bar{X} | 2.4919 |
| $ar{X}'$ | 2.47157 |
| $\hat{\sigma}$ | 0.499997 |

3.3 The Markov Estimate (NIST SP 800-90B Section 6.3.3)

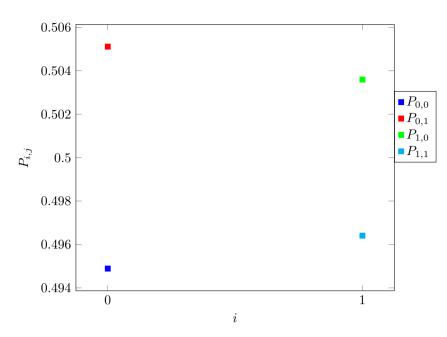


Fig. 5 Transition probability $P_{i,j}$ of §6.3.3 of NIST SP 800-90B

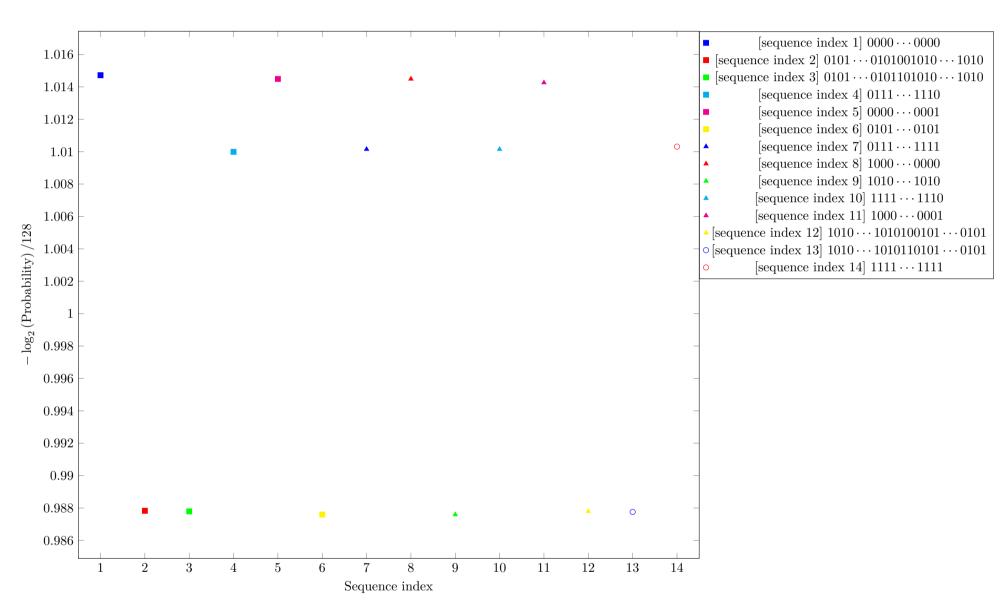


Fig. 6 Estimated Min-Entropy using §6.3.3 of NIST SP 800-90B

3.4 The Compression Estimate (NIST SP 800-90B Section 6.3.4)

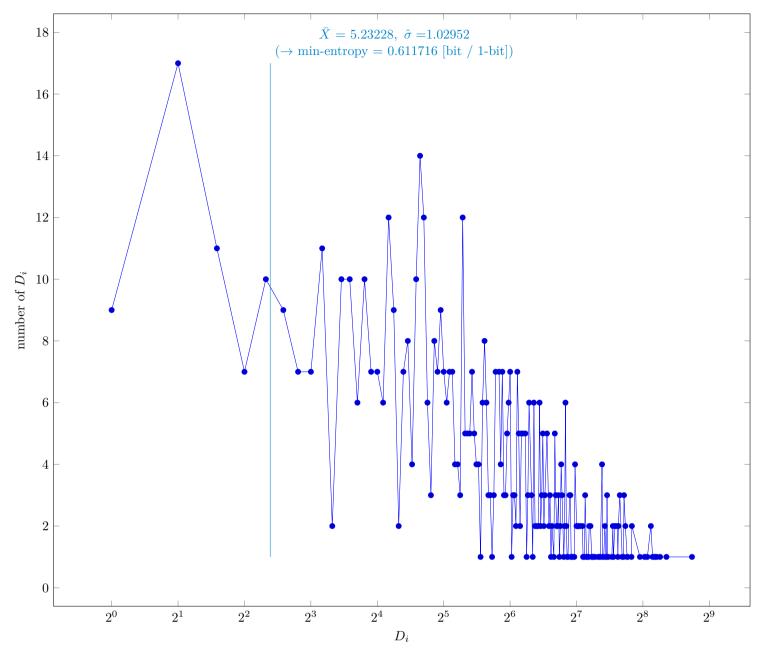


Fig. 7 Distribution of intermediate value D_i

3.4.1 Supplemental information for traceability

Table 7 Supplemental information for traceability (NIST SP 800-90B Section 6.3.4)

| Symbol | Value |
|----------------|-----------|
| p | 0.0785472 |
| \bar{X} | 5.23228 |
| $\hat{\sigma}$ | 1.02952 |
| \bar{X}' | 5.12953 |

3.5 The t-tuple Estimate (NIST SP 800-90B Section 6.3.5)

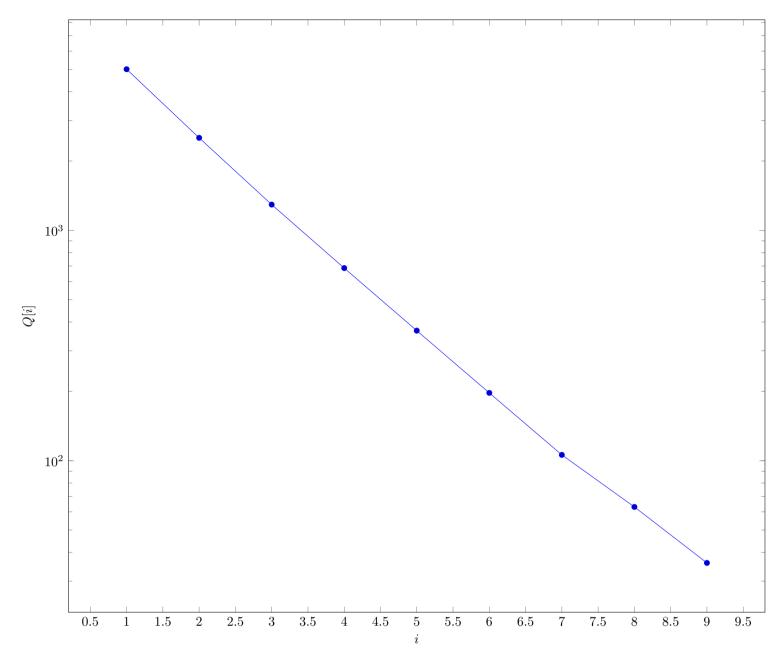


Fig. 8 Intermediate value Q[i] ~ in $\S 6.3.5$ of NIST SP 800-90B

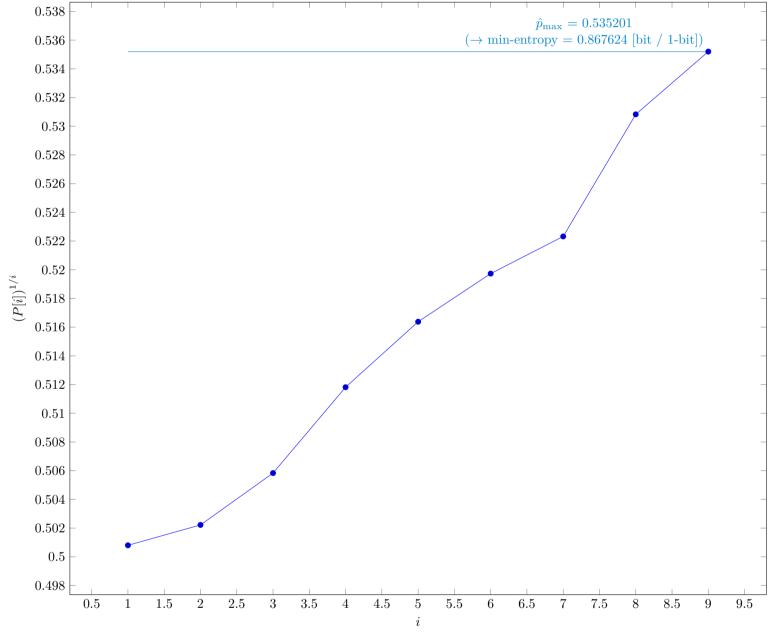


Fig. 9 $P[i]^{1/i}$ in $\S 6.3.5$ of NIST SP 800-90B

3.5.1 Supplemental information for traceability

Table 8 Supplemental information for traceability (NIST SP 800-90B Section 6.3.5)

| Value |
|----------|
| 9 |
| 0.535201 |
| 0.548049 |
| |

3.6 The LRS Estimate (NIST SP 800-90B Section 6.3.6)

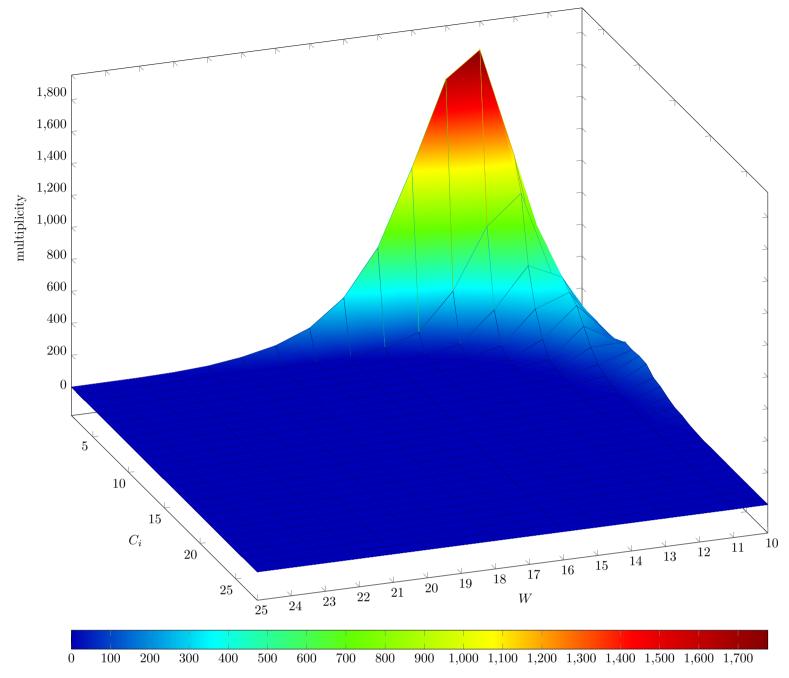


Fig. 10 Estimated W-tuple collision probability in Step 3 of $\S 6.3.6$ of NIST SP 800-90B

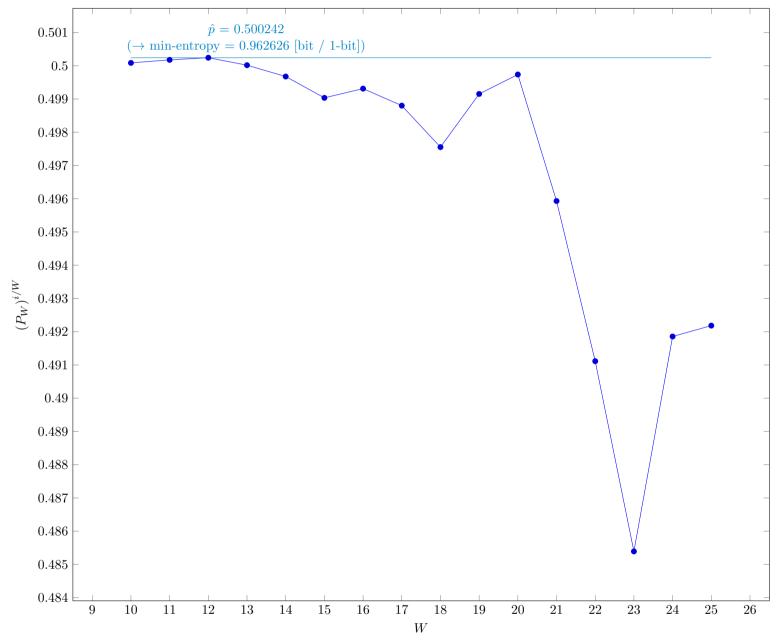


Fig. 11 Estimated average collision probability per string symbol in Step 3 of $\S 6.3.6$ of NIST SP 800-90B

3.6.1 Supplemental information for traceability

Table 9 Supplemental information for traceability (NIST SP 800-90B Section 6.3.6)

| Symbol | Value |
|-----------|----------|
| u | 10 |
| v | 25 |
| \hat{p} | 0.500242 |
| p_u | 0.513122 |

3.7 Multi Most Common in Window Prediction Estimate (NIST SP 800-90B Section 6.3.7)

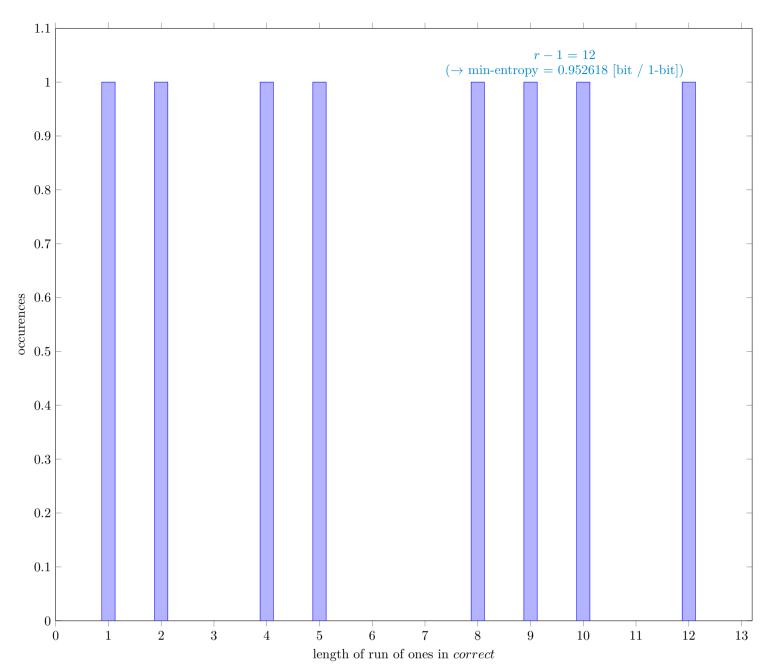


Fig. 12 Distribution of correct

3.7.1 Supplemental information for traceability

Table 10 Supplemental information for traceability (NIST SP 800-90B Section 6.3.7)

| Symbol | Value |
|-----------------------|----------|
| N | 9937 |
| C | 5006 |
| P_{global} | 0.503774 |
| $P'_{ m global}$ | 0.516694 |
| r | 13 |
| P_{local} | 0.357828 |

3.8 Lag Prediction Estimate (NIST SP 800-90B Section 6.3.8)

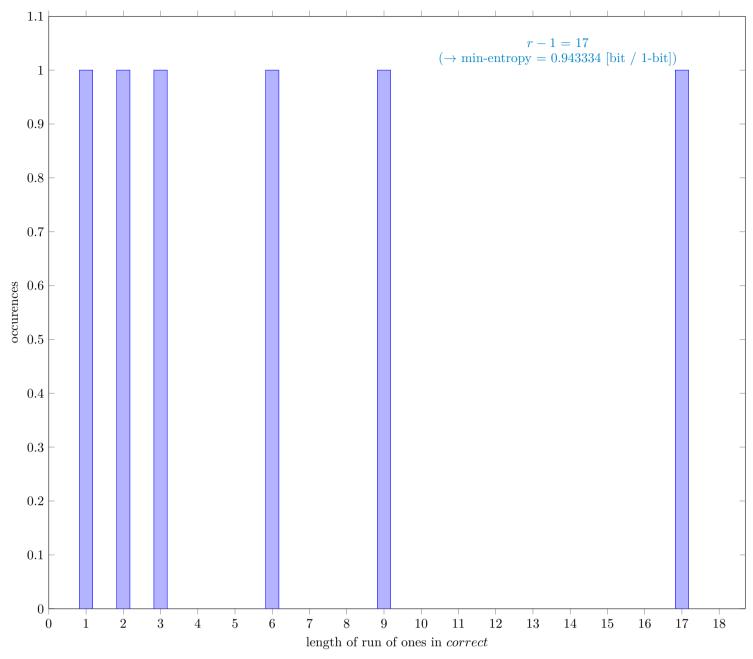


Fig. 13 Distribution of correct

3.8.1 Supplemental information for traceability

 $\begin{tabular}{ll} Table 11 & Supplemental information for traceability (NIST SP 800-90B Section 6.3.8) \\ \end{tabular}$

| Symbol | Value |
|-----------------------|----------|
| N | 9999 |
| C | 5071 |
| P_{global} | 0.507151 |
| $P'_{ m global}$ | 0.52003 |
| r | 18 |
| $P_{ m local}$ | 0.481593 |

3.9 The MultiMMC Prediction Estimate (NIST SP 800-90B Section 6.3.9)

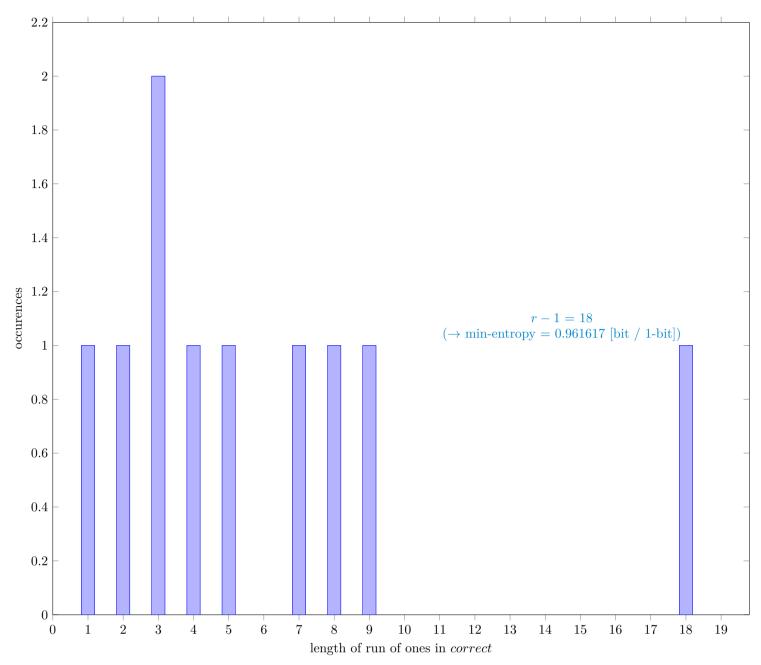


Fig. 14 Distribution of correct

3.9.1 Supplemental information for traceability

Table 12 Supplemental information for traceability (NIST SP 800-90B Section 6.3.9)

| Symbol | Value |
|-----------------------|----------|
| N | 9998 |
| C | 5005 |
| P_{global} | 0.5006 |
| $P'_{ m global}$ | 0.513481 |
| r | 19 |
| P_{local} | 0.501512 |

3.10 The LZ78Y Prediction Estimate (NIST SP 800-90B Section 6.3.10)

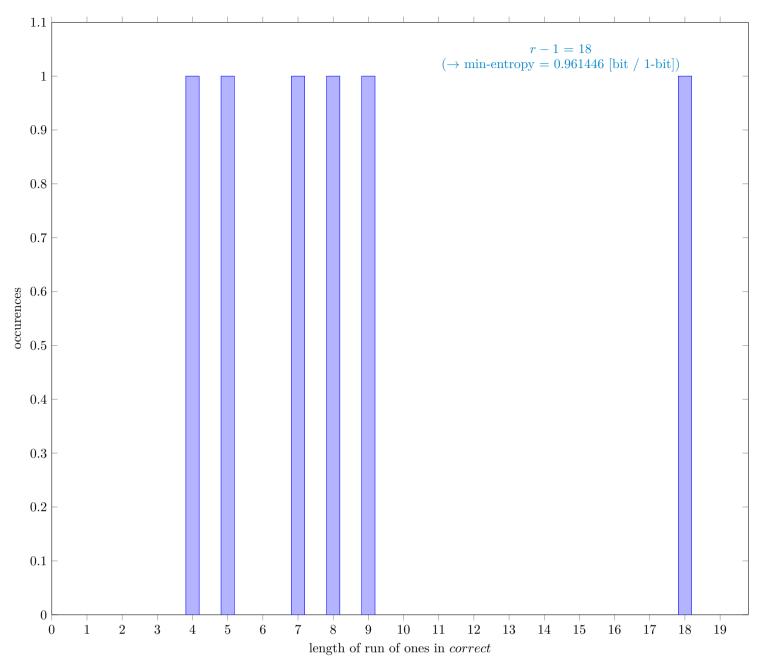


Fig. 15 Distribution of correct

3.10.1 Supplemental information for traceability

Table 13 Supplemental information for traceability (NIST SP 800-90B Section 6.3.10)

| Symbol | Value |
|------------------|----------|
| N | 9983 |
| C | 4998 |
| $P_{ m global}$ | 0.500651 |
| $P'_{ m global}$ | 0.513542 |
| r | 19 |
| $P_{ m local}$ | 0.501554 |

3 References

^[1] Meltem Sönmez Turan, Elaine Barker, John Kelsey, Kerry A. McKay, Mary L. Baish, Mike Boyle Recommendation for the Entropy Sources Used for Random Bit Generation, NIST Special Publication 800-90B, Jan. 2018 https://nvlpubs.nist.gov/nistpubs/SpecialPublications/NIST.SP.800-90B.pdf

^[2] G. Sakurai, Proposed list of corrections for NIST SP 800-90B 6.3 Estimators, Dec. 2022 https://github.com/g-g-sakura/AnotherEntropyEstimationTool/blob/main/documentation/ProposedListOfCorrections_SP800-90B.pdf