

# Procedural City Generation

Jakob Krause and Karl Volkenandt

14. September 2018

## Inhaltsverzeichnis

<b>1</b>	<b>Overview over possible solutions</b>	<b>2</b>
1.1	Probability distribution . . . . .	2
1.2	Lindenmayer system . . . . .	2
1.3	Agent based . . . . .	2
<b>2</b>	<b>Our approaches</b>	<b>2</b>
2.1	Terrain generation using simplex noise . . . . .	3
2.2	Agent based . . . . .	3
2.3	Procedural street generation via voronoi . . . . .	5
2.4	Anzeige/Plotting . . . . .	5

# 1 Overview over possible solutions

There are multiple possible solutions to this problem we found out about or thought about doing. First terrain generation mittels noise Ideen/Ansätze: Agent based, probability distribution based, L grammars Kurzübersicht

## 1.1 Probability distribution

One thought was to pick a center for the city and distribute streets and buildings around it according to a normal distribution so that there is a higher density of streets and buildings in the middle than further away from the center. This is a rather vague idea since it does not explain how we would go about creating the street network.

## 1.2 Lindenmayer system

Lindenmayer systems or short L-systems are a way of generating complicated patterns with only a few given rules that were initially inspired by the way plants evolve. The basic idea is to give a set of possible symbols that are treated as either variables or constants and a set of transformation rules describing how variables can be replaced. constants are not allowed to be replaced. We then give an initial string (also called an axiom) and iterate: each symbol of our initial state gets replaced via the given rules. When done we get a new string consisting of elements of our variables and constants and repeat the process. After iterating for some time we can stop and need to translate the output string into an image for example by interpreting every character of the string as an instruction. Via this method many self similar structures can be created such as the dragon curve or the Sierpinski triangle. While this method can give some nice looking and complicated patterns we thought it would look too artificial when applied to street patterns and did not look further into it.

## 1.3 Agent based

Another method to generate a believable city that takes care of the street network and the buildings simultaneously is to simulate the process of city-generation. This is done in the agent based approach where different agents move around and interact with the environment based on the local perspective. Possible agents include street builders, house builders and people investing in certain areas resulting in industrial quarters or housing areas. This would also add new buildings but can make the process more complex.

# 2 Our approaches

Before we started thinking how we built our city we wanted to create a terrain on which the city should be built. We then followed with two approaches to the city generation and found a way to visualize the results. From now on everything happens on a two dimensional grid which we wish to fill with a natural looking city and the terrain around it.




Abbildung 1: An example of a terrain generated by simplex noise  
Blue = Water, Green = Grass, Brown = Mountain

## 2.1 Terrain generation using simplex noise

For terrain generation we used a simplex noise. This is a noise that is similar to the computationally more expensive Perlin noise which is used for tasks like procedural texture generation and is used in the terrain generation of the computer game minecraft. This noise is procedural generated the result is not random. To obtain mentioned randomness and get different terrains we generate a three dimensional simplex noise and use only a random two dimensional slice as our terrain. Using this method we get some natural looking two dimensional terrains consisting of three levels of height: water, grass and mountain. The next step is to figure out where we can start to build the city. This is done by assigning a grade to each point on the grid and starting the city at the point with the highest score. This is done by specifying a radius (vaguely giving the size of the city) and checking for each point how much area of grass, water and mountain is contained in a circle of the given radius. We decided that starting a city near mountain is not preferred and thus the number of tiles representing mountains is subtracted from the score. Conversely the area of grass is added to the score. For water we thought that a certain amount of water is nice but too much or too little water is bad. To realize this we add a weighted score based on the difference of the preferred amount of water and the real amount of water in the circle. The preferred amount of water is given by a percentage that should be covered in water. This percentage then influences how far away from water the city will be built.

## 2.2 Agent based

To pursue the idea of an agent based system we would first like to have a street leading to the city center. This makes thematically sense since cities do not get built in the middle of nothing. To do this we select a random point on the border of our map and connect it with a street to the city center. To do this in a way that does not look artificial we equally distribute points every few tiles on the straight line between the point on the border and the point chosen to be our city center. We then move these points by a small

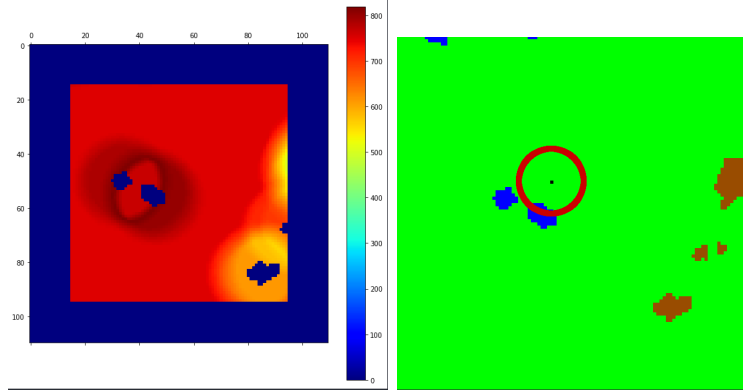


Abbildung 2: (left) A heatmap visualizing the score assigned to each position on the map  
(right) the final chosen point inside the red circle where the city will be built

random amount and use them as the control points for a bezier curve forming the street coming from the outside to the city.

We now introduce two types of agents to our map: The street builder and the house builder. All agents have a method telling them where to move and a method telling them how to change the environment. The way how they determine where to move is very similar. Theoretically the agents look at each direction they can move (one tile north, east, south or west) and assign a score to them. We then look at the two largest scores and the agent moves towards one of the two directions at random with a higher chance of choosing the direction in which the maximum score is assigned. This is done in order to get rid of the deterministic movement and allow for multiple agents to move along different paths. Instead of just looking at the relevant positions on the map we look at each and every single point on our map and evaluate a score. That way we can plot this scoremap and estimate how the agents will move based on the given parameters.

Both agents rate the positions based on the number of different tile types in a circle of given radius. The street builders get a street density as parameter that influences the score the same way water influences the heatmap explained before. This rule alone results in streets that run parallel to each other. In order to get streets between these parallel streets we let the number of built houses nearby positively influence the score. If we are given the scenario just described a housebuilder will most likely build some buildings between the two streets. Now the street builders are incentivised to build a street close to the buildings connecting the parallel streets. We want to have streets that have enough free space for buildings around them so grass increases the score. Finally to give the city some tendency to a shape we let the distance of the street builder to the origin of the city influence the score. After a street builder moves he builds a street at his current location.

The house builders are only allowed to move on streets but we allow them to build in a small radius around them allowing for more than one row of buildings along a street.

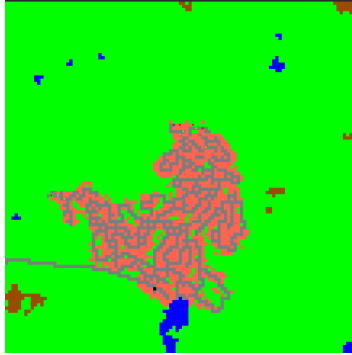


Abbildung 3: A city generated by an agent based system

The score the house builders use is positively influenced by water, streets, the distance to the city origin and grass. This is because it is attractive to live near the water or midtown where the density of streets should be a bit higher. The number of buildings in the neighbourhood reduces the score resulting in movement away from developed part to places with space to build. After moving a house gets built at a random position in a small circle around the agent.

All that is left to do now is to let a given amount of street builders spawn at the citycenter and let them start building the street network. We gave the agents a lifetime to prevent them from filling up the whole map. The house builders have a much shorter lifetime but after dying the street builders each spawn a house builder resulting in residential neighbourhoods.

The sheer amount of parameters of approach allows for a lot of finetuning. It is however not easy to give meta parameters such as citysize or an amount of area that should be covered by buildings.

### 2.3 Procedural street generation via voronoi

erster schritt: finde optimalen stadtstartpunkt und baue von da aus wasser/gras  
stadtgenerierung (Beschreibung):

### 2.4 Anzeige/Plotting

Tileplotting mittels pygame, anfangs nur Farbkästen, dann sprites