


BASE PLATE (TOP SIDE)			
TAG	X LOC	Y LOC	SIZE
A1	1.625	10.479	∅ .531 THRU ⌴ ∅ .787 ↧ .472 FOR M12 SHCS
A2	2.500	1.000	
A3	11.500	1.000	
B1	2.250	4.938	DR. & TAP FOR M6X1.0 - 6H ↧ .472
B2	2.250	9.063	
B3	3.250	4.938	
B4	3.250	9.063	
B5	3.938	9.750	
B6	3.938	10.750	
B7	4.500	2.500	
B8	4.500	4.500	
B9	6.482	5.676	
B10	6.482	8.426	
B11	8.750	2.500	
B12	8.750	4.500	
B13	9.045	5.676	
B14	9.045	8.426	
B15	9.423	4.022	
B16	10.093	3.459	
B17	10.438	9.750	
B18	10.438	10.750	
B19	10.950	5.841	
B20	11.620	5.279	
C1	2.750	4.938	P.F. ∅ .236 ↧ .591 FOR M6 DOWEL PIN LOC. AT ASSY.
C2	2.750	9.063	
C3	3.938	10.250	
C4	4.500	3.500	
C5	6.482	6.176	
C6	8.750	3.500	
C7	9.045	7.926	
C8	9.758	3.741	
C9	10.438	10.250	
C10	11.285	5.560	
D1	5.500	8.000	∅ .827 ↧ 1.250 PUSH-FIT FOR BUSHING; Ø.25 ↧ 1.750 SPRING POCKET; Ø.13 THRU LOC. AT ASSY.
D2	8.965	6.602	
E1	6.000	6.750	∅ 1.000 PUSH-FIT THRU LOC. AT ASSY.
E2	7.000	7.063	
E3	8.156	7.938	
F1	8.260	5.787	∅ .625 PUSH-FIT THRU LOC. AT ASSY.

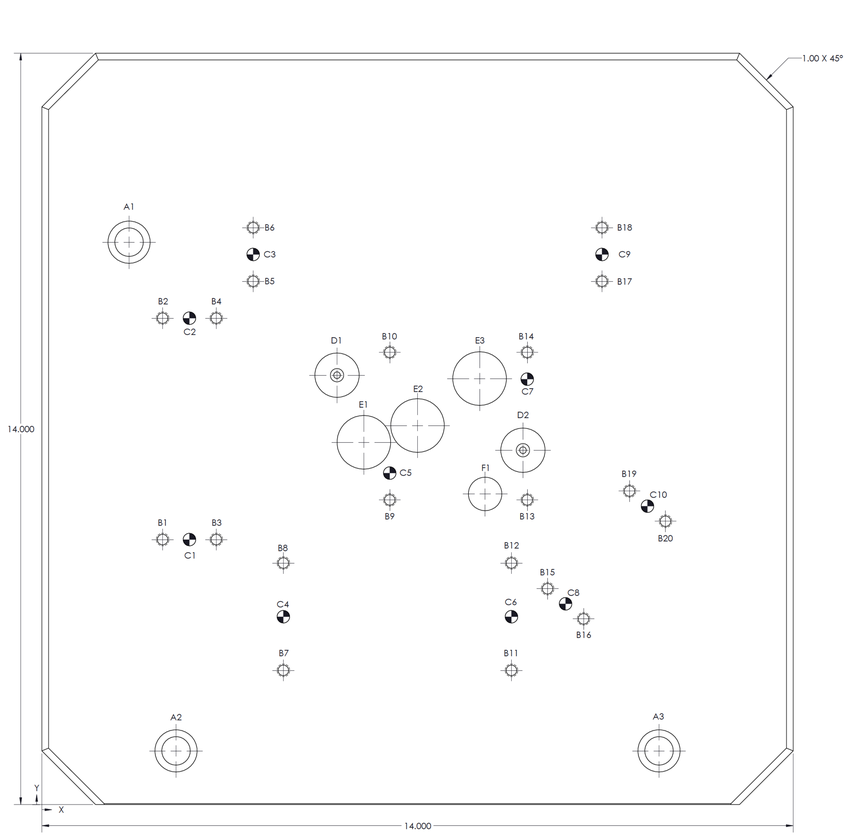

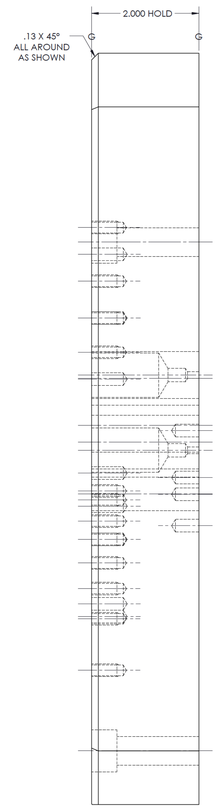

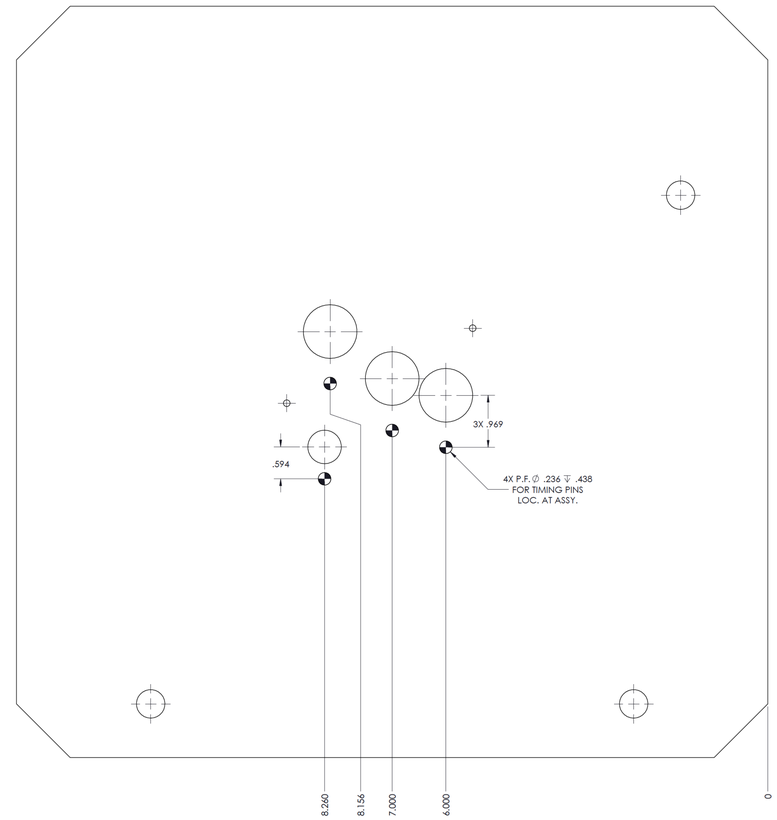

1 BASE PLATE ~ 1020 H.R.S./B.O.
ONE-REQ'D
STRESS RELIEVE & BLACK OXIDE

DATE: --/--/----

NOTE:
ALL DIMENSIONS MARKED THUS
ARE TO BE HELD ±.0005 UNLESS
OTHERWISE SPECIFIED & CERTIFIED

56977 Elk Court Elkhart, IN 46516
Phone: (574) 522-9600 Fax: (574) 522-0685
Email: info@Jus-Rite.com
Designers and Builders of
Gages and Gage Fixtures

Jus-Rite ENGINEERING, INC.

SCALE: 1:1	P/N: [redacted]	DRAWN BY: TRG	
DATE: 12/08/2017	P/P REV LETTER: -	SHEET: 16 OF 19	
BUILT BY: JRE	P/P REV DATE: -	CAD FILE: JRE-19206	
CUSTOMER: [redacted]			
TITLE: -A-B-C- GAGE FIXTURE		DRAWING NUMBER: JRE-19206-16	

JUS-RITE ENG. DESIGN D.O.# 19205 BUILD S.O.# 19206