

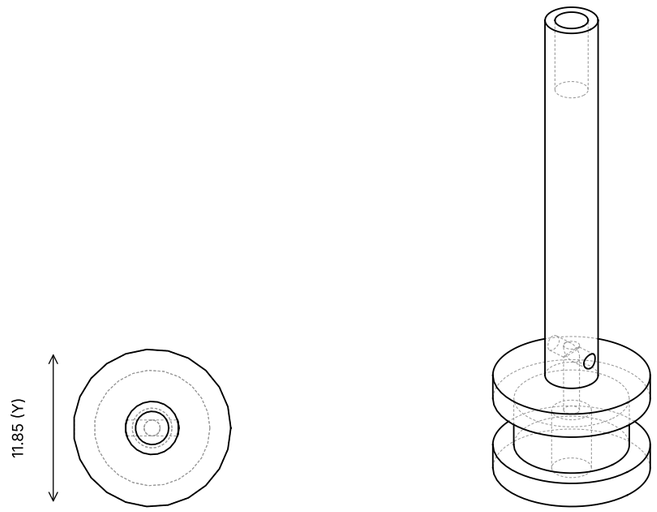


TOP (along -Z)

ISO (iso, not to scale)

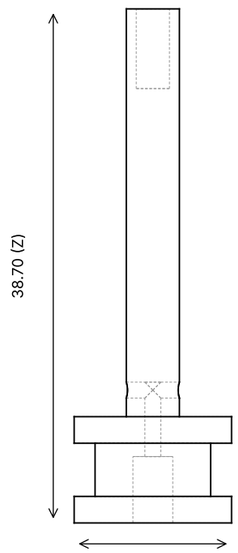

FRONT (along +Y)

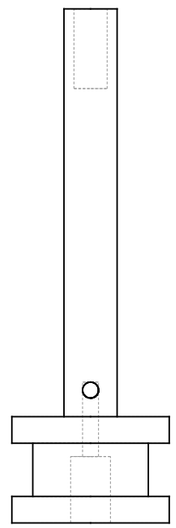

SIDE (along -X)

ENG-FS-04   MV-P balance piston 11.9 f7 + rod 4 h7 (one piece), seal groove, cross hole 1.2 into the balance chamber
Material: 17-4PH (1.4542) condition H1150, pins   Process: CNC lathe, rod ground
Mass: 7.7 g (CAD volume x density)   Units: mm   Frame: modelling frame (+Z forward)   Bounding box: 11.85 x 11.85 x 38.70
Datum: seat plane A, module axis B   Finish: clear anodise (6061) / passivate (316L, 17-4PH); oxygen-clean wetted parts   Heat treatment: n/a
Fits / features: piston bore 11.9 H8 Ra 0.4; rod bore 4.05 +0.02/0; seat counterbore 16 H7; 1/4-18 NPT, 1/8-27 NPT
Notes: module frame: axis r 10 / az 219.5, seat plane z 279.5 (lead Option A, zone top); oxygen-clean ASTM G93, Krytox only
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)
Oxygen service: clean to ASTM G93, Krytox only