



# **Bagging System**

# BAGGING

## **Hygienic standard**

Premier Tech Chronos always put a strong emphasis on high hygienic standards. With the Panther, this is realized through:

- Continuous bag transfer in closed conditions, contamination of the product is impossible from the empty bag placing through the closing of the filled bag.
- Dust free bagging is enhanced by the bag clamp, which keeps the operating environment clean.
- Simple and easy cleaning
- Constructed with stainless steel contact parts

## **Functionality**

Bags suitable for automatic bag placing are positioned in the empty bag magazine, the bag is carried out by means of suction pads. Once opened, the bag is kept open by the grippers on the bag-placing arm. The bag is placed onto the bag clamp and held by the gripper jaws. Having placed the bag, the placing arm moves away. Once the

bag is filled, the spout is lowered and the transfer unit takes away the filled bag. The belt guiding device holds the bag at the upper edges and supports it by a conveyor belt whilst the bag is moved to a closing device.

# **Applications**

The Panther Bagging System is designed for bagging all types of free flowing materials into plastic, paper or polywoven open-mouth bags. They can handle pillow-type or side gusseted bags of various sizes at capacities of up to 20 bags per minute.

Chemicals: Fertilizer, plastic pellets, etc.

Food: Flour, grain, rice, salt, seeds, sugar, animal feed, ect.





#### **Features and benefits**

- Single swivel spout allowing for high production capacities of up to 20 bags per minute
- Synchronized feeding speed to the closing system due to the integrated drive system
- Quick and reliable transfer of filled bags to the closing system thanks to continuous bag retention from bag placing to closing
- Automatic reject system for misplaced or unopened bags (no human action needed)
- Stainless steel product contact surfaces

# **Options available**


- Bag closing systems
- Model for side gusseted bags
- Aspiration ducts, etc.

- Double bag magazine which allows non-stop operation and fast reloading
- Motorized height adjustment of outfeed conveyor
- PLC control system with user-friendly operator interface for easy troubleshooting and error code reading
- Rugged, durable construction including high quality and low maintenance components for long-term reliability
- Quick and simple bag size changeover
- Can handle a wide range of bag materials and size
- Posser to settle bag contents





# **Typical layout**

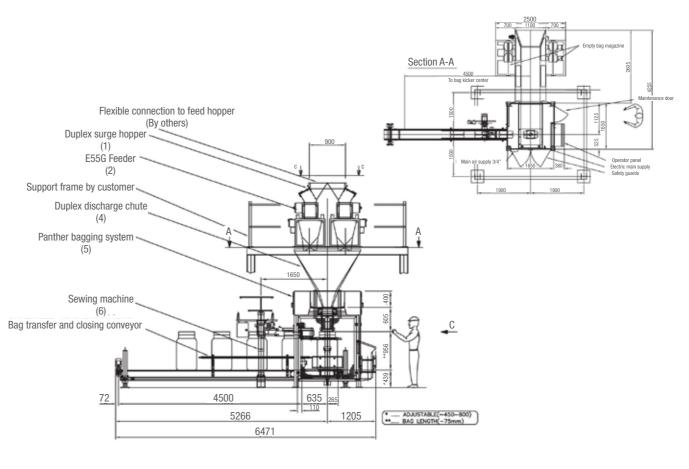

#### Office

Chronos Richardson India Pvt. Ltd.
A 21, Third Floor,
Green Park Main
New Delhi - 110016
India
+91 11 26523533
info@chronosrichardson.in



#### **Manufacturing Plant**

Chronos Richardson India Pvt. Ltd.
Plot No. 5E, Sector 4,
Ballabgargh - 121004
Haryana
+91129 2243002
info@chronosrichardson.in



