

Panel Mount LED Indicators- Chrome Recessed M6 PA03CRx-12_24V Series

Features:

- Ø7.0mm Bezel, M6 Thread
- Bright chrome or Matt Chrome housing
- Sealed to IP20 or IP67
- Diffused lens
- Choice of termination
- Range of LED colours
- Low Voltage, High Efficiency
- Long Life – 50,000 hrs typical
- High Reliability, Maintenance Free



Description


Attractive, panel mount lamp comprising of a single 3.0mm LED emitter with a choice of termination

Specifications

Part No.	Item No.	Colour	Operating Voltage	Current	Luminous intensity at DC current	Bezel color
PA03CR-G-12V	19030251	green	12 V DC	20 mA	8 mcd	satin chrome
PA03CR-Y-12V	19030252	yellow	12 V DC	20 mA	8 mcd	satin chrome
PA03CR-R-12V	19030253	red	12 V DC	20 mA	13 mcd	satin chrome
PA03CR-B-12V	19030257	blue	12 V DC	18 mA	36 mcd	satin chrome
PA03CR-W-12V	1903025W	white	12 V DC	6 mA	900 mcd	satin chrome
PA03CR-G-24V	19030351	green	24 V DC	15 mA	6 mcd	satin chrome
PA03CR-Y-24V	19030352	yellow	24 V DC	15 mA	6 mcd	satin chrome
PA03CR-R-24V	19030353	red	24 V DC	15 mA	8 mcd	satin chrome
PA03CR-B-24V	19030357	blue	24 V DC	15 mA	26 mcd	satin chrome
PA03CR-W-24V	1903035W	white	24 V DC	7 mA	1050 mcd	satin chrome

Matt Chrome bezel finish is also available

Dimensions

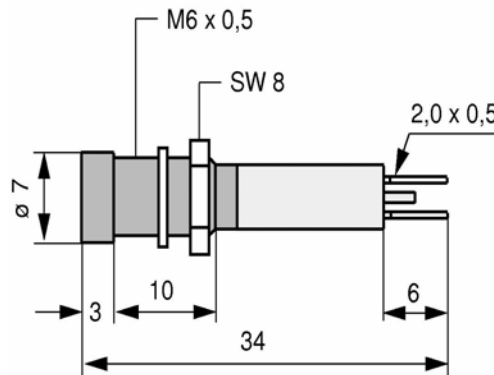

Please contact our office for the latest intensity yields
Specifications may be subject to change without notice