Ghaith Bakar- EEE394

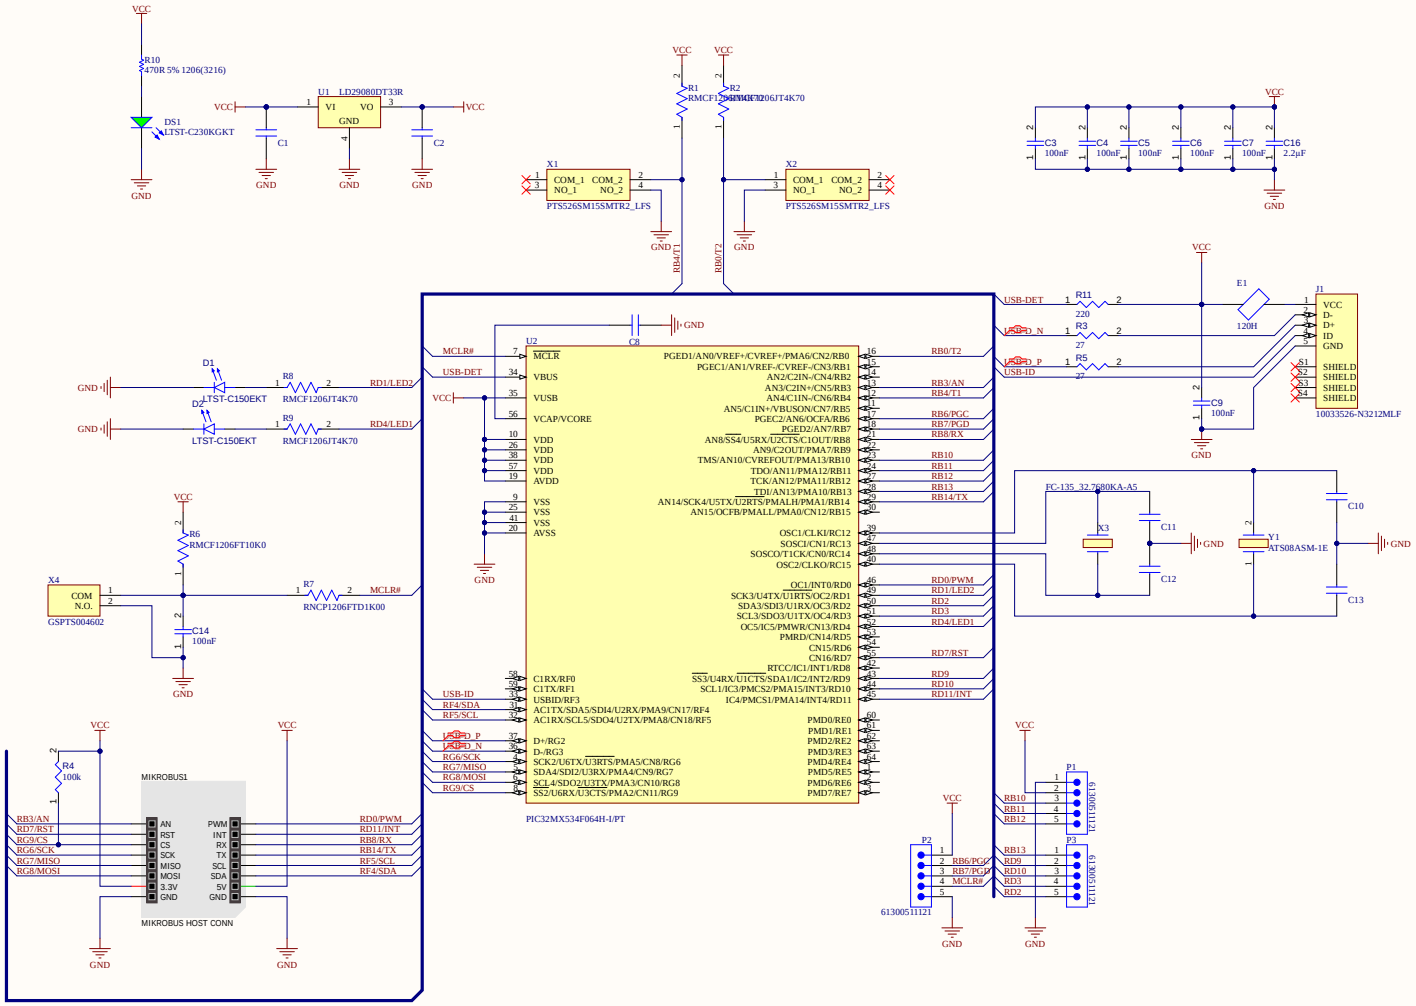

Title		
Size C	Number	Revision
Date: 4/02/2026	Sheet of	
File: C:\Users\..\Sheet1.SchDoc	Drawn By:	

Comment	Description	Designator	Footprint	LibRef	Quantity
CL31B106KAHNNNE	Samsung Electro-Mechanics CL31B106KAHNNNE 10uF Multilayer Ceramic Capacitor MLCC 25V dc +/-10% Tolerance SMD	C1, C2, C8	CAPC3216X180N	CMP-001-00089-1	3
AMDD251W104K1GF0 02E	Ceramic Capacitor, Multilayer, Ceramic, 250V, 10% +Tol, 10% -Tol, X7R, 15% TC, 0.1uF, Surface Mount, 1206	C3, C4, C5, C6, C7, C9, C14	Chip2PinSM127P600-8N	CMP-001-00086-2	7
CL31C220JBCNNNC	Samsung Electro-Mechanics CL31C220JBCNNNC 22pF Ceramic Multilayer Capacitor 50V dc +/-5% Tolerance SMD	C10, C11, C12, C13	CAPC3216X100N	CMP-001-00088-1	4
CL31B225KBHNNNE	50V 2.2uF X7R±10% 1206 Multilayer Ceramic Capacitors MLCC - SMD/SMT ROHS	C16	Chip2PinSM127P600-8N	CMP-001-00087-1	1
LTST-C150EKT	Single Color LED, Red Orange, Water Clear, 2.06mm	D1, D2	RESC3015X65	CMP-007-00036-3	2
LTST-C230KGKT	LED Green, 75 mW, 30 mA, -30 to 85 degC, 2-Pin SMD, RoHS, Tape and Reel	DS1	LTST-C230KGKT_V	CMP-2000-06625-1	1
HI1206P121R-10	120 Ohms @100 MHz 1 Power, Signal Line Ferrite Bead 1206 (3216 Metric) 4A 30mOhm	E1	FB_HI1206P121R-10	CMP-006-00021-1	1
10033526-N3212MLF	Right Angle Surface Mount Mount Female Type B USB Connector	J1	AMPHENOL_10033526-N3212MLF	CMP-002-00075-1	1
MIKROBUS-HOST CONN		MIKROBUS1	MIKROBUS-HOST CONN 8gen TH	CMP-002-00073-1	1
61300511121	THT Vertical Pin Header WR-PHD, Pitch 2.54 mm, Single Row, 5 pins	P1, P2, P3	61300511121	CMP-1502-01068-4	3
RMCF1206JT4K70	4.7kΩ ±5% 0.25W 1206 Thick Film Chip Resistor AEC-Q200 compliant	R1, R2, R8, R9	FP-RMCF1206-IPC_A	CMP-26527-005426-1	4
RC1206JR-0727RL	Res Thick Film 1206 27 Ohm 5% 0.25W(1/4W) ±100ppm/C Pad SMD T/R	R3, R5	Chip2PinSM127P600-8N	CMP-009-00180-1	2
Resistor 100k +/-1% 1206 250 mW	Chip Resistor, 100 kOhm, +/- 1%, 0.25 W, -55 to 155 degC, 1206 (3216 Metric)	R4	RESC3216X60X45ML15T20	CMP-009-00025-5	1
RMCF1206FT10K0	10kΩ ±1% 0.25W 1206 Thick Film Chip Resistor AEC-Q200 compliant	R6	FP-RMCF1206-IPC_B	CMP-26527-000151-1	1
RNCP1206FTD1K00	1kΩ ±1% 0.5W 1206 High Power Anti-Sulfur Thin Film Chip Resistor	R7	FP-RNCP1206-MFG	CMP-26527-000033-1	1
470R 5% 1206(3216)	470R 0.25W 5% 1206 (3216 Metric) SMD	R10	RESC1206(3216)_N	CMP-1014-00066-1	1
RMCF1206FT220R	Res Thick Film 1206 220 Ohm 1% 0.25W ±100ppm/°C Molded SMD Paper T/R	R11	Chip2PinSM127P600-8N	CMP-009-00181-1	1
LD29080DT33R	800mA, Very-Low Drop Voltage Regulator, 3.3V, 3-Pin DPAK	U1	TO-252_N	CMP-0244-00114-1	1
PIC32MX534F064H-I/PT	High Performance 80 MHz MIPS-Based 32-Bit Flash Microcontroller with USB and CAN, 64KB Program Memory, 64-pin TQFP, Industrial Temperature	U2	TQFP-PT64_L	CMP-0048-00357-1	1
PTS526SM15SMTR2_LFS	Tactile Switches 50mA 12VDC, 5.2x5.2mm, 1.5mm H, 160gf, Gleads, No ground pin, metal actuator	X1, X2	PTS526SM15SMTR2LFS	CMP-002-00074-1	2
FC-135_32.7680KA-A5	Crystal 0.032768MHz +/-20ppm (Tol) 12.5pF FUND 70000Ohm 2-Pin CSMD T/R	X3	FC135327680KAA5	CMP-003-00030-1	1
GSPTS004602	Tactile Switch SPST-NO Top Actuated Surface Mount 0.05A,12VDC ,-40C~90C,"PTS636SK25FSMTR LFS"	X4	GSPTS004602	CMP-011-00013-1	1
ATSD8ASM-1E	Crystal or Oscillator	Y1	ATSD40SM1	ATSD8ASM-1E	1