



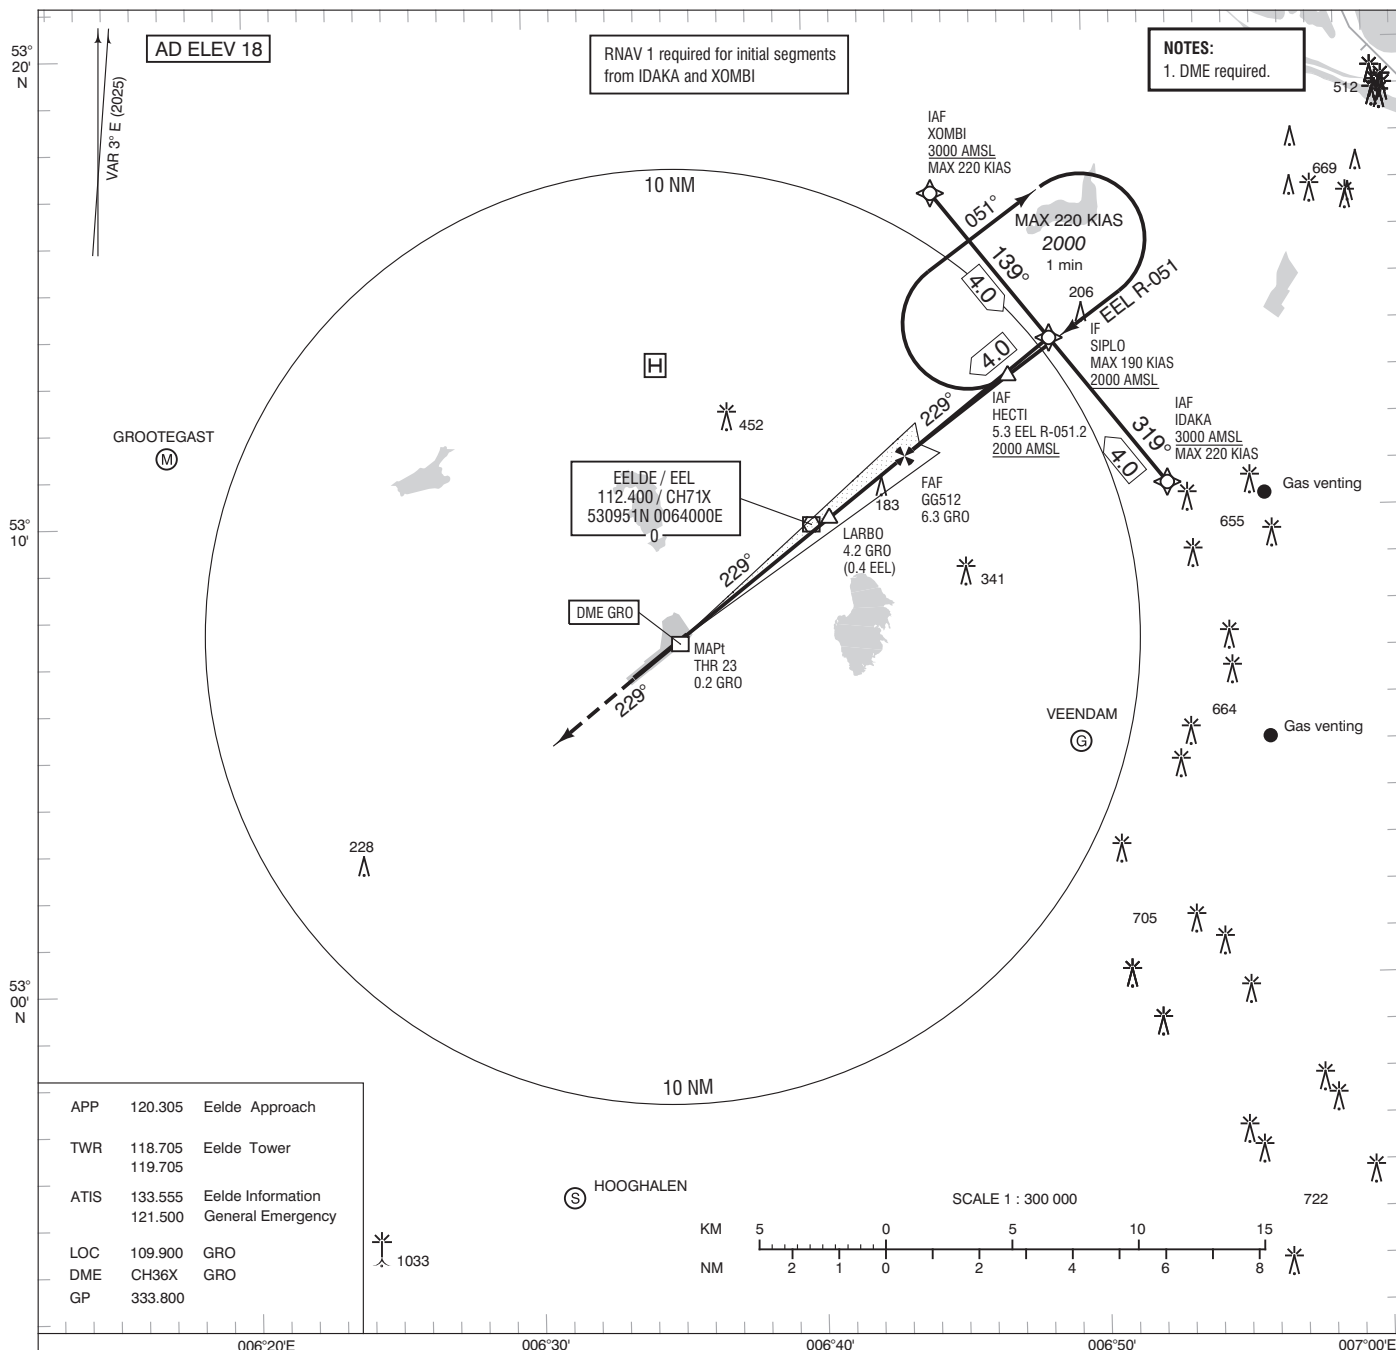

1. Missed Approach:
- Track 229° MAG and climb to 2000 FT AMSL.
Inform ATC.
2. Missed Approach in case of communication failure:
- Track 229° MAG and climb to 3000 FT AMSL;
- When reaching 3000 FT AMSL turn right to EEL;
- After passing EEL proceed to HECTI via EEL R-051;
- After arriving over HECTI hold or descend to 2000 FT AMSL in an outbound turn, intercept final approach and execute the instrument approach procedure again.

TRANSITION LEVEL BY ATC
TRANSITION ALTITUDE 3000 FT AMSL

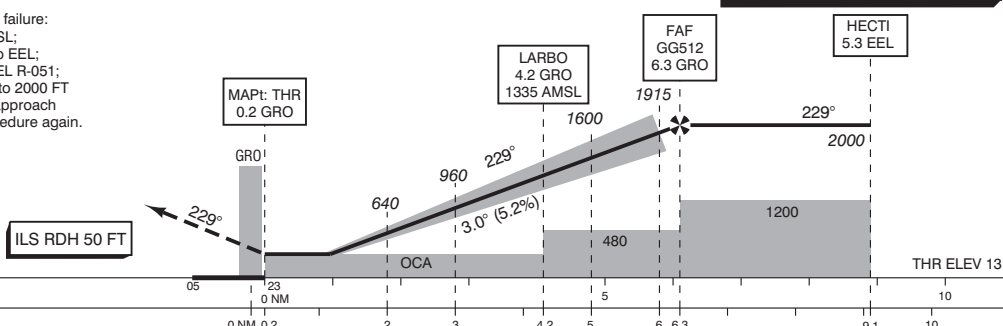

GS IN KT		60	80	100	120	140	160	180			
VERTICAL SPEED		320 FT/MIN	425 FT/MIN	530 FT/MIN	635 FT/MIN	745 FT/MIN	850 FT/MIN	955 FT/MIN			
OCA (OCH) ELEV THR 23: 12.5 FT							MSA BASED ON EEL VOR/DME				
ACFT CAT	CAT I	LOC MAPt: THR	CIRCLING*	* Circling approaches shall be executed south-east of the AD, unless otherwise instructed by ATC.	THR 23 530729.8N 0063525.0E GG512 531114.8N 0064322.6E						
A	161 (149)	460 (442)	450 (432)								
B	174 (162)		520 (502)								
C	184 (172)		620 (602)								
D	197 (185)		850 (832)								
CEILING AND VISIBILITY MINIMA				DIRECTIONS ARE MAGNETIC DISTANCES IN NM ALTITUDES AND ELEVATIONS IN FEET							
TAKE-OFF	DAY:	NA							NIGHT:	NA	
LANDING	DAY:	NA							NIGHT:	NA	