



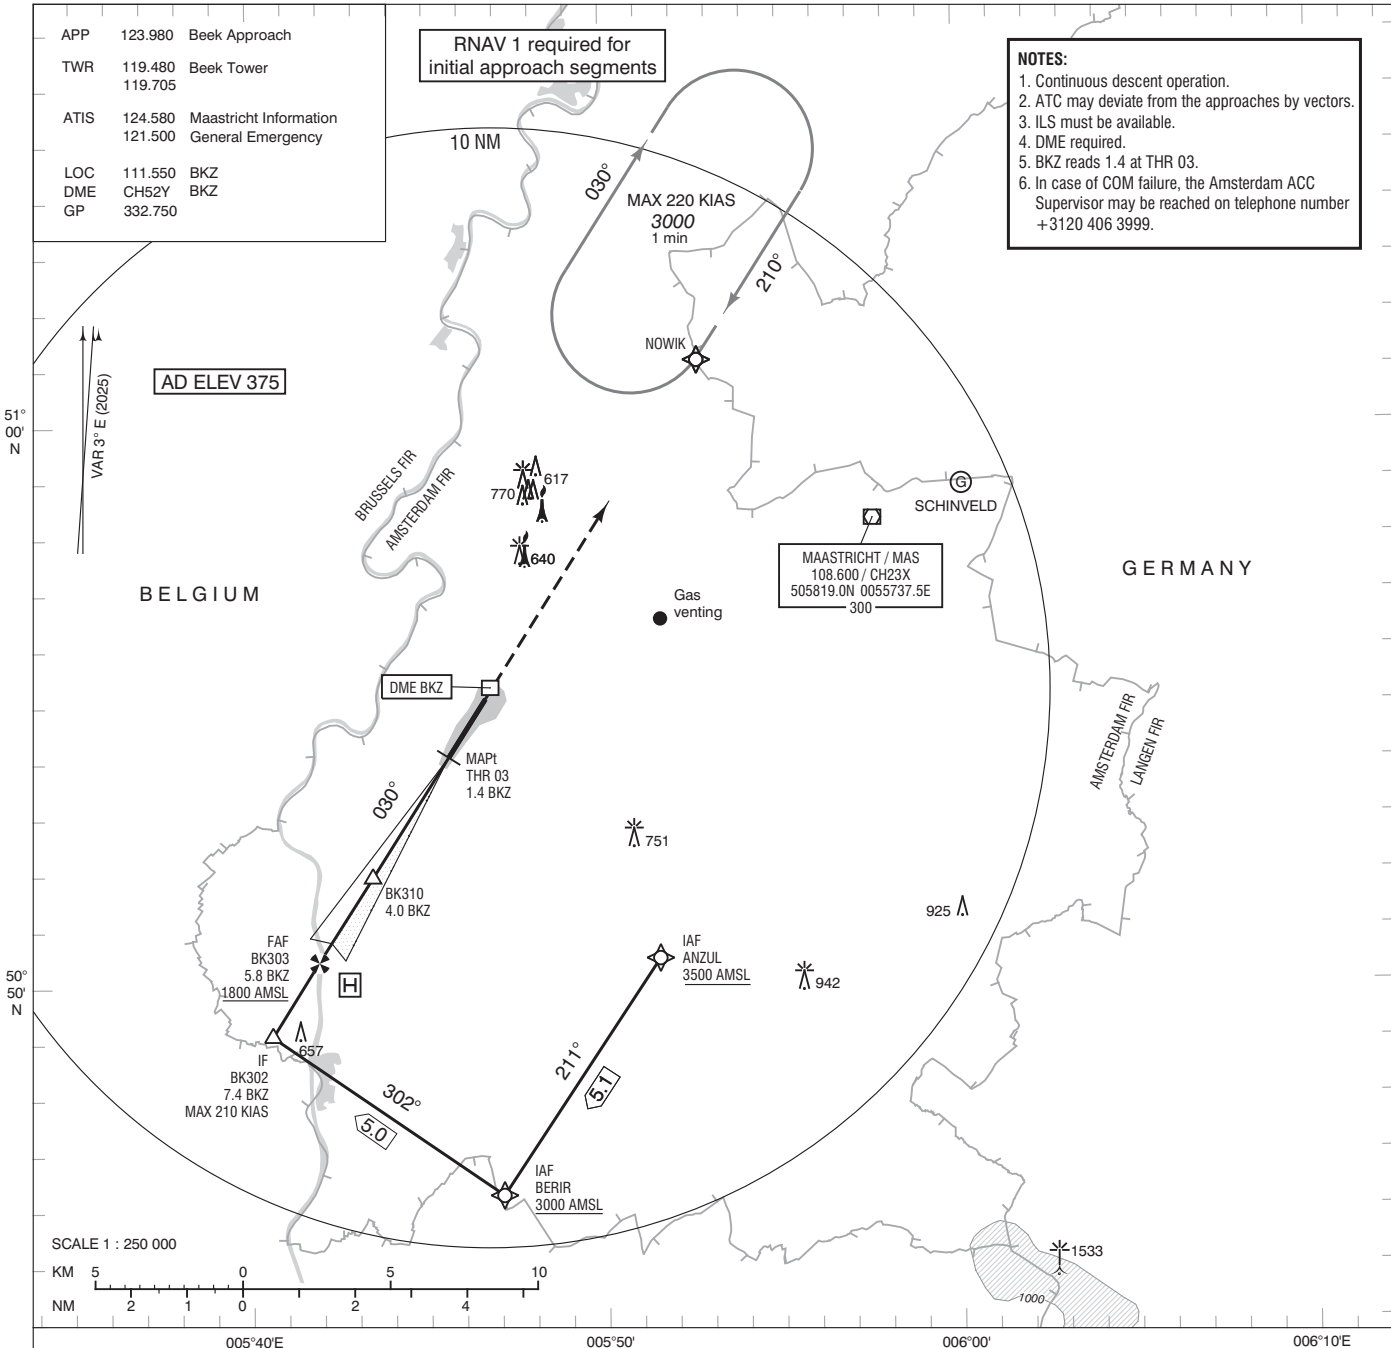

DO NOT DESCEND BELOW THE DESCENT PROFILE

TRANSITION LEVEL BY ATC
TRANSITION ALTITUDE 3000 FT AMSL

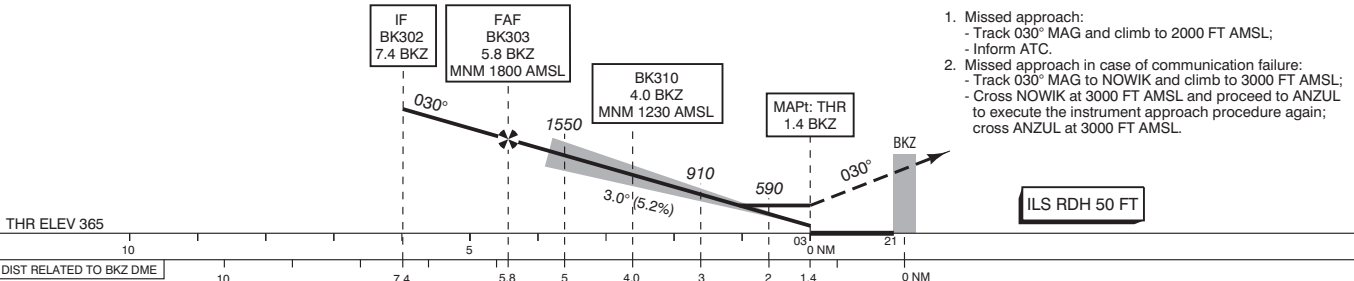

- Missed approach:
- Track 030° MAG and climb to 2000 FT AMSL;
- Inform ATC.
- Missed approach in case of communication failure:
- Track 030° MAG to NOWIK and climb to 3000 FT AMSL;
- Cross NOWIK at 3000 FT AMSL and proceed to ANZUL to execute the instrument approach procedure again;
- cross ANZUL at 3000 FT AMSL.

GS IN KT	60	80	100	120	140	160	180
VERTICAL SPEED	320 FT/MIN	425 FT/MIN	530 FT/MIN	635 FT/MIN	745 FT/MIN	850 FT/MIN	955 FT/MIN

OCA (OCH) ELEV THR 03: 365.2 FT

ACFT CAT	CAT I	LOC MAPt: THR	CIRCLING	THR 03	505406.7N	0054536.2E
A	513 (148)	720 (360)	890 (520)	BK302	504907.9N	0054034.5E
B	523 (158)		940 (570)	BK303	505027.1N	0054154.3E
C	533 (168)		1170 (800)	BK310	505157.6N	0054325.7E
D	543 (178)					
DL	553 (188)					

CEILING AND VISIBILITY MINIMA

TAKE-OFF	DAY:	NA	NIGHT:	NA
LANDING	DAY:		NIGHT:	

DIRECTIONS ARE MAGNETIC
DISTANCES IN NM
ALTITUDES AND ELEVATIONS
IN FEET

MSA BASED ON MAS VOR/DME

