



ADA Curb Ramp New Construction Inspection Form (Perpendicular)

Nw 311

North-South Road Name

24952.54

Project No.

Sheet No.

Intersection No.

Nw Commercial

East-West Road Name

Calibration Date

9/5/2024

(mm/dd/yy)

Ramp Style **PR**

RAMP RUN 1

Pass

Fail

Running Slope 1

3.3

≤ 8.3%

☒

>8.3%

☐

Length 1

4.5

Cross Slope 1

2.2

≤ 2.0%

☐

>2.0%

☒

Detectable Warning (Y,N)

Y

☒

N

☐

Lip Height

1/4"

☐

>1/4"

☐

Gutter Flow Slope

N/A

1.5

≤ *

☐

>*

☐

Curb Running Slope (avg)

4.32

≤ 8.3%

☒

>8.3%

☐

Counter Slope (+/-) *2

6.2

≤ |5.0%|

☒

>|5.0%|

☐

Longest distance from corner to back of curb (see dwg on BT form)

< 5.0'

☒

≥ 5.0'

☐

Detectable warning extends full width of ramp throat opening

Y

☒

N

☐

TURN SPACE

LANDING

☒

NONE

☐

Pass

Fail

Width X

5.0

≥ 4.0'

☒

< 4.0'

☐

Length Y

3.4

≥ 4.0'*1

☐

< 4.0'*1

☒

Back of Ramp Obstruction (Y/N)

≥ 5.0'*1

☐

< 5.0'*1

☐

Slope X

0.9

≤ 2.0%

☒

>2.0%

☐

Slope Y

0.7

≤ 2.0%

☒

>2.0%

☐

MISCELLANEOUS Traversable

Pass

Fail

Flare Slope 1

☒

5.9

≤ 10%

☒

< 10%

☐

Flare Slope 2

☒

8.4

≤ 10%

☒

<10%

☐

Clear Width (feet)

6.0

≥ 4.0'

☐

< 4.0'

☐

Intersection Control Type

SY

Slope of Road

1.7

Horizontal Gaps


☐

≤ 1/2"

☒


> 1/2"

☐

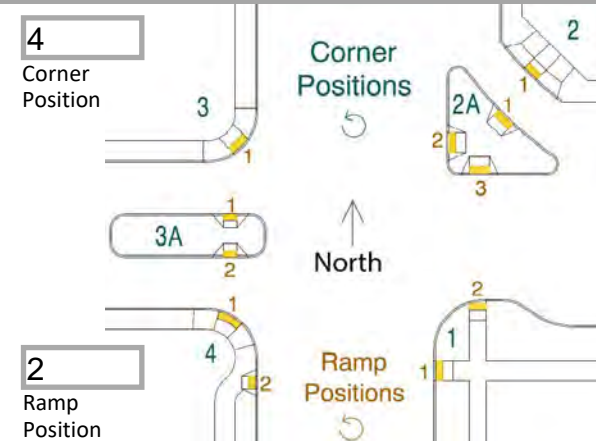

PE Stamp (required for private development)

Comments:

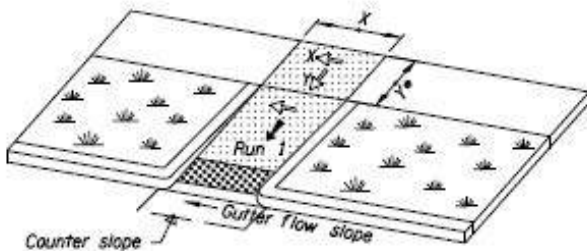

PERPENDICULAR RAMP (PR)

- Pedestrian Access Route (to measure Clear Width)
- Detectable Warning Surface
- Cross Slope (2.0% max.)
- Running Slope (8.3% max.)
- Counter Slope (5.0% max.)
- Turning Space (X & Y) (2.0% max. / 4' x 4' min.)*
- * If constrained at back of walk, min. Y length is 5'.
- Gutter Flow Slope (as directed)

Reset Entire Form

Keep Intersection, Reset Fields

WashCo ADA 01 (4-2020)

Inspector's Signature

Date (mm/dd/yyyy)

Darrell Wyant

52638

Print name clearly

Certification No.

3J Consulting

Company/Agency

ADA Curb Ramp Images

Attached photos must be in .pdf format in order to be placed

