



ADA Curb Ramp New Construction Inspection Form (Parallel)

	24952.54			
North-South Road Name	Project No.	Sheet No.	Intersection No.	East-West Road Name

See https://www.oregon.gov/odot/Engineering/Documents_RoadwayEng/ADA_ExhibitA.pdf for more corner styles.
Use Washington County corner numbering system.

Calibration Date **8/30/2024** (mm/dd/yy)


PL
 Ramp Style

*The passing value for Gutter Flow Slope (GFS) depends on the Intersection Control Type. At a Midblock (MB), GFS must be ≤ Slope of the Road, at Signalized or Uncontrolled (SU), GFS must be ≤ 5.0%, and at Stop or Yield (SY), GFS must be ≤ 2.0%.

*1 If Back of Ramp Obstruction is Yes, turn space length Y must be minimum 5.0 ft.

*2 Clear Space area is the width of Ramp Run 1 and extends 4.0 ft into the roadway.

See also Standard Drawings to assess provisions not shown: (inlets, alignment, etc.)

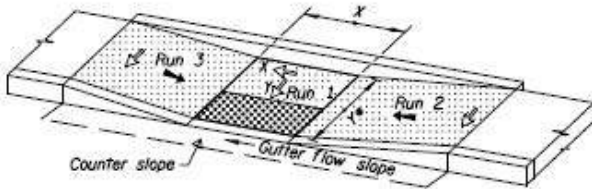

PARALLEL RAMP (PL)

PARALLEL RAMP (PL)

- Pedestrian Access Route (to measure Clear Width)
- Detectable Warning Surface
- Cross Slope (2.0% max.)
- Running Slope (8.3% max.)
- Counter Slope (5.0% max.)
- Turning Space (X & Y) (2.0% max. / 4' x 4' min.)*
* If constrained at back of walk, min. Y length is 5'.
- Gutter Flow Slope (as directed)

RAMP RUN 1		Pass	Fail
Running Slope 1	1.1 ≤ 2.0% <input checked="" type="checkbox"/> > 2.0% <input type="checkbox"/>		
Cross Slope 1	1.1 ≤ 2.0% <input checked="" type="checkbox"/> > 2.0% <input type="checkbox"/>		
Detectable Warning	<input type="checkbox"/> Y <input checked="" type="checkbox"/> N <input type="checkbox"/>		
Lip Height	<input type="checkbox"/> ≤ 1/4" <input type="checkbox"/> > 1/4" <input type="checkbox"/>		
Gutter Flow Slope	1.7 ≤ * <input type="checkbox"/> > * <input type="checkbox"/>		
Curb Running Slope (avg)	<input type="checkbox"/> 0.6199 ≤ 8.3% <input type="checkbox"/> > 8.3% <input type="checkbox"/>		
Counter Slope (+/-)*2	6.3 ≤ 5.0% <input type="checkbox"/> > 5.0% <input type="checkbox"/>		
Det. warning full width of ramp	<input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/>		

RAMP RUN 2		Pass	Fail
Running Slope 2	6.9 ≤ 8.3% <input checked="" type="checkbox"/> > 8.3% <input type="checkbox"/>		
Length 2	11.8		
Cross Slope 2	1.2 ≤ 2.0% <input checked="" type="checkbox"/> > 2.0% <input type="checkbox"/>		

RAMP RUN 3		Pass	Fail
Running Slope 3	4.4 ≤ 8.3% <input checked="" type="checkbox"/> > 8.3% <input type="checkbox"/>		
Length 3	9.75		
Cross Slope 3	1.2 ≤ 2.0% <input checked="" type="checkbox"/> > 2.0% <input type="checkbox"/>		

TURN SPACE		Pass	Fail
Width X	5.0 ≥ 4.0' <input checked="" type="checkbox"/> < 4.0' <input type="checkbox"/>		
Length Y	5.0 ≥ 4.0'*1 <input checked="" type="checkbox"/> < 4.0'*1 <input type="checkbox"/>		
Back of Ramp Obstruction (Y/N)	<input type="checkbox"/> ≥ 5.0'*1 <input type="checkbox"/> < 5.0'*1 <input type="checkbox"/>		
Slope X (Cross Slope 1)	1.1 ≤ 2.0% <input checked="" type="checkbox"/> > 2.0% <input type="checkbox"/>		
Slope Y (Running Slope 1)	1.1 ≤ 2.0% <input checked="" type="checkbox"/> > 2.0% <input type="checkbox"/>		

MISCELLANEOUS		Pass	Fail
Clear Width (feet)	<input type="checkbox"/> ≥ 4.0' <input type="checkbox"/> < 4.0' <input type="checkbox"/>		
Intersection Control Type	SY Slope of Rd. 0.9		
Horizontal Gaps	<input type="checkbox"/> ≤ 1/2" <input type="checkbox"/> > 1/2" <input type="checkbox"/>		

1
 Corner Position

1
 Ramp Position

PE Stamp (required for private development)

Comments:

Crack ramp run 3

Inspector's Signature	Date (mm/dd/yy)
Darrell Wyant	52638
Print name clearly	Certification No.
3J Consulting	
Company/Agency	

Reset Entire Form

Keep Intersection, Reset Fields

ADA Curb Ramp Images

Attached photos must be in .pdf format in order to be placed

