A company of SIM Tech

SIM900_IP_Application Note_V1.01

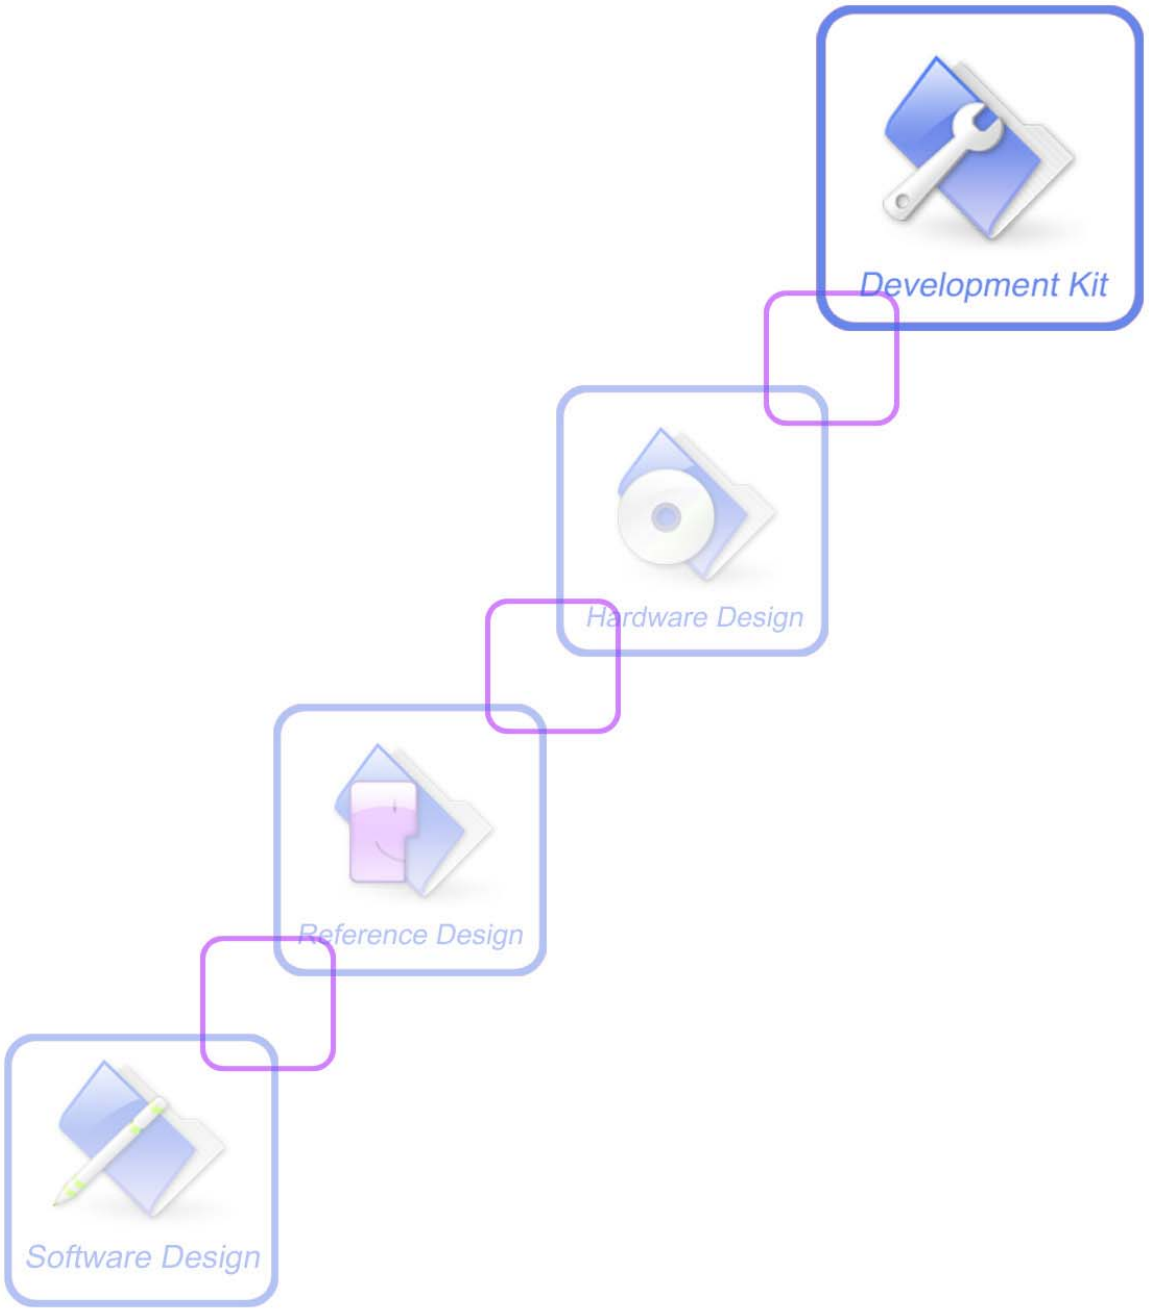

Document Title:	SIM900 IP Application Note
Version:	1.01
Date:	2011-03-23
Status:	Release
Document Control ID:	SIM900_IP_Application Note_V1.01

General Notes

SIMCom offers this information as a service to its customers, to support application and engineering efforts that use the products designed by SIMCom. The information provided is based upon requirements specifically provided to SIMCom by the customers. SIMCom has not undertaken any independent search for additional relevant information, including any information that may be in the customer's possession. Furthermore, system validation of this product designed by SIMCom within a larger electronic system remains the responsibility of the customer or the customer's system integrator. All specifications supplied herein are subject to change.

Copyright

This document contains proprietary technical information which is the property of SIMCom Limited., copying of this document and giving it to others and the using or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights reserved in the event of grant of a patent or the registration of a utility model or design. All specification supplied herein are subject to change without notice at any time.

Copyright © Shanghai SIMCom Wireless Solutions Ltd. 2011

Contents

Version history **5**

1. Bearer Configure **6**

1.1 Bearer Profile 6

2. HTTP Application **7**

2.1 HTTP GET Method 7

2.2 HTTP POST Method 7

2.3 HTTP HEAD Method 8

2.4 Set Proxy HTTP Server 8

2.5 Set HTTP Redirection Parameter 9

2.6 Set HTTP Download Break Point Parameter 10

3. FTP Application **10**

3.1 FTP GET Method 11

3.2 FTP PUT Method 12

3.3 FTP Time Out 13

3.4 FTP Error 14

3.5 FTP Operation Error 14

3.6 FTP READ and WRITE Error 14

3.7 Set FTP Download Break Point Parameter 15

Appendix **17**

A. Related Documents 17

B. Conventions and Abbreviations 17

Version history

Date	Version	Description of change	Author
2010-11-15	1.00	Origin	
2011-3-23	1.01	Added new chapter 3.7 to describes how to use FTP broken download resuming function.	Chenyang

SCOPE

This document describes how to use the HTTP and FTP function of SIM900 through AT commands.
Examples are also given for reference. This document can be used for SIM900 serial modules, like SIM900, SIM900D, SIM900B and SIM900A.

This document is subject to change without notice at any time.

1. Bearer Configure

The bearer contexts of HTTP and FTP applications can be set or activated by SAPBR command.

1.1 Bearer Profile

Demonstration	Syntax	Expect Result
Configure bearer profile 1	AT+SAPBR=3,1,"Contype","GPRS" AT+SAPBR=3,1,"APN","CMNET"	OK OK
To open a GPRS context.	AT+SAPBR =1,1	OK
To query the GPRS context.	AT+SAPBR=2,1	+SAPBR: 1,1,"10.89.193.1" OK
To close a GPRS context.	AT+SAPBR =0,1	OK
GPRS context is released by network		+SAPBR 1: DEACT

2. HTTP Application

Hyper Text Transfer Protocol application provides a mode to alternate of HTTP server. The basic application contains GET, POST, HEAD methods; it also supports proxy server, redirection, broken transfer resuming functions.

2.1 HTTP GET Method

Download data from HTTP server

Demonstration	Syntax	Expect Result
Init http service	AT+HTTPINIT	OK
Set parameters for HTTP session	AT+HTTPPARA = “CID”,1 AT+HTTPPARA=“URL”,”www.sim.com”	OK OK
GET session start	AT+HTTPACTION=0	OK
GET successfully		+HTTPACTION:0,200,1000
Read the data of HTTP server	AT+HTTPREAD	+HTTPREAD: 1000 …. *//output the data to uart* OK
Terminate http service	AT+HTTPTERM	OK

2.2 HTTP POST Method

Upload data to HTTP server

Demonstration	Syntax	Expect Result
Init http service	AT+HTTPINIT	OK
Set parameters for HTTP session	AT+HTTPPARA = “CID”,1 AT+HTTPPARA=“URL”,”www.sim.com”	OK OK

POST the data whose size is 100 Bytes and the maximum latency time for inputting is 10000 ms. It is recommended to set the latency time long enough to allow downloading all the data.	AT+HTTPDATA=100,10000	DOWNLOAD …… *//It is ready to receive data from uart, and DCD has been set to low.* OK *//All data has been received over, and DCD is set to high.*
POST session start	AT+HTTPACTION=1	OK
POST successfully		+HTTPACTION:1,200,0
Terminate http service	AT+HTTPTERM	OK

2.3 HTTP HEAD Method

Get HTTP head information from HTTP server

Demonstration	Syntax	Expect Result
Init http service	AT+HTTPINIT	OK
Set parameters for HTTP session	AT+HTTPPARA = “CID”,1 AT+HTTPPARA=“URL”,”www.sim.com”	OK OK
HEAD session start	AT+HTTPACTION=1	OK
HEAD successfully		+HTTPACTION:1,200,0
Terminate http service	AT+HTTPTERM	OK

2.4 Set Proxy HTTP Server

It provides the method to use proxy HTTP server.

Demonstration	Syntax	Expect Result
Init http service	AT+HTTPINIT	OK
Set parameters for HTTP session	AT+HTTPPARA = “CID”,1 AT+HTTPPARA=“URL”,”www.sim.com”	OK OK

Set proxy server IP address	AT+HTTPPARA=“PROIP”,”10.0.0.172”	OK
Set proxy server port	AT+HTTPPARA = “PROPORT”,80	OK
GET session start	AT+HTTPACTION=0	OK
GET successfully		+HTTPACTION:0,200,1000
Read the data of HTTP server	AT+HTTPREAD	+HTTPREAD: 1000 …. *//output the data to uart* OK
Terminate http service	AT+HTTPTERM	OK

2.5 Set HTTP Redirection Parameter

It provides the method to use HTTP redirection function.

Demonstration	Syntax	Expect Result
Init http service	AT+HTTPINIT	OK
Set parameters for HTTP session	AT+HTTPPARA = “CID”,1	OK
Set the redirection parameter	AT+HTTPPARA = “REDIR”,1	OK
Set the URL	AT+HTTPPARA=“URL”,”www.sim.com/abcde”	OK
GET session start	AT+HTTPACTION=0	OK
GET successfully		+HTTPACTION:0,200,1000
Read the response of HTTP server	AT+HTTPREAD	+HTTPREAD: 1000 …. *//output the data to uart* OK
Terminate http service	AT+HTTPTERM	OK

2.6 Set HTTP Download Break Point Parameter

It provides the method to use HTTP broken download resuming function.

Demonstration	Syntax	Expect Result
Init http service	AT+HTTPINIT	OK
Set parameters for HTTP session	AT+HTTPPARA = “CID”,1	OK
Set the URL, the size of gif is 16384 bytes	AT+HTTPPARA = “URL”,” http://www.sim.com/img/sim_logo_jr_1003_38.gif”	OK
Set the break point	AT+HTTPPARA = “BREAK”,2000	OK
GET session start, get data from 2000 to 16384	AT+HTTPACTION=0	OK
GET successfully		+HTTPACTION:0, 200,14384
Read the data of HTTP server	AT+HTTPREAD	+HTTPREAD: 14384 …. *//output the data to uart* OK
Terminate http service	AT+HTTPTERM	OK

3. FTP Application

File Transfer Protocol application provides a mode to interact with FTP server. The basic

application contains GET, PUT methods, which also supports broken transfer resuming function. PUT method supports APPE, STOR and other modes.

3.1 FTP GET Method

Download data from FTP server

Demonstration	Syntax	Expect Result
Set parameters for FTP session.	AT+FTPCID=1 AT+FTPSERV="116.228.221.52" AT+FTPUN="sim.cs1" AT+FTPPW="******" AT+FTPGETNAME="1K.txt" AT+FTPGETPATH="/"	OK OK OK OK OK OK
Open the FTP get session.	AT+FTPGET=1	OK
Data are available.		+FTPGET:1,1
Request to read 1024 bytes, but Only 50 bytes are now available.	AT+FTPGET=2,1024	+FTPGET:2,50 01234567890123456789012345678901234567890 OK
Request to read 1024 bytes again. No byte is now available, but it is not the end of session.	AT+FTPGET=2,1024	+FTPGET:2,0 OK
If the module receives data but user do not input “AT+FTPGET:2, <reqlength>” to read data, “+FTPGE T:1,1” will be shown again in a certain time.		+FTPGET:1,1

Request to read 1024 bytes. 1024 bytes are now available.	AT+FTPGET=2,1024	+FTPGET:2,1024 0123456789012345678901 2345678901234567890 1234567890…..1234 OK
Data transfer finished. The connection to the FTP server is closed.		+FTPGET:1,0

3.2 FTP PUT Method

Upload data to FTP server

Demonstration	Syntax	Expect Result
Set parameters for FTP session.	AT+FTPCID=1 AT+FTPSERV="116.228.221.52" AT+FTPUN="sim.cs1" AT+FTPPW="******" AT+FTPPUTNAME="1K.txt" AT+FTPPUTPATH="/"	OK OK OK OK OK OK
Open the FTP put session.	AT+ FTPPUT =1	OK
FTP session is ready for uploading. 1280 is the max length of data which can be sent at a time. It depends on the network status.		+FTPPUT:1,1,1280
Client requests to send 100 bytes. Response indicates that user must input 100 bytes for transferring now.	AT+FTPPUT=2,100	+FTPPUT:2,100 …… *//It is ready to receive data from uart , and DCD has been set to low.* OK *//All data has been received over, and DCD is set to high.*

URC indicates that the FTP session is ready to transfer more data.		+FTPPUT:1,1,1280
No more data will be uploaded, the FTP session will be closed.	AT+FTPPUT=2,0	OK
Data transfer is finished. The connection to the FTP server is closed.		+FTPPUT:1,0

During FTP session, different failure may occur because of bad network environment or other reasons. Some common failure includes timeout failure and wrong password failure.

3.3 FTP Time Out

Time out occurs during FTP session because of different reasons.

Demonstration	Syntax	Expect Result
Open the FTP Get session.	AT+ FTPGET =1	OK
If the status of the network is poor, it may be time out. The connection to the FTP server is closed.		+FTPGET:1,64
Open the FTP Get session.	AT+ FTPGET =1	OK
Data are available.		+FTPGET:1,1
If customer does not use **“**AT+FTPGET:2, <reqlength>” to read data, “+FTPGE T:1,1” will be shown again in a certain time.		+FTPGET:1,1 …….. +FTPGET:1,1
If the user does not read data for a long time, the session will time out. The connection to the FTP server is closed.		+FTPGET:1,64

3.4 FTP Error

Error occurs during FTP applications because of wrong parameter setting.

Demonstration	Syntax	Expect Result
Set wrong password	AT+FTPPW="3214567"	OK
Open the FTP Get session	AT+ FTPGET =1	OK
FTP session password error. The connection to the FTP server is closed.		+FTPPUT:1,72
Note: Other errors, you can refer to “AT+FTPGET” command in SIM900 ATC document.		

3.5 FTP Operation Error

Error occurs during FTP applications because of wrong operating.

Demonstration	Syntax	Expect Result
Open the FTP Get session.	AT+ FTPGET =1	OK
The parameter of “get file name” is empty. It shows ftp operation error.		+FTPPUT:1,66
Open the FTP PUT session.	AT+ FTPPUT =1	OK
Open the FTP PUT session again. Show ftp operation error.	AT+ FTPPUT =1	OK +FTPPUT:1,66

3.6 FTP READ and WRITE Error

Error occurs before FTP applications because of operating in wrong state.

Demonstration	Syntax	Expect Result
Open the FTP Get session.	AT+ FTPGET =1	OK
Read data before **“**+FTPGET:1,1**”** is shown.	AT+FTPGET=2,1000	ERROR
Data are available		+FTPGET:1,1

Read data after "+FTPGET:1,1" is shown.	AT+ FTPGET =1	+FTPGET:2,50 01234567890123456789012345678901234567890123456789 OK
Data transfer finished. The connection to the FTP server is closed.		+FTPGET:1,0
Read data after FTP session is stopped.	AT+FTPGET=2,1000	ERROR
Open the FTP PUT session.	AT+ FTPPUT =1	OK
Write data before "+FTPPUT:1,1,1280" is shown.	AT+FTPPUT=2,1000	ERROR
FTP session is ready for uploading.		+FTPPUT:1,1,1280
Write data after "+FTPPUT:1,1,1280" is shown.	AT+FTPPUT=2,100	+FTPPUT:2,100 …… OK
No more data will be uploaded, the FTP session will be closed.	AT+FTPPUT=2,0	OK
Write data after FTP session is stopped.	AT+ FTPPUT=2,100	ERROR

3.7 Set FTP Download Break Point Parameter

It provides the method to use FTP broken download resuming function.

Demonstration	Syntax	Expect Result
Open the FTP Get session.	AT+ FTPGET =1	OK
Data are available.		+FTPGET:1,1
Get data of FTP server.	AT+ FTPGET = 2,1024	+FTPGET:2,29 wodeceshijieguo,zhgeshigeshia OK
Data transfer finished. The connection to the FTP server is closed.		+FTPGET:1,0

Set the broken point.	AT+FTPRESET=20	OK
Open the FTP Get session.	AT+ FTPGET =1	OK
Data are available.		+FTPGET:1,1
Get the data begin from the broken point.	AT+ FTPGET = 2,1024	+FTPGET:2,9 shigeshia OK
Data transfer is finished. The connection to the FTP server is closed.		+FTPGET:1,0

Appendix

A. Related Documents

SN	Document name	Remark
[1]	*SIM900 AT Commands*	SIM900_ATC_V1.03

B. Conventions and Abbreviations

FTP	File Transfer Protocol
HTTP	Hypertext Transfer Protocol
APN	Access Point Name
GPRS	General Packet Radio Service
PDP	Packet Data Protocol

Contact us:

Shanghai SIMCom Wireless Solutions Ltd.

Add: Building A, SIM Technology Building, No.633 Jinzhong Road, Changning District, Shanghai, P. R. China 200335

Tel: +86 21 3252 3300

Fax: +86 21 3252 3301

URL: www.sim.com/wm