

ENERGY METER (kWh) MONOPHASE DDS-1Y-18L

■ INTRODUCTION



This meter is suitable for carrying out sectorized measurements of electrical energy, consumption calculations in hotels, farms, inns, and other places where it is not possible to install measurements from the utility. It has an additional feature that makes them extremely useful for automating these measurements: it emits electrical pulses proportional to consumption. These pulses can be used to centralize measurements using PLCs.

■ SPECIFICATIONS


Technical Specifications

Operating Voltage		127/220V AC ±20%
Maximum Current		50A
Starting Current		0.004 x Nominal Current
Nominal Frequency		50/60Hz
Display		1 Accumulating Counter LCD (5+2 Digits) (99999.99)kWh
Pulses		2000/kWh
Energy Consumption		≤ 10VA, 0.4W
Operating Temperature		-20℃ ~ 55℃
Pulse Indication		Made by LED
Humidity		75% (Max. 95% non-condensing)
Accuracy Class		1%
Fixation		DIN rail 35mm
Reference Standard		IEC61036
Characteristics of Pulse	Voltage	10~30Vdc
	Current	27mA
	Pulse Width	90ms
	Max. Comp. without Amplifier	20m
	Value Limits	Max. 60VDC, Max. 50mA

■ MODEL

Model	Color	Weight
DDS-1Y-18L	Gray	80g

■ INSTALLATION DIAGRAM

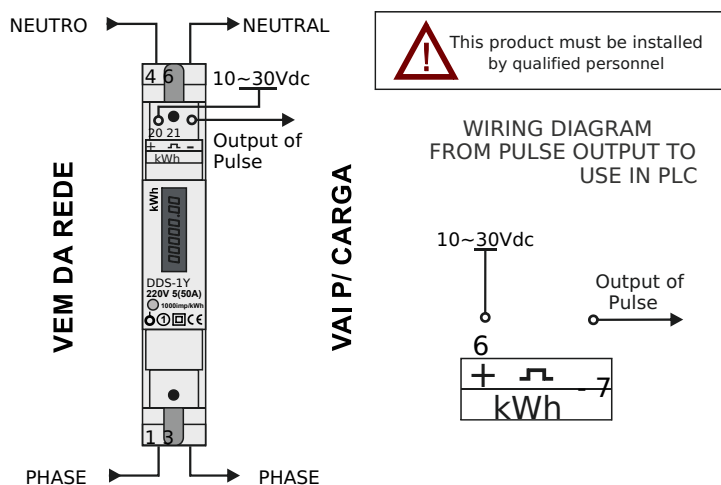

■ PHYSICAL DIMENSIONS (mm)

