




TOYOTA RAV4 Plug-in Hybrid

5 doors / 5 seats / wagon

MY: 2026-Present

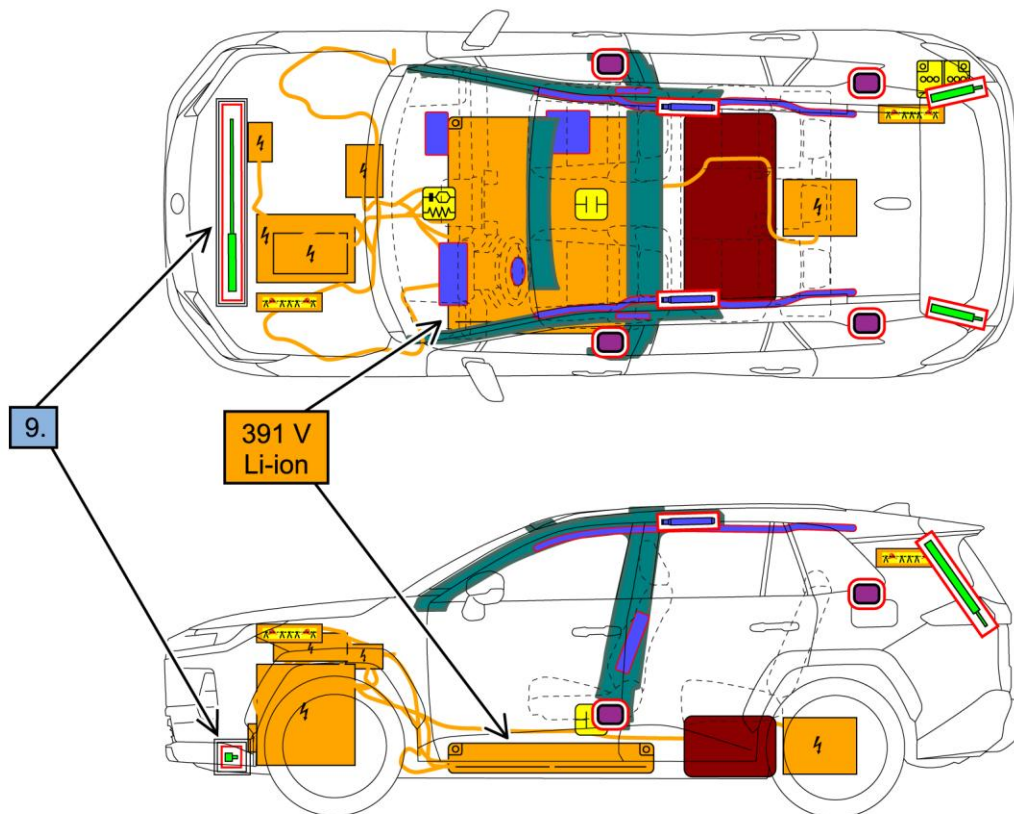


	Airbag		Stored gas inflator		Seat belt pretensioner		SRS control unit		Gas strut / Preloaded spring
	High strength zone		Zone requiring special attention		Battery low voltage		Ultra-capacitor, low-voltage		Fuel tank
	Battery pack, high-voltage		High voltage power cable		High voltage component		Cable cut		
ID No.		Version No.		Version date		Page			
RAV4PlugInHybrid64		01		03 / 2026		1 / 4			

1. Identification / Recognition



LACK OF ENGINE NOISE DOES NOT MEAN VEHICLE IS OFF. SILENT MOVEMENT OR INSTANT RESTART CAPABILITY EXISTS UNTIL VEHICLE IS FULLY SHUT DOWN.

■ Location of vehicle badges

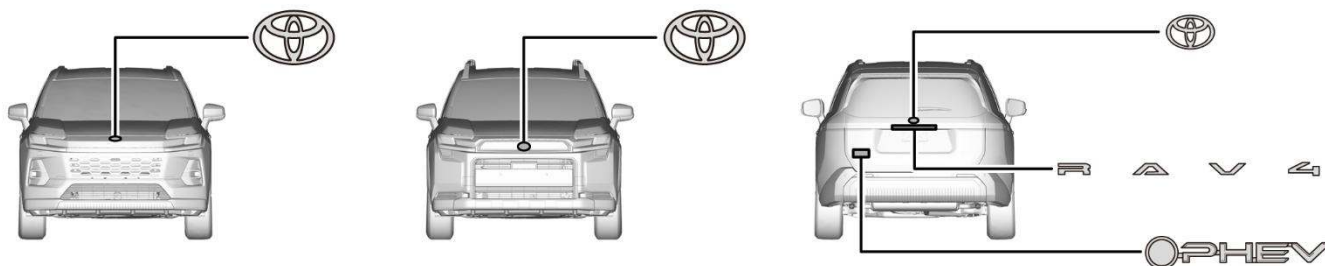


■ Energy source: Lithium-ion battery



2. Immobilisation / Stabilisation / Lifting

■ Completely immobilize the vehicle

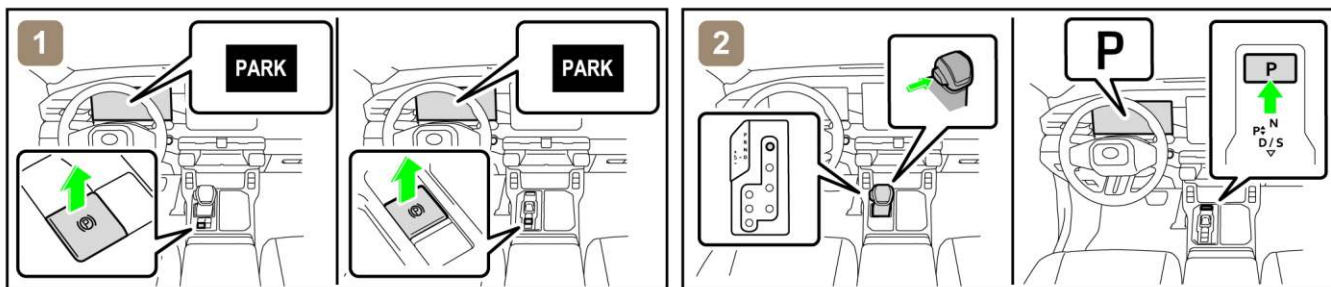

1) Chock the wheels and engage the parking brake.

2) Move the shift lever to the park (P) position.*1


*1: Mechanical type

2) Press the P position switch.*2

*2: Electronic type

■ Stabilisation-lifting point

Place cribbing such as wooden blocks at the four points under the front and rear pillars.

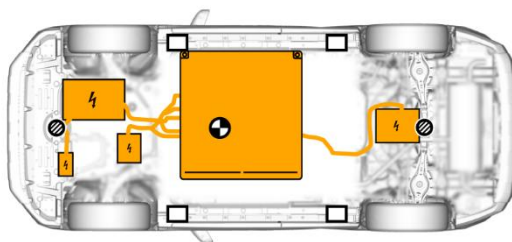

Extra Reinforced Lifting Points



Standard Jack Locations



Vehicle Center of Gravity



DO NOT PLACE CRIBBING SUCH AS WOODEN BLOCKS OR RESCUE AIR LIFTING BAGS UNDER THE EXHAUST SYSTEM, FUEL SYSTEM OR HIGH VOLTAGE POWER CABLES. DOING SO MAY RESULT IN FUEL LEAKS, FIRE OR ELECTRIC SHOCK.

ID No.	Version No.	Version date	Page
RAV4PlugInHybrid64	01	03 / 2026	2 / 4

3. Disable direct hazards / Safety regulations


■ If any of the following systems are required to be operated, operate them BEFORE disconnecting the battery.

- Power door lock
- Electric parking brake
- Sliding roof
- Power window
- Power back door
- Panoramic moon roof
- Power seat
- Electronic shift lever

When the 12 V battery is disconnected, electrical components cannot be operated.


■ Perform procedure Main or Alternative to completely shut off the vehicle.

<Main Procedure>

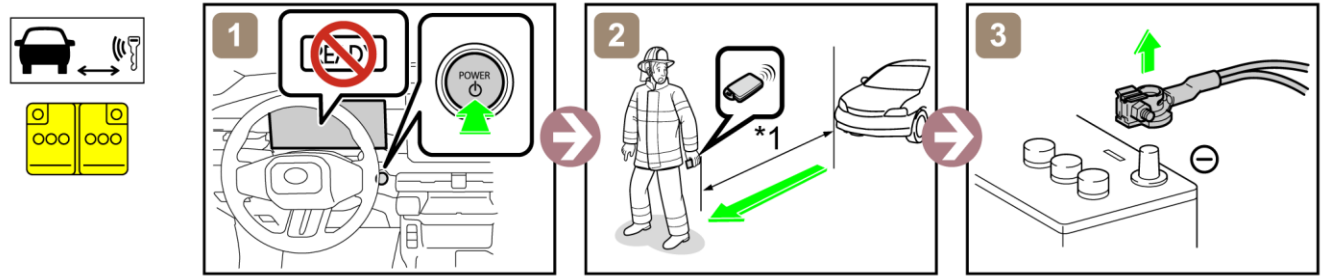


*1: 5 m (16.4 ft) or more

<Alternative Procedure>

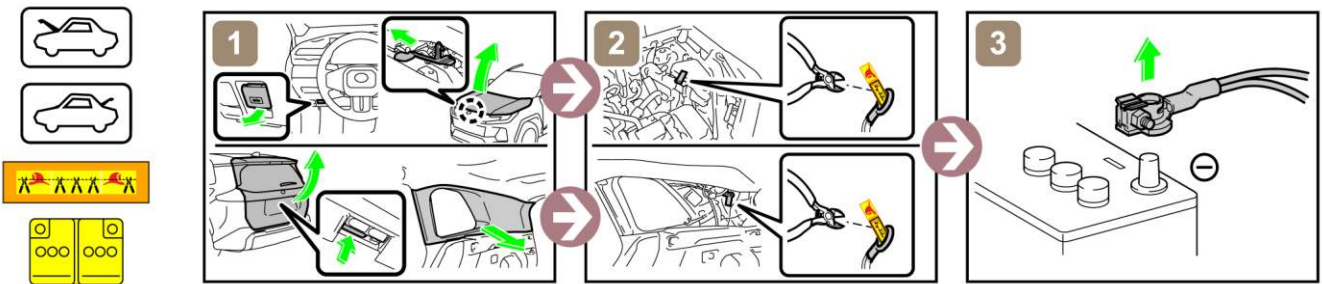


In the event of an accident in which the airbags are deployed, the high-voltage system will be automatically deactivated.

■ Access to 12 V Battery

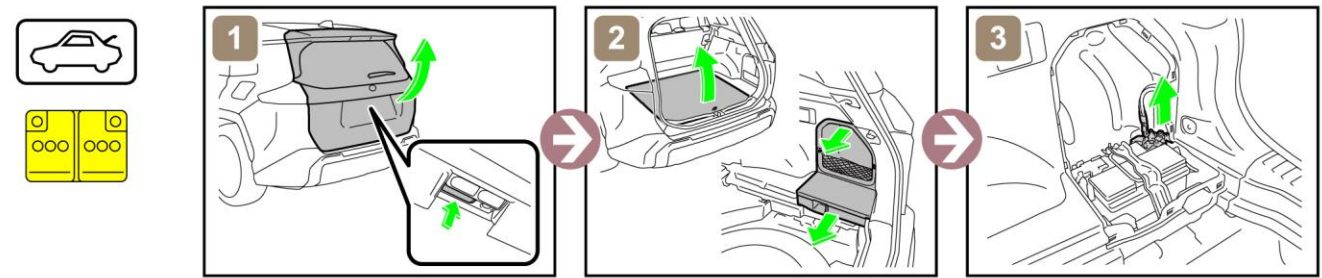

4. Access to the occupants

■ Window Glass

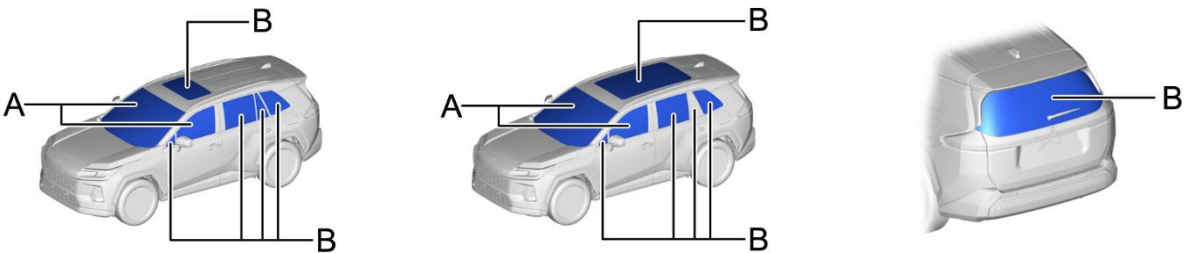

A	Laminated	B	Tempered
---	-----------	---	----------

ID No.	Version No.	Version date	Page
RAV4PluginHybrid64	01	03 / 2026	3 / 4

5. Stored energy / Liquids / Gases / Solids



High Voltage Li-ion Battery: 391 V



Low Voltage Battery: 12 V



Gasoline Tank: 55 L



Air Conditioner Refrigerant Gas



- ALWAYS WEAR APPROPRIATE PERSONAL PROTECTIVE EQUIPMENT (PPE) WHEN DEALING WITH ANY OF THESE ITEMS.
- NEVER BREACH OR REMOVE THE BATTERY ASSEMBLY COVER UNDER ANY CIRCUMSTANCES, INCLUDING FIRE. DOING SO MAY RESULT IN SERIOUS INJURY OR DEATH FROM SEVERE BURNS OR ELECTRIC SHOCK.

6. In case of fire



USE COPIOUS AMOUNTS OF WATER

If it is difficult to apply copious amounts of water to the high voltage battery, it is recommended to allow the high voltage battery to burn itself out.



RE-IGNITION POSSIBLE !



Gas strut / Preloaded spring


As it is possible for a gas strut / preloaded spring to become a projectile, refer to the component layout drawing.

7. In case of submersion



DO NOT TOUCH ANY OF THE HIGH-VOLTAGE COMPONENTS OR CABLES WHILE THE VEHICLE IS SUBMERGED. DOING SO MAY RESULT IN ELECTRIC SHOCK.
WORK ON THE VEHICLE ONLY AFTER THE VEHICLE HAS BEEN PULLED OUT OF THE WATER.

8. Towing / Transportation / Storage



RE-IGNITION POSSIBLE !

Store the vehicle at a safe distance (15 m (49.2 ft) or more) from other vehicles.

9. Important additional information

A performance damper (gas-filled damper) is installed on the front lower structural frame (near the bumper).

For further details, please refer to "Emergency Response Guide".
<http://www.techinfo.toyota.com>

	ID No.	Version No.	Version date	Page
	RAV4PluginHybrid64	01	03 / 2026	4 / 4